Utilities

Release 10.6

The Sage Development Team

Jun 27, 2025

CONTENTS

1 General Infrastructure 1

2 Programming Utilities 95

3 Code Evaluation 377

4 Formatted Output 407

5 Saving and Loading Sage Objects 547

6 Interactive Usage Support 599

7 Development Tools 637

8 Low-Level Utilities 723

9 Indices and Tables 755

Python Module Index 757

Index 759

CHAPTER

ONE

GENERAL INFRASTRUCTURE

1.1 Default Settings

AUTHORS: William Stein and David Kohel

sage.misc.defaults.**latex_variable_names**(*n*, *name=None*)

Convert a root string into a tuple of variable names by adding numbers in sequence.

INPUT:

- `n` – a nonnegative Integer; the number of variable names to output
- `names` a string (default: `None`); the root of the variable name

EXAMPLES:

```
sage: from sage.misc.defaults import latex_variable_names
sage: latex_variable_names(0)
()
sage: latex_variable_names(1,'a')
('a',)
sage: latex_variable_names(3,beta)
('beta_{0}', 'beta_{1}', 'beta_{2}')
sage: latex_variable_names(3,r'\beta')
('\\beta_{0}', '\\beta_{1}', '\\beta_{2}')
```

```
>>> from sage.all import *
>>> from sage.misc.defaults import latex_variable_names
>>> latex_variable_names(Integer(0))
()
>>> latex_variable_names(Integer(1),'a')
('a',)
>>> latex_variable_names(Integer(3),beta)
('beta_{0}', 'beta_{1}', 'beta_{2}')
>>> latex_variable_names(Integer(3),r'\beta')
('\\beta_{0}', '\\beta_{1}', '\\beta_{2}')
```

sage.misc.defaults.**series_precision**()

Return the Sage-wide precision for series (symbolic, power series, Laurent series).

EXAMPLES:

```
sage: series_precision()
20
```

```
>>> from sage.all import *
>>> series_precision()
20
```

sage.misc.defaults.**set_default_variable_name**(*name*, *separator=''*)

Change the default variable name and separator.

sage.misc.defaults.**set_series_precision**(*prec*)

Change the Sage-wide precision for series (symbolic, power series, Laurent series).

EXAMPLES:

```
sage: set_series_precision(5)
sage: series_precision()
5
sage: set_series_precision(20)
```

```
>>> from sage.all import *
>>> set_series_precision(Integer(5))
>>> series_precision()
5
>>> set_series_precision(Integer(20))
```

sage.misc.defaults.**variable_names**(*n*, *name=None*)

Convert a root string into a tuple of variable names by adding numbers in sequence.

INPUT:

- `n` – a nonnegative Integer; the number of variable names to output
- `names` a string (default: `None`); the root of the variable name

EXAMPLES:

```
sage: from sage.misc.defaults import variable_names
sage: variable_names(0)
()
sage: variable_names(1)
('x',)
sage: variable_names(1,'alpha')
('alpha',)
sage: variable_names(2,'alpha')
('alpha0', 'alpha1')
```

```
>>> from sage.all import *
>>> from sage.misc.defaults import variable_names
>>> variable_names(Integer(0))
()
>>> variable_names(Integer(1))
('x',)
>>> variable_names(Integer(1),'alpha')
('alpha',)
>>> variable_names(Integer(2),'alpha')
('alpha0', 'alpha1')
```

1.2 Functional notation

These are functions so that you can write `foo(x)` instead of `x.foo()` in certain common cases.

AUTHORS:

- William Stein: Initial version
- David Joyner (2005-12-20): More Examples

`sage.misc.functional.N`(*x*, *prec=None*, *digits=None*, *algorithm=None*)

Return a numerical approximation of `self` with `prec` bits (or decimal `digits`) of precision.

No guarantee is made about the accuracy of the result.

Note

Lower case *n()* is an alias for *numerical_approx()* and may be used as a method.

INPUT:

- `prec` – precision in bits
- `digits` – precision in decimal digits (only used if `prec` is not given)
- `algorithm` – which algorithm to use to compute this approximation (the accepted algorithms depend on the object)

If neither `prec` nor `digits` is given, the default precision is 53 bits (roughly 16 digits).

EXAMPLES:

```
sage: # needs sage.symbolic
sage: numerical_approx(pi, 10)
3.1
sage: numerical_approx(pi, digits=10)
3.141592654
sage: numerical_approx(pi^2 + e, digits=20)
12.587862295484038 54
sage: n(pi^2 + e)
12.5878862295484
sage: N(pi^2 + e)
12.5878862295484
sage: n(pi^2 + e, digits=50)
12.587886229548403854194778471228813633070946500941

sage: # needs sage.rings.real_mpfr
sage: a = CC(-5).n(prec=40)
sage: b = ComplexField(40)(-5)
sage: a == b
True
sage: parent(a) is parent(b)
True
sage: numerical_approx(9)
9.00000000000000
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> numerical_approx(pi, Integer(10))
3.1
>>> numerical_approx(pi, digits=Integer(10))
3.141592654
>>> numerical_approx(pi**Integer(2) + e, digits=Integer(20))
12.587886229548403854
>>> n(pi**Integer(2) + e)
12.5878862295484
>>> N(pi**Integer(2) + e)
12.5878862295484
>>> n(pi**Integer(2) + e, digits=Integer(50))
12.587886229548403854194778471228813633070946500941

>>> # needs sage.rings.real_mpfr
>>> a = CC(-Integer(5)).n(prec=Integer(40))
>>> b = ComplexField(Integer(40))(-Integer(5))
>>> a == b
True
>>> parent(a) is parent(b)
True
>>> numerical_approx(Integer(9))
9.00000000000000
```

You can also usually use method notation:

```
sage: (pi^2 + e).n()                                                    #␣
↪needs sage.symbolic
12.5878862295484
sage: (pi^2 + e).numerical_approx()                                     #␣
↪needs sage.symbolic
12.5878862295484
```

```
>>> from sage.all import *
>>> (pi**Integer(2) + e).n()                                             ␣
↪      # needs sage.symbolic
12.5878862295484
>>> (pi**Integer(2) + e).numerical_approx()                              ␣
↪      # needs sage.symbolic
12.5878862295484
```

Vectors and matrices may also have their entries approximated:

```
sage: v = vector(RDF, [1,2,3])                                          #␣
↪needs sage.modules
sage: v.n()                                                             #␣
↪needs sage.modules
(1.00000000000000, 2.00000000000000, 3.00000000000000)

sage: # needs sage.modules
sage: v = vector(CDF, [1,2,3])
sage: v.n()
```

(continues on next page)

(continued from previous page)

```
(1.00000000000000, 2.00000000000000, 3.00000000000000)
sage: _.parent()
Vector space of dimension 3 over Complex Field with 53 bits of precision
sage: v.n(prec=20)
(1.0000, 2.0000, 3.0000)

sage: u = vector(QQ, [1/2, 1/3, 1/4])                                          #␣
↪needs sage.modules
sage: n(u, prec=15)                                                            #␣
↪needs sage.modules
(0.5000, 0.3333, 0.2500)
sage: n(u, digits=5)                                                           #␣
↪needs sage.modules
(0.50000, 0.33333, 0.25000)

sage: # needs sage.modules
sage: v = vector(QQ, [1/2, 0, 0, 1/3, 0, 0, 0, 1/4], sparse=True)
sage: u = v.numerical_approx(digits=4)
sage: u.is_sparse()
True
sage: u
(0.5000, 0.0000, 0.0000, 0.3333, 0.0000, 0.0000, 0.0000, 0.2500)

sage: # needs sage.modules
sage: A = matrix(QQ, 2, 3, range(6))
sage: A.n()
[0.000000000000000  1.00000000000000  2.00000000000000]
[ 3.00000000000000  4.00000000000000  5.00000000000000]
sage: B = matrix(Integers(12), 3, 8, srange(24))
sage: N(B, digits=2)
[0.00  1.0  2.0  3.0  4.0  5.0  6.0  7.0]
[ 8.0  9.0  10.  11. 0.00  1.0  2.0  3.0]
[ 4.0  5.0  6.0  7.0  8.0  9.0  10.  11.]
```

```
>>> from sage.all import *
>>> v = vector(RDF, [Integer(1),Integer(2),Integer(3)])                        ␣
↪                       # needs sage.modules
>>> v.n()                                                                      #␣
↪needs sage.modules
(1.00000000000000, 2.00000000000000, 3.00000000000000)

>>> # needs sage.modules
>>> v = vector(CDF, [Integer(1),Integer(2),Integer(3)])
>>> v.n()
(1.00000000000000, 2.00000000000000, 3.00000000000000)
>>> _.parent()
Vector space of dimension 3 over Complex Field with 53 bits of precision
>>> v.n(prec=Integer(20))
(1.0000, 2.0000, 3.0000)

>>> u = vector(QQ, [Integer(1)/Integer(2), Integer(1)/Integer(3), Integer(1)/
↪Integer(4)])                                          # needs sage.modules
```

(continues on next page)

(continued from previous page)

```
>>> n(u, prec=Integer(15))                                                    ␣
↪     # needs sage.modules
(0.5000, 0.3333, 0.2500)
>>> n(u, digits=Integer(5))                                                   ␣
↪     # needs sage.modules
(0.50000, 0.33333, 0.25000)

>>> # needs sage.modules
>>> v = vector(QQ, [Integer(1)/Integer(2), Integer(0), Integer(0), Integer(1)/
↪Integer(3), Integer(0), Integer(0), Integer(0), Integer(1)/Integer(4)],␣
↪sparse=True)
>>> u = v.numerical_approx(digits=Integer(4))
>>> u.is_sparse()
True
>>> u
(0.5000, 0.0000, 0.0000, 0.3333, 0.0000, 0.0000, 0.0000, 0.2500)

>>> # needs sage.modules
>>> A = matrix(QQ, Integer(2), Integer(3), range(Integer(6)))
>>> A.n()
[0.000000000000000  1.00000000000000  2.00000000000000]
[ 3.00000000000000  4.00000000000000  5.00000000000000]
>>> B = matrix(Integers(Integer(12)), Integer(3), Integer(8), srange(Integer(24)))
>>> N(B, digits=Integer(2))
[0.00  1.0  2.0  3.0  4.0  5.0  6.0  7.0]
[ 8.0  9.0  10.  11. 0.00  1.0  2.0  3.0]
[ 4.0  5.0  6.0  7.0  8.0  9.0  10.  11.]
```

Internally, numerical approximations of real numbers are stored in base-2. Therefore, numbers which look the same in their decimal expansion might be different:

```
sage: x = N(pi, digits=3); x                                                  #␣
↪needs sage.symbolic
3.14
sage: y = N(3.14, digits=3); y                                                #␣
↪needs sage.rings.real_mpfr
3.14
sage: x == y                                                                  #␣
↪needs sage.rings.real_mpfr sage.symbolic
False
sage: x.str(base=2)                                                           #␣
↪needs sage.symbolic
'11.001001000100'
sage: y.str(base=2)                                                           #␣
↪needs sage.rings.real_mpfr
'11.001000111101'
```

```
>>> from sage.all import *
>>> x = N(pi, digits=Integer(3)); x                                           ␣
↪     # needs sage.symbolic
3.14
>>> y = N(RealNumber('3.14'), digits=Integer(3)); y                           ␣
```

(continues on next page)

(continued from previous page)

```
↪                    # needs sage.rings.real_mpfr
3.14
>>> x == y                                                                    #␣
↪needs sage.rings.real_mpfr sage.symbolic
False
>>> x.str(base=Integer(2))                                                    ␣
↪      # needs sage.symbolic
'11.001001000100'
>>> y.str(base=Integer(2))                                                    ␣
↪      # needs sage.rings.real_mpfr
'11.001000111101'
```

Increasing the precision of a floating point number is not allowed:

```
sage: CC(-5).n(prec=100)                                                      #␣
↪needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 100 bits, use at most 53 bits
sage: n(1.3r, digits=20)                                                      #␣
↪needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 70 bits, use at most 53 bits
sage: RealField(24).pi().n()                                                  #␣
↪needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 53 bits, use at most 24 bits
```

```
>>> from sage.all import *
>>> CC(-Integer(5)).n(prec=Integer(100))                                      ␣
↪               # needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 100 bits, use at most 53 bits
>>> n(1.3, digits=Integer(20))                                                ␣
↪     # needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 70 bits, use at most 53 bits
>>> RealField(Integer(24)).pi().n()                                           ␣
↪      # needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 53 bits, use at most 24 bits
```

As an exceptional case, `digits=1` usually leads to 2 digits (one significant) in the decimal output (see Issue #11647):

```
sage: # needs sage.symbolic
sage: N(pi, digits=1)
```

(continues on next page)

(continued from previous page)

```
3.2
sage: N(pi, digits=2)
3.1
sage: N(100*pi, digits=1)
320.
sage: N(100*pi, digits=2)
310.
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> N(pi, digits=Integer(1))
3.2
>>> N(pi, digits=Integer(2))
3.1
>>> N(Integer(100)*pi, digits=Integer(1))
320.
>>> N(Integer(100)*pi, digits=Integer(2))
310.
```

In the following example, `pi` and `3` are both approximated to two bits of precision and then subtracted, which kills two bits of precision:

```
sage: N(pi, prec=2)                                                             #␣
↪needs sage.symbolic
3.0
sage: N(3, prec=2)                                                              #␣
↪needs sage.rings.real_mpfr
3.0
sage: N(pi - 3, prec=2)                                                         #␣
↪needs sage.symbolic
0.00
```

```
>>> from sage.all import *
>>> N(pi, prec=Integer(2))                                                      ␣
↪     # needs sage.symbolic
3.0
>>> N(Integer(3), prec=Integer(2))                                              ␣
↪               # needs sage.rings.real_mpfr
3.0
>>> N(pi - Integer(3), prec=Integer(2))                                         ␣
↪               # needs sage.symbolic
0.00
```

sage.misc.functional.**additive_order**(*x*)

Return the additive order of `x`.

EXAMPLES:

```
sage: additive_order(5)
+Infinity
sage: additive_order(Mod(5,11))
11
```

(continues on next page)

(continued from previous page)

```
sage: additive_order(Mod(4,12))
3
```

```
>>> from sage.all import *
>>> additive_order(Integer(5))
+Infinity
>>> additive_order(Mod(Integer(5),Integer(11)))
11
>>> additive_order(Mod(Integer(4),Integer(12)))
3
```

sage.misc.functional.**base_field**(*x*)

Return the base field over which `x` is defined.

EXAMPLES:

```
sage: R = PolynomialRing(GF(7), 'x')
sage: base_ring(R)
Finite Field of size 7
sage: base_field(R)
Finite Field of size 7
```

```
>>> from sage.all import *
>>> R = PolynomialRing(GF(Integer(7)), 'x')
>>> base_ring(R)
Finite Field of size 7
>>> base_field(R)
Finite Field of size 7
```

This catches base rings which are fields as well, but does not implement a `base_field` method for objects which do not have one:

```
sage: R.base_field()
Traceback (most recent call last):
...
AttributeError: 'PolynomialRing_dense_mod_p_with_category' object has no␣
↪attribute 'base_field'...
```

```
>>> from sage.all import *
>>> R.base_field()
Traceback (most recent call last):
...
AttributeError: 'PolynomialRing_dense_mod_p_with_category' object has no␣
↪attribute 'base_field'...
```

sage.misc.functional.**base_ring**(*x*)

Return the base ring over which `x` is defined.

EXAMPLES:

```
sage: R = PolynomialRing(GF(7), 'x')
sage: base_ring(R)
Finite Field of size 7
```

```
>>> from sage.all import *
>>> R = PolynomialRing(GF(Integer(7)), 'x')
>>> base_ring(R)
Finite Field of size 7
```

sage.misc.functional.**basis**(*x*)

Return the fixed basis of x.

EXAMPLES:

```
sage: V = VectorSpace(QQ, 3)                                                    #␣
↪needs sage.modules
sage: S = V.subspace([[1,2,0], [2,2,-1]])                                       #␣
↪needs sage.modules
sage: basis(S)                                                                  #␣
↪needs sage.modules
[(1, 0, -1), (0, 1, 1/2)]
```

```
>>> from sage.all import *
>>> V = VectorSpace(QQ, Integer(3))                                              ␣
↪     # needs sage.modules
>>> S = V.subspace([[Integer(1),Integer(2),Integer(0)], [Integer(2),Integer(2),-
↪Integer(1)]])                                          # needs sage.modules
>>> basis(S)                                                                   #␣
↪needs sage.modules
[(1, 0, -1), (0, 1, 1/2)]
```

sage.misc.functional.**category**(*x*)

Return the category of x.

EXAMPLES:

```
sage: V = VectorSpace(QQ, 3)                                                    #␣
↪needs sage.modules
sage: category(V)                                                               #␣
↪needs sage.modules
Category of finite dimensional vector spaces with basis over
 (number fields and quotient fields and metric spaces)
```

```
>>> from sage.all import *
>>> V = VectorSpace(QQ, Integer(3))                                              ␣
↪     # needs sage.modules
>>> category(V)                                                                #␣
↪needs sage.modules
Category of finite dimensional vector spaces with basis over
 (number fields and quotient fields and metric spaces)
```

sage.misc.functional.**characteristic_polynomial**(*x*, *var='x'*)

Return the characteristic polynomial of x in the given variable.

EXAMPLES:

```
sage: # needs sage.libs.pari sage.modules
sage: M = MatrixSpace(QQ, 3, 3)
```

(continues on next page)

(continued from previous page)

```
sage: A = M([1,2,3,4,5,6,7,8,9])
sage: charpoly(A)
x^3 - 15*x^2 - 18*x
sage: charpoly(A, 't')
t^3 - 15*t^2 - 18*t

sage: k.<alpha> = GF(7^10); k                                                  #␣
↪needs sage.rings.finite_rings
Finite Field in alpha of size 7^10
sage: alpha.charpoly('T')                                                      #␣
↪needs sage.rings.finite_rings
T^10 + T^6 + T^5 + 4*T^4 + T^3 + 2*T^2 + 3*T + 3
sage: characteristic_polynomial(alpha, 'T')                                    #␣
↪needs sage.rings.finite_rings
T^10 + T^6 + T^5 + 4*T^4 + T^3 + 2*T^2 + 3*T + 3
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari sage.modules
>>> M = MatrixSpace(QQ, Integer(3), Integer(3))
>>> A = M([Integer(1),Integer(2),Integer(3),Integer(4),Integer(5),Integer(6),
↪Integer(7),Integer(8),Integer(9)])
>>> charpoly(A)
x^3 - 15*x^2 - 18*x
>>> charpoly(A, 't')
t^3 - 15*t^2 - 18*t

>>> k = GF(Integer(7)**Integer(10), names=('alpha',)); (alpha,) = k._first_
↪ngens(1); k                                                  # needs sage.
↪rings.finite_rings
Finite Field in alpha of size 7^10
>>> alpha.charpoly('T')                                                      #␣
↪needs sage.rings.finite_rings
T^10 + T^6 + T^5 + 4*T^4 + T^3 + 2*T^2 + 3*T + 3
>>> characteristic_polynomial(alpha, 'T')                                    #␣
↪needs sage.rings.finite_rings
T^10 + T^6 + T^5 + 4*T^4 + T^3 + 2*T^2 + 3*T + 3
```

Ensure the variable name of the polynomial does not conflict with variables used within the matrix, and that non-integral powers of variables do not confuse the computation (Issue #14403):

```
sage: # needs sage.libs.pari sage.symbolic
sage: y = var('y')
sage: a = matrix([[x,0,0,0], [0,1,0,0], [0,0,1,0], [0,0,0,1]])
sage: characteristic_polynomial(a).list()
[x, -3*x - 1, 3*x + 3, -x - 3, 1]
sage: b = matrix([[y^(1/2),0,0,0], [0,1,0,0], [0,0,1,0], [0,0,0,1]])
sage: charpoly(b).list()
[sqrt(y), -3*sqrt(y) - 1, 3*sqrt(y) + 3, -sqrt(y) - 3, 1]
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari sage.symbolic
>>> y = var('y')
```

(continues on next page)

(continued from previous page)

```
>>> a = matrix([[x,Integer(0),Integer(0),Integer(0)], [Integer(0),Integer(1),
↪Integer(0),Integer(0)], [Integer(0),Integer(0),Integer(1),Integer(0)],␣
↪[Integer(0),Integer(0),Integer(0),Integer(1)]])
>>> characteristic_polynomial(a).list()
[x, -3*x - 1, 3*x + 3, -x - 3, 1]
>>> b = matrix([[y**(Integer(1)/Integer(2)),Integer(0),Integer(0),Integer(0)],␣
↪[Integer(0),Integer(1),Integer(0),Integer(0)], [Integer(0),Integer(0),
↪Integer(1),Integer(0)], [Integer(0),Integer(0),Integer(0),Integer(1)]])
>>> charpoly(b).list()
[sqrt(y), -3*sqrt(y) - 1, 3*sqrt(y) + 3, -sqrt(y) - 3, 1]
```

sage.misc.functional.**charpoly**(*x*, *var='x'*)

Return the characteristic polynomial of `x` in the given variable.

EXAMPLES:

```
sage: # needs sage.libs.pari sage.modules
sage: M = MatrixSpace(QQ, 3, 3)
sage: A = M([1,2,3,4,5,6,7,8,9])
sage: charpoly(A)
x^3 - 15*x^2 - 18*x
sage: charpoly(A, 't')
t^3 - 15*t^2 - 18*t

sage: k.<alpha> = GF(7^10); k                                                  #␣
↪needs sage.rings.finite_rings
Finite Field in alpha of size 7^10
sage: alpha.charpoly('T')                                                      #␣
↪needs sage.rings.finite_rings
T^10 + T^6 + T^5 + 4*T^4 + T^3 + 2*T^2 + 3*T + 3
sage: characteristic_polynomial(alpha, 'T')                                    #␣
↪needs sage.rings.finite_rings
T^10 + T^6 + T^5 + 4*T^4 + T^3 + 2*T^2 + 3*T + 3
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari sage.modules
>>> M = MatrixSpace(QQ, Integer(3), Integer(3))
>>> A = M([Integer(1),Integer(2),Integer(3),Integer(4),Integer(5),Integer(6),
↪Integer(7),Integer(8),Integer(9)])
>>> charpoly(A)
x^3 - 15*x^2 - 18*x
>>> charpoly(A, 't')
t^3 - 15*t^2 - 18*t

>>> k = GF(Integer(7)**Integer(10), names=('alpha',)); (alpha,) = k._first_
↪ngens(1); k                                                 # needs sage.
↪rings.finite_rings
Finite Field in alpha of size 7^10
>>> alpha.charpoly('T')                                                      #␣
↪needs sage.rings.finite_rings
T^10 + T^6 + T^5 + 4*T^4 + T^3 + 2*T^2 + 3*T + 3
>>> characteristic_polynomial(alpha, 'T')                                    #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.rings.finite_rings
T^10 + T^6 + T^5 + 4*T^4 + T^3 + 2*T^2 + 3*T + 3
```

Ensure the variable name of the polynomial does not conflict with variables used within the matrix, and that non-integral powers of variables do not confuse the computation (Issue #14403):

```
sage: # needs sage.libs.pari sage.symbolic
sage: y = var('y')
sage: a = matrix([[x,0,0,0], [0,1,0,0], [0,0,1,0], [0,0,0,1]])
sage: characteristic_polynomial(a).list()
[x, -3*x - 1, 3*x + 3, -x - 3, 1]
sage: b = matrix([[y^(1/2),0,0,0], [0,1,0,0], [0,0,1,0], [0,0,0,1]])
sage: charpoly(b).list()
[sqrt(y), -3*sqrt(y) - 1, 3*sqrt(y) + 3, -sqrt(y) - 3, 1]
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari sage.symbolic
>>> y = var('y')
>>> a = matrix([[x,Integer(0),Integer(0),Integer(0)], [Integer(0),Integer(1),
↪Integer(0),Integer(0)], [Integer(0),Integer(0),Integer(1),Integer(0)],␣
↪[Integer(0),Integer(0),Integer(0),Integer(1)]])
>>> characteristic_polynomial(a).list()
[x, -3*x - 1, 3*x + 3, -x - 3, 1]
>>> b = matrix([[y**(Integer(1)/Integer(2)),Integer(0),Integer(0),Integer(0)],␣
↪[Integer(0),Integer(1),Integer(0),Integer(0)], [Integer(0),Integer(0),
↪Integer(1),Integer(0)], [Integer(0),Integer(0),Integer(0),Integer(1)]])
>>> charpoly(b).list()
[sqrt(y), -3*sqrt(y) - 1, 3*sqrt(y) + 3, -sqrt(y) - 3, 1]
```

sage.misc.functional.**coerce**(*P*, *x*)

Coerce `x` to type `P` if possible.

EXAMPLES:

```
sage: type(5)
<class 'sage.rings.integer.Integer'>
sage: type(coerce(QQ,5))
<class 'sage.rings.rational.Rational'>
```

```
>>> from sage.all import *
>>> type(Integer(5))
<class 'sage.rings.integer.Integer'>
>>> type(coerce(QQ,Integer(5)))
<class 'sage.rings.rational.Rational'>
```

sage.misc.functional.**cyclotomic_polynomial**(*n*, *var='x'*)

Return the n-th cyclotomic polynomial.

EXAMPLES:

```
sage: # needs sage.libs.pari
sage: cyclotomic_polynomial(3)
x^2 + x + 1
```

(continues on next page)

(continued from previous page)

```
sage: cyclotomic_polynomial(4)
x^2 + 1
sage: cyclotomic_polynomial(9)
x^6 + x^3 + 1
sage: cyclotomic_polynomial(10)
x^4 - x^3 + x^2 - x + 1
sage: cyclotomic_polynomial(11)
x^10 + x^9 + x^8 + x^7 + x^6 + x^5 + x^4 + x^3 + x^2 + x + 1
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari
>>> cyclotomic_polynomial(Integer(3))
x^2 + x + 1
>>> cyclotomic_polynomial(Integer(4))
x^2 + 1
>>> cyclotomic_polynomial(Integer(9))
x^6 + x^3 + 1
>>> cyclotomic_polynomial(Integer(10))
x^4 - x^3 + x^2 - x + 1
>>> cyclotomic_polynomial(Integer(11))
x^10 + x^9 + x^8 + x^7 + x^6 + x^5 + x^4 + x^3 + x^2 + x + 1
```

sage.misc.functional.**decomposition**(*x*)

Return the decomposition of `x`.

EXAMPLES:

```
sage: M = matrix([[2, 3], [3, 4]])                                          #␣
↪needs sage.libs.pari sage.modules
sage: M.decomposition()                                                      #␣
↪needs sage.libs.pari sage.modules
[(Ambient free module of rank 2 over the principal ideal domain Integer Ring,
  True)]

sage: # needs sage.groups
sage: G.<a,b> = DirichletGroup(20)
sage: c = a * b
sage: d = c.decomposition(); d
[Dirichlet character modulo 4 of conductor 4 mapping 3 |--> -1,
 Dirichlet character modulo 5 of conductor 5 mapping 2 |--> zeta4]
sage: d[0].parent()
Group of Dirichlet characters modulo 4
 with values in Cyclotomic Field of order 4 and degree 2
```

```
>>> from sage.all import *
>>> M = matrix([[Integer(2), Integer(3)], [Integer(3), Integer(4)]])          ␣
↪                                # needs sage.libs.pari sage.modules
>>> M.decomposition()                                                        #␣
↪needs sage.libs.pari sage.modules
[(Ambient free module of rank 2 over the principal ideal domain Integer Ring,
  True)]
```

(continues on next page)

(continued from previous page)

```
>>> # needs sage.groups
>>> G = DirichletGroup(Integer(20), names=('a', 'b',)); (a, b,) = G._first_
↪ngens(2)
>>> c = a * b
>>> d = c.decomposition(); d
[Dirichlet character modulo 4 of conductor 4 mapping 3 |--> -1,
 Dirichlet character modulo 5 of conductor 5 mapping 2 |--> zeta4]
>>> d[Integer(0)].parent()
Group of Dirichlet characters modulo 4
 with values in Cyclotomic Field of order 4 and degree 2
```

sage.misc.functional.**denominator**(*x*)

Return the denominator of `x`.

EXAMPLES:

```
sage: denominator(17/11111)
11111
sage: R.<x> = PolynomialRing(QQ)
sage: F = FractionField(R)
sage: r = (x+1)/(x-1)
sage: denominator(r)
x - 1
```

```
>>> from sage.all import *
>>> denominator(Integer(17)/Integer(11111))
11111
>>> R = PolynomialRing(QQ, names=('x',)); (x,) = R._first_ngens(1)
>>> F = FractionField(R)
>>> r = (x+Integer(1))/(x-Integer(1))
>>> denominator(r)
x - 1
```

sage.misc.functional.**det**(*x*)

Return the determinant of `x`.

EXAMPLES:

```
sage: M = MatrixSpace(QQ, 3, 3)                                                 #␣
↪needs sage.modules
sage: A = M([1,2,3, 4,5,6, 7,8,9])                                              #␣
↪needs sage.modules
sage: det(A)                                                                    #␣
↪needs sage.modules
0
```

```
>>> from sage.all import *
>>> M = MatrixSpace(QQ, Integer(3), Integer(3))                                 ␣
↪              # needs sage.modules
>>> A = M([Integer(1),Integer(2),Integer(3), Integer(4),Integer(5),Integer(6),␣
↪Integer(7),Integer(8),Integer(9)])
↪# needs sage.modules
```

(continues on next page)

(continued from previous page)

```
>>> det(A)                                                                    #␣
↪needs sage.modules
0
```

sage.misc.functional.**dim**(*x*)

Return the dimension of `x`.

EXAMPLES:

```
sage: V = VectorSpace(QQ, 3)                                                  #␣
↪needs sage.modules
sage: S = V.subspace([[1,2,0], [2,2,-1]])                                     #␣
↪needs sage.modules
sage: dimension(S)                                                            #␣
↪needs sage.modules
2
```

```
>>> from sage.all import *
>>> V = VectorSpace(QQ, Integer(3))                                                ␣
↪      # needs sage.modules
>>> S = V.subspace([[Integer(1),Integer(2),Integer(0)], [Integer(2),Integer(2),-
↪Integer(1)]])                                          # needs sage.modules
>>> dimension(S)                                                              #␣
↪needs sage.modules
2
```

sage.misc.functional.**dimension**(*x*)

Return the dimension of `x`.

EXAMPLES:

```
sage: V = VectorSpace(QQ, 3)                                                  #␣
↪needs sage.modules
sage: S = V.subspace([[1,2,0], [2,2,-1]])                                     #␣
↪needs sage.modules
sage: dimension(S)                                                            #␣
↪needs sage.modules
2
```

```
>>> from sage.all import *
>>> V = VectorSpace(QQ, Integer(3))                                                ␣
↪      # needs sage.modules
>>> S = V.subspace([[Integer(1),Integer(2),Integer(0)], [Integer(2),Integer(2),-
↪Integer(1)]])                                          # needs sage.modules
>>> dimension(S)                                                              #␣
↪needs sage.modules
2
```

sage.misc.functional.**disc**(*x*)

Return the discriminant of `x`.

EXAMPLES:

```
sage: R.<x> = PolynomialRing(QQ)
sage: S = R.quotient(x^29 - 17*x - 1, 'alpha')                                  #␣
↪needs sage.libs.pari
sage: K = S.number_field()                                                      #␣
↪needs sage.libs.pari sage.rings.number_field
sage: discriminant(K)                                                           #␣
↪needs sage.libs.pari sage.rings.number_field
-15975100446626038280218213241591829458737190477345113376757479850566957249523
```

```
>>> from sage.all import *
>>> R = PolynomialRing(QQ, names=('x',)); (x,) = R._first_ngens(1)
>>> S = R.quotient(x**Integer(29) - Integer(17)*x - Integer(1), 'alpha')         ␣
↪                        # needs sage.libs.pari
>>> K = S.number_field()                                                        #␣
↪needs sage.libs.pari sage.rings.number_field
>>> discriminant(K)                                                            #␣
↪needs sage.libs.pari sage.rings.number_field
-15975100446626038280218213241591829458737190477345113376757479850566957249523
```

sage.misc.functional.**discriminant**(*x*)

Return the discriminant of x.

EXAMPLES:

```
sage: R.<x> = PolynomialRing(QQ)
sage: S = R.quotient(x^29 - 17*x - 1, 'alpha')                                  #␣
↪needs sage.libs.pari
sage: K = S.number_field()                                                      #␣
↪needs sage.libs.pari sage.rings.number_field
sage: discriminant(K)                                                           #␣
↪needs sage.libs.pari sage.rings.number_field
-15975100446626038280218213241591829458737190477345113376757479850566957249523
```

```
>>> from sage.all import *
>>> R = PolynomialRing(QQ, names=('x',)); (x,) = R._first_ngens(1)
>>> S = R.quotient(x**Integer(29) - Integer(17)*x - Integer(1), 'alpha')         ␣
↪                        # needs sage.libs.pari
>>> K = S.number_field()                                                        #␣
↪needs sage.libs.pari sage.rings.number_field
>>> discriminant(K)                                                            #␣
↪needs sage.libs.pari sage.rings.number_field
-15975100446626038280218213241591829458737190477345113376757479850566957249523
```

sage.misc.functional.**eta**(*x*)

Return the value of the η function at x, which must be in the upper half plane.

The η function is

$$\eta(z) = e^{\pi i z/12} \prod_{n=1}^{\infty} (1 - e^{2\pi i n z})$$

EXAMPLES:

```
sage: eta(1 + I)                                                                #␣
↪needs sage.symbolic
0.7420487758365647 + 0.1988313702299107*I
```

```
>>> from sage.all import *
>>> eta(Integer(1) + I)                                                         ␣
↪     # needs sage.symbolic
0.7420487758365647 + 0.1988313702299107*I
```

sage.misc.functional.**fcp**(*x*, *var='x'*)

Return the factorization of the characteristic polynomial of `x`.

EXAMPLES:

```
sage: M = MatrixSpace(QQ, 3, 3)                                                 #␣
↪needs sage.modules
sage: A = M([1,2,3, 4,5,6, 7,8,9])                                              #␣
↪needs sage.modules
sage: fcp(A, 'x')                                                               #␣
↪needs sage.libs.pari sage.modules
x * (x^2 - 15*x - 18)
```

```
>>> from sage.all import *
>>> M = MatrixSpace(QQ, Integer(3), Integer(3))                                 ␣
↪              # needs sage.modules
>>> A = M([Integer(1),Integer(2),Integer(3), Integer(4),Integer(5),Integer(6),␣
↪Integer(7),Integer(8),Integer(9)])
↪# needs sage.modules
>>> fcp(A, 'x')                                                                #␣
↪needs sage.libs.pari sage.modules
x * (x^2 - 15*x - 18)
```

sage.misc.functional.**gen**(*x*)

Return the generator of `x`.

EXAMPLES:

```
sage: R.<x> = QQ[]; R
Univariate Polynomial Ring in x over Rational Field
sage: gen(R)
x
sage: gen(GF(7))
1
sage: A = AbelianGroup(1, [23])                                                 #␣
↪needs sage.groups
sage: gen(A)                                                                    #␣
↪needs sage.groups
f
```

```
>>> from sage.all import *
>>> R = QQ['x']; (x,) = R._first_ngens(1); R
Univariate Polynomial Ring in x over Rational Field
>>> gen(R)
```

(continues on next page)

(continued from previous page)

```
x
>>> gen(GF(Integer(7)))
1
>>> A = AbelianGroup(Integer(1), [Integer(23)])                                 ␣
↪              # needs sage.groups
>>> gen(A)                                                                    #␣
↪needs sage.groups
f
```

sage.misc.functional.**gens**(*x*)

Return the generators of x.

EXAMPLES:

```
sage: R.<x,y> = SR[]                                                          #␣
↪needs sage.symbolic
sage: R                                                                       #␣
↪needs sage.symbolic
Multivariate Polynomial Ring in x, y over Symbolic Ring
sage: gens(R)                                                                 #␣
↪needs sage.symbolic
(x, y)

sage: A = AbelianGroup(5, [5,5,7,8,9])                                        #␣
↪needs sage.groups
sage: gens(A)                                                                 #␣
↪needs sage.groups
(f0, f1, f2, f3, f4)
```

```
>>> from sage.all import *
>>> R = SR['x, y']; (x, y,) = R._first_ngens(2)# needs sage.symbolic
>>> R                                                                         #␣
↪needs sage.symbolic
Multivariate Polynomial Ring in x, y over Symbolic Ring
>>> gens(R)                                                                   #␣
↪needs sage.symbolic
(x, y)

>>> A = AbelianGroup(Integer(5), [Integer(5),Integer(5),Integer(7),Integer(8),
↪Integer(9)])                                          # needs sage.groups
>>> gens(A)                                                                   #␣
↪needs sage.groups
(f0, f1, f2, f3, f4)
```

sage.misc.functional.**hecke_operator**(*x*, *n*)

Return the n-th Hecke operator T_n acting on x.

EXAMPLES:

```
sage: M = ModularSymbols(1,12)                                                #␣
↪needs sage.modular
sage: hecke_operator(M,5)                                                     #␣
↪needs sage.modular
```

(continues on next page)

(continued from previous page)

```
Hecke operator T_5 on Modular Symbols space of dimension 3 for Gamma_0(1)
 of weight 12 with sign 0 over Rational Field
```

```
>>> from sage.all import *
>>> M = ModularSymbols(Integer(1),Integer(12))                                 ␣
↪              # needs sage.modular
>>> hecke_operator(M,Integer(5))                                               ␣
↪     # needs sage.modular
Hecke operator T_5 on Modular Symbols space of dimension 3 for Gamma_0(1)
 of weight 12 with sign 0 over Rational Field
```

sage.misc.functional.**image**(*x*)

Return the image of `x`.

EXAMPLES:

```
sage: M = MatrixSpace(QQ, 3, 3)                                              #␣
↪needs sage.modules
sage: A = M([1,2,3, 4,5,6, 7,8,9])                                           #␣
↪needs sage.modules
sage: image(A)                                                               #␣
↪needs sage.modules
Vector space of degree 3 and dimension 2 over Rational Field
Basis matrix:
[ 1  0 -1]
[ 0  1  2]
```

```
>>> from sage.all import *
>>> M = MatrixSpace(QQ, Integer(3), Integer(3))                                ␣
↪              # needs sage.modules
>>> A = M([Integer(1),Integer(2),Integer(3), Integer(4),Integer(5),Integer(6),␣
↪Integer(7),Integer(8),Integer(9)])
↪# needs sage.modules
>>> image(A)                                                                  #␣
↪needs sage.modules
Vector space of degree 3 and dimension 2 over Rational Field
Basis matrix:
[ 1  0 -1]
[ 0  1  2]
```

sage.misc.functional.**integral**(*x*, **args*, ***kwds*)

Return an indefinite or definite integral of an object `x`.

First call `x.integral()` and if that fails make an object and integrate it using Maxima, maple, etc, as specified by algorithm.

For symbolic expression calls `sage.calculus.calculus.integral()` - see this function for available options.

EXAMPLES:

```
sage: f = cyclotomic_polynomial(10)
sage: integral(f)
1/5*x^5 - 1/4*x^4 + 1/3*x^3 - 1/2*x^2 + x
```

```
>>> from sage.all import *
>>> f = cyclotomic_polynomial(Integer(10))
>>> integral(f)
1/5*x^5 - 1/4*x^4 + 1/3*x^3 - 1/2*x^2 + x
```

```
sage: integral(sin(x), x)                                                   #␣
↪needs sage.symbolic
-cos(x)
```

```
>>> from sage.all import *
>>> integral(sin(x), x)                                                     #␣
↪needs sage.symbolic
-cos(x)
```

```
sage: y = var('y')                                                          #␣
↪needs sage.symbolic
sage: integral(sin(x), y)                                                   #␣
↪needs sage.symbolic
y*sin(x)
```

```
>>> from sage.all import *
>>> y = var('y')                                                            #␣
↪needs sage.symbolic
>>> integral(sin(x), y)                                                     #␣
↪needs sage.symbolic
y*sin(x)
```

```
sage: integral(sin(x), x, 0, pi/2)                                          #␣
↪needs sage.symbolic
1
sage: sin(x).integral(x, 0, pi/2)                                           #␣
↪needs sage.symbolic
1
sage: integral(exp(-x), (x, 1, oo))                                         #␣
↪needs sage.symbolic
e^(-1)
```

```
>>> from sage.all import *
>>> integral(sin(x), x, Integer(0), pi/Integer(2))                          ␣
↪              # needs sage.symbolic
1
>>> sin(x).integral(x, Integer(0), pi/Integer(2))                           ␣
↪              # needs sage.symbolic
1
>>> integral(exp(-x), (x, Integer(1), oo))                                  ␣
↪     # needs sage.symbolic
e^(-1)
```

Numerical approximation:

```
sage: h = integral(tan(x)/x, (x, 1, pi/3))                                  #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.symbolic
...
sage: h                                                                    #␣
↪needs sage.symbolic
integrate(tan(x)/x, x, 1, 1/3*pi)
sage: h.n()                                                                #␣
↪needs sage.symbolic
0.07571599101...
```

```
>>> from sage.all import *
>>> h = integral(tan(x)/x, (x, Integer(1), pi/Integer(3)))                 ␣
↪              # needs sage.symbolic
...
>>> h                                                                      #␣
↪needs sage.symbolic
integrate(tan(x)/x, x, 1, 1/3*pi)
>>> h.n()                                                                  #␣
↪needs sage.symbolic
0.07571599101...
```

Specific algorithm can be used for integration:

```
sage: integral(sin(x)^2, x, algorithm='maxima')                            #␣
↪needs sage.symbolic
1/2*x - 1/4*sin(2*x)
sage: integral(sin(x)^2, x, algorithm='sympy')                             #␣
↪needs sage.symbolic
-1/2*cos(x)*sin(x) + 1/2*x
```

```
>>> from sage.all import *
>>> integral(sin(x)**Integer(2), x, algorithm='maxima')                    ␣
↪      # needs sage.symbolic
1/2*x - 1/4*sin(2*x)
>>> integral(sin(x)**Integer(2), x, algorithm='sympy')                     ␣
↪      # needs sage.symbolic
-1/2*cos(x)*sin(x) + 1/2*x
```

sage.misc.functional.**integral_closure**(*x*)

Return the integral closure of `x`.

EXAMPLES:

```
sage: integral_closure(QQ)
Rational Field
sage: K.<a> = QuadraticField(5)                                            #␣
↪needs sage.rings.number_field
sage: O2 = K.order(2 * a); O2                                              #␣
↪needs sage.rings.number_field
Order of conductor 4 generated by 2*a in Number Field in a
 with defining polynomial x^2 - 5 with a = 2.236067977499790?
sage: integral_closure(O2)                                                 #␣
↪needs sage.rings.number_field
```

(continues on next page)

(continued from previous page)

```
Maximal Order generated by 1/2*a + 1/2 in Number Field in a
 with defining polynomial x^2 - 5 with a = 2.236067977499790?
```

```
>>> from sage.all import *
>>> integral_closure(QQ)
Rational Field
>>> K = QuadraticField(Integer(5), names=('a',)); (a,) = K._first_ngens(1)# needs␣
↪sage.rings.number_field
>>> O2 = K.order(Integer(2) * a); O2                                              ␣
↪     # needs sage.rings.number_field
Order of conductor 4 generated by 2*a in Number Field in a
 with defining polynomial x^2 - 5 with a = 2.236067977499790?
>>> integral_closure(O2)                                                          #␣
↪needs sage.rings.number_field
Maximal Order generated by 1/2*a + 1/2 in Number Field in a
 with defining polynomial x^2 - 5 with a = 2.236067977499790?
```

sage.misc.functional.**integrate**(*x*, **args*, ***kwds*)

Return an indefinite or definite integral of an object `x`.

First call `x.integral()` and if that fails make an object and integrate it using Maxima, maple, etc, as specified by algorithm.

For symbolic expression calls `sage.calculus.calculus.integral()` - see this function for available options.

EXAMPLES:

```
sage: f = cyclotomic_polynomial(10)
sage: integral(f)
1/5*x^5 - 1/4*x^4 + 1/3*x^3 - 1/2*x^2 + x
```

```
>>> from sage.all import *
>>> f = cyclotomic_polynomial(Integer(10))
>>> integral(f)
1/5*x^5 - 1/4*x^4 + 1/3*x^3 - 1/2*x^2 + x
```

```
sage: integral(sin(x), x)                                                       #␣
↪needs sage.symbolic
-cos(x)
```

```
>>> from sage.all import *
>>> integral(sin(x), x)                                                         #␣
↪needs sage.symbolic
-cos(x)
```

```
sage: y = var('y')                                                              #␣
↪needs sage.symbolic
sage: integral(sin(x), y)                                                       #␣
↪needs sage.symbolic
y*sin(x)
```

```
>>> from sage.all import *
>>> y = var('y')                                                    #␣
↪needs sage.symbolic
>>> integral(sin(x), y)                                             #␣
↪needs sage.symbolic
y*sin(x)
```

```
sage: integral(sin(x), x, 0, pi/2)                                  #␣
↪needs sage.symbolic
1
sage: sin(x).integral(x, 0, pi/2)                                   #␣
↪needs sage.symbolic
1
sage: integral(exp(-x), (x, 1, oo))                                 #␣
↪needs sage.symbolic
e^(-1)
```

```
>>> from sage.all import *
>>> integral(sin(x), x, Integer(0), pi/Integer(2))                  ␣
↪              # needs sage.symbolic
1
>>> sin(x).integral(x, Integer(0), pi/Integer(2))                   ␣
↪              # needs sage.symbolic
1
>>> integral(exp(-x), (x, Integer(1), oo))                          ␣
↪     # needs sage.symbolic
e^(-1)
```

Numerical approximation:

```
sage: h = integral(tan(x)/x, (x, 1, pi/3))                          #␣
↪needs sage.symbolic
...
sage: h                                                             #␣
↪needs sage.symbolic
integrate(tan(x)/x, x, 1, 1/3*pi)
sage: h.n()                                                         #␣
↪needs sage.symbolic
0.07571599101...
```

```
>>> from sage.all import *
>>> h = integral(tan(x)/x, (x, Integer(1), pi/Integer(3)))          ␣
↪              # needs sage.symbolic
...
>>> h                                                               #␣
↪needs sage.symbolic
integrate(tan(x)/x, x, 1, 1/3*pi)
>>> h.n()                                                           #␣
↪needs sage.symbolic
0.07571599101...
```

Specific algorithm can be used for integration:

```
sage: integral(sin(x)^2, x, algorithm='maxima')                                #␣
↪needs sage.symbolic
1/2*x - 1/4*sin(2*x)
sage: integral(sin(x)^2, x, algorithm='sympy')                                 #␣
↪needs sage.symbolic
-1/2*cos(x)*sin(x) + 1/2*x
```

```
>>> from sage.all import *
>>> integral(sin(x)**Integer(2), x, algorithm='maxima')                        ␣
↪      # needs sage.symbolic
1/2*x - 1/4*sin(2*x)
>>> integral(sin(x)**Integer(2), x, algorithm='sympy')                         ␣
↪      # needs sage.symbolic
-1/2*cos(x)*sin(x) + 1/2*x
```

sage.misc.functional.**interval**(*a*, *b*)

Integers between a and b *inclusive* (a and b integers).

EXAMPLES:

```
sage: I = interval(1,3)
sage: 2 in I
True
sage: 1 in I
True
sage: 4 in I
False
```

```
>>> from sage.all import *
>>> I = interval(Integer(1),Integer(3))
>>> Integer(2) in I
True
>>> Integer(1) in I
True
>>> Integer(4) in I
False
```

sage.misc.functional.**is_even**(*x*)

Return whether or not an integer `x` is even, e.g., divisible by 2.

EXAMPLES:

```
sage: is_even(-1)
False
sage: is_even(4)
True
sage: is_even(-2)
True
```

```
>>> from sage.all import *
>>> is_even(-Integer(1))
False
>>> is_even(Integer(4))
```

(continues on next page)

(continued from previous page)

```
True
>>> is_even(-Integer(2))
True
```

sage.misc.functional.**is_odd**(*x*)

Return whether or not `x` is odd.

This is by definition the complement of *is_even()*.

EXAMPLES:

```
sage: is_odd(-2)
False
sage: is_odd(-3)
True
sage: is_odd(0)
False
sage: is_odd(1)
True
```

```
>>> from sage.all import *
>>> is_odd(-Integer(2))
False
>>> is_odd(-Integer(3))
True
>>> is_odd(Integer(0))
False
>>> is_odd(Integer(1))
True
```

sage.misc.functional.**isqrt**(*x*)

Return an integer square root, i.e., the floor of a square root.

EXAMPLES:

```
sage: isqrt(10)
3
sage: isqrt(10r)
3
```

```
>>> from sage.all import *
>>> isqrt(Integer(10))
3
>>> isqrt(10)
3
```

sage.misc.functional.**kernel**(*x*)

Return the left kernel of `x`.

EXAMPLES:

```
sage: # needs sage.modules
sage: M = MatrixSpace(QQ, 3, 2)
```

(continues on next page)

(continued from previous page)

```
sage: A = M([1,2, 3,4, 5,6])
sage: kernel(A)
Vector space of degree 3 and dimension 1 over Rational Field
Basis matrix:
[ 1 -2  1]
sage: kernel(A.transpose())
Vector space of degree 2 and dimension 0 over Rational Field
Basis matrix:
[]
```

```
>>> from sage.all import *
>>> # needs sage.modules
>>> M = MatrixSpace(QQ, Integer(3), Integer(2))
>>> A = M([Integer(1),Integer(2), Integer(3),Integer(4), Integer(5),Integer(6)])
>>> kernel(A)
Vector space of degree 3 and dimension 1 over Rational Field
Basis matrix:
[ 1 -2  1]
>>> kernel(A.transpose())
Vector space of degree 2 and dimension 0 over Rational Field
Basis matrix:
[]
```

Here are two corner cases:

```
sage: # needs sage.modules
sage: M = MatrixSpace(QQ, 0, 3)
sage: A = M([])
sage: kernel(A)
Vector space of degree 0 and dimension 0 over Rational Field
Basis matrix:
[]
sage: kernel(A.transpose()).basis()
[(1, 0, 0), (0, 1, 0), (0, 0, 1)]
```

```
>>> from sage.all import *
>>> # needs sage.modules
>>> M = MatrixSpace(QQ, Integer(0), Integer(3))
>>> A = M([])
>>> kernel(A)
Vector space of degree 0 and dimension 0 over Rational Field
Basis matrix:
[]
>>> kernel(A.transpose()).basis()
[(1, 0, 0), (0, 1, 0), (0, 0, 1)]
```

sage.misc.functional.**krull_dimension**(*x*)

Return the Krull dimension of `x`.

EXAMPLES:

```
sage: krull_dimension(QQ)
doctest:warning...:
DeprecationWarning: please use the krull_dimension method
See https://github.com/sagemath/sage/issues/39311 for details.
0
sage: ZZ.krull_dimension()
1
sage: ZZ[sqrt(5)].krull_dimension()
↪# needs sage.rings.number_field sage.symbolic
1
sage: U.<x,y,z> = PolynomialRing(ZZ, 3); U
Multivariate Polynomial Ring in x, y, z over Integer Ring
sage: U.krull_dimension()
4
```

```
>>> from sage.all import *
>>> krull_dimension(QQ)
doctest:warning...:
DeprecationWarning: please use the krull_dimension method
See https://github.com/sagemath/sage/issues/39311 for details.
0
>>> ZZ.krull_dimension()
1
>>> ZZ[sqrt(Integer(5))].krull_dimension()                                    ␣
↪      # needs sage.rings.number_field sage.symbolic
1
>>> U = PolynomialRing(ZZ, Integer(3), names=('x', 'y', 'z',)); (x, y, z,) = U._
↪first_ngens(3); U
Multivariate Polynomial Ring in x, y, z over Integer Ring
>>> U.krull_dimension()
4
```

sage.misc.functional.**lift**(*x*)

Lift an object of a quotient ring R/I to R.

EXAMPLES:

We lift an integer modulo 3:

```
sage: Mod(2,3).lift()
2
```

```
>>> from sage.all import *
>>> Mod(Integer(2),Integer(3)).lift()
2
```

We lift an element of a quotient polynomial ring:

```
sage: R.<x> = QQ['x']
sage: S.<xmod> = R.quo(x^2 + 1)                                            #␣
↪needs sage.libs.pari
sage: lift(xmod - 7)                                                       #␣
↪needs sage.libs.pari
x - 7
```

```
>>> from sage.all import *
>>> R = QQ['x']; (x,) = R._first_ngens(1)
>>> S = R.quo(x**Integer(2) + Integer(1), names=('xmod',)); (xmod,) = S._first_
↪ngens(1)# needs sage.libs.pari
>>> lift(xmod - Integer(7))
↪     # needs sage.libs.pari
x - 7
```

sage.misc.functional.**log**(**args*, ***kwds*)

Return the logarithm of the first argument to the base of the second argument which if missing defaults to `e`.

It calls the `log` method of the first argument when computing the logarithm, thus allowing the use of logarithm on any object containing a `log` method. In other words, `log` works on more than just real numbers.

Note

In Magma, the order of arguments is reversed from in Sage, i.e., the base is given first. We use the opposite ordering, so the base can be viewed as an optional second argument.

EXAMPLES:

```
sage: log(e^2)                                                                  #␣
↪needs sage.symbolic
2
```

```
>>> from sage.all import *
>>> log(e**Integer(2))
↪     # needs sage.symbolic
2
```

To change the base of the logarithm, add a second parameter:

```
sage: log(1000,10)
3
```

```
>>> from sage.all import *
>>> log(Integer(1000),Integer(10))
3
```

The synonym `ln` can only take one argument:

```
sage: # needs sage.symbolic
sage: ln(RDF(10))
2.302585092994046
sage: ln(2.718)
0.999896315728952
sage: ln(2.0)
0.693147180559945
sage: ln(float(-1))
3.141592653589793j
```

(continues on next page)

(continued from previous page)

```
sage: ln(complex(-1))
3.141592653589793j
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> ln(RDF(Integer(10)))
2.302585092994046
>>> ln(RealNumber('2.718'))
0.999896315728952
>>> ln(RealNumber('2.0'))
0.693147180559945
>>> ln(float(-Integer(1)))
3.141592653589793j

>>> ln(complex(-Integer(1)))
3.141592653589793j
```

You can use `RDF`, `RealField` or `n` to get a numerical real approximation:

```
sage: log(1024, 2)
10
sage: RDF(log(1024, 2))
10.0

sage: # needs sage.symbolic
sage: log(10, 4)
1/2*log(10)/log(2)
sage: RDF(log(10, 4))
1.6609640474436813
sage: log(10, 2)
log(10)/log(2)
sage: n(log(10, 2))
3.32192809488736
sage: log(10, e)
log(10)
sage: n(log(10, e))
2.30258509299405
```

```
>>> from sage.all import *
>>> log(Integer(1024), Integer(2))
10
>>> RDF(log(Integer(1024), Integer(2)))
10.0

>>> # needs sage.symbolic
>>> log(Integer(10), Integer(4))
1/2*log(10)/log(2)
>>> RDF(log(Integer(10), Integer(4)))
1.6609640474436813
>>> log(Integer(10), Integer(2))
log(10)/log(2)
>>> n(log(Integer(10), Integer(2)))
```

(continues on next page)

(continued from previous page)

```
3.32192809488736
>>> log(Integer(10), e)
log(10)
>>> n(log(Integer(10), e))
2.30258509299405
```

The log function works for negative numbers, complex numbers, and symbolic numbers too, picking the branch with angle between $-\pi$ and π:

```
sage: log(-1+0*I)                                                          #␣
↪needs sage.symbolic
I*pi
sage: log(CC(-1))                                                          #␣
↪needs sage.rings.real_mpfr
3.14159265358979*I
sage: log(-1.0)                                                            #␣
↪needs sage.symbolic
3.14159265358979*I
```

```
>>> from sage.all import *
>>> log(-Integer(1)+Integer(0)*I)                                          ␣
↪              # needs sage.symbolic
I*pi
>>> log(CC(-Integer(1)))                                                  ␣
↪     # needs sage.rings.real_mpfr
3.14159265358979*I
>>> log(-RealNumber('1.0'))                                               ␣
↪          # needs sage.symbolic
3.14159265358979*I
```

Small integer powers are factored out immediately:

```
sage: # needs sage.symbolic
sage: log(4)
2*log(2)
sage: log(1000000000)
9*log(10)
sage: log(8) - 3*log(2)
0
sage: bool(log(8) == 3*log(2))
True
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> log(Integer(4))
2*log(2)
>>> log(Integer(1000000000))
9*log(10)
>>> log(Integer(8)) - Integer(3)*log(Integer(2))
0
>>> bool(log(Integer(8)) == Integer(3)*log(Integer(2)))
True
```

The `hold` parameter can be used to prevent automatic evaluation:

```
sage: # needs sage.symbolic
sage: log(-1, hold=True)
log(-1)
sage: log(-1)
I*pi
sage: I.log(hold=True)
log(I)
sage: I.log(hold=True).simplify()
1/2*I*pi
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> log(-Integer(1), hold=True)
log(-1)
>>> log(-Integer(1))
I*pi
>>> I.log(hold=True)
log(I)
>>> I.log(hold=True).simplify()
1/2*I*pi
```

For input zero, the following behavior occurs:

```
sage: log(0)                                                                #␣
↪needs sage.symbolic
-Infinity
sage: log(CC(0))                                                            #␣
↪needs sage.rings.real_mpfr
-infinity
sage: log(0.0)                                                              #␣
↪needs sage.symbolic
-infinity
```

```
>>> from sage.all import *
>>> log(Integer(0))                                                          ␣
↪     # needs sage.symbolic
-Infinity
>>> log(CC(Integer(0)))                                                      ␣
↪     # needs sage.rings.real_mpfr
-infinity
>>> log(RealNumber('0.0'))                                                   ␣
↪          # needs sage.symbolic
-infinity
```

The log function also works in finite fields as long as the argument lies in the multiplicative group generated by the base:

```
sage: # needs sage.libs.pari
sage: F = GF(13); g = F.multiplicative_generator(); g
2
sage: a = F(8)
```

(continues on next page)

(continued from previous page)

```
sage: log(a, g); g^log(a, g)
3
8
sage: log(a, 3)
Traceback (most recent call last):
...
ValueError: no logarithm of 8 found to base 3 modulo 13
sage: log(F(9), 3)
2
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari
>>> F = GF(Integer(13)); g = F.multiplicative_generator(); g
2
>>> a = F(Integer(8))
>>> log(a, g); g**log(a, g)
3
8
>>> log(a, Integer(3))
Traceback (most recent call last):
...
ValueError: no logarithm of 8 found to base 3 modulo 13
>>> log(F(Integer(9)), Integer(3))
2
```

The log function also works for p-adics (see documentation for p-adics for more information):

```
sage: R = Zp(5); R                                                          #␣
↪needs sage.rings.padics
5-adic Ring with capped relative precision 20
sage: a = R(16); a                                                          #␣
↪needs sage.rings.padics
1 + 3*5 + O(5^20)
sage: log(a)                                                                #␣
↪needs sage.rings.padics
3*5 + 3*5^2 + 3*5^4 + 3*5^5 + 3*5^6 + 4*5^7 + 2*5^8 + 5^9 +
5^11 + 2*5^12 + 5^13 + 3*5^15 + 2*5^16 + 4*5^17 + 3*5^18 +
3*5^19 + O(5^20)
```

```
>>> from sage.all import *
>>> R = Zp(Integer(5)); R                                                   ␣
↪     # needs sage.rings.padics
5-adic Ring with capped relative precision 20
>>> a = R(Integer(16)); a                                                   ␣
↪     # needs sage.rings.padics
1 + 3*5 + O(5^20)
>>> log(a)                                                                 #␣
↪needs sage.rings.padics
3*5 + 3*5^2 + 3*5^4 + 3*5^5 + 3*5^6 + 4*5^7 + 2*5^8 + 5^9 +
5^11 + 2*5^12 + 5^13 + 3*5^15 + 2*5^16 + 4*5^17 + 3*5^18 +
3*5^19 + O(5^20)
```

sage.misc.functional.**minimal_polynomial**(*x*, *var='x'*)

Return the minimal polynomial of `x`.

EXAMPLES:

```
sage: # needs sage.libs.pari sage.modules
sage: a = matrix(ZZ, 2, [1..4])
sage: minpoly(a)
x^2 - 5*x - 2
sage: minpoly(a, 't')
t^2 - 5*t - 2
sage: minimal_polynomial(a)
x^2 - 5*x - 2
sage: minimal_polynomial(a, 'theta')
theta^2 - 5*theta - 2
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari sage.modules
>>> a = matrix(ZZ, Integer(2), (ellipsis_range(Integer(1),Ellipsis,Integer(4))))
>>> minpoly(a)
x^2 - 5*x - 2
>>> minpoly(a, 't')
t^2 - 5*t - 2
>>> minimal_polynomial(a)
x^2 - 5*x - 2
>>> minimal_polynomial(a, 'theta')
theta^2 - 5*theta - 2
```

`sage.misc.functional.`**`minpoly`**(*x*, *var='x'*)

Return the minimal polynomial of `x`.

EXAMPLES:

```
sage: # needs sage.libs.pari sage.modules
sage: a = matrix(ZZ, 2, [1..4])
sage: minpoly(a)
x^2 - 5*x - 2
sage: minpoly(a, 't')
t^2 - 5*t - 2
sage: minimal_polynomial(a)
x^2 - 5*x - 2
sage: minimal_polynomial(a, 'theta')
theta^2 - 5*theta - 2
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari sage.modules
>>> a = matrix(ZZ, Integer(2), (ellipsis_range(Integer(1),Ellipsis,Integer(4))))
>>> minpoly(a)
x^2 - 5*x - 2
>>> minpoly(a, 't')
t^2 - 5*t - 2
>>> minimal_polynomial(a)
x^2 - 5*x - 2
>>> minimal_polynomial(a, 'theta')
```

(continues on next page)

(continued from previous page)

```
theta^2 - 5*theta - 2
```

sage.misc.functional.**multiplicative_order**(*x*)

Return the multiplicative order of `x`, if `x` is a unit, or raise `ArithmeticError` otherwise.

EXAMPLES:

```
sage: a = mod(5, 11)
sage: multiplicative_order(a)                                                  #␣
↪needs sage.libs.pari
5
sage: multiplicative_order(mod(2, 11))                                         #␣
↪needs sage.libs.pari
10
sage: multiplicative_order(mod(2, 12))                                         #␣
↪needs sage.libs.pari
Traceback (most recent call last):
...
ArithmeticError: multiplicative order of 2 not defined since it is not a unit␣
↪modulo 12
```

```
>>> from sage.all import *
>>> a = mod(Integer(5), Integer(11))
>>> multiplicative_order(a)                                                  #␣
↪needs sage.libs.pari
5
>>> multiplicative_order(mod(Integer(2), Integer(11)))                          ␣
↪              # needs sage.libs.pari
10
>>> multiplicative_order(mod(Integer(2), Integer(12)))                          ␣
↪              # needs sage.libs.pari
Traceback (most recent call last):
...
ArithmeticError: multiplicative order of 2 not defined since it is not a unit␣
↪modulo 12
```

sage.misc.functional.**n**(*x*, *prec=None*, *digits=None*, *algorithm=None*)

Return a numerical approximation of `self` with `prec` bits (or decimal `digits`) of precision.

No guarantee is made about the accuracy of the result.

Note

Lower case *n()* is an alias for *numerical_approx()* and may be used as a method.

INPUT:

- `prec` – precision in bits
- `digits` – precision in decimal digits (only used if `prec` is not given)
- `algorithm` – which algorithm to use to compute this approximation (the accepted algorithms depend on the object)

If neither `prec` nor `digits` is given, the default precision is 53 bits (roughly 16 digits).

EXAMPLES:

```
sage: # needs sage.symbolic
sage: numerical_approx(pi, 10)
3.1
sage: numerical_approx(pi, digits=10)
3.141592654
sage: numerical_approx(pi^2 + e, digits=20)
12.587886229548403854
sage: n(pi^2 + e)
12.5878862295484
sage: N(pi^2 + e)
12.5878862295484
sage: n(pi^2 + e, digits=50)
12.587886229548403854194778471228813633070946500941

sage: # needs sage.rings.real_mpfr
sage: a = CC(-5).n(prec=40)
sage: b = ComplexField(40)(-5)
sage: a == b
True
sage: parent(a) is parent(b)
True
sage: numerical_approx(9)
9.00000000000000
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> numerical_approx(pi, Integer(10))
3.1
>>> numerical_approx(pi, digits=Integer(10))
3.141592654
>>> numerical_approx(pi**Integer(2) + e, digits=Integer(20))
12.587886229548403854
>>> n(pi**Integer(2) + e)
12.5878862295484
>>> N(pi**Integer(2) + e)
12.5878862295484
>>> n(pi**Integer(2) + e, digits=Integer(50))
12.587886229548403854194778471228813633070946500941

>>> # needs sage.rings.real_mpfr
>>> a = CC(-Integer(5)).n(prec=Integer(40))
>>> b = ComplexField(Integer(40))(-Integer(5))
>>> a == b
True
>>> parent(a) is parent(b)
True
>>> numerical_approx(Integer(9))
9.00000000000000
```

You can also usually use method notation:

```
sage: (pi^2 + e).n()                                                    #␣
↪needs sage.symbolic
12.5878862295484
sage: (pi^2 + e).numerical_approx()                                     #␣
↪needs sage.symbolic
12.5878862295484
```

```
>>> from sage.all import *
>>> (pi**Integer(2) + e).n()                                             ␣
↪       # needs sage.symbolic
12.5878862295484
>>> (pi**Integer(2) + e).numerical_approx()                              ␣
↪       # needs sage.symbolic
12.5878862295484
```

Vectors and matrices may also have their entries approximated:

```
sage: v = vector(RDF, [1,2,3])                                          #␣
↪needs sage.modules
sage: v.n()                                                             #␣
↪needs sage.modules
(1.00000000000000, 2.00000000000000, 3.00000000000000)

sage: # needs sage.modules
sage: v = vector(CDF, [1,2,3])
sage: v.n()
(1.00000000000000, 2.00000000000000, 3.00000000000000)
sage: _.parent()
Vector space of dimension 3 over Complex Field with 53 bits of precision
sage: v.n(prec=20)
(1.0000, 2.0000, 3.0000)

sage: u = vector(QQ, [1/2, 1/3, 1/4])                                   #␣
↪needs sage.modules
sage: n(u, prec=15)                                                     #␣
↪needs sage.modules
(0.5000, 0.3333, 0.2500)
sage: n(u, digits=5)                                                    #␣
↪needs sage.modules
(0.50000, 0.33333, 0.25000)

sage: # needs sage.modules
sage: v = vector(QQ, [1/2, 0, 0, 1/3, 0, 0, 0, 1/4], sparse=True)
sage: u = v.numerical_approx(digits=4)
sage: u.is_sparse()
True
sage: u
(0.5000, 0.0000, 0.0000, 0.3333, 0.0000, 0.0000, 0.0000, 0.2500)

sage: # needs sage.modules
sage: A = matrix(QQ, 2, 3, range(6))
sage: A.n()
[0.000000000000000  1.00000000000000  2.00000000000000]
```

(continues on next page)

(continued from previous page)

```
[ 3.00000000000000  4.00000000000000  5.00000000000000]
sage: B = matrix(Integers(12), 3, 8, srange(24))
sage: N(B, digits=2)
[0.00  1.0  2.0  3.0  4.0  5.0  6.0  7.0]
[ 8.0  9.0  10.  11. 0.00  1.0  2.0  3.0]
[ 4.0  5.0  6.0  7.0  8.0  9.0  10.  11.]
```

```
>>> from sage.all import *
>>> v = vector(RDF, [Integer(1),Integer(2),Integer(3)])
↪                        # needs sage.modules
>>> v.n()
↪needs sage.modules
(1.00000000000000, 2.00000000000000, 3.00000000000000)

>>> # needs sage.modules
>>> v = vector(CDF, [Integer(1),Integer(2),Integer(3)])
>>> v.n()
(1.00000000000000, 2.00000000000000, 3.00000000000000)
>>> _.parent()
Vector space of dimension 3 over Complex Field with 53 bits of precision
>>> v.n(prec=Integer(20))
(1.0000, 2.0000, 3.0000)

>>> u = vector(QQ, [Integer(1)/Integer(2), Integer(1)/Integer(3), Integer(1)/
↪Integer(4)])                                          # needs sage.modules
>>> n(u, prec=Integer(15))
↪     # needs sage.modules
(0.5000, 0.3333, 0.2500)
>>> n(u, digits=Integer(5))
↪     # needs sage.modules
(0.50000, 0.33333, 0.25000)

>>> # needs sage.modules
>>> v = vector(QQ, [Integer(1)/Integer(2), Integer(0), Integer(0), Integer(1)/
↪Integer(3), Integer(0), Integer(0), Integer(0), Integer(1)/Integer(4)],
↪sparse=True)
>>> u = v.numerical_approx(digits=Integer(4))
>>> u.is_sparse()
True
>>> u
(0.5000, 0.0000, 0.0000, 0.3333, 0.0000, 0.0000, 0.0000, 0.2500)

>>> # needs sage.modules
>>> A = matrix(QQ, Integer(2), Integer(3), range(Integer(6)))
>>> A.n()
[0.000000000000000  1.00000000000000  2.00000000000000]
[ 3.00000000000000  4.00000000000000  5.00000000000000]
>>> B = matrix(Integers(Integer(12)), Integer(3), Integer(8), srange(Integer(24)))
>>> N(B, digits=Integer(2))
[0.00  1.0  2.0  3.0  4.0  5.0  6.0  7.0]
[ 8.0  9.0  10.  11. 0.00  1.0  2.0  3.0]
[ 4.0  5.0  6.0  7.0  8.0  9.0  10.  11.]
```

Internally, numerical approximations of real numbers are stored in base-2. Therefore, numbers which look the same in their decimal expansion might be different:

```
sage: x = N(pi, digits=3); x                                                #␣
↪needs sage.symbolic
3.14
sage: y = N(3.14, digits=3); y                                              #␣
↪needs sage.rings.real_mpfr
3.14
sage: x == y                                                                #␣
↪needs sage.rings.real_mpfr sage.symbolic
False
sage: x.str(base=2)                                                         #␣
↪needs sage.symbolic
'11.001001000100'
sage: y.str(base=2)                                                         #␣
↪needs sage.rings.real_mpfr
'11.001000111101'
```

```
>>> from sage.all import *
>>> x = N(pi, digits=Integer(3)); x                                          ␣
↪     # needs sage.symbolic
3.14
>>> y = N(RealNumber('3.14'), digits=Integer(3)); y                          ␣
↪                   # needs sage.rings.real_mpfr
3.14
>>> x == y                                                                  #␣
↪needs sage.rings.real_mpfr sage.symbolic
False
>>> x.str(base=Integer(2))                                                   ␣
↪     # needs sage.symbolic
'11.001001000100'
>>> y.str(base=Integer(2))                                                   ␣
↪     # needs sage.rings.real_mpfr
'11.001000111101'
```

Increasing the precision of a floating point number is not allowed:

```
sage: CC(-5).n(prec=100)                                                    #␣
↪needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 100 bits, use at most 53 bits
sage: n(1.3r, digits=20)                                                    #␣
↪needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 70 bits, use at most 53 bits
sage: RealField(24).pi().n()                                                #␣
↪needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 53 bits, use at most 24 bits
```

```
>>> from sage.all import *
>>> CC(-Integer(5)).n(prec=Integer(100))                                    ␣
↪              # needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 100 bits, use at most 53 bits
>>> n(1.3, digits=Integer(20))                                              ␣
↪    # needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 70 bits, use at most 53 bits
>>> RealField(Integer(24)).pi().n()                                         ␣
↪     # needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 53 bits, use at most 24 bits
```

As an exceptional case, `digits=1` usually leads to 2 digits (one significant) in the decimal output (see Issue #11647):

```
sage: # needs sage.symbolic
sage: N(pi, digits=1)
3.2
sage: N(pi, digits=2)
3.1
sage: N(100*pi, digits=1)
320.
sage: N(100*pi, digits=2)
310.
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> N(pi, digits=Integer(1))
3.2
>>> N(pi, digits=Integer(2))
3.1
>>> N(Integer(100)*pi, digits=Integer(1))
320.
>>> N(Integer(100)*pi, digits=Integer(2))
310.
```

In the following example, `pi` and `3` are both approximated to two bits of precision and then subtracted, which kills two bits of precision:

```
sage: N(pi, prec=2)                                                         #␣
↪needs sage.symbolic
3.0
sage: N(3, prec=2)                                                          #␣
↪needs sage.rings.real_mpfr
3.0
sage: N(pi - 3, prec=2)                                                     #␣
↪needs sage.symbolic
0.00
```

```
>>> from sage.all import *
>>> N(pi, prec=Integer(2))                                                    ␣
↪     # needs sage.symbolic
3.0
>>> N(Integer(3), prec=Integer(2))                                            ␣
↪              # needs sage.rings.real_mpfr
3.0
>>> N(pi - Integer(3), prec=Integer(2))                                       ␣
↪              # needs sage.symbolic
0.00
```

sage.misc.functional.**ngens**(*x*)

Return the number of generators of `x`.

EXAMPLES:

```
sage: R.<x,y> = SR[]; R                                                      #␣
↪needs sage.symbolic
Multivariate Polynomial Ring in x, y over Symbolic Ring
sage: ngens(R)                                                               #␣
↪needs sage.symbolic
2
sage: A = AbelianGroup(5, [5,5,7,8,9])                                       #␣
↪needs sage.groups
sage: ngens(A)                                                               #␣
↪needs sage.groups
5
sage: ngens(ZZ)
1
```

```
>>> from sage.all import *
>>> R = SR['x, y']; (x, y,) = R._first_ngens(2); R                           ␣
↪                          # needs sage.symbolic
Multivariate Polynomial Ring in x, y over Symbolic Ring
>>> ngens(R)                                                                 #␣
↪needs sage.symbolic
2
>>> A = AbelianGroup(Integer(5), [Integer(5),Integer(5),Integer(7),Integer(8),
↪Integer(9)])                                                 # needs sage.groups
>>> ngens(A)                                                                 #␣
↪needs sage.groups
5
>>> ngens(ZZ)
1
```

sage.misc.functional.**norm**(*x*)

Return the norm of `x`.

For matrices and vectors, this returns the L2-norm. The L2-norm of a vector $\mathbf{v} = (v_1, v_2, \ldots, v_n)$, also called the Euclidean norm, is defined as

$$|\mathbf{v}| = \sqrt{\sum_{i=1}^{n} |v_i|^2}$$

where $|v_i|$ is the complex modulus of v_i. The Euclidean norm is often used for determining the distance between two points in two- or three-dimensional space.

For complex numbers, the function returns the field norm. If $c = a + bi$ is a complex number, then the norm of c is defined as the product of c and its complex conjugate:

$$\text{norm}(c) = \text{norm}(a + bi) = c \cdot \overline{c} = a^2 + b^2.$$

The norm of a complex number is different from its absolute value. The absolute value of a complex number is defined to be the square root of its norm. A typical use of the complex norm is in the integral domain $\mathbf{Z}[i]$ of Gaussian integers, where the norm of each Gaussian integer $c = a + bi$ is defined as its complex norm.

For vector fields on a pseudo-Riemannian manifold (M, g), the function returns the norm with respect to the metric g:

$$|v| = \sqrt{g(v, v)}$$

See also

- sage.matrix.matrix2.Matrix.norm()
- sage.modules.free_module_element.FreeModuleElement.norm()
- sage.rings.complex_double.ComplexDoubleElement.norm()
- sage.rings.complex_mpfr.ComplexNumber.norm()
- sage.symbolic.expression.Expression.norm()
- sage.manifolds.differentiable.vectorfield.VectorField.norm()

EXAMPLES:

The norm of vectors:

```
sage: # needs sage.modules sage.symbolic
sage: z = 1 + 2*I
sage: norm(vector([z]))
sqrt(5)
sage: v = vector([-1,2,3])
sage: norm(v)
sqrt(14)
sage: _ = var("a b c d", domain='real')
sage: v = vector([a, b, c, d])
sage: norm(v)
sqrt(a^2 + b^2 + c^2 + d^2)
```

```
>>> from sage.all import *
>>> # needs sage.modules sage.symbolic
>>> z = Integer(1) + Integer(2)*I
>>> norm(vector([z]))
sqrt(5)
>>> v = vector([-Integer(1),Integer(2),Integer(3)])
>>> norm(v)
sqrt(14)
```

(continues on next page)

(continued from previous page)

```
>>> _ = var("a b c d", domain='real')
>>> v = vector([a, b, c, d])
>>> norm(v)
sqrt(a^2 + b^2 + c^2 + d^2)
```

The norm of matrices:

```
sage: # needs sage.modules sage.symbolic
sage: z = 1 + 2*I
sage: norm(matrix([[z]]))
2.23606797749979
sage: M = matrix(ZZ, [[1,2,4,3], [-1,0,3,-10]])
sage: norm(M)  # abs tol 1e-14
10.690331129154467
sage: norm(CDF(z))
5.0
sage: norm(CC(z))
5.00000000000000
```

```
>>> from sage.all import *
>>> # needs sage.modules sage.symbolic
>>> z = Integer(1) + Integer(2)*I
>>> norm(matrix([[z]]))
2.23606797749979
>>> M = matrix(ZZ, [[Integer(1),Integer(2),Integer(4),Integer(3)], [-Integer(1),
↪Integer(0),Integer(3),-Integer(10)]])
>>> norm(M)  # abs tol 1e-14
10.690331129154467
>>> norm(CDF(z))
5.0
>>> norm(CC(z))
5.00000000000000
```

The norm of complex numbers:

```
sage: # needs sage.symbolic
sage: z = 2 - 3*I
sage: norm(z)
13
sage: a = randint(-10^10, 100^10)
sage: b = randint(-10^10, 100^10)
sage: z = a + b*I
sage: bool(norm(z) == a^2 + b^2)
True
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> z = Integer(2) - Integer(3)*I
>>> norm(z)
13
>>> a = randint(-Integer(10)**Integer(10), Integer(100)**Integer(10))
>>> b = randint(-Integer(10)**Integer(10), Integer(100)**Integer(10))
```

(continues on next page)

(continued from previous page)

```
>>> z = a + b*I
>>> bool(norm(z) == a**Integer(2) + b**Integer(2))
True
```

The complex norm of symbolic expressions:

```
sage: # needs sage.symbolic
sage: a, b, c = var("a, b, c")
sage: assume((a, 'real'), (b, 'real'), (c, 'real'))
sage: z = a + b*I
sage: bool(norm(z).simplify() == a^2 + b^2)
True
sage: norm(a + b).simplify()
a^2 + 2*a*b + b^2
sage: v = vector([a, b, c])
sage: bool(norm(v).simplify() == sqrt(a^2 + b^2 + c^2))
True
sage: forget()
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> a, b, c = var("a, b, c")
>>> assume((a, 'real'), (b, 'real'), (c, 'real'))
>>> z = a + b*I
>>> bool(norm(z).simplify() == a**Integer(2) + b**Integer(2))
True
>>> norm(a + b).simplify()
a^2 + 2*a*b + b^2
>>> v = vector([a, b, c])
>>> bool(norm(v).simplify() == sqrt(a**Integer(2) + b**Integer(2) +␣
↪c**Integer(2)))
True
>>> forget()
```

sage.misc.functional.**numerator**(*x*)

Return the numerator of `x`.

EXAMPLES:

```
sage: R.<x> = PolynomialRing(QQ)
sage: F = FractionField(R)
sage: r = (x+1)/(x-1)
sage: numerator(r)
x + 1
sage: numerator(17/11111)
17
```

```
>>> from sage.all import *
>>> R = PolynomialRing(QQ, names=('x',)); (x,) = R._first_ngens(1)
>>> F = FractionField(R)
>>> r = (x+Integer(1))/(x-Integer(1))
>>> numerator(r)
```

(continues on next page)

(continued from previous page)

```
x + 1
>>> numerator(Integer(17)/Integer(11111))
17
```

sage.misc.functional.**numerical_approx**(*x*, *prec=None*, *digits=None*, *algorithm=None*)

Return a numerical approximation of `self` with `prec` bits (or decimal `digits`) of precision.

No guarantee is made about the accuracy of the result.

Note

Lower case *n()* is an alias for *numerical_approx()* and may be used as a method.

INPUT:

- `prec` – precision in bits
- `digits` – precision in decimal digits (only used if `prec` is not given)
- `algorithm` – which algorithm to use to compute this approximation (the accepted algorithms depend on the object)

If neither `prec` nor `digits` is given, the default precision is 53 bits (roughly 16 digits).

EXAMPLES:

```
sage: # needs sage.symbolic
sage: numerical_approx(pi, 10)
3.1
sage: numerical_approx(pi, digits=10)
3.141592654
sage: numerical_approx(pi^2 + e, digits=20)
12.587886229548403854
sage: n(pi^2 + e)
12.5878862295484
sage: N(pi^2 + e)
12.5878862295484
sage: n(pi^2 + e, digits=50)
12.587886229548403854194778471228813633070946500941

sage: # needs sage.rings.real_mpfr
sage: a = CC(-5).n(prec=40)
sage: b = ComplexField(40)(-5)
sage: a == b
True
sage: parent(a) is parent(b)
True
sage: numerical_approx(9)
9.00000000000000
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> numerical_approx(pi, Integer(10))
3.1
```

(continues on next page)

(continued from previous page)

```
>>> numerical_approx(pi, digits=Integer(10))
3.141592654
>>> numerical_approx(pi**Integer(2) + e, digits=Integer(20))
12.587886229548403854
>>> n(pi**Integer(2) + e)
12.5878862295484
>>> N(pi**Integer(2) + e)
12.5878862295484
>>> n(pi**Integer(2) + e, digits=Integer(50))
12.587886229548403854194778471228813633070946500941

>>> # needs sage.rings.real_mpfr
>>> a = CC(-Integer(5)).n(prec=Integer(40))
>>> b = ComplexField(Integer(40))(-Integer(5))
>>> a == b
True
>>> parent(a) is parent(b)
True
>>> numerical_approx(Integer(9))
9.00000000000000
```

You can also usually use method notation:

```
sage: (pi^2 + e).n()                                                    #␣
↪needs sage.symbolic
12.5878862295484
sage: (pi^2 + e).numerical_approx()                                     #␣
↪needs sage.symbolic
12.5878862295484
```

```
>>> from sage.all import *
>>> (pi**Integer(2) + e).n()                                             ␣
↪      # needs sage.symbolic
12.5878862295484
>>> (pi**Integer(2) + e).numerical_approx()                              ␣
↪      # needs sage.symbolic
12.5878862295484
```

Vectors and matrices may also have their entries approximated:

```
sage: v = vector(RDF, [1,2,3])                                          #␣
↪needs sage.modules
sage: v.n()                                                             #␣
↪needs sage.modules
(1.00000000000000, 2.00000000000000, 3.00000000000000)

sage: # needs sage.modules
sage: v = vector(CDF, [1,2,3])
sage: v.n()
(1.00000000000000, 2.00000000000000, 3.00000000000000)
sage: _.parent()
Vector space of dimension 3 over Complex Field with 53 bits of precision
```

(continues on next page)

(continued from previous page)

```
sage: v.n(prec=20)
(1.0000, 2.0000, 3.0000)

sage: u = vector(QQ, [1/2, 1/3, 1/4])                                          #␣
↪needs sage.modules
sage: n(u, prec=15)                                                            #␣
↪needs sage.modules
(0.5000, 0.3333, 0.2500)
sage: n(u, digits=5)                                                           #␣
↪needs sage.modules
(0.50000, 0.33333, 0.25000)

sage: # needs sage.modules
sage: v = vector(QQ, [1/2, 0, 0, 1/3, 0, 0, 0, 1/4], sparse=True)
sage: u = v.numerical_approx(digits=4)
sage: u.is_sparse()
True
sage: u
(0.5000, 0.0000, 0.0000, 0.3333, 0.0000, 0.0000, 0.0000, 0.2500)

sage: # needs sage.modules
sage: A = matrix(QQ, 2, 3, range(6))
sage: A.n()
[0.000000000000000  1.00000000000000  2.00000000000000]
[ 3.00000000000000  4.00000000000000  5.00000000000000]
sage: B = matrix(Integers(12), 3, 8, srange(24))
sage: N(B, digits=2)
[0.00  1.0  2.0  3.0  4.0  5.0  6.0  7.0]
[ 8.0  9.0  10.  11. 0.00  1.0  2.0  3.0]
[ 4.0  5.0  6.0  7.0  8.0  9.0  10.  11.]
```

```
>>> from sage.all import *
>>> v = vector(RDF, [Integer(1),Integer(2),Integer(3)])                        ␣
↪                       # needs sage.modules
>>> v.n()                                                                     #␣
↪needs sage.modules
(1.00000000000000, 2.00000000000000, 3.00000000000000)

>>> # needs sage.modules
>>> v = vector(CDF, [Integer(1),Integer(2),Integer(3)])
>>> v.n()
(1.00000000000000, 2.00000000000000, 3.00000000000000)
>>> _.parent()
Vector space of dimension 3 over Complex Field with 53 bits of precision
>>> v.n(prec=Integer(20))
(1.0000, 2.0000, 3.0000)

>>> u = vector(QQ, [Integer(1)/Integer(2), Integer(1)/Integer(3), Integer(1)/
↪Integer(4)])                                              # needs sage.modules
>>> n(u, prec=Integer(15))                                                     ␣
↪      # needs sage.modules
(0.5000, 0.3333, 0.2500)
```

(continues on next page)

(continued from previous page)

```
>>> n(u, digits=Integer(5))                                                    ␣
↪     # needs sage.modules
(0.50000, 0.33333, 0.25000)

>>> # needs sage.modules
>>> v = vector(QQ, [Integer(1)/Integer(2), Integer(0), Integer(0), Integer(1)/
↪Integer(3), Integer(0), Integer(0), Integer(0), Integer(1)/Integer(4)],␣
↪sparse=True)
>>> u = v.numerical_approx(digits=Integer(4))
>>> u.is_sparse()
True
>>> u
(0.5000, 0.0000, 0.0000, 0.3333, 0.0000, 0.0000, 0.0000, 0.2500)

>>> # needs sage.modules
>>> A = matrix(QQ, Integer(2), Integer(3), range(Integer(6)))
>>> A.n()
[0.000000000000000  1.00000000000000  2.00000000000000]
[ 3.00000000000000  4.00000000000000  5.00000000000000]
>>> B = matrix(Integers(Integer(12)), Integer(3), Integer(8), srange(Integer(24)))
>>> N(B, digits=Integer(2))
[0.00  1.0  2.0  3.0  4.0  5.0  6.0  7.0]
[ 8.0  9.0  10.  11. 0.00  1.0  2.0  3.0]
[ 4.0  5.0  6.0  7.0  8.0  9.0  10.  11.]
```

Internally, numerical approximations of real numbers are stored in base-2. Therefore, numbers which look the same in their decimal expansion might be different:

```
sage: x = N(pi, digits=3); x                                                  #␣
↪needs sage.symbolic
3.14
sage: y = N(3.14, digits=3); y                                                #␣
↪needs sage.rings.real_mpfr
3.14
sage: x == y                                                                  #␣
↪needs sage.rings.real_mpfr sage.symbolic
False
sage: x.str(base=2)                                                           #␣
↪needs sage.symbolic
'11.001001000100'
sage: y.str(base=2)                                                           #␣
↪needs sage.rings.real_mpfr
'11.001000111101'
```

```
>>> from sage.all import *
>>> x = N(pi, digits=Integer(3)); x                                           ␣
↪     # needs sage.symbolic
3.14
>>> y = N(RealNumber('3.14'), digits=Integer(3)); y                           ␣
↪                   # needs sage.rings.real_mpfr
3.14
>>> x == y                                                                    #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.rings.real_mpfr sage.symbolic
False
>>> x.str(base=Integer(2))                                                    ␣
↪     # needs sage.symbolic
'11.001001000100'
>>> y.str(base=Integer(2))                                                    ␣
↪     # needs sage.rings.real_mpfr
'11.001000111101'
```

Increasing the precision of a floating point number is not allowed:

```
sage: CC(-5).n(prec=100)                                                    #␣
↪needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 100 bits, use at most 53 bits
sage: n(1.3r, digits=20)                                                    #␣
↪needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 70 bits, use at most 53 bits
sage: RealField(24).pi().n()                                                #␣
↪needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 53 bits, use at most 24 bits
```

```
>>> from sage.all import *
>>> CC(-Integer(5)).n(prec=Integer(100))                                      ␣
↪              # needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 100 bits, use at most 53 bits
>>> n(1.3, digits=Integer(20))                                                ␣
↪    # needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 70 bits, use at most 53 bits
>>> RealField(Integer(24)).pi().n()                                           ␣
↪     # needs sage.rings.real_mpfr
Traceback (most recent call last):
...
TypeError: cannot approximate to a precision of 53 bits, use at most 24 bits
```

As an exceptional case, `digits=1` usually leads to 2 digits (one significant) in the decimal output (see Issue #11647):

```
sage: # needs sage.symbolic
sage: N(pi, digits=1)
3.2
sage: N(pi, digits=2)
3.1
```

(continues on next page)

(continued from previous page)

```
sage: N(100*pi, digits=1)
320.
sage: N(100*pi, digits=2)
310.
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> N(pi, digits=Integer(1))
3.2
>>> N(pi, digits=Integer(2))
3.1
>>> N(Integer(100)*pi, digits=Integer(1))
320.
>>> N(Integer(100)*pi, digits=Integer(2))
310.
```

In the following example, `pi` and `3` are both approximated to two bits of precision and then subtracted, which kills two bits of precision:

```
sage: N(pi, prec=2)                                                             #␣
↪needs sage.symbolic
3.0
sage: N(3, prec=2)                                                              #␣
↪needs sage.rings.real_mpfr
3.0
sage: N(pi - 3, prec=2)                                                         #␣
↪needs sage.symbolic
0.00
```

```
>>> from sage.all import *
>>> N(pi, prec=Integer(2))                                                      ␣
↪     # needs sage.symbolic
3.0
>>> N(Integer(3), prec=Integer(2))                                              ␣
↪              # needs sage.rings.real_mpfr
3.0
>>> N(pi - Integer(3), prec=Integer(2))                                         ␣
↪              # needs sage.symbolic
0.00
```

`sage.misc.functional.`**`objgen`**`(`x`)`

EXAMPLES:

```
sage: R, x = objgen(FractionField(QQ['x']))
sage: R
Fraction Field of Univariate Polynomial Ring in x over Rational Field
sage: x
x
```

```
>>> from sage.all import *
>>> R, x = objgen(FractionField(QQ['x']))
```

(continues on next page)

(continued from previous page)

```
>>> R
Fraction Field of Univariate Polynomial Ring in x over Rational Field
>>> x
x
```

sage.misc.functional.**objgens**(*x*)

EXAMPLES:

```
sage: R, x = objgens(PolynomialRing(QQ,3, 'x'))
sage: R
Multivariate Polynomial Ring in x0, x1, x2 over Rational Field
sage: x
(x0, x1, x2)
```

```
>>> from sage.all import *
>>> R, x = objgens(PolynomialRing(QQ,Integer(3), 'x'))
>>> R
Multivariate Polynomial Ring in x0, x1, x2 over Rational Field
>>> x
(x0, x1, x2)
```

sage.misc.functional.**order**(*x*)

Return the order of `x`.

If `x` is a ring or module element, this is the additive order of `x`.

EXAMPLES:

```
sage: C = CyclicPermutationGroup(10)                                    #␣
↪needs sage.groups
sage: order(C)                                                          #␣
↪needs sage.groups
10
sage: F = GF(7)
sage: order(F)
7
```

```
>>> from sage.all import *
>>> C = CyclicPermutationGroup(Integer(10))                                ␣
↪     # needs sage.groups
>>> order(C)                                                           #␣
↪needs sage.groups
10
>>> F = GF(Integer(7))
>>> order(F)
7
```

sage.misc.functional.**quo**(*x*, *y*, **args*, ***kwds*)

Return the quotient object x/y, e.g., a quotient of numbers or of a polynomial ring x by the ideal generated by y, etc.

EXAMPLES:

```
sage: quotient(5, 6)
5/6
sage: quotient(5., 6.)
0.833333333333333
sage: R.<x> = ZZ[]; R
Univariate Polynomial Ring in x over Integer Ring
sage: I = Ideal(R, x^2 + 1)
sage: quotient(R, I)                                                    #␣
↪needs sage.libs.pari
Univariate Quotient Polynomial Ring in xbar over Integer Ring with modulus x^2 + 1
```

```
>>> from sage.all import *
>>> quotient(Integer(5), Integer(6))
5/6
>>> quotient(RealNumber('5.'), RealNumber('6.'))
0.833333333333333
>>> R = ZZ['x']; (x,) = R._first_ngens(1); R
Univariate Polynomial Ring in x over Integer Ring
>>> I = Ideal(R, x**Integer(2) + Integer(1))
>>> quotient(R, I)                                                      #␣
↪needs sage.libs.pari
Univariate Quotient Polynomial Ring in xbar over Integer Ring with modulus x^2 + 1
```

sage.misc.functional.**quotient**(*x*, *y*, **args*, ***kwds*)

Return the quotient object x/y, e.g., a quotient of numbers or of a polynomial ring x by the ideal generated by y, etc.

EXAMPLES:

```
sage: quotient(5, 6)
5/6
sage: quotient(5., 6.)
0.833333333333333
sage: R.<x> = ZZ[]; R
Univariate Polynomial Ring in x over Integer Ring
sage: I = Ideal(R, x^2 + 1)
sage: quotient(R, I)                                                    #␣
↪needs sage.libs.pari
Univariate Quotient Polynomial Ring in xbar over Integer Ring with modulus x^2 + 1
```

```
>>> from sage.all import *
>>> quotient(Integer(5), Integer(6))
5/6
>>> quotient(RealNumber('5.'), RealNumber('6.'))
0.833333333333333
>>> R = ZZ['x']; (x,) = R._first_ngens(1); R
Univariate Polynomial Ring in x over Integer Ring
>>> I = Ideal(R, x**Integer(2) + Integer(1))
>>> quotient(R, I)                                                      #␣
↪needs sage.libs.pari
Univariate Quotient Polynomial Ring in xbar over Integer Ring with modulus x^2 + 1
```

sage.misc.functional.**rank**(*x*)

Return the rank of `x`.

EXAMPLES:

We compute the rank of a matrix:

```
sage: M = MatrixSpace(QQ, 3, 3)                                                 #␣
↪needs sage.modules
sage: A = M([1,2,3, 4,5,6, 7,8,9])                                              #␣
↪needs sage.modules
sage: rank(A)                                                                   #␣
↪needs sage.modules
2
```

```
>>> from sage.all import *
>>> M = MatrixSpace(QQ, Integer(3), Integer(3))                                 ␣
↪              # needs sage.modules
>>> A = M([Integer(1),Integer(2),Integer(3), Integer(4),Integer(5),Integer(6),␣
↪Integer(7),Integer(8),Integer(9)])
↪# needs sage.modules
>>> rank(A)                                                                     #␣
↪needs sage.modules
2
```

We compute the rank of an elliptic curve:

```
sage: E = EllipticCurve([0,0,1,-1,0])                                           #␣
↪needs sage.schemes
sage: rank(E)                                                                   #␣
↪needs sage.schemes
1
```

```
>>> from sage.all import *
>>> E = EllipticCurve([Integer(0),Integer(0),Integer(1),-Integer(1),Integer(0)]) ␣
↪                                          # needs sage.schemes
>>> rank(E)                                                                     #␣
↪needs sage.schemes
1
```

`sage.misc.functional.`**`regulator`**`(x)`

Return the regulator of `x`.

EXAMPLES:

```
sage: x = polygen(ZZ, 'x')
sage: regulator(NumberField(x^2 - 2, 'a'))                                      #␣
↪needs sage.rings.number_field
0.881373587019543
sage: regulator(EllipticCurve('11a'))                                           #␣
↪needs sage.schemes
1.00000000000000
```

```
>>> from sage.all import *
>>> x = polygen(ZZ, 'x')
```

(continues on next page)

(continued from previous page)

```
>>> regulator(NumberField(x**Integer(2) - Integer(2), 'a'))
↪               # needs sage.rings.number_field
0.881373587019543
>>> regulator(EllipticCurve('11a'))                                    #␣
↪needs sage.schemes
1.00000000000000
```

sage.misc.functional.**round**(*x*, *ndigits=0*)

round(number[, ndigits]) - double-precision real number

Round a number to a given precision in decimal digits (default 0 digits). If no precision is specified this just calls the element's .round() method.

EXAMPLES:

```
sage: # needs sage.symbolic
sage: round(sqrt(2), 2)
1.41
sage: q = round(sqrt(2), 5); q
1.41421
sage: type(q)
<class 'sage.rings.real_double...RealDoubleElement...'>
sage: q = round(sqrt(2)); q
1
sage: type(q)
<class 'sage.rings.integer.Integer'>
sage: round(pi)
3

sage: b = 5.4999999999999999
sage: round(b)
5
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> round(sqrt(Integer(2)), Integer(2))
1.41
>>> q = round(sqrt(Integer(2)), Integer(5)); q
1.41421
>>> type(q)
<class 'sage.rings.real_double...RealDoubleElement...'>
>>> q = round(sqrt(Integer(2))); q
1
>>> type(q)
<class 'sage.rings.integer.Integer'>
>>> round(pi)
3

>>> b = RealNumber('5.4999999999999999')
>>> round(b)
5
```

This example addresses Issue #23502:

```
sage: n = round(6); type(n)
<class 'sage.rings.integer.Integer'>
```

```
>>> from sage.all import *
>>> n = round(Integer(6)); type(n)
<class 'sage.rings.integer.Integer'>
```

Since we use floating-point with a limited range, some roundings can't be performed:

```
sage: round(sqrt(Integer('1'*1000)), 2)                                    #␣
↪needs sage.symbolic
+infinity
```

```
>>> from sage.all import *
>>> round(sqrt(Integer('1'*Integer(1000))), Integer(2))                    ␣
↪              # needs sage.symbolic
+infinity
```

IMPLEMENTATION: If ndigits is specified, it calls Python's builtin round function, and converts the result to a real double field element. Otherwise, it tries the argument's .round() method; if that fails, it reverts to the builtin round function, converted to a real double field element.

Note

This is currently slower than the builtin round function, since it does more work - i.e., allocating an RDF element and initializing it. To access the builtin version do `import builtins; builtins.round`.

`sage.misc.functional.`**`sqrt`**(*x*, **args*, ***kwds*)

INPUT:

- `x` – a number
- `prec` – integer (default: `None`); if `None`, returns an exact square root. Otherwise returns a numerical square root if necessary, to the given bits of precision.
- `extend` – boolean (default: `True`); this is a placeholder, and is always ignored or passed to the `sqrt` method of `x`, since in the symbolic ring everything has a square root
- `all` – boolean (default: `False`); if `True`, return all square roots of `self`, instead of just one

EXAMPLES:

```
sage: sqrt(4)
2
sage: sqrt(4, all=True)
[2, -2]

sage: # needs sage.symbolic
sage: sqrt(-1)
I
sage: sqrt(2)
sqrt(2)
sage: sqrt(2)^2
2
```

(continues on next page)

(continued from previous page)

```
sage: sqrt(x^2)
sqrt(x^2)
```

```
>>> from sage.all import *
>>> sqrt(Integer(4))
2
>>> sqrt(Integer(4), all=True)
[2, -2]

>>> # needs sage.symbolic
>>> sqrt(-Integer(1))
I
>>> sqrt(Integer(2))
sqrt(2)
>>> sqrt(Integer(2))**Integer(2)
2
>>> sqrt(x**Integer(2))
sqrt(x^2)
```

For a non-symbolic square root, there are a few options. The best is to numerically approximate afterward:

```
sage: sqrt(2).n()                                                           #␣
↪needs sage.symbolic
1.41421356237310
sage: sqrt(2).n(prec=100)                                                   #␣
↪needs sage.symbolic
1.4142135623730950488016887242
```

```
>>> from sage.all import *
>>> sqrt(Integer(2)).n()                                                    ␣
↪     # needs sage.symbolic
1.41421356237310
>>> sqrt(Integer(2)).n(prec=Integer(100))                                   ␣
↪               # needs sage.symbolic
1.4142135623730950488016887242
```

Or one can input a numerical type:

```
sage: sqrt(2.)
1.41421356237310
sage: sqrt(2.0000000000000000000000000)
1.4142135623730950488169
sage: sqrt(4.0)
2.00000000000000
```

```
>>> from sage.all import *
>>> sqrt(RealNumber('2.'))
1.41421356237310
>>> sqrt(RealNumber('2.0000000000000000000000000'))
1.4142135623730950488169
>>> sqrt(RealNumber('4.0'))
2.00000000000000
```

To prevent automatic evaluation, one can use the `hold` parameter after coercing to the symbolic ring:

```
sage: sqrt(SR(4), hold=True)                                                    #␣
↪needs sage.symbolic
sqrt(4)
sage: sqrt(4, hold=True)
Traceback (most recent call last):
...
TypeError: ..._do_sqrt() got an unexpected keyword argument 'hold'
```

```
>>> from sage.all import *
>>> sqrt(SR(Integer(4)), hold=True)                                             ␣
↪     # needs sage.symbolic
sqrt(4)
>>> sqrt(Integer(4), hold=True)
Traceback (most recent call last):
...
TypeError: ..._do_sqrt() got an unexpected keyword argument 'hold'
```

This illustrates that the bug reported in Issue #6171 has been fixed:

```
sage: a = 1.1
sage: a.sqrt(prec=100)  # this is supposed to fail
Traceback (most recent call last):
...
TypeError: ...sqrt() got an unexpected keyword argument 'prec'
sage: sqrt(a, prec=100)                                                         #␣
↪needs sage.rings.real_mpfr
1.0488088481701515469914535137
sage: sqrt(4.00, prec=250)                                                      #␣
↪needs sage.rings.real_mpfr
2.0000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
```

```
>>> from sage.all import *
>>> a = RealNumber('1.1')
>>> a.sqrt(prec=Integer(100))  # this is supposed to fail
Traceback (most recent call last):
...
TypeError: ...sqrt() got an unexpected keyword argument 'prec'
>>> sqrt(a, prec=Integer(100))                                                  ␣
↪     # needs sage.rings.real_mpfr
1.0488088481701515469914535137
>>> sqrt(RealNumber('4.00'), prec=Integer(250))                                 ␣
↪                    # needs sage.rings.real_mpfr
2.0000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
```

One can use numpy input as well:

```
sage: import numpy                                                              #␣
↪needs numpy
sage: a = numpy.arange(2,5)                                                     #␣
↪needs numpy
sage: sqrt(a)                                                                   #␣
```

(continues on next page)

(continued from previous page)

```
↪needs numpy
array([1.41421356, 1.73205081, 2.        ])
```

```
>>> from sage.all import *
>>> import numpy                                                    #␣
↪needs numpy
>>> a = numpy.arange(Integer(2),Integer(5))                          ␣
↪              # needs numpy
>>> sqrt(a)                                                         #␣
↪needs numpy
array([1.41421356, 1.73205081, 2.        ])
```

sage.misc.functional.**squarefree_part**(*x*)

Return the square free part of `x`, i.e., a divisor z such that $x = zy^2$, for a perfect square y^2.

EXAMPLES:

```
sage: squarefree_part(100)
1
sage: squarefree_part(12)
3
sage: squarefree_part(10)
10
sage: squarefree_part(216r) # see #8976
6
```

```
>>> from sage.all import *
>>> squarefree_part(Integer(100))
1
>>> squarefree_part(Integer(12))
3
>>> squarefree_part(Integer(10))
10
>>> squarefree_part(Integer(216)) # see #8976
6
```

```
sage: x = QQ['x'].0
sage: S = squarefree_part(-9*x*(x-6)^7*(x-3)^2); S
-9*x^2 + 54*x
sage: S.factor()                                                    #␣
↪needs sage.libs.pari
(-9) * (x - 6) * x
```

```
>>> from sage.all import *
>>> x = QQ['x'].gen(0)
>>> S = squarefree_part(-Integer(9)*x*(x-Integer(6))**Integer(7)*(x-
↪Integer(3))**Integer(2)); S
-9*x^2 + 54*x
>>> S.factor()                                                      #␣
↪needs sage.libs.pari
(-9) * (x - 6) * x
```

```
sage: f = (x^3 + x + 1)^3*(x-1); f
x^10 - x^9 + 3*x^8 + 3*x^5 - 2*x^4 - x^3 - 2*x - 1
sage: g = squarefree_part(f); g
x^4 - x^3 + x^2 - 1
sage: g.factor()                                                              #␣
↪needs sage.libs.pari
(x - 1) * (x^3 + x + 1)
```

```
>>> from sage.all import *
>>> f = (x**Integer(3) + x + Integer(1))**Integer(3)*(x-Integer(1)); f
x^10 - x^9 + 3*x^8 + 3*x^5 - 2*x^4 - x^3 - 2*x - 1
>>> g = squarefree_part(f); g
x^4 - x^3 + x^2 - 1
>>> g.factor()                                                                #␣
↪needs sage.libs.pari
(x - 1) * (x^3 + x + 1)
```

sage.misc.functional.**symbolic_prod**(*expression*, **args*, ***kwds*)

Return the symbolic product $\prod_{v=a}^{b} expression$ with respect to the variable v with endpoints a and b.

INPUT:

- `expression` – a symbolic expression
- `v` – a variable or variable name
- `a` – lower endpoint of the product
- `b` – upper endpoint of the prduct
- `algorithm` – (default: `'maxima'`) one of
  - `'maxima'` – use Maxima (the default)
  - `'giac'` – (optional) use Giac
  - `'sympy'` – use SymPy
- `hold` – boolean (default: `False`); if `True` don't evaluate

EXAMPLES:

```
sage: # needs sage.symbolic
sage: i, k, n = var('i,k,n')
sage: product(k, k, 1, n)
factorial(n)
sage: product(x + i*(i+1)/2, i, 1, 4)
x^4 + 20*x^3 + 127*x^2 + 288*x + 180
sage: product(i^2, i, 1, 7)
25401600
sage: f = function('f')
sage: product(f(i), i, 1, 7)
f(7)*f(6)*f(5)*f(4)*f(3)*f(2)*f(1)
sage: product(f(i), i, 1, n)
product(f(i), i, 1, n)
sage: assume(k>0)
sage: product(integrate(x^k, x, 0, 1), k, 1, n)
1/factorial(n + 1)
```

(continues on next page)

(continued from previous page)

```
sage: product(f(i), i, 1, n).log().log_expand()
sum(log(f(i)), i, 1, n)
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> i, k, n = var('i,k,n')
>>> product(k, k, Integer(1), n)
factorial(n)
>>> product(x + i*(i+Integer(1))/Integer(2), i, Integer(1), Integer(4))
x^4 + 20*x^3 + 127*x^2 + 288*x + 180
>>> product(i**Integer(2), i, Integer(1), Integer(7))
25401600
>>> f = function('f')
>>> product(f(i), i, Integer(1), Integer(7))
f(7)*f(6)*f(5)*f(4)*f(3)*f(2)*f(1)
>>> product(f(i), i, Integer(1), n)
product(f(i), i, 1, n)
>>> assume(k>Integer(0))
>>> product(integrate(x**k, x, Integer(0), Integer(1)), k, Integer(1), n)
1/factorial(n + 1)
>>> product(f(i), i, Integer(1), n).log().log_expand()
sum(log(f(i)), i, 1, n)
```

sage.misc.functional.**symbolic_sum**(*expression*, **args*, ***kwds*)

Return the symbolic sum $\sum_{v=a}^{b} expression$ with respect to the variable v with endpoints a and b.

INPUT:

- `expression` – a symbolic expression
- `v` – a variable or variable name
- `a` – lower endpoint of the sum
- `b` – upper endpoint of the sum
- `algorithm` – (default: `'maxima'`) one of
  - `'maxima'` – use Maxima (the default)
  - `'maple'` – (optional) use Maple
  - `'mathematica'` – (optional) use Mathematica
  - `'giac'` – (optional) use Giac
  - `'sympy'` – use SymPy

EXAMPLES:

```
sage: k, n = var('k,n')                                                    #␣
↪needs sage.symbolic
sage: sum(k, k, 1, n).factor()                                             #␣
↪needs sage.symbolic
1/2*(n + 1)*n
```

```
>>> from sage.all import *
>>> k, n = var('k,n')                                                    #␣
↪needs sage.symbolic
>>> sum(k, k, Integer(1), n).factor()                                      ␣
↪      # needs sage.symbolic
1/2*(n + 1)*n
```

```
sage: sum(1/k^4, k, 1, oo)                                               #␣
↪needs sage.symbolic
1/90*pi^4
```

```
>>> from sage.all import *
>>> sum(Integer(1)/k**Integer(4), k, Integer(1), oo)                       ␣
↪                          # needs sage.symbolic
1/90*pi^4
```

```
sage: sum(1/k^5, k, 1, oo)                                               #␣
↪needs sage.symbolic
zeta(5)
```

```
>>> from sage.all import *
>>> sum(Integer(1)/k**Integer(5), k, Integer(1), oo)                       ␣
↪                          # needs sage.symbolic
zeta(5)
```

Warning

This function only works with symbolic expressions. To sum any other objects like list elements or function return values, please use python summation, see http://docs.python.org/library/functions.html#sum

In particular, this does not work:

```
sage: n = var('n')                                                       #␣
↪needs sage.symbolic
sage: mylist = [1,2,3,4,5]
sage: sum(mylist[n], n, 0, 3)                                            #␣
↪needs sage.symbolic
Traceback (most recent call last):
...
TypeError: unable to convert n to an integer
```

```
>>> from sage.all import *
>>> n = var('n')                                                       #␣
↪needs sage.symbolic
>>> mylist = [Integer(1),Integer(2),Integer(3),Integer(4),Integer(5)]
>>> sum(mylist[n], n, Integer(0), Integer(3))                             ␣
↪             # needs sage.symbolic
Traceback (most recent call last):
...
TypeError: unable to convert n to an integer
```

Use python `sum()` instead:

```
sage: sum(mylist[n] for n in range(4))
10
```

```
>>> from sage.all import *
>>> sum(mylist[n] for n in range(Integer(4)))
10
```

Also, only a limited number of functions are recognized in symbolic sums:

```
sage: sum(valuation(n, 2), n, 1, 5)                                             #␣
↪needs sage.symbolic
Traceback (most recent call last):
...
TypeError: unable to convert n to an integer
```

```
>>> from sage.all import *
>>> sum(valuation(n, Integer(2)), n, Integer(1), Integer(5))                    ␣
↪                      # needs sage.symbolic
Traceback (most recent call last):
...
TypeError: unable to convert n to an integer
```

Again, use python `sum()`:

```
sage: sum(valuation(n + 1, 2) for n in range(5))
3
```

```
>>> from sage.all import *
>>> sum(valuation(n + Integer(1), Integer(2)) for n in range(Integer(5)))
3
```

(now back to the Sage `sum` examples)

A well known binomial identity:

```
sage: sum(binomial(n, k), k, 0, n)                                              #␣
↪needs sage.symbolic
2^n
```

```
>>> from sage.all import *
>>> sum(binomial(n, k), k, Integer(0), n)                                       ␣
↪     # needs sage.symbolic
2^n
```

The binomial theorem:

```
sage: x, y = var('x, y')                                                        #␣
↪needs sage.symbolic
sage: sum(binomial(n, k) * x^k * y^(n-k), k, 0, n)                              #␣
↪needs sage.symbolic
(x + y)^n
```

```
>>> from sage.all import *
>>> x, y = var('x, y')                                                          #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.symbolic
>>> sum(binomial(n, k) * x**k * y**(n-k), k, Integer(0), n)                ␣
↪       # needs sage.symbolic
(x + y)^n
```

```
sage: sum(k * binomial(n, k), k, 1, n)                                     #␣
↪needs sage.symbolic
2^(n - 1)*n
```

```
>>> from sage.all import *
>>> sum(k * binomial(n, k), k, Integer(1), n)                              ␣
↪     # needs sage.symbolic
2^(n - 1)*n
```

```
sage: sum((-1)^k * binomial(n, k), k, 0, n)                                #␣
↪needs sage.symbolic
0
```

```
>>> from sage.all import *
>>> sum((-Integer(1))**k * binomial(n, k), k, Integer(0), n)               ␣
↪               # needs sage.symbolic
0
```

```
sage: sum(2^(-k)/(k*(k+1)), k, 1, oo)                                      #␣
↪needs sage.symbolic
-log(2) + 1
```

```
>>> from sage.all import *
>>> sum(Integer(2)**(-k)/(k*(k+Integer(1))), k, Integer(1), oo)            ␣
↪                        # needs sage.symbolic
-log(2) + 1
```

Another binomial identity (Issue #7952):

```
sage: t, k, i = var('t,k,i')                                               #␣
↪needs sage.symbolic
sage: sum(binomial(i + t, t), i, 0, k)                                     #␣
↪needs sage.symbolic
binomial(k + t + 1, t + 1)
```

```
>>> from sage.all import *
>>> t, k, i = var('t,k,i')                                                 #␣
↪needs sage.symbolic
>>> sum(binomial(i + t, t), i, Integer(0), k)                              ␣
↪     # needs sage.symbolic
binomial(k + t + 1, t + 1)
```

Summing a hypergeometric term:

```
sage: sum(binomial(n, k) * factorial(k) / factorial(n+1+k), k, 0, n)                #␣
↪needs sage.symbolic
1/2*sqrt(pi)/factorial(n + 1/2)
```

```
>>> from sage.all import *
>>> sum(binomial(n, k) * factorial(k) / factorial(n+Integer(1)+k), k, Integer(0),␣
↪n)            # needs sage.symbolic
1/2*sqrt(pi)/factorial(n + 1/2)
```

We check a well known identity:

```
sage: bool(sum(k^3, k, 1, n) == sum(k, k, 1, n)^2)                                  #␣
↪needs sage.symbolic
True
```

```
>>> from sage.all import *
>>> bool(sum(k**Integer(3), k, Integer(1), n) == sum(k, k, Integer(1),␣
↪n)**Integer(2))                                  # needs sage.symbolic
True
```

A geometric sum:

```
sage: a, q = var('a, q')                                                            #␣
↪needs sage.symbolic
sage: sum(a*q^k, k, 0, n)                                                           #␣
↪needs sage.symbolic
(a*q^(n + 1) - a)/(q - 1)
```

```
>>> from sage.all import *
>>> a, q = var('a, q')                                                             #␣
↪needs sage.symbolic
>>> sum(a*q**k, k, Integer(0), n)                                                    ␣
↪       # needs sage.symbolic
(a*q^(n + 1) - a)/(q - 1)
```

The geometric series:

```
sage: assume(abs(q) < 1)                                                            #␣
↪needs sage.symbolic
sage: sum(a * q^k, k, 0, oo)                                                        #␣
↪needs sage.symbolic
-a/(q - 1)
```

```
>>> from sage.all import *
>>> assume(abs(q) < Integer(1))                                                      ␣
↪      # needs sage.symbolic
>>> sum(a * q**k, k, Integer(0), oo)                                                 ␣
↪       # needs sage.symbolic
-a/(q - 1)
```

A divergent geometric series. Don't forget to forget your assumptions:

```
sage: forget()                                                                  #␣
↪needs sage.symbolic
sage: assume(q > 1)                                                             #␣
↪needs sage.symbolic
sage: sum(a * q^k, k, 0, oo)                                                    #␣
↪needs sage.symbolic
Traceback (most recent call last):
...
ValueError: Sum is divergent.
```

```
>>> from sage.all import *
>>> forget()                                                                  #␣
↪needs sage.symbolic
>>> assume(q > Integer(1))                                                      ␣
↪     # needs sage.symbolic
>>> sum(a * q**k, k, Integer(0), oo)                                            ␣
↪      # needs sage.symbolic
Traceback (most recent call last):
...
ValueError: Sum is divergent.
```

This summation only Mathematica can perform:

```
sage: sum(1/(1+k^2), k, -oo, oo, algorithm='mathematica')       # optional -␣
↪mathematica, needs sage.symbolic
pi*coth(pi)
```

```
>>> from sage.all import *
>>> sum(Integer(1)/(Integer(1)+k**Integer(2)), k, -oo, oo, algorithm='mathematica
↪')       # optional - mathematica, needs sage.symbolic
pi*coth(pi)
```

Use Maple as a backend for summation:

```
sage: sum(binomial(n, k) * x^k, k, 0, n, algorithm='maple')     # optional -␣
↪maple, needs sage.symbolic
(x + 1)^n
```

```
>>> from sage.all import *
>>> sum(binomial(n, k) * x**k, k, Integer(0), n, algorithm='maple')     #␣
↪optional - maple, needs sage.symbolic
(x + 1)^n
```

Python ints should work as limits of summation (Issue #9393):

```
sage: sum(x, x, 1r, 5r)                                                         #␣
↪needs sage.symbolic
15
```

```
>>> from sage.all import *
>>> sum(x, x, 1, 5)                                                           #␣
↪needs sage.symbolic
15
```

Note

1. Sage can currently only understand a subset of the output of Maxima, Maple and Mathematica, so even if the chosen backend can perform the summation the result might not be convertible into a Sage expression.

sage.misc.functional.**transpose**(*x*)

Return the transpose of `x`.

EXAMPLES:

```
sage: M = MatrixSpace(QQ, 3, 3)                                                #␣
↪needs sage.modules
sage: A = M([1,2,3, 4,5,6, 7,8,9])                                             #␣
↪needs sage.modules
sage: transpose(A)                                                             #␣
↪needs sage.modules
[1 4 7]
[2 5 8]
[3 6 9]
```

```
>>> from sage.all import *
>>> M = MatrixSpace(QQ, Integer(3), Integer(3))                                 ␣
↪              # needs sage.modules
>>> A = M([Integer(1),Integer(2),Integer(3), Integer(4),Integer(5),Integer(6),␣
↪Integer(7),Integer(8),Integer(9)])
↪# needs sage.modules
>>> transpose(A)                                                              #␣
↪needs sage.modules
[1 4 7]
[2 5 8]
[3 6 9]
```

sage.misc.functional.**xinterval**(*a*, *b*)

Iterator over the integers between a and b, *inclusive*.

EXAMPLES:

```
sage: I = xinterval(2,5); I
range(2, 6)
sage: 5 in I
True
sage: 6 in I
False
```

```
>>> from sage.all import *
>>> I = xinterval(Integer(2),Integer(5)); I
range(2, 6)
>>> Integer(5) in I
True
>>> Integer(6) in I
False
```

1.3 Random Number States

AUTHORS:

- Carl Witty (2008-03): new file

This module manages all the available pseudo-random number generators in Sage. (For the rest of the documentation in this module, we will drop the "pseudo".)

The goal is to allow algorithms using random numbers to be reproducible from one run of Sage to the next, and (to the extent possible) from one machine to the next (even across different operating systems and architectures).

There are two parts to the API. First we will describe the command line oriented API, for setting random number generator seeds. Then we will describe the library API, for people writing Sage library code that uses random numbers.

1.3.1 Command line oriented API

We'll start with the simplest usage: setting fixed random number seeds and showing that these lead to reproducible results.

```
sage: K.<x> = QQ[]
sage: G = PermutationGroup([[(1,2,3),(4,5)], [(1,2)]])
sage: rgp = Gp()
sage: def gap_randstring(n):
....:     current_randstate().set_seed_gap()
....:     return gap(n).SCRRandomString()
sage: def rtest():
....:     current_randstate().set_seed_gp(rgp)
....:     return (ZZ.random_element(1000), RR.random_element(),
....:             K.random_element(), G.random_element(),
....:             gap_randstring(5),
....:             rgp.random(), ntl.ZZ_random(99999),
....:             random())
```

```
>>> from sage.all import *
>>> K = QQ['x']; (x,) = K._first_ngens(1)
>>> G = PermutationGroup([[(Integer(1),Integer(2),Integer(3)),(Integer(4),
↪Integer(5))], [(Integer(1),Integer(2))]])
>>> rgp = Gp()
>>> def gap_randstring(n):
...     current_randstate().set_seed_gap()
...     return gap(n).SCRRandomString()
>>> def rtest():
...     current_randstate().set_seed_gp(rgp)
...     return (ZZ.random_element(Integer(1000)), RR.random_element(),
...             K.random_element(), G.random_element(),
...             gap_randstring(Integer(5)),
...             rgp.random(), ntl.ZZ_random(Integer(99999)),
...             random())
```

The above test shows the results of six different random number generators, in three different processes. The random elements from `ZZ`, `RR`, and `K` all derive from a single GMP-based random number generator. The random element from `G` comes from a GAP subprocess. The random "string" (5-element binary list) is also from a GAP subprocess, using the "classical" GAP random generator. The random number from `rgp` is from a Pari/gp subprocess. NTL's `ZZ_random` uses a separate NTL random number generator in the main Sage process. And `random()` is from a Python `random.Random` object.

Here we see that setting the random number seed really does make the results of these random number generators reproducible.

```
sage: set_random_seed(0)
sage: print(rtest())
(303, -0.266166246380421, 1/2*x^2 - 1/95*x - 1/2, (1,3), [ 1, 0, 0, 1, 1 ], 265625921,
↪ 5842, 0.9661911734708414)
sage: set_random_seed(1)
sage: print(rtest())
(978, 0.0557699430711638, -3*x^2 - 1/12, (1,2), [ 0, 0, 1, 1, 0 ], 807447831, 29982,␣
↪0.8335077654199736)
sage: set_random_seed(2)
sage: print(rtest())
(207, -0.0141049486533456, 4*x^2 + 1/2, (1,2)(4,5), [ 1, 0, 0, 1, 1 ], 1642898426,␣
↪41662, 0.19982565117278328)
sage: set_random_seed(0)
sage: print(rtest())
(303, -0.266166246380421, 1/2*x^2 - 1/95*x - 1/2, (1,3), [ 1, 0, 0, 1, 1 ], 265625921,
↪ 5842, 0.9661911734708414)
sage: set_random_seed(1)
sage: print(rtest())
(978, 0.0557699430711638, -3*x^2 - 1/12, (1,2), [ 0, 0, 1, 1, 0 ], 807447831, 29982,␣
↪0.8335077654199736)
sage: set_random_seed(2)
sage: print(rtest())
(207, -0.0141049486533456, 4*x^2 + 1/2, (1,2)(4,5), [ 1, 0, 0, 1, 1 ], 1642898426,␣
↪41662, 0.19982565117278328)
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(0))
>>> print(rtest())
(303, -0.266166246380421, 1/2*x^2 - 1/95*x - 1/2, (1,3), [ 1, 0, 0, 1, 1 ], 265625921,
↪ 5842, 0.9661911734708414)
>>> set_random_seed(Integer(1))
>>> print(rtest())
(978, 0.0557699430711638, -3*x^2 - 1/12, (1,2), [ 0, 0, 1, 1, 0 ], 807447831, 29982,␣
↪0.8335077654199736)
>>> set_random_seed(Integer(2))
>>> print(rtest())
(207, -0.0141049486533456, 4*x^2 + 1/2, (1,2)(4,5), [ 1, 0, 0, 1, 1 ], 1642898426,␣
↪41662, 0.19982565117278328)
>>> set_random_seed(Integer(0))
>>> print(rtest())
(303, -0.266166246380421, 1/2*x^2 - 1/95*x - 1/2, (1,3), [ 1, 0, 0, 1, 1 ], 265625921,
↪ 5842, 0.9661911734708414)
>>> set_random_seed(Integer(1))
>>> print(rtest())
(978, 0.0557699430711638, -3*x^2 - 1/12, (1,2), [ 0, 0, 1, 1, 0 ], 807447831, 29982,␣
↪0.8335077654199736)
>>> set_random_seed(Integer(2))
>>> print(rtest())
(207, -0.0141049486533456, 4*x^2 + 1/2, (1,2)(4,5), [ 1, 0, 0, 1, 1 ], 1642898426,␣
↪41662, 0.19982565117278328)
```

Once we've set the random number seed, we can check what seed was used. (This is not the current random number state; it does not change when random numbers are generated.)

```
sage: set_random_seed(12345)
sage: initial_seed()
12345
sage: print(rtest())
(720, -0.612180244315804, x^2 - x, (1,2,3), [ 1, 0, 0, 0, 1 ], 1911581957, 27093, 0.
↪9205331599518184)
sage: initial_seed()
12345
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(12345))
>>> initial_seed()
12345
>>> print(rtest())
(720, -0.612180244315804, x^2 - x, (1,2,3), [ 1, 0, 0, 0, 1 ], 1911581957, 27093, 0.
↪9205331599518184)
>>> initial_seed()
12345
```

If *set_random_seed()* is called with no arguments, then a new seed is automatically selected. On operating systems that support it, the new seed comes from `os.urandom()`; this is intended to be a truly random (not pseudo-random), cryptographically secure number. (Whether it is actually cryptographically secure depends on operating system details that are outside the control of Sage.)

If `os.urandom()` is not supported, then the new seed comes from the current time, which is definitely not cryptographically secure.

```
sage: set_random_seed()
sage: r = rtest()
sage: r          # random
(909, -0.407373370020575, 6/7*x^2 + 1, (1,2,3)(4,5), 985329107, 21461, 0.
↪30047071049504859)
```

```
>>> from sage.all import *
>>> set_random_seed()
>>> r = rtest()
>>> r          # random
(909, -0.407373370020575, 6/7*x^2 + 1, (1,2,3)(4,5), 985329107, 21461, 0.
↪30047071049504859)
```

After setting a new random number seed with *set_random_seed()*, we can use *initial_seed()* to see what seed was automatically selected, and call *set_random_seed()* to restart the same random number sequence.

```
sage: s = initial_seed()
sage: s          # random
336237747258024892084418842839280045662
sage: set_random_seed(s)
sage: r2 = rtest()
sage: r == r2
True
```

```
>>> from sage.all import *
>>> s = initial_seed()
>>> s          # random
336237747258024892084418842839280045662
>>> set_random_seed(s)
>>> r2 = rtest()
>>> r == r2
True
```

Whenever Sage starts, *set_random_seed()* is called just before command line interaction starts; so every Sage run starts with a different random number seed. This seed can be recovered with *initial_seed()* (as long as the user has not set a different seed with *set_random_seed()*), so that the results of this run can be reproduced in another run; or this automatically selected seed can be overridden with, for instance, `set_random_seed(0)`.

We can demonstrate this startup behavior by running a new instance of Sage as a subprocess.

```
sage: subsage = Sage()
sage: s = ZZ(subsage('initial_seed()'))
sage: r = ZZ(subsage('ZZ.random_element(2^200)'))
sage: s          # random
161165040149656168853863459174502758403
sage: r          # random
127382886162042746292415148849807511924125420946876136794144 2
sage: set_random_seed(s)
sage: r == ZZ.random_element(2^200)
True
```

```
>>> from sage.all import *
>>> subsage = Sage()
>>> s = ZZ(subsage('initial_seed()'))
>>> r = ZZ(subsage('ZZ.random_element(2^200)'))
>>> s          # random
161165040149656168853863459174502758403
>>> r          # random
127382886162042746292415148849807511924125420946876136794144 2
>>> set_random_seed(s)
>>> r == ZZ.random_element(Integer(2)**Integer(200))
True
```

Note that wrappers of all the random number generation methods from Python's `random` module are available at the Sage command line, and these wrappers are properly affected by *set_random_seed()*.

```
sage: set_random_seed(0)
sage: random(), getrandbits(20), uniform(5.0, 10.0), normalvariate(0, 1)
(0.111439293741037, 539332, 8.26785106378383, 1.3893337539828183)
sage: set_random_seed(1)
sage: random(), getrandbits(20), uniform(5.0, 10.0), normalvariate(0, 1)
(0.8294022851874259, 624859, 5.77894484361117, -0.4201366826308758)
sage: set_random_seed(0)
sage: random(), getrandbits(20), uniform(5.0, 10.0), normalvariate(0, 1)
(0.111439293741037, 539332, 8.26785106378383, 1.3893337539828183)
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(0))
>>> random(), getrandbits(Integer(20)), uniform(RealNumber('5.0'), RealNumber('10.0
↪')), normalvariate(Integer(0), Integer(1))
(0.111439293741037, 539332, 8.26785106378383, 1.3893337539828183)
>>> set_random_seed(Integer(1))
>>> random(), getrandbits(Integer(20)), uniform(RealNumber('5.0'), RealNumber('10.0
↪')), normalvariate(Integer(0), Integer(1))
(0.8294022851874259, 624859, 5.77894484361117, -0.4201366826308758)
>>> set_random_seed(Integer(0))
>>> random(), getrandbits(Integer(20)), uniform(RealNumber('5.0'), RealNumber('10.0
↪')), normalvariate(Integer(0), Integer(1))
(0.111439293741037, 539332, 8.26785106378383, 1.3893337539828183)
```

That pretty much covers what you need to know for command-line use of this module. Now let's move to what authors of Sage library code need to know about the module.

1.3.2 Library API

First, we'll cover doctesting. Every docstring now has an implicit `set_random_seed(0)` prepended. Any uses of `# random` that are based on random numbers under the control of this module should be removed, and the reproducible answers inserted instead.

This practice has two potential drawbacks. First, it increases the work of maintaining doctests. For instance, in a long docstring that has many doctests that depend on random numbers, a change near the beginning (for instance, adding a new doctest) may invalidate all later doctests in the docstring. To reduce this downside, you may add calls to `set_random_seed(0)` throughout the docstring (in the extreme case, before every doctest).

Second, the `# random` in the doctest served as a signal to the reader of the docstring that the result was unpredictable and that it would not be surprising to get a different result when trying out the examples in the doctest. If a doctest specifically refers to `ZZ.random_element()` (for instance), this is presumably enough of a signal to render this function of `# random` unnecessary. However, some doctests are not obviously (from the name) random, but do depend on random numbers internally, such as the `composition_series` method of a `PermutationGroup`. In these cases, the convention is to insert the following text at the beginning of the `EXAMPLES` section.

```
These computations use pseudo-random numbers, so we set the
seed for reproducible testing.

    sage: set_random_seed(0)
```

Note that this call to `set_random_seed(0)` is redundant, since `set_random_seed(0)` is automatically inserted at the beginning of every docstring. However, it makes the example reproducible for somebody who just types the lines from the doctest and doesn't know about the automatic `set_random_seed(0)`.

Next, let's cover setting the random seed from library code. The first rule is that library code should never call *`set_random_seed()`*. This function is only for command-line use. Instead, if the library code wants to use a different random seed, it should use `with seed(s):`. This will use the new seed within the scope of the `with` statement, but will revert to the previous seed once the `with` statement is completed. (Or the library can use `with seed():` to get a seed automatically selected using `os.urandom()` or the current time, in the same way as described for *`set_random_seed()`* above.)

Ideally, using `with seed(s):` should not affect the outer random number sequence at all; we will call this property "isolation." We achieve isolation for most, but not all, of the random number generators in Sage (we fail for generators, such as NTL, that do not provide an API to retrieve the current random number state).

We'll demonstrate isolation. First, we show the sequence of random numbers that you get without intervening `with seed`.

```
sage: set_random_seed(0)
sage: r1 = rtest(); print(r1)
(303, -0.266166246380421, 1/2*x^2 - 1/95*x - 1/2, (1,3), [ 1, 0, 0, 1, 1 ], 265625921,
↪ 5842, 0.9661911734708414)
sage: r2 = rtest(); print(r2)
(105, 0.642309615982449, -x^2 - x - 6, (1,3)(4,5), [ 1, 0, 0, 0, 1 ], 53231108, 77132,
↪ 0.001767155077382232)
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(0))
>>> r1 = rtest(); print(r1)
(303, -0.266166246380421, 1/2*x^2 - 1/95*x - 1/2, (1,3), [ 1, 0, 0, 1, 1 ], 265625921,
↪ 5842, 0.9661911734708414)
>>> r2 = rtest(); print(r2)
(105, 0.642309615982449, -x^2 - x - 6, (1,3)(4,5), [ 1, 0, 0, 0, 1 ], 53231108, 77132,
↪ 0.001767155077382232)
```

We get slightly different results with an intervening `with seed`.

```
sage: set_random_seed(0)
sage: r1 == rtest()
True
sage: with seed(1): rtest()
(978, 0.0557699430711638, -3*x^2 - 1/12, (1,2), [ 0, 0, 1, 1, 0 ], 807447831, 29982,␣
↪0.8335077654199736)
sage: r2m = rtest(); r2m
(105, 0.642309615982449, -x^2 - x - 6, (1,3)(4,5), [ 1, 0, 0, 0, 1 ], 53231108, 40267,
↪ 0.001767155077382232)
sage: r2m == r2
False
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(0))
>>> r1 == rtest()
True
>>> with seed(Integer(1)): rtest()
(978, 0.0557699430711638, -3*x^2 - 1/12, (1,2), [ 0, 0, 1, 1, 0 ], 807447831, 29982,␣
↪0.8335077654199736)
>>> r2m = rtest(); r2m
(105, 0.642309615982449, -x^2 - x - 6, (1,3)(4,5), [ 1, 0, 0, 0, 1 ], 53231108, 40267,
↪ 0.001767155077382232)
>>> r2m == r2
False
```

We can see that `r2` and `r2m` are the same except for the call to `ntl.ZZ_random()`, which produces different results with and without the `with seed`.

However, we do still get a partial form of isolation, even in this case, as we see in this example:

```
sage: set_random_seed(0)
sage: r1 == rtest()
```

(continues on next page)

(continued from previous page)

```
True
sage: with seed(1):
....:     print(rtest())
....:     print(rtest())
(978, 0.0557699430711638, -3*x^2 - 1/12, (1,2), [ 0, 0, 1, 1, 0 ], 807447831, 29982,␣
↪0.8335077654199736)
(138, -0.0404945051288503, 2*x - 24, (1,2,3), [ 1, 1, 0, 1, 1 ], 1010791326, 91360, 0.
↪00333322308080608 03)
sage: r2m == rtest()
True
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(0))
>>> r1 == rtest()
True
>>> with seed(Integer(1)):
...     print(rtest())
...     print(rtest())
(978, 0.0557699430711638, -3*x^2 - 1/12, (1,2), [ 0, 0, 1, 1, 0 ], 807447831, 29982,␣
↪0.8335077654199736)
(138, -0.0404945051288503, 2*x - 24, (1,2,3), [ 1, 1, 0, 1, 1 ], 1010791326, 91360, 0.
↪00333322308080608 03)
>>> r2m == rtest()
True
```

The NTL results after the `with seed` don't depend on how many NTL random numbers were generated inside the `with seed`.

sage: set_random_seed(0) sage: r1 == rtest() True sage: with seed(1): ….: rtest() (978, 0.0557699430711638, -3*x^2 - 1/12, (1,2), [0, 0, 1, 1, 0], 807447831, 29982, 0.8335077654199736) sage: r2m == rtest() True

(In general, the above code is not exactly equivalent to the `with` statement, because if an exception happens in the body, the real `with` statement will pass the exception information as parameters to the `__exit__` method. However, our `__exit__` method ignores the exception information anyway, so the above is equivalent in our case.)

1.3.3 Generating random numbers in library code

Now we come to the last part of the documentation: actually generating random numbers in library code. First, the easy case. If you generate random numbers only by calling other Sage library code (such as `random_element` methods on parents), you don't need to do anything special; the other code presumably already interacts with this module correctly.

Otherwise, it depends on what random number generator you want to use.

- `gmp_randstate_t` – if you want to use some random number generator that takes a `gmp_randstate_t` (like `mpz_urandomm` or `mpfr_urandomb`), then use code like the following:

```
from sage.misc.randstate cimport randstate, current_randstate
...

cdef randstate rstate = current_randstate()
```

Then a `gmp_randstate_t` is available as `rstate.gmp_state`.

Fetch the current *randstate* with current_randstate() in every function that wants to use it; don't cache it globally or in a class. (Such caching would break set_random_seed).

- Python – if you want to use the random number generators from the random module, you have two choices. The slightly easier choice is to import functions from *sage.misc.prandom*; for instance, you can simply replace from random import randrange with from sage.misc.prandom import randrange. However, this is slightly less efficient, because the wrappers in *sage.misc.prandom* look up the current *randstate* on each call. If you're generating many random numbers in a row, it's faster to instead do

```
from sage.misc.randstate import current_randstate ...

randrange = current_randstate().python_random().randrange
```

Fetch the current *randstate* with *current_randstate()* in every function that wants to use it; don't cache the *randstate*, the Random object returned by python_random, or the bound methods on that Random object globally or in a class. (Such caching would break set_random_seed).

- GAP – if you are calling code in GAP that uses random numbers, call set_seed_gap at the beginning of your function, like this:

```
from sage.misc.randstate import current_randstate
...

current_randstate().set_seed_gap()
```

Fetch the current *randstate* with *current_randstate()* in every function that wants to use it; don't cache it globally or in a class. (Such caching would break set_random_seed).

- Pari – if you are calling code in the Pari library that uses random numbers, call set_seed_pari at the beginning of your function, like this:

```
from sage.misc.randstate import current_randstate
...

current_randstate().set_seed_pari()
```

Fetch the current *randstate* with *current_randstate()* in every function that wants to use it; don't cache it globally or in a class. (Such caching would break set_random_seed).

- Pari/gp – if you are calling code in a Pari/gp subprocess that uses random numbers, call set_seed_gp at the beginning of your function, like this:

```
from sage.misc.randstate import current_randstate
...

current_randstate().set_seed_gp()
```

This will set the seed in the gp process in sage.interfaces.gp.gp. If you have a different gp process, say in the variable my_gp, then call set_seed_gp(my_gp) instead.

Fetch the current *randstate* with *current_randstate()* in every function that wants to use it; don't cache it globally or in a class. (Such caching would break set_random_seed).

- NTL – if you are calling code in the NTL library that uses random numbers, call set_seed_ntl at the beginning of your function, like this:

```
from sage.misc.randstate import current_randstate ...

current_randstate().set_seed_ntl(False)
```

Fetch the current *randstate* with *current_randstate()* in every function that wants to use it; don't cache it globally or in a class. (Such caching would break `set_random_seed`).

- `libc` – if you are writing code that calls the libc function *random()*: don't! The *random()* function does not give reproducible results across different operating systems, so we can't make portable doctests for the results. Instead, do:

```
from sage.misc.randstate cimport random
```

The *random()* function in *sage.misc.randstate* gives a 31-bit random number, but it uses the `gmp_randstate_t` in the current *randstate*, so it is portable. (This range was chosen for two reasons: it matches the range of random() on 32-bit and 64-bit Linux, although not Solaris; and it's the largest range of nonnegative numbers that fits in a 32-bit signed integer.)

However, you may still need to set the libc random number state; for instance, if you are wrapping a library that uses *random()* internally and you don't want to change the library. In that case, call `set_seed_libc` at the beginning of your function, like this:

```
from sage.misc.randstate import current_randstate
...

current_randstate().set_seed_libc(False)
```

Fetch the current *randstate* with *current_randstate()* in every function that wants to use it; don't cache it globally or in a class. (Such caching would break `set_random_seed`).

1.3.4 Classes and methods

`sage.misc.randstate.`**`benchmark_libc`**`()`

This function was used to test whether moving from libc to GMP's Mersenne Twister for random numbers would be a significant slowdown.

EXAMPLES:

```
sage: from sage.misc.randstate import benchmark_libc, benchmark_mt
sage: timeit('benchmark_libc()')  # random
125 loops, best of 3: 1.95 ms per loop
sage: timeit('benchmark_mt()')    # random
125 loops, best of 3: 2.12 ms per loop
```

```
>>> from sage.all import *
>>> from sage.misc.randstate import benchmark_libc, benchmark_mt
>>> timeit('benchmark_libc()')  # random
125 loops, best of 3: 1.95 ms per loop
>>> timeit('benchmark_mt()')    # random
125 loops, best of 3: 2.12 ms per loop
```

`sage.misc.randstate.`**`benchmark_mt`**`()`

This function was used to test whether moving from libc to GMP's Mersenne Twister for random numbers would be a significant slowdown.

EXAMPLES:

```
sage: from sage.misc.randstate import benchmark_libc, benchmark_mt
sage: timeit('benchmark_libc()')  # random
125 loops, best of 3: 1.95 ms per loop
sage: timeit('benchmark_mt()')    # random
125 loops, best of 3: 2.11 ms per loop
```

```
>>> from sage.all import *
>>> from sage.misc.randstate import benchmark_libc, benchmark_mt
>>> timeit('benchmark_libc()')  # random
125 loops, best of 3: 1.95 ms per loop
>>> timeit('benchmark_mt()')    # random
125 loops, best of 3: 2.11 ms per loop
```

sage.misc.randstate.**current_randstate**()

Return the current random number state.

EXAMPLES:

```
sage: set_random_seed(0)
sage: current_randstate()
<sage.misc.randstate.randstate object at 0x...>
sage: current_randstate().python_random().random()
0.111439293741037
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(0))
>>> current_randstate()
<sage.misc.randstate.randstate object at 0x...>
>>> current_randstate().python_random().random()
0.111439293741037
```

sage.misc.randstate.**initial_seed**()

Return the initial seed used to create the current *randstate*.

EXAMPLES:

```
sage: set_random_seed(42)
sage: initial_seed()
42
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(42))
>>> initial_seed()
42
```

If you set a random seed (by failing to specify the seed), this is how you retrieve the seed actually chosen by Sage. This can also be used to retrieve the seed chosen for a new Sage run (if the user has not used `set_random_seed()`).

```
sage: set_random_seed()
sage: initial_seed()           # random
121030915255244661507561642968348336774
```

```
>>> from sage.all import *
>>> set_random_seed()
>>> initial_seed()           # random
121030915255244661507561642968348336774
```

sage.misc.randstate.**random**()

Return a 31-bit random number. Intended as a drop-in replacement for the libc *random()* function.

EXAMPLES:

```
sage: set_random_seed(31)
sage: from sage.misc.randstate import random
sage: random()
32990711
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(31))
>>> from sage.misc.randstate import random
>>> random()
32990711
```

class sage.misc.randstate.**randstate**

Bases: object

The *randstate* class. This class keeps track of random number states and seeds. Type sage.misc.randstate? for much more information on random numbers in Sage.

ZZ_seed()

When called on the current *randstate*, returns a 128-bit Integer suitable for seeding another random number generator.

EXAMPLES:

```
sage: set_random_seed(1414)
sage: current_randstate().ZZ_seed()
48314508034782595865062786044921182484
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(1414))
>>> current_randstate().ZZ_seed()
48314508034782595865062786044921182484
```

c_rand_double()

Return a random floating-point number between 0 and 1.

EXAMPLES:

```
sage: set_random_seed(2718281828)
sage: current_randstate().c_rand_double()
0.22437207488974298
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(2718281828))
>>> current_randstate().c_rand_double()
0.22437207488974298
```

c_random()

Return a 31-bit random number. Intended for internal use only; instead of calling `current_randstate().c_random()`, it is equivalent (but probably faster) to call the *random* method of this *randstate* class.

EXAMPLES:

```
sage: set_random_seed(1207)
sage: current_randstate().c_random()
2008037228
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(1207))
>>> current_randstate().c_random()
2008037228
```

We verify the equivalence mentioned above.

```
sage: from sage.misc.randstate import random
sage: set_random_seed(1207)
sage: random()
2008037228
```

```
>>> from sage.all import *
>>> from sage.misc.randstate import random
>>> set_random_seed(Integer(1207))
>>> random()
2008037228
```

long_seed()

When called on the current *randstate*, returns a 128-bit Python long suitable for seeding another random number generator.

EXAMPLES:

```
sage: set_random_seed(1618)
sage: current_randstate().long_seed()
256056279774514099508607350947089272595
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(1618))
>>> current_randstate().long_seed()
256056279774514099508607350947089272595
```

python_random(*cls=None*, *seed=None*)

Return a `random.Random` object. The first time it is called on a given *randstate*, a new `random.Random` is created (seeded from the *current* *randstate*); the same object is returned on subsequent calls.

It is expected that `python_random` will only be called on the current *randstate*.

INPUT:

- `cls` – (optional) a class with the same interface as `random.Random` (e.g. a subclass thereof) to use as the Python RNG interface. Otherwise the standard `random.Random` is used.
- `seed` – (optional) an integer to seed the `random.Random` instance with upon creation; if not specified it is seeded using `ZZ.random_element(1 << 128)`.

EXAMPLES:

```
sage: set_random_seed(5)
sage: rnd = current_randstate().python_random()
sage: rnd.random()
0.013558022446944151
sage: rnd.randrange(1000)
544
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(5))
>>> rnd = current_randstate().python_random()
>>> rnd.random()
0.013558022446944151
>>> rnd.randrange(Integer(1000))
544
```

seed()

Return the initial seed of a *randstate* object. (This is not the current state; it does not change when you get random numbers.)

EXAMPLES:

```
sage: set_random_seed(0)
sage: from sage.misc.randstate import randstate
sage: r = randstate(314159)
sage: r.seed()
314159
sage: r.python_random().random()
0.111439293741037
sage: r.seed()
314159
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(0))
>>> from sage.misc.randstate import randstate
>>> r = randstate(Integer(314159))
>>> r.seed()
314159
>>> r.python_random().random()
0.111439293741037
>>> r.seed()
314159
```

set_seed_gap()

Check to see if `self` was the most recent *randstate* to seed the GAP random number generator. If not, seeds the generator.

EXAMPLES:

```
sage: set_random_seed(99900000999)
sage: current_randstate().set_seed_gap()
sage: gap.Random(1, 10^50)
14967382633325554344745322977686806345409395800 77
```

(continues on next page)

(continued from previous page)

```
sage: gap(35).SCRRandomString()
[ 1, 0, 1, 0, 0, 1, 0, 0, 0, 0, 1, 1, 0, 1, 0, 0, 1, 1, 0, 1, 0, 1, 0, 1, 1,
  1, 0, 0, 1, 1, 1, 1, 1, 0, 1 ]
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(99900000999))
>>> current_randstate().set_seed_gap()
>>> gap.Random(Integer(1), Integer(10)**Integer(50))
14967382633325554344745322977686806345409395800 77
>>> gap(Integer(35)).SCRRandomString()
[ 1, 0, 1, 0, 0, 1, 0, 0, 0, 0, 1, 1, 0, 1, 0, 0, 1, 1, 0, 1, 0, 1, 0, 1, 1,
  1, 0, 0, 1, 1, 1, 1, 1, 0, 1 ]
```

set_seed_gp(*gp=None*)

Check to see if `self` was the most recent *randstate* to seed the random number generator in the given instance of gp. (If no instance is given, uses the one in `gp`.) If not, seeds the generator.

EXAMPLES:

```
sage: set_random_seed(987654321)
sage: current_randstate().set_seed_gp()
sage: gp.random()
23289294
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(987654321))
>>> current_randstate().set_seed_gp()
>>> gp.random()
23289294
```

set_seed_libc(*force*)

Check to see if `self` was the most recent *randstate* to seed the libc random number generator. If not, seeds the libc random number generator. (Do not use the libc random number generator if you have a choice; its randomness is poor, and the random number sequences it produces are not portable across operating systems.)

If the argument `force` is `True`, seeds the generator unconditionally.

EXAMPLES:

```
sage: from sage.misc.randstate import _doctest_libc_random
sage: set_random_seed(0xBAD)
sage: current_randstate().set_seed_libc(False)
sage: _doctest_libc_random()    # random
1070075918
```

```
>>> from sage.all import *
>>> from sage.misc.randstate import _doctest_libc_random
>>> set_random_seed(Integer(0xBAD))
>>> current_randstate().set_seed_libc(False)
>>> _doctest_libc_random()    # random
1070075918
```

set_seed_ntl(*force*)

Check to see if `self` was the most recent *randstate* to seed the NTL random number generator. If not, seeds the generator. If the argument `force` is `True`, seeds the generator unconditionally.

EXAMPLES:

```
sage: set_random_seed(2008)
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(2008))
```

This call is actually redundant; `ntl.ZZ_random()` will seed the generator itself. However, we put the call in to make the coverage tester happy.

```
sage: current_randstate().set_seed_ntl(False)
sage: ntl.ZZ_random(10^40)
1495283511775355459459209288047895196007
```

```
>>> from sage.all import *
>>> current_randstate().set_seed_ntl(False)
>>> ntl.ZZ_random(Integer(10)**Integer(40))
1495283511775355459459209288047895196007
```

set_seed_pari()

Check to see if `self` was the most recent *randstate* to seed the Pari random number generator. If not, seeds the generator.

Note

Since pari 2.4.3, pari's random number generator has changed a lot. the seed output by getrand() is now a vector of integers.

EXAMPLES:

```
sage: set_random_seed(5551212)
sage: current_randstate().set_seed_pari()
sage: pari.getrand().type()
't_INT'
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(5551212))
>>> current_randstate().set_seed_pari()
>>> pari.getrand().type()
't_INT'
```

sage.misc.randstate.**seed**

alias of *randstate*

sage.misc.randstate.**set_random_seed**(*seed=None*)

Set the current random number seed from the given `seed` (which must be coercible to a Python long).

If no seed is given, then a seed is automatically selected using `os.urandom()` if it is available, or the current time otherwise.

Type `sage.misc.randstate?` for much more information on random numbers in Sage.

This function is only intended for command line use. Never call this from library code; instead, use `with seed(s):`.

Note that setting the random number seed to 0 is much faster than using any other number.

EXAMPLES:

```
sage: set_random_seed(5)
sage: initial_seed()
5
```

```
>>> from sage.all import *
>>> set_random_seed(Integer(5))
>>> initial_seed()
5
```

1.4 Random Numbers with Python API

AUTHORS:

– Carl Witty (2008-03): new file

This module has the same functions as the Python standard module module{random}, but uses the current sage random number state from module{sage.misc.randstate} (so that it can be controlled by the same global random number seeds).

The functions here are less efficient than the functions in module{random}, because they look up the current random number state on each call.

If you are going to be creating many random numbers in a row, it is better to use the functions in module{sage.misc.randstate} directly.

Here is an example:

(The imports on the next two lines are not necessary, since function{randrange} and function{current_randstate} are both available by default at the code{sage:} prompt; but you would need them to run these examples inside a module.)

```
sage: from sage.misc.prandom import randrange
sage: from sage.misc.randstate import current_randstate
sage: def test1():
....:     return sum([randrange(100) for i in range(100)])
sage: def test2():
....:     randrange = current_randstate().python_random().randrange
....:     return sum([randrange(100) for i in range(100)])
```

```
>>> from sage.all import *
>>> from sage.misc.prandom import randrange
>>> from sage.misc.randstate import current_randstate
>>> def test1():
...     return sum([randrange(Integer(100)) for i in range(Integer(100))])
>>> def test2():
...     randrange = current_randstate().python_random().randrange
...     return sum([randrange(Integer(100)) for i in range(Integer(100))])
```

Test2 will be slightly faster than test1, but they give the same answer:

```
sage: with seed(0): test1()
5169
sage: with seed(0): test2()
5169
sage: with seed(1): test1()
5097
sage: with seed(1): test2()
5097
sage: timeit('test1()') # random
625 loops, best of 3: 590 us per loop
sage: timeit('test2()') # random
625 loops, best of 3: 460 us per loop
```

```
>>> from sage.all import *
>>> with seed(Integer(0)): test1()
5169
>>> with seed(Integer(0)): test2()
5169
>>> with seed(Integer(1)): test1()
5097
>>> with seed(Integer(1)): test2()
5097
>>> timeit('test1()') # random
625 loops, best of 3: 590 us per loop
>>> timeit('test2()') # random
625 loops, best of 3: 460 us per loop
```

The docstrings for the functions in this file are mostly copied from Python's file{random.py}, so those docstrings are "Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006, 2007 Python Software Foundation; All Rights Reserved" and are available under the terms of the Python Software Foundation License Version 2.

sage.misc.prandom.**betavariate**(*alpha*, *beta*)

Beta distribution.

Conditions on the parameters are alpha > 0 and beta > 0. Returned values range between 0 and 1.

EXAMPLES:

```
sage: s = betavariate(0.1, 0.9); s  # random
9.75087916621299e-9
sage: 0.0 <= s <= 1.0
True

sage: s = betavariate(0.9, 0.1); s  # random
0.941890400939253
sage: 0.0 <= s <= 1.0
True
```

```
>>> from sage.all import *
>>> s = betavariate(RealNumber('0.1'), RealNumber('0.9')); s  # random
9.75087916621299e-9
>>> RealNumber('0.0') <= s <= RealNumber('1.0')
True
```

(continues on next page)

(continued from previous page)

```
>>> s = betavariate(RealNumber('0.9'), RealNumber('0.1')); s  # random
0.941890400939253
>>> RealNumber('0.0') <= s <= RealNumber('1.0')
True
```

sage.misc.prandom.**choice**(*seq*)

Choose a random element from a non-empty sequence.

EXAMPLES:

```
sage: s = [choice(list(primes(10, 100))) for i in range(5)]; s  # random        #␣
↪needs sage.libs.pari
[17, 47, 11, 31, 47]
sage: all(t in primes(10, 100) for t in s)                                      #␣
↪needs sage.libs.pari
True
```

```
>>> from sage.all import *
>>> s = [choice(list(primes(Integer(10), Integer(100)))) for i in␣
↪range(Integer(5))]; s  # random        # needs sage.libs.pari
[17, 47, 11, 31, 47]
>>> all(t in primes(Integer(10), Integer(100)) for t in s)                      ␣
↪              # needs sage.libs.pari
True
```

sage.misc.prandom.**expovariate**(*lambd*)

Exponential distribution.

lambd is 1.0 divided by the desired mean. (The parameter would be called "lambda", but that is a reserved word in Python.) Returned values range from 0 to positive infinity.

EXAMPLES:

```
sage: sample = [expovariate(0.001) for i in range(3)]; sample  # random
[118.152309288166, 722.261959038118, 45.7190543690470]
sage: all(s >= 0.0 for s in sample)
True

sage: sample = [expovariate(1.0) for i in range(3)]; sample  # random
[0.404201816061304, 0.735220464997051, 0.201765578600627]
sage: all(s >= 0.0 for s in sample)
True

sage: sample = [expovariate(1000) for i in range(3)]; sample  # random
[0.0012068700332283973, 8.340929747302108e-05, 0.00219877067980605]
sage: all(s >= 0.0 for s in sample)
True
```

```
>>> from sage.all import *
>>> sample = [expovariate(RealNumber('0.001')) for i in range(Integer(3))];␣
↪sample  # random
[118.152309288166, 722.261959038118, 45.7190543690470]
>>> all(s >= RealNumber('0.0') for s in sample)
```

(continues on next page)

(continued from previous page)

```
True

>>> sample = [expovariate(RealNumber('1.0')) for i in range(Integer(3))]; sample
↪# random
[0.404201816061304, 0.735220464997051, 0.201765578600627]
>>> all(s >= RealNumber('0.0') for s in sample)
True

>>> sample = [expovariate(Integer(1000)) for i in range(Integer(3))]; sample  #␣
↪random
[0.0012068700332283973, 8.340929747302108e-05, 0.00219877067980605]
>>> all(s >= RealNumber('0.0') for s in sample)
True
```

sage.misc.prandom.**gammavariate**(*alpha*, *beta*)

Gamma distribution. (Not the gamma function.)

Conditions on the parameters are alpha > 0 and beta > 0.

EXAMPLES:

```
sage: sample = gammavariate(1.0, 3.0); sample  # random
6.58282586130638
sage: sample > 0
True
sage: sample = gammavariate(3.0, 1.0); sample  # random
3.07801512341612
sage: sample > 0
True
```

```
>>> from sage.all import *
>>> sample = gammavariate(RealNumber('1.0'), RealNumber('3.0')); sample  # random
6.58282586130638
>>> sample > Integer(0)
True
>>> sample = gammavariate(RealNumber('3.0'), RealNumber('1.0')); sample  # random
3.07801512341612
>>> sample > Integer(0)
True
```

sage.misc.prandom.**gauss**(*mu*, *sigma*)

Gaussian distribution.

mu is the mean, and sigma is the standard deviation. This is slightly faster than the normalvariate() function, but is not thread-safe.

EXAMPLES:

```
sage: [gauss(0, 1) for i in range(3)]  # random
[0.9191011757657915, 0.7744526756246484, 0.8638996866800877]
sage: [gauss(0, 100) for i in range(3)]  # random
[24.916051749154448, -62.99272061579273, -8.1993122536718...]
sage: [gauss(1000, 10) for i in range(3)]  # random
[998.7590700045661, 996.1087338511692, 1010.1256817458031]
```

```
>>> from sage.all import *
>>> [gauss(Integer(0), Integer(1)) for i in range(Integer(3))]  # random
[0.9191011757657915, 0.7744526756246484, 0.8638996866800877]
>>> [gauss(Integer(0), Integer(100)) for i in range(Integer(3))]  # random
[24.916051749154448, -62.99272061579273, -8.1993122536718...]
>>> [gauss(Integer(1000), Integer(10)) for i in range(Integer(3))]  # random
[998.7590700045661, 996.1087338511692, 1010.1256817458031]
```

sage.misc.prandom.**getrandbits**(*k*) → x. Generates a long int with k random bits.

EXAMPLES:

```
sage: getrandbits(10) in range(2^10)
True
sage: getrandbits(200) in range(2^200)
True
sage: getrandbits(4) in range(2^4)
True
```

```
>>> from sage.all import *
>>> getrandbits(Integer(10)) in range(Integer(2)**Integer(10))
True
>>> getrandbits(Integer(200)) in range(Integer(2)**Integer(200))
True
>>> getrandbits(Integer(4)) in range(Integer(2)**Integer(4))
True
```

sage.misc.prandom.**lognormvariate**(*mu*, *sigma*)

Log normal distribution.

If you take the natural logarithm of this distribution, you'll get a normal distribution with mean mu and standard deviation sigma. mu can have any value, and sigma must be greater than zero.

EXAMPLES:

```
sage: [lognormvariate(100, 10) for i in range(3)]  # random
[2.9410355688290246e+37, 2.2257548162070125e+38, 4.142299451717446e+43]
```

```
>>> from sage.all import *
>>> [lognormvariate(Integer(100), Integer(10)) for i in range(Integer(3))]  #␣
↪random
[2.9410355688290246e+37, 2.2257548162070125e+38, 4.142299451717446e+43]
```

sage.misc.prandom.**normalvariate**(*mu*, *sigma*)

Normal distribution.

mu is the mean, and sigma is the standard deviation.

EXAMPLES:

```
sage: [normalvariate(0, 1) for i in range(3)]  # random
[-1.372558980559407, -1.1701670364898928, 0.04324100555110143]
sage: [normalvariate(0, 100) for i in range(3)]  # random
[37.45695875041769, 159.6347743233298, 124.1029321124009]
sage: [normalvariate(1000, 10) for i in range(3)]  # random
[1008.5303090383741, 989.8624892644895, 985.7728921150242]
```

```
>>> from sage.all import *
>>> [normalvariate(Integer(0), Integer(1)) for i in range(Integer(3))]  # random
[-1.372558980559407, -1.1701670364898928, 0.04324100555110143]
>>> [normalvariate(Integer(0), Integer(100)) for i in range(Integer(3))]  # random
[37.45695875041769, 159.6347743233298, 124.1029321124009]
>>> [normalvariate(Integer(1000), Integer(10)) for i in range(Integer(3))]  #␣
↪random
[1008.5303090383741, 989.8624892644895, 985.7728921150242]
```

sage.misc.prandom.**paretovariate**(*alpha*)

Pareto distribution. alpha is the shape parameter.

EXAMPLES:

```
sage: sample = [paretovariate(3) for i in range(1, 5)]; sample  # random
[1.0401699394233033, 1.2722080162636495, 1.0153564009379579, 1.1442323078983077]
sage: all(s >= 1.0 for s in sample)
True
```

```
>>> from sage.all import *
>>> sample = [paretovariate(Integer(3)) for i in range(Integer(1), Integer(5))];␣
↪sample  # random
[1.0401699394233033, 1.2722080162636495, 1.0153564009379579, 1.1442323078983077]
>>> all(s >= RealNumber('1.0') for s in sample)
True
```

sage.misc.prandom.**randint**(*a*, *b*)

Return random integer in range [a, b], including both end points.

EXAMPLES:

```
sage: s = [randint(0, 2) for i in range(15)]; s  # random
[0, 1, 0, 0, 1, 0, 2, 0, 2, 1, 2, 2, 0, 2, 2]
sage: all(t in [0, 1, 2] for t in s)
True
sage: -100 <= randint(-100, 10) <= 10
True
```

```
>>> from sage.all import *
>>> s = [randint(Integer(0), Integer(2)) for i in range(Integer(15))]; s  # random
[0, 1, 0, 0, 1, 0, 2, 0, 2, 1, 2, 2, 0, 2, 2]
>>> all(t in [Integer(0), Integer(1), Integer(2)] for t in s)
True
>>> -Integer(100) <= randint(-Integer(100), Integer(10)) <= Integer(10)
True
```

sage.misc.prandom.**random**()

Get the next random number in the range [0.0, 1.0).

EXAMPLES:

```
sage: sample = [random() for i in [1 .. 4]]; sample  # random
[0.111439293741037, 0.5143475134191677, 0.04468968524815642, 0.332490606442413]
```

(continues on next page)

(continued from previous page)

```
sage: all(0.0 <= s <= 1.0 for s in sample)
True
```

```
>>> from sage.all import *
>>> sample = [random() for i in (ellipsis_range(Integer(1) ,Ellipsis,␣
↪Integer(4)))]; sample  # random
[0.111439293741037, 0.5143475134191677, 0.04468968524815642, 0.332490606442413]
>>> all(RealNumber('0.0') <= s <= RealNumber('1.0') for s in sample)
True
```

sage.misc.prandom.**randrange**(*start*, *stop=None*, *step=1*)

Choose a random item from range(start, stop[, step]).

This fixes the problem with randint() which includes the endpoint; in Python this is usually not what you want.

EXAMPLES:

```
sage: s = randrange(0, 100, 11)
sage: 0 <= s < 100
True
sage: s % 11
0

sage: 5000 <= randrange(5000, 5100) < 5100
True
sage: s = [randrange(0, 2) for i in range(15)]
sage: all(t in [0, 1] for t in s)
True

sage: s = randrange(0, 1000000, 1000)
sage: 0 <= s < 1000000
True
sage: s % 1000
0
sage: -100 <= randrange(-100, 10) < 10
True
```

```
>>> from sage.all import *
>>> s = randrange(Integer(0), Integer(100), Integer(11))
>>> Integer(0) <= s < Integer(100)
True
>>> s % Integer(11)
0

>>> Integer(5000) <= randrange(Integer(5000), Integer(5100)) < Integer(5100)
True
>>> s = [randrange(Integer(0), Integer(2)) for i in range(Integer(15))]
>>> all(t in [Integer(0), Integer(1)] for t in s)
True

>>> s = randrange(Integer(0), Integer(1000000), Integer(1000))
>>> Integer(0) <= s < Integer(1000000)
```

(continues on next page)

(continued from previous page)

```
True
>>> s % Integer(1000)
0
>>> -Integer(100) <= randrange(-Integer(100), Integer(10)) < Integer(10)
True
```

sage.misc.prandom.**sample**(*population*, *k*)

Choose k unique random elements from a population sequence.

Return a new list containing elements from the population while leaving the original population unchanged. The resulting list is in selection order so that all sub-slices will also be valid random samples. This allows raffle winners (the sample) to be partitioned into grand prize and second place winners (the subslices).

Members of the population need not be hashable or unique. If the population contains repeats, then each occurrence is a possible selection in the sample.

To choose a sample in a range of integers, use xrange as an argument (in Python 2) or range (in Python 3). This is especially fast and space efficient for sampling from a large population: sample(range(10000000), 60)

EXAMPLES:

```
sage: from sage.misc.misc import is_sublist
sage: l = ["Here", "I", "come", "to", "save", "the", "day"]
sage: s = sample(l, 3); s  # random
['Here', 'to', 'day']
sage: is_sublist(sorted(s), sorted(l))
True
sage: len(s)
3

sage: s = sample(range(2^30), 7); s  # random
[357009070, 558990255, 196187132, 752551188, 85926697, 954621491, 624802848]
sage: len(s)
7
sage: all(t in range(2^30) for t in s)
True
```

```
>>> from sage.all import *
>>> from sage.misc.misc import is_sublist
>>> l = ["Here", "I", "come", "to", "save", "the", "day"]
>>> s = sample(l, Integer(3)); s  # random
['Here', 'to', 'day']
>>> is_sublist(sorted(s), sorted(l))
True
>>> len(s)
3

>>> s = sample(range(Integer(2)**Integer(30)), Integer(7)); s  # random
[357009070, 558990255, 196187132, 752551188, 85926697, 954621491, 624802848]
>>> len(s)
7
>>> all(t in range(Integer(2)**Integer(30)) for t in s)
True
```

sage.misc.prandom.**shuffle**(*x*)

x, random=random.random -> shuffle list x in place; return None.

Optional arg random is a 0-argument function returning a random float in [0.0, 1.0); by default, the sage.misc.random.random.

EXAMPLES:

```
sage: shuffle([1 .. 10])
```

```
>>> from sage.all import *
>>> shuffle((ellipsis_range(Integer(1) ,Ellipsis, Integer(10))))
```

sage.misc.prandom.**uniform**(*a*, *b*)

Get a random number in the range [a, b).

Equivalent to code{a + (b-a) * random()}.

EXAMPLES:

```
sage: s = uniform(0, 1); s  # random
0.111439293741037
sage: 0.0 <= s <= 1.0
True

sage: s = uniform(e, pi); s  # random                                    #␣
↪needs sage.symbolic
0.5143475134191677*pi + 0.48565248658083227*e
sage: bool(e <= s <= pi)                                                 #␣
↪needs sage.symbolic
True
```

```
>>> from sage.all import *
>>> s = uniform(Integer(0), Integer(1)); s  # random
0.111439293741037
>>> RealNumber('0.0') <= s <= RealNumber('1.0')
True

>>> s = uniform(e, pi); s  # random                                      #␣
↪needs sage.symbolic
0.5143475134191677*pi + 0.48565248658083227*e
>>> bool(e <= s <= pi)                                                   #␣
↪needs sage.symbolic
True
```

sage.misc.prandom.**vonmisesvariate**(*mu*, *kappa*)

Circular data distribution.

mu is the mean angle, expressed in radians between 0 and 2*pi, and kappa is the concentration parameter, which must be greater than or equal to zero. If kappa is equal to zero, this distribution reduces to a uniform random angle over the range 0 to 2*pi.

EXAMPLES:

```
sage: sample = [vonmisesvariate(1.0r, 3.0r) for i in range(1, 5)]; sample  #␣
↪random
```

(continues on next page)

(continued from previous page)

```
[0.898328639355427, 0.6718030007041281, 2.0308777524813393, 1.714325253725145]
sage: all(s >= 0.0 for s in sample)
True
```

```
>>> from sage.all import *
>>> sample = [vonmisesvariate(1.0, 3.0) for i in range(Integer(1), Integer(5))];␣
↪sample  # random
[0.898328639355427, 0.6718030007041281, 2.0308777524813393, 1.714325253725145]
>>> all(s >= RealNumber('0.0') for s in sample)
True
```

sage.misc.prandom.**weibullvariate**(*alpha*, *beta*)

Weibull distribution.

alpha is the scale parameter and beta is the shape parameter.

EXAMPLES:

```
sage: sample = [weibullvariate(1, 3) for i in range(1, 5)]; sample  # random
[0.49069775546342537, 0.8972185564611213, 0.357573846531942, 0.739377255516847]
sage: all(s >= 0.0 for s in sample)
True
```

```
>>> from sage.all import *
>>> sample = [weibullvariate(Integer(1), Integer(3)) for i in range(Integer(1),␣
↪Integer(5))]; sample  # random
[0.49069775546342537, 0.8972185564611213, 0.357573846531942, 0.739377255516847]
>>> all(s >= RealNumber('0.0') for s in sample)
True
```

1.5 The Unknown truth value

The `Unknown` object is used in Sage in several places as return value in addition to `True` and `False`, in order to signal uncertainty about or inability to compute the result. `Unknown` can be identified using `is`, or by catching *UnknownError* from a boolean operation.

Warning

Calling `bool()` with `Unknown` as argument will throw an *UnknownError*. This also means that in the following cases, `and`, `not`, and `or` fail or return a somewhat wrong value:

```
sage: not Unknown          # should return Unknown
Traceback (most recent call last):
...
UnknownError: Unknown does not evaluate in boolean context
sage: Unknown and False    # should return False
Traceback (most recent call last):
...
UnknownError: Unknown does not evaluate in boolean context
sage: Unknown or False     # should return Unknown
Traceback (most recent call last):
...
UnknownError: Unknown does not evaluate in boolean context
```

```
>>> from sage.all import *
>>> not Unknown          # should return Unknown
Traceback (most recent call last):
...
UnknownError: Unknown does not evaluate in boolean context
>>> Unknown and False    # should return False
Traceback (most recent call last):
...
UnknownError: Unknown does not evaluate in boolean context
>>> Unknown or False     # should return Unknown
Traceback (most recent call last):
...
UnknownError: Unknown does not evaluate in boolean context
```

EXAMPLES:

```
sage: def func(n):
....:     if n > 0:
....:         return True
....:     elif n < 0:
....:         return False
....:     else:
....:         return Unknown
```

```
>>> from sage.all import *
>>> def func(n):
...     if n > Integer(0):
...         return True
...     elif n < Integer(0):
...         return False
...     else:
...         return Unknown
```

Using direct identification:

```
sage: for n in [-3, 0, 12]:
....:     res = func(n)
....:     if res is True:
....:         print("n={} is positive".format(n))
....:     elif res is False:
....:         print("n={} is negative".format(n))
....:     else:
....:         print("n={} is neither positive nor negative".format(n))
n=-3 is negative
n=0 is neither positive nor negative
n=12 is positive
```

```
>>> from sage.all import *
>>> for n in [-Integer(3), Integer(0), Integer(12)]:
...     res = func(n)
...     if res is True:
...         print("n={} is positive".format(n))
```

(continues on next page)

(continued from previous page)

```
...     elif res is False:
...         print("n={} is negative".format(n))
...     else:
...         print("n={} is neither positive nor negative".format(n))
n=-3 is negative
n=0 is neither positive nor negative
n=12 is positive
```

Using *UnknownError*:

```
sage: for n in [-3, 0, 12]:
....:     try:
....:         if func(n):
....:             print("n={} is positive".format(n))
....:         else:
....:             print("n={} is negative".format(n))
....:     except UnknownError:
....:         print("n={} is neither positive nor negative".format(n))
n=-3 is negative
n=0 is neither positive nor negative
n=12 is positive
```

```
>>> from sage.all import *
>>> for n in [-Integer(3), Integer(0), Integer(12)]:
...     try:
...         if func(n):
...             print("n={} is positive".format(n))
...         else:
...             print("n={} is negative".format(n))
...     except UnknownError:
...         print("n={} is neither positive nor negative".format(n))
n=-3 is negative
n=0 is neither positive nor negative
n=12 is positive
```

AUTHORS:

- Florent Hivert (2010): initial version.
- Ralf Stephan, Vincent Delecroix (2018-2020): redesign

class sage.misc.unknown.**UnknownClass**

Bases: UniqueRepresentation

The Unknown truth value.

The `Unknown` object is used in Sage in several places as return value in addition to `True` and `False`, in order to signal uncertainty about or inability to compute the result. `Unknown` can be identified using `is`, or by catching *UnknownError* from a boolean operation.

Warning

Calling `bool()` with `Unknown` as argument will throw an *UnknownError*. This also means that applying `and`, `not`, and `or` to `Unknown` might fail.

exception sage.misc.unknown.**UnknownError**

Bases: TypeError

Raised whenever Unknown is used in a boolean operation.

EXAMPLES:

```
sage: not Unknown
Traceback (most recent call last):
...
UnknownError: Unknown does not evaluate in boolean context
```

```
>>> from sage.all import *
>>> not Unknown
Traceback (most recent call last):
...
UnknownError: Unknown does not evaluate in boolean context
```

CHAPTER

TWO

PROGRAMMING UTILITIES

2.1 Special Base Classes, Decorators, etc.

2.1.1 Abstract methods

class sage.misc.abstract_method.**AbstractMethod**(*f*, *optional=False*)

Bases: object

Constructor for abstract methods.

EXAMPLES:

```
sage: def f(x):
....:     "doc of f"
....:     return 1
sage: x = abstract_method(f); x
<abstract method f at ...>
sage: x.__doc__
'doc of f'
sage: x.__name__
'f'
sage: x.__module__
'__main__'
```

```
>>> from sage.all import *
>>> def f(x):
...     "doc of f"
...     return Integer(1)
>>> x = abstract_method(f); x
<abstract method f at ...>
>>> x.__doc__
'doc of f'
>>> x.__name__
'f'
>>> x.__module__
'__main__'
```

is_optional()

Return whether an abstract method is optional or not.

EXAMPLES:

```
sage: class AbstractClass:
....:     @abstract_method
....:     def required(): pass
....:
....:     @abstract_method(optional = True)
....:     def optional(): pass
sage: AbstractClass.required.is_optional()
False
sage: AbstractClass.optional.is_optional()
True
```

```
>>> from sage.all import *
>>> class AbstractClass:
...     @abstract_method
...     def required(): pass
....:
>>>     @abstract_method(optional = True)
...     def optional(): pass
>>> AbstractClass.required.is_optional()
False
>>> AbstractClass.optional.is_optional()
True
```

sage.misc.abstract_method.**abstract_method**(*f=None*, *optional=False*)

Abstract methods.

INPUT:

- `f` – a function
- `optional` – boolean (default: `False`)

The decorator *abstract_method* can be used to declare methods that should be implemented by all concrete derived classes. This declaration should typically include documentation for the specification for this method.

The purpose is to enforce a consistent and visual syntax for such declarations. It is used by the Sage categories for automated tests (see `Sets.Parent.test_not_implemented`).

EXAMPLES:

We create a class with an abstract method:

```
sage: class A():
....:
....:     @abstract_method
....:     def my_method(self):
....:         '''
....:         The method :meth:`my_method` computes my_method
....:
....:         EXAMPLES::
....:
....:         '''
....:         pass

sage: A.my_method
<abstract method my_method at ...>
```

```
>>> from sage.all import *
>>> class A():
....:
>>>     @abstract_method
...     def my_method(self):
...         '''
...         The method :meth:`my_method` computes my_method
....:
>>>         EXAMPLES::
....:
>>>         '''
...         pass

>>> A.my_method
<abstract method my_method at ...>
```

The current policy is that a `NotImplementedError` is raised when accessing the method through an instance, even before the method is called:

```
sage: x = A()
sage: x.my_method
Traceback (most recent call last):
...
NotImplementedError: <abstract method my_method at ...>
```

```
>>> from sage.all import *
>>> x = A()
>>> x.my_method
Traceback (most recent call last):
...
NotImplementedError: <abstract method my_method at ...>
```

It is also possible to mark abstract methods as optional:

```
sage: class A():
....:
....:     @abstract_method(optional = True)
....:     def my_method(self):
....:         '''
....:         The method :meth:`my_method` computes my_method
....:
....:         EXAMPLES::
....:
....:         '''
....:         pass

sage: A.my_method
<optional abstract method my_method at ...>

sage: x = A()
sage: x.my_method
NotImplemented
```

```
>>> from sage.all import *
>>> class A():
....:
>>>     @abstract_method(optional = True)
...     def my_method(self):
...         '''
...         The method :meth:`my_method` computes my_method
....:
>>>         EXAMPLES::
....:
>>>         '''
...         pass

>>> A.my_method
<optional abstract method my_method at ...>

>>> x = A()
>>> x.my_method
NotImplemented
```

The official mantra for testing whether an optional abstract method is implemented is:

```
sage: if x.my_method is not NotImplemented:
....:     x.my_method()
....: else:
....:     print("x.my_method is not available.")
x.my_method is not available.
```

```
>>> from sage.all import *
>>> if x.my_method is not NotImplemented:
...     x.my_method()
... else:
...     print("x.my_method is not available.")
x.my_method is not available.
```

Discussion

The policy details are not yet fixed. The purpose of this first implementation is to let developers experiment with it and give feedback on what's most practical.

The advantage of the current policy is that attempts at using a non implemented methods are caught as early as possible. On the other hand, one cannot use introspection directly to fetch the documentation:

```
sage: x.my_method?      # todo: not implemented
```

```
>>> from sage.all import *
>>> x.my_method?      # todo: not implemented
```

Instead one needs to do:

```
sage: A._my_method?     # todo: not implemented
```

```
>>> from sage.all import *
>>> A._my_method?      # todo: not implemented
```

This could probably be fixed in *sage.misc.sageinspect*.

Todo

what should be the recommended mantra for existence testing from the class?

Todo

should extra information appear in the output? The name of the class? That of the super class where the abstract method is defined?

Todo

look for similar decorators on the web, and merge

Implementation details

Technically, an abstract_method is a non-data descriptor (see Invoking Descriptors in the Python reference manual).

The syntax `@abstract_method` w.r.t. @abstract_method(optional = True) is achieved by a little trick which we test here:

```
sage: abstract_method(optional = True)
<function abstract_method.<locals>.<lambda> at ...>
sage: abstract_method(optional = True)(version)
<optional abstract method version at ...>
sage: abstract_method(version, optional = True)
<optional abstract method version at ...>
```

```
>>> from sage.all import *
>>> abstract_method(optional = True)
<function abstract_method.<locals>.<lambda> at ...>
>>> abstract_method(optional = True)(version)
<optional abstract method version at ...>
>>> abstract_method(version, optional = True)
<optional abstract method version at ...>
```

sage.misc.abstract_method.**abstract_methods_of_class**(*cls*)

Return the required and optional abstract methods of the class.

EXAMPLES:

```
sage: class AbstractClass:
....:     @abstract_method
....:     def required1(): pass
....:
....:     @abstract_method(optional = True)
```

(continues on next page)

(continued from previous page)

```
....:     def optional2(): pass
....:
....:     @abstract_method(optional = True)
....:     def optional1(): pass
....:
....:     @abstract_method
....:     def required2(): pass

sage: sage.misc.abstract_method.abstract_methods_of_class(AbstractClass)
{'optional': ['optional1', 'optional2'],
 'required': ['required1', 'required2']}
```

```
>>> from sage.all import *
>>> class AbstractClass:
...     @abstract_method
...     def required1(): pass
....:
>>>     @abstract_method(optional = True)
...     def optional2(): pass
....:
>>>     @abstract_method(optional = True)
...     def optional1(): pass
....:
>>>     @abstract_method
...     def required2(): pass

>>> sage.misc.abstract_method.abstract_methods_of_class(AbstractClass)
{'optional': ['optional1', 'optional2'],
 'required': ['required1', 'required2']}
```

2.1.2 Bindable classes

class sage.misc.bindable_class.**BindableClass**

Bases: object

Bindable classes.

This class implements a binding behavior for nested classes that derive from it. Namely, if a nested class `Outer.Inner` derives from `BindableClass`, and if `outer` is an instance of `Outer`, then `outer.Inner(...)` is equivalent to `Outer.Inner(outer, ...)`.

EXAMPLES:

Let us consider the following class `Outer` with a nested class `Inner`:

```
sage: from sage.misc.nested_class import NestedClassMetaclass
sage: class Outer(metaclass=NestedClassMetaclass):
....:     class Inner:
....:         def __init__(self, *args):
....:             print(args)
....:     def f(self, *args):
....:         print("{} {}".format(self, args))
....:     @staticmethod
```

(continues on next page)

(continued from previous page)

```
....:     def f_static(*args):
....:         print(args)

sage: outer = Outer()
```

```
>>> from sage.all import *
>>> from sage.misc.nested_class import NestedClassMetaclass
>>> class Outer(metaclass=NestedClassMetaclass):
...     class Inner:
...         def __init__(self, *args):
...             print(args)
...     def f(self, *args):
...         print("{} {}".format(self, args))
...     @staticmethod
...     def f_static(*args):
...         print(args)

>>> outer = Outer()
```

By default, when `Inner` is a class nested in `Outer`, accessing `outer.Inner` returns the `Inner` class as is:

```
sage: outer.Inner is Outer.Inner
True
```

```
>>> from sage.all import *
>>> outer.Inner is Outer.Inner
True
```

In particular, `outer` is completely ignored in the following call:

```
sage: x = outer.Inner(1,2,3)
(1, 2, 3)
```

```
>>> from sage.all import *
>>> x = outer.Inner(Integer(1),Integer(2),Integer(3))
(1, 2, 3)
```

This is similar to what happens with a static method:

```
sage: outer.f_static(1,2,3)
(1, 2, 3)
```

```
>>> from sage.all import *
>>> outer.f_static(Integer(1),Integer(2),Integer(3))
(1, 2, 3)
```

In some cases, we would want instead `Inner` to receive `outer` as parameter, like in a usual method call:

```
sage: outer.f(1,2,3)
<__main__.Outer object at ...> (1, 2, 3)
```

```
>>> from sage.all import *
>>> outer.f(Integer(1),Integer(2),Integer(3))
<__main__.Outer object at ...> (1, 2, 3)
```

To this end, `outer.f` returns a *bound method*:

```
sage: outer.f
<bound method Outer.f of <__main__.Outer object at ...>>
```

```
>>> from sage.all import *
>>> outer.f
<bound method Outer.f of <__main__.Outer object at ...>>
```

so that `outer.f(1,2,3)` is equivalent to:

```
sage: Outer.f(outer, 1,2,3)
<__main__.Outer object at ...> (1, 2, 3)
```

```
>>> from sage.all import *
>>> Outer.f(outer, Integer(1),Integer(2),Integer(3))
<__main__.Outer object at ...> (1, 2, 3)
```

BindableClass gives this binding behavior to all its subclasses:

```
sage: from sage.misc.bindable_class import BindableClass
sage: class Outer(metaclass=NestedClassMetaclass):
....:     class Inner(BindableClass):
....:         " some documentation "
....:         def __init__(self, outer, *args):
....:             print("{} {}".format(outer, args))
```

```
>>> from sage.all import *
>>> from sage.misc.bindable_class import BindableClass
>>> class Outer(metaclass=NestedClassMetaclass):
...     class Inner(BindableClass):
...         " some documentation "
...         def __init__(self, outer, *args):
...             print("{} {}".format(outer, args))
```

Calling `Outer.Inner` returns the (unbound) class as usual:

```
sage: Outer.Inner
<class '__main__.Outer.Inner'>
```

```
>>> from sage.all import *
>>> Outer.Inner
<class '__main__.Outer.Inner'>
```

However, `outer.Inner(1,2,3)` is equivalent to `Outer.Inner(outer, 1,2,3)`:

```
sage: outer = Outer()
sage: x = outer.Inner(1,2,3)
<__main__.Outer object at ...> (1, 2, 3)
```

```
>>> from sage.all import *
>>> outer = Outer()
>>> x = outer.Inner(Integer(1),Integer(2),Integer(3))
<__main__.Outer object at ...> (1, 2, 3)
```

To achieve this, `outer.Inner` returns (some sort of) bound class:

```
sage: outer.Inner
<bound class '__main__.Outer.Inner' of <__main__.Outer object at ...>>
```

```
>>> from sage.all import *
>>> outer.Inner
<bound class '__main__.Outer.Inner' of <__main__.Outer object at ...>>
```

Note

This is not actually a class, but an instance of `functools.partial`:

```
sage: type(outer.Inner).mro()
[<class 'sage.misc.bindable_class.BoundClass'>,
 <... 'functools.partial'>,
 <... 'object'>]
```

```
>>> from sage.all import *
>>> type(outer.Inner).mro()
[<class 'sage.misc.bindable_class.BoundClass'>,
 <... 'functools.partial'>,
 <... 'object'>]
```

Still, documentation works as usual:

```
sage: outer.Inner.__doc__
'...some documentation '
```

```
>>> from sage.all import *
>>> outer.Inner.__doc__
'...some documentation '
```

class sage.misc.bindable_class.**BoundClass**(**args*)

Bases: `partial`

class sage.misc.bindable_class.**Inner2**

Bases: *BindableClass*

Some documentation for Inner2

class sage.misc.bindable_class.**Outer**

Bases: `object`

A class with a bindable nested class, for testing purposes

class Inner

Bases: *BindableClass*

Some documentation for Outer.Inner

Inner2

alias of *Inner2*

2.1.3 Decorators

Python decorators for use in Sage.

AUTHORS:

- Tim Dumol (5 Dec 2009) – initial version.
- Johan S. R. Nielsen (2010) – collect decorators from various modules.
- Johan S. R. Nielsen (8 apr 2011) – improve introspection on decorators.
- Simon King (2011-05-26) – improve introspection of sage_wraps. Put this file into the reference manual.
- Julian Rueth (2014-03-19): added `decorator_keywords` decorator

`sage.misc.decorators.`**decorator_defaults**(*func*)

This function allows a decorator to have default arguments.

Normally, a decorator can be called with or without arguments. However, the two cases call for different types of return values. If a decorator is called with no parentheses, it should be run directly on the function. However, if a decorator is called with parentheses (i.e., arguments), then it should return a function that is then in turn called with the defined function as an argument.

This decorator allows us to have these default arguments without worrying about the return type.

EXAMPLES:

```
sage: from sage.misc.decorators import decorator_defaults
sage: @decorator_defaults
....: def my_decorator(f, *args, **kwds):
....:   print(kwds)
....:   print(args)
....:   print(f.__name__)

sage: @my_decorator
....: def my_fun(a, b):
....:   return a,b
{}
()
my_fun
sage: @my_decorator(3,4,c=1,d=2)
....: def my_fun(a, b):
....:   return a,b
{'c': 1, 'd': 2}
(3, 4)
my_fun
```

```
>>> from sage.all import *
>>> from sage.misc.decorators import decorator_defaults
>>> @decorator_defaults
... def my_decorator(f, *args, **kwds):
...   print(kwds)
...   print(args)
...   print(f.__name__)
```

(continues on next page)

(continued from previous page)

```
>>> @my_decorator
... def my_fun(a, b):
...   return a,b
{}
()
my_fun
>>> @my_decorator(Integer(3),Integer(4),c=Integer(1),d=Integer(2))
... def my_fun(a, b):
...   return a,b
{'c': 1, 'd': 2}
(3, 4)
my_fun
```

sage.misc.decorators.**decorator_keywords**(*func*)

A decorator for decorators with optional keyword arguments.

EXAMPLES:

```
sage: from sage.misc.decorators import decorator_keywords
sage: @decorator_keywords
....: def preprocess(f=None, processor=None):
....:     def wrapper(*args, **kwargs):
....:         if processor is not None:
....:             args, kwargs = processor(*args, **kwargs)
....:         return f(*args, **kwargs)
....:     return wrapper
```

```
>>> from sage.all import *
>>> from sage.misc.decorators import decorator_keywords
>>> @decorator_keywords
... def preprocess(f=None, processor=None):
...     def wrapper(*args, **kwargs):
...         if processor is not None:
...             args, kwargs = processor(*args, **kwargs)
...         return f(*args, **kwargs)
...     return wrapper
```

This decorator can be called with and without arguments:

```
sage: @preprocess
....: def foo(x): return x
sage: foo(None)
sage: foo(1)
1

sage: def normalize(x): return ((0,),{}) if x is None else ((x,),{})
sage: @preprocess(processor=normalize)
....: def foo(x): return x
sage: foo(None)
0
sage: foo(1)
1
```

```
>>> from sage.all import *
>>> @preprocess
... def foo(x): return x
>>> foo(None)
>>> foo(Integer(1))
1

>>> def normalize(x): return ((Integer(0),),{}) if x is None else ((x,),{})
>>> @preprocess(processor=normalize)
... def foo(x): return x
>>> foo(None)
0
>>> foo(Integer(1))
1
```

class sage.misc.decorators.**infix_operator**(*precedence*)

Bases: object

A decorator for functions which allows for a hack that makes the function behave like an infix operator.

This decorator exists as a convenience for interactive use.

EXAMPLES:

An infix dot product operator:

```
sage: @infix_operator('multiply')
....: def dot(a, b):
....:     '''Dot product.'''
....:     return a.dot_product(b)
sage: u = vector([1, 2, 3])                                                    #␣
↪needs sage.modules
sage: v = vector([5, 4, 3])                                                    #␣
↪needs sage.modules
sage: u *dot* v                                                                #␣
↪needs sage.modules
22
```

```
>>> from sage.all import *
>>> @infix_operator('multiply')
... def dot(a, b):
...     '''Dot product.'''
...     return a.dot_product(b)
>>> u = vector([Integer(1), Integer(2), Integer(3)])                            ␣
↪                       # needs sage.modules
>>> v = vector([Integer(5), Integer(4), Integer(3)])                            ␣
↪                       # needs sage.modules
>>> u *dot* v                                                                 #␣
↪needs sage.modules
22
```

An infix element-wise addition operator:

```
sage: # needs sage.modules
sage: @infix_operator('add')
```

(continues on next page)

(continued from previous page)

```
....: def eadd(a, b):
....:   return a.parent([i + j for i, j in zip(a, b)])
sage: u = vector([1, 2, 3])
sage: v = vector([5, 4, 3])
sage: u +eadd+ v
(6, 6, 6)
sage: 2*u +eadd+ v
(7, 8, 9)
```

```
>>> from sage.all import *
>>> # needs sage.modules
>>> @infix_operator('add')
... def eadd(a, b):
...   return a.parent([i + j for i, j in zip(a, b)])
>>> u = vector([Integer(1), Integer(2), Integer(3)])
>>> v = vector([Integer(5), Integer(4), Integer(3)])
>>> u +eadd+ v
(6, 6, 6)
>>> Integer(2)*u +eadd+ v
(7, 8, 9)
```

A hack to simulate a postfix operator:

```
sage: @infix_operator('or')
....: def thendo(a, b):
....:     return b(a)
sage: x |thendo| cos |thendo| (lambda x: x^2)                                  #␣
↪needs sage.symbolic
cos(x)^2
```

```
>>> from sage.all import *
>>> @infix_operator('or')
... def thendo(a, b):
...     return b(a)
>>> x |thendo| cos |thendo| (lambda x: x**Integer(2))                          ␣
↪      # needs sage.symbolic
cos(x)^2
```

```
operators = {'add': {'left': '__add__', 'right': '__radd__'}, 'multiply':
{'left': '__mul__', 'right': '__rmul__'}, 'or': {'left': '__or__', 'right':
'__ror__'}}
```

class sage.misc.decorators.**options**(***options*)

Bases: object

A decorator for functions which allows for default options to be set and reset by the end user. Additionally, if one needs to, one can get at the original keyword arguments passed into the decorator.

class sage.misc.decorators.**rename_keyword**(*deprecated=None*, *deprecation=None*, ***renames*)

Bases: object

A decorator which renames keyword arguments and optionally deprecates the new keyword.

INPUT:

- deprecation – integer; the github issue number where the deprecation was introduced
- the rest of the arguments is a list of keyword arguments in the form renamed_option='existing_option'. This will have the effect of renaming renamed_option so that the function only sees existing_option. If both renamed_option and existing_option are passed to the function, existing_option will override the renamed_option value.

EXAMPLES:

```
sage: from sage.misc.decorators import rename_keyword
sage: r = rename_keyword(color='rgbcolor')
sage: r.renames
{'color': 'rgbcolor'}
sage: loads(dumps(r)).renames
{'color': 'rgbcolor'}
```

```
>>> from sage.all import *
>>> from sage.misc.decorators import rename_keyword
>>> r = rename_keyword(color='rgbcolor')
>>> r.renames
{'color': 'rgbcolor'}
>>> loads(dumps(r)).renames
{'color': 'rgbcolor'}
```

To deprecate an old keyword:

```
sage: r = rename_keyword(deprecation=13109, color='rgbcolor')
```

```
>>> from sage.all import *
>>> r = rename_keyword(deprecation=Integer(13109), color='rgbcolor')
```

sage.misc.decorators.**sage_wraps**(*wrapped*, *assigned=('__module__', '__name__', '__qualname__', '__doc__', '__annotations__', '__type_params__')*, *updated=('__dict__',)*)

Decorator factory which should be used in decorators for making sure that meta-information on the decorated callables are retained through the decorator, such that the introspection functions of sage.misc.sageinspect retrieves them correctly. This includes documentation string, source, and argument specification. This is an extension of the Python standard library decorator functools.wraps.

That the argument specification is retained from the decorated functions implies, that if one uses sage_wraps in a decorator which intentionally changes the argument specification, one should add this information to the special attribute _sage_argspec_ of the wrapping function (for an example, see e.g. @options decorator in this module).

Note that in .pyx files which is compiled by Cython, because Sage uses binding=False compiler directive by default, you need to explicitly specify binding=True for all functions decorated with sage_wraps:

```
sage: import cython
sage: def square(f):
....:     @sage_wraps(f)
....:     @cython.binding(True)
....:     def new_f(x):
....:         return f(x)*f(x)
....:     return new_f
```

```
>>> from sage.all import *
>>> import cython
>>> def square(f):
...     @sage_wraps(f)
...     @cython.binding(True)
...     def new_f(x):
...         return f(x)*f(x)
...     return new_f
```

EXAMPLES:

Demonstrate that documentation string and source are retained from the decorated function:

```
sage: def square(f):
....:     @sage_wraps(f)
....:     def new_f(x):
....:         return f(x)*f(x)
....:     return new_f
sage: @square
....: def g(x):
....:     "My little function"
....:     return x
sage: g(2)
4
sage: g(x)                                                                  #␣
↪needs sage.symbolic
x^2
sage: g.__doc__
'My little function'
sage: from sage.misc.sageinspect import sage_getsource, sage_getsourcelines, sage_
↪getfile
sage: sage_getsource(g)
'@square...def g(x)...'
```

```
>>> from sage.all import *
>>> def square(f):
...     @sage_wraps(f)
...     def new_f(x):
...         return f(x)*f(x)
...     return new_f
>>> @square
... def g(x):
...     "My little function"
...     return x
>>> g(Integer(2))
4
>>> g(x)                                                                    #␣
↪needs sage.symbolic
x^2
>>> g.__doc__
'My little function'
>>> from sage.misc.sageinspect import sage_getsource, sage_getsourcelines, sage_
↪getfile
```

(continues on next page)

(continued from previous page)

```
>>> sage_getsource(g)
'@square...def g(x)...'
```

Demonstrate that the argument description are retained from the decorated function through the special method (when left unchanged) (see Issue #9976):

```
sage: def diff_arg_dec(f):
....:     @sage_wraps(f)
....:     def new_f(y, some_def_arg=2):
....:         return f(y+some_def_arg)
....:     return new_f
sage: @diff_arg_dec
....: def g(x):
....:     return x
sage: g(1)
3
sage: g(1, some_def_arg=4)
5
sage: from sage.misc.sageinspect import sage_getargspec
sage: sage_getargspec(g)
FullArgSpec(args=['x'], varargs=None, varkw=None, defaults=None,
            kwonlyargs=[], kwonlydefaults=None, annotations={})
```

```
>>> from sage.all import *
>>> def diff_arg_dec(f):
...     @sage_wraps(f)
...     def new_f(y, some_def_arg=Integer(2)):
...         return f(y+some_def_arg)
...     return new_f
>>> @diff_arg_dec
... def g(x):
...     return x
>>> g(Integer(1))
3
>>> g(Integer(1), some_def_arg=Integer(4))
5
>>> from sage.misc.sageinspect import sage_getargspec
>>> sage_getargspec(g)
FullArgSpec(args=['x'], varargs=None, varkw=None, defaults=None,
            kwonlyargs=[], kwonlydefaults=None, annotations={})
```

Demonstrate that it correctly gets the source lines and the source file, which is essential for interactive code edition; note that we do not test the line numbers, as they may easily change:

```
sage: P.<x,y> = QQ[]
sage: I = P*[x,y]
sage: sage_getfile(I.interreduced_basis)        # known bug
'.../sage/rings/polynomial/multi_polynomial_ideal.py'
sage: sage_getsourcelines(I.interreduced_basis)                                 #␣
↪needs sage.libs.singular
(['    @handle_AA_and_QQbar\n',
  '    @singular_gb_standard_options\n',
```

(continues on next page)

(continued from previous page)

```
  '    @libsingular_gb_standard_options\n',
  '    def interreduced_basis(self):\n',
  ...
  '        return self.basis.reduced()\n'], ...)
```

```
>>> from sage.all import *
>>> P = QQ['x, y']; (x, y,) = P._first_ngens(2)
>>> I = P*[x,y]
>>> sage_getfile(I.interreduced_basis)       # known bug
'.../sage/rings/polynomial/multi_polynomial_ideal.py'
>>> sage_getsourcelines(I.interreduced_basis)                                    #␣
↪needs sage.libs.singular
(['    @handle_AA_and_QQbar\n',
  '    @singular_gb_standard_options\n',
  '    @libsingular_gb_standard_options\n',
  '    def interreduced_basis(self):\n',
  ...
  '        return self.basis.reduced()\n'], ...)
```

The `f` attribute of the decorated function refers to the original function:

```
sage: foo = object()
sage: @sage_wraps(foo)
....: def func():
....:     pass
sage: wrapped = sage_wraps(foo)(func)
sage: wrapped.f is foo
True
```

```
>>> from sage.all import *
>>> foo = object()
>>> @sage_wraps(foo)
... def func():
...     pass
>>> wrapped = sage_wraps(foo)(func)
>>> wrapped.f is foo
True
```

Demonstrate that sage_wraps works for non-function callables (Issue #9919):

```
sage: def square_for_met(f):
....:   @sage_wraps(f)
....:   def new_f(self, x):
....:       return f(self,x)*f(self,x)
....:   return new_f
sage: class T:
....:   @square_for_met
....:   def g(self, x):
....:       "My little method"
....:       return x
sage: t = T()
sage: t.g(2)
```

(continues on next page)

(continued from previous page)

```
4
sage: t.g.__doc__
'My little method'
```

```
>>> from sage.all import *
>>> def square_for_met(f):
...     @sage_wraps(f)
...     def new_f(self, x):
...         return f(self,x)*f(self,x)
...     return new_f
>>> class T:
...     @square_for_met
...     def g(self, x):
...         "My little method"
...         return x
>>> t = T()
>>> t.g(Integer(2))
4
>>> t.g.__doc__
'My little method'
```

The bug described in Issue #11734 is fixed:

```
sage: def square(f):
....:     @sage_wraps(f)
....:     def new_f(x):
....:         return f(x)*f(x)
....:     return new_f
sage: f = lambda x:x^2
sage: g = square(f)
sage: g(3)  # this line used to fail for some people if these command were␣
↪manually entered on the sage prompt
81
```

```
>>> from sage.all import *
>>> def square(f):
...     @sage_wraps(f)
...     def new_f(x):
...         return f(x)*f(x)
...     return new_f
>>> f = lambda x:x**Integer(2)
>>> g = square(f)
>>> g(Integer(3))  # this line used to fail for some people if these command were␣
↪manually entered on the sage prompt
81
```

class sage.misc.decorators.**specialize**(**args*, ***kwargs*)

Bases: object

A decorator generator that returns a decorator that in turn returns a specialized function for function `f`. In other words, it returns a function that acts like `f` with arguments `*args` and `**kwargs` supplied.

INPUT:

- `*args`, `**kwargs` – arguments to specialize the function for

OUTPUT: a decorator that accepts a function `f` and specializes it with `*args` and `**kwargs`

EXAMPLES:

```
sage: f = specialize(5)(lambda x, y: x+y)
sage: f(10)
15
sage: f(5)
10
sage: @specialize("Bon Voyage")
....: def greet(greeting, name):
....:     print("{0}, {1}!".format(greeting, name))
sage: greet("Monsieur Jean Valjean")
Bon Voyage, Monsieur Jean Valjean!
sage: greet(name = 'Javert')
Bon Voyage, Javert!
```

```
>>> from sage.all import *
>>> f = specialize(Integer(5))(lambda x, y: x+y)
>>> f(Integer(10))
15
>>> f(Integer(5))
10
>>> @specialize("Bon Voyage")
... def greet(greeting, name):
...     print("{0}, {1}!".format(greeting, name))
>>> greet("Monsieur Jean Valjean")
Bon Voyage, Monsieur Jean Valjean!
>>> greet(name = 'Javert')
Bon Voyage, Javert!
```

class sage.misc.decorators.**suboptions**(*name*, ***options*)

Bases: `object`

A decorator for functions which collects all keywords starting with `name+'_'` and collects them into a dictionary which will be passed on to the wrapped function as a dictionary called `name_options`.

The keyword arguments passed into the constructor are taken to be default for the `name_options` dictionary.

EXAMPLES:

```
sage: from sage.misc.decorators import suboptions
sage: s = suboptions('arrow', size=2)
sage: s.name
'arrow_'
sage: s.options
{'size': 2}
```

```
>>> from sage.all import *
>>> from sage.misc.decorators import suboptions
>>> s = suboptions('arrow', size=Integer(2))
>>> s.name
'arrow_'
```

(continues on next page)

(continued from previous page)

```
>>> s.options
{'size': 2}
```

2.1.4 Constant functions

class sage.misc.constant_function.**ConstantFunction**

Bases: SageObject

A class for function objects implementing constant functions.

EXAMPLES:

```
sage: f = ConstantFunction(3)
sage: f
The constant function (...) -> 3
sage: f()
3
sage: f(5)
3
```

```
>>> from sage.all import *
>>> f = ConstantFunction(Integer(3))
>>> f
The constant function (...) -> 3
>>> f()
3
>>> f(Integer(5))
3
```

Such a function could be implemented as a lambda expression, but this is not (currently) picklable:

```
sage: g = lambda x: 3
sage: g == loads(dumps(g))
Traceback (most recent call last):
...
PicklingError: Can't pickle ...: attribute lookup ... failed
sage: f == loads(dumps(f))
True
```

```
>>> from sage.all import *
>>> g = lambda x: Integer(3)
>>> g == loads(dumps(g))
Traceback (most recent call last):
...
PicklingError: Can't pickle ...: attribute lookup ... failed
>>> f == loads(dumps(f))
True
```

Also, in the long run, the information that this function is constant could be used by some algorithms.

Todo

- Should constant functions have unique representation?
- Should the number of arguments be specified in the input?
- Should this go into `sage.categories.maps`? Then what should be the parent (e.g. for `lambda x: True`)?

2.1.5 Special Methods for Classes

AUTHORS:

- Nicolas M. Thiery (2009-2011) implementation of `__classcall__`, `__classget__`, `__classcontains__`;
- Florent Hivert (2010-2012): implementation of `__classcall_private__`, documentation, Cythonization and optimization.

class sage.misc.classcall_metaclass.**ClasscallMetaclass**

Bases: *NestedClassMetaclass*

A metaclass providing support for special methods for classes.

From the Section Special method names of the Python Reference Manual:

> `a class `cls` can implement certain operations on its instances that are invoked by special syntax (such as arithmetic operations or subscripting and slicing) by defining methods with special names'.

The purpose of this metaclass is to allow for the class `cls` to implement analogues of those special methods for the operations on the class itself.

Currently, the following special methods are supported:

- `.__classcall__` (and `.__classcall_private__`) for customizing `cls(...)` (analogue of `.__call__`).
- `.__classcontains__` for customizing membership testing `x in cls` (analogue of `.__contains__`).
- `.__classget__` for customizing the binding behavior in `foo.cls` (analogue of `.__get__`).

See the documentation of `__call__()` and of `__get__()` and `__contains__()` for the description of the respective protocols.

Warning

For technical reasons, `__classcall__`, `__classcall_private__`, `__classcontains__`, and `__classget__` must be defined as `staticmethod()`'s, even though they receive the class itself as their first argument.

Warning

For efficiency reasons, the resolution for the special methods is done once for all, upon creation of the class. Thus, later dynamic changes to those methods are ignored. But see also `_set_classcall()`.

`ClasscallMetaclass` is an extension of the base `type`.

Todo

find a good name for this metaclass.

Note

If a class is put in this metaclass it automatically becomes a new-style class:

```
sage: from sage.misc.classcall_metaclass import ClasscallMetaclass
sage: class Foo(metaclass=ClasscallMetaclass): pass
sage: x = Foo(); x
<__main__.Foo object at 0x...>
sage: issubclass(Foo, object)
True
sage: isinstance(Foo, type)
True
```

```
>>> from sage.all import *
>>> from sage.misc.classcall_metaclass import ClasscallMetaclass
>>> class Foo(metaclass=ClasscallMetaclass): pass
>>> x = Foo(); x
<__main__.Foo object at 0x...>
>>> issubclass(Foo, object)
True
>>> isinstance(Foo, type)
True
```

sage.misc.classcall_metaclass.**timeCall**(*T*, *n*, **args*)

We illustrate some timing when using the classcall mechanism.

EXAMPLES:

```
sage: from sage.misc.classcall_metaclass import (
....:     ClasscallMetaclass, CRef, C2, C3, C2C, timeCall)
sage: timeCall(object, 1000)
```

```
>>> from sage.all import *
>>> from sage.misc.classcall_metaclass import (
...     ClasscallMetaclass, CRef, C2, C3, C2C, timeCall)
>>> timeCall(object, Integer(1000))
```

For reference let construct basic objects and a basic Python class:

```
sage: %timeit timeCall(object, 1000)   # not tested
625 loops, best of 3: 41.4 µs per loop

sage: i1 = int(1); i3 = int(3) # don't use Sage's Integer
sage: class PRef():
....:     def __init__(self, i):
....:         self.i = i+i1
```

```
>>> from sage.all import *
>>> %timeit timeCall(object, Integer(1000))    # not tested
625 loops, best of 3: 41.4 µs per loop

>>> i1 = int(Integer(1)); i3 = int(Integer(3)) # don't use Sage's Integer
>>> class PRef():
...     def __init__(self, i):
...         self.i = i+i1
```

For a Python class, compared to the reference class there is a 10% overhead in using *ClasscallMetaclass* if there is no classcall defined:

```
sage: class P(metaclass=ClasscallMetaclass):
....:     def __init__(self, i):
....:         self.i = i+i1

sage: %timeit timeCall(PRef, 1000, i3)    # not tested
625 loops, best of 3: 420 µs per loop
sage: %timeit timeCall(P, 1000, i3)       # not tested
625 loops, best of 3: 458 µs per loop
```

```
>>> from sage.all import *
>>> class P(metaclass=ClasscallMetaclass):
...     def __init__(self, i):
...         self.i = i+i1

>>> %timeit timeCall(PRef, Integer(1000), i3)    # not tested
625 loops, best of 3: 420 µs per loop
>>> %timeit timeCall(P, Integer(1000), i3)       # not tested
625 loops, best of 3: 458 µs per loop
```

For a Cython class (not cdef since they doesn't allows metaclasses), the overhead is a little larger:

```
sage: %timeit timeCall(CRef, 1000, i3)    # not tested
625 loops, best of 3: 266 µs per loop
sage: %timeit timeCall(C2, 1000, i3)      # not tested
625 loops, best of 3: 298 µs per loop
```

```
>>> from sage.all import *
>>> %timeit timeCall(CRef, Integer(1000), i3)    # not tested
625 loops, best of 3: 266 µs per loop
>>> %timeit timeCall(C2, Integer(1000), i3)      # not tested
625 loops, best of 3: 298 µs per loop
```

Let's now compare when there is a classcall defined:

```
sage: class PC(object, metaclass=ClasscallMetaclass):
....:     @staticmethod
....:     def __classcall__(cls, i):
....:         return i+i1
sage: %timeit timeCall(C2C, 1000, i3)    # not tested
625 loops, best of 3: 148 µs per loop
```

(continues on next page)

(continued from previous page)

```
sage: %timeit timeCall(PC, 1000, i3)    # not tested
625 loops, best of 3: 289 µs per loop
```

```
>>> from sage.all import *
>>> class PC(object, metaclass=ClasscallMetaclass):
...     @staticmethod
...     def __classcall__(cls, i):
...         return i+i1
>>> %timeit timeCall(C2C, Integer(1000), i3)    # not tested
625 loops, best of 3: 148 µs per loop
>>> %timeit timeCall(PC, Integer(1000), i3)    # not tested
625 loops, best of 3: 289 µs per loop
```

The overhead of the indirection (`C(...) -> ClasscallMetaclass.__call__(...) -> C.__classcall__(...)`) is unfortunately quite large in this case (two method calls instead of one). In reasonable usecases, the overhead should be mostly hidden by the computations inside the classcall:

```
sage: %timeit timeCall(C2C.__classcall__, 1000, C2C, i3)  # not tested
625 loops, best of 3: 33 µs per loop
sage: %timeit timeCall(PC.__classcall__, 1000, PC, i3)    # not tested
625 loops, best of 3: 131 µs per loop
```

```
>>> from sage.all import *
>>> %timeit timeCall(C2C.__classcall__, Integer(1000), C2C, i3)  # not tested
625 loops, best of 3: 33 µs per loop
>>> %timeit timeCall(PC.__classcall__, Integer(1000), PC, i3)    # not tested
625 loops, best of 3: 131 µs per loop
```

Finally, there is no significant difference between Cython's V2 and V3 syntax for metaclass:

```
sage: %timeit timeCall(C2, 1000, i3)   # not tested
625 loops, best of 3: 330 µs per loop
sage: %timeit timeCall(C3, 1000, i3)   # not tested
625 loops, best of 3: 328 µs per loop
```

```
>>> from sage.all import *
>>> %timeit timeCall(C2, Integer(1000), i3)   # not tested
625 loops, best of 3: 330 µs per loop
>>> %timeit timeCall(C3, Integer(1000), i3)   # not tested
625 loops, best of 3: 328 µs per loop
```

sage.misc.classcall_metaclass.**typecall**(*cls*, **args*, ***kwds*)

Object construction.

This is a faster equivalent to `type.__call__(cls, <some arguments>)`.

INPUT:

- `cls` – the class used for constructing the instance; it must be a builtin type or a new style class (inheriting from `object`)

EXAMPLES:

```
sage: from sage.misc.classcall_metaclass import typecall
sage: class Foo(): pass
sage: typecall(Foo)
<__main__.Foo object at 0x...>
sage: typecall(list)
[]
sage: typecall(Integer, 2)
2
```

```
>>> from sage.all import *
>>> from sage.misc.classcall_metaclass import typecall
>>> class Foo(): pass
>>> typecall(Foo)
<__main__.Foo object at 0x...>
>>> typecall(list)
[]
>>> typecall(Integer, Integer(2))
2
```

2.1.6 Metaclass for inheriting comparison functions

This module defines a metaclass *InheritComparisonMetaclass* to inherit comparison functions in Cython extension types. In Python 2, the special methods __richcmp__, __cmp__ and __hash__ are only inherited as a whole: defining just 1 or 2 of these will prevent the others from being inherited.

To solve this issue, you can use *InheritComparisonMetaclass* as a Cython "metaclass" (see sage.cpython.cython_metaclass for the general mechanism). If you do this for an extension type which defines neither __richcmp__ nor __cmp__, then both these methods are inherited from the base class (the MRO is not used).

In Sage, this is in particular used for sage.structure.element.Element to support comparisons using the coercion framework.

None of this is relevant to Python classes, which inherit comparison methods anyway.

AUTHOR:

- Jeroen Demeyer (2015-05-22): initial version, see Issue #18329

class sage.misc.inherit_comparison.**InheritComparisonClasscallMetaclass**

Bases: *ClasscallMetaclass*, *InheritComparisonMetaclass*

Combine ClasscallMetaclass with *InheritComparisonMetaclass*.

class sage.misc.inherit_comparison.**InheritComparisonMetaclass**

Bases: type

If the type does not define __richcmp__ nor __cmp__, inherit both these methods from the base class. The difference with plain extension types is that comparison is inherited even if __hash__ is defined.

EXAMPLES:

```
sage: # needs sage.misc.cython
sage: cython(
....: '''
....: cimport cython
....:
....: from sage.misc.inherit_comparison cimport InheritComparisonMetaclass
```

(continues on next page)

(continued from previous page)

```
....:
....: cdef class Base():
....:     def __richcmp__(left, right, int op):
....:         print("Calling Base.__richcmp__")
....:         return left is right
....:
....: cdef class Derived(Base):
....:     def __hash__(self):
....:         return 1
....:
....: cdef class DerivedWithRichcmp(Base):
....:     @cython.always_allow_keywords(False)
....:     def __getmetaclass__(_):
....:         from sage.misc.inherit_comparison import InheritComparisonMetaclass
....:         return InheritComparisonMetaclass
....:     def __hash__(self):
....:         return 1
....: ''')
sage: a = Derived()
sage: a == a
True
sage: b = DerivedWithRichcmp()
sage: b == b
Calling Base.__richcmp__
True
```

```
>>> from sage.all import *
>>> # needs sage.misc.cython
>>> cython(
... '''
... cimport cython
....:
>>> from sage.misc.inherit_comparison cimport InheritComparisonMetaclass
....:
>>> cdef class Base():
...     def __richcmp__(left, right, int op):
...         print("Calling Base.__richcmp__")
...         return left is right
....:
>>> cdef class Derived(Base):
...     def __hash__(self):
...         return Integer(1)
....:
>>> cdef class DerivedWithRichcmp(Base):
...     @cython.always_allow_keywords(False)
...     def __getmetaclass__(_):
...         from sage.misc.inherit_comparison import InheritComparisonMetaclass
...         return InheritComparisonMetaclass
...     def __hash__(self):
...         return Integer(1)
... ''')
>>> a = Derived()
```

(continues on next page)

(continued from previous page)

```
>>> a == a
True
>>> b = DerivedWithRichcmp()
>>> b == b
Calling Base.__richcmp__
True
```

2.1.7 Base Class to Support Method Decorators

AUTHOR:

- Martin Albrecht (2009-05): inspired by a conversation with and code by Mike Hansen

class sage.misc.method_decorator.**MethodDecorator**(*f*)

Bases: SageObject

EXAMPLES:

```
sage: from sage.misc.method_decorator import MethodDecorator
sage: class Foo:
....:     @MethodDecorator
....:     def bar(self, x):
....:         return x**2
sage: J = Foo()
sage: J.bar
<sage.misc.method_decorator.MethodDecorator object at ...>
```

```
>>> from sage.all import *
>>> from sage.misc.method_decorator import MethodDecorator
>>> class Foo:
...     @MethodDecorator
...     def bar(self, x):
...         return x**Integer(2)
>>> J = Foo()
>>> J.bar
<sage.misc.method_decorator.MethodDecorator object at ...>
```

2.1.8 Multiplex calls to one object to calls to many objects

AUTHORS:

- Martin Albrecht (2011): initial version

class sage.misc.object_multiplexer.**Multiplex**(**args*)

Bases: object

Object for a list of children such that function calls on this new object implies that the same function is called on all children.

class sage.misc.object_multiplexer.**MultiplexFunction**(*multiplexer*, *name*)

Bases: object

A simple wrapper object for functions that are called on a list of objects.

2.1.9 Fast methods via Cython

This module provides extension classes with useful methods of cython speed, that python classes can inherit.

Note

This module provides a cython base class *WithEqualityById* implementing unique instance behaviour, and a cython base class *FastHashable_class*, which has a quite fast hash whose value can be freely chosen at initialisation time.

AUTHOR:

- Simon King (2013-02): Original version
- Simon King (2013-10): Add *Singleton*

class sage.misc.fast_methods.**FastHashable_class**

Bases: object

A class that has a fast hash method, returning a pre-assigned value.

Note

This is for internal use only. The class has a cdef attribute _hash, that needs to be assigned (for example, by calling the init method, or by a direct assignment using cython). This is slower than using provide_hash_by_id(), but has the advantage that the hash can be prescribed, by assigning a cdef attribute _hash.

class sage.misc.fast_methods.**Singleton**

Bases: *WithEqualityById*

A base class for singletons.

A singleton is a class that allows to create not more than a single instance. This instance can also belong to a subclass, but it is not possible to have several subclasses of a singleton all having distinct unique instances.

In order to create a singleton, just add *Singleton* to the list of base classes:

```
sage: from sage.misc.fast_methods import Singleton
sage: class C(Singleton, SageObject):
....:     def __init__(self):
....:         print("creating singleton")
sage: c = C()
creating singleton
sage: c2 = C()
sage: c is c2
True
```

```
>>> from sage.all import *
>>> from sage.misc.fast_methods import Singleton
>>> class C(Singleton, SageObject):
...     def __init__(self):
...         print("creating singleton")
>>> c = C()
creating singleton
```

(continues on next page)

(continued from previous page)

```
>>> c2 = C()
>>> c is c2
True
```

The unique instance of a singleton stays in memory as long as the singleton itself does.

Pickling, copying, hashing, and comparison are provided for by *Singleton* according to the singleton paradigm. Note that pickling fails if the class is replaced by a sub-sub-class after creation of the instance:

```
sage: class D(C):
....:     pass
sage: import __main__       # This is only needed ...
sage: __main__.C = C        # ... in doctests
sage: __main__.D = D        # same here, only in doctests
sage: orig = type(c)
sage: c.__class__ = D
sage: orig == type(c)
False
sage: loads(dumps(c))
Traceback (most recent call last):
...
AssertionError: <class '__main__.D'> is not a direct subclass of <class 'sage.
↪misc.fast_methods.Singleton'>
```

```
>>> from sage.all import *
>>> class D(C):
...     pass
>>> import __main__       # This is only needed ...
>>> __main__.C = C        # ... in doctests
>>> __main__.D = D        # same here, only in doctests
>>> orig = type(c)
>>> c.__class__ = D
>>> orig == type(c)
False
>>> loads(dumps(c))
Traceback (most recent call last):
...
AssertionError: <class '__main__.D'> is not a direct subclass of <class 'sage.
↪misc.fast_methods.Singleton'>
```

class sage.misc.fast_methods.**WithEqualityById**

Bases: object

Provide hash and equality test based on identity.

Note

This class provides the unique representation behaviour of UniqueRepresentation, together with CachedRepresentation.

EXAMPLES:

Any instance of UniqueRepresentation inherits from *WithEqualityById*.

```
sage: class MyParent(Parent):
....:   def __init__(self, x):
....:       self.x = x
....:   def __hash__(self):
....:       return hash(self.x)
sage: class MyUniqueParent(UniqueRepresentation, MyParent): pass
sage: issubclass(MyUniqueParent, sage.misc.fast_methods.WithEqualityById)
True
```

```
>>> from sage.all import *
>>> class MyParent(Parent):
...   def __init__(self, x):
...       self.x = x
...   def __hash__(self):
...       return hash(self.x)
>>> class MyUniqueParent(UniqueRepresentation, MyParent): pass
>>> issubclass(MyUniqueParent, sage.misc.fast_methods.WithEqualityById)
True
```

Inheriting from *WithEqualityById* provides unique representation behaviour:

```
sage: a = MyUniqueParent(1)
sage: b = MyUniqueParent(2)
sage: c = MyUniqueParent(1)
sage: a is c
True
sage: d = MyUniqueParent(-1)
sage: a == d
False
```

```
>>> from sage.all import *
>>> a = MyUniqueParent(Integer(1))
>>> b = MyUniqueParent(Integer(2))
>>> c = MyUniqueParent(Integer(1))
>>> a is c
True
>>> d = MyUniqueParent(-Integer(1))
>>> a == d
False
```

The hash inherited from `MyParent` is replaced by a hash that coincides with `object`'s hash:

```
sage: hash(a) == hash(a.x)
False
sage: hash(a) == object.__hash__(a)
True
```

```
>>> from sage.all import *
>>> hash(a) == hash(a.x)
False
>>> hash(a) == object.__hash__(a)
True
```

Warning

It is possible to inherit from `UniqueRepresentation` and then overload equality test in a way that destroys the unique representation property. We strongly recommend against it! You should use `CachedRepresentation` instead.

```
sage: class MyNonUniqueParent(MyUniqueParent):
....:   def __eq__(self, other):
....:       return self.x^2 == other.x^2
sage: a = MyNonUniqueParent(1)
sage: d = MyNonUniqueParent(-1)
sage: a is MyNonUniqueParent(1)
True
sage: a == d
True
sage: a is d
False
```

```
>>> from sage.all import *
>>> class MyNonUniqueParent(MyUniqueParent):
...   def __eq__(self, other):
...       return self.x**Integer(2) == other.x**Integer(2)
>>> a = MyNonUniqueParent(Integer(1))
>>> d = MyNonUniqueParent(-Integer(1))
>>> a is MyNonUniqueParent(Integer(1))
True
>>> a == d
True
>>> a is d
False
```

2.1.10 Attribute and method calling

class sage.misc.call.**AttrCallObject**(*name*, *args*, *kwds*)

Bases: object

sage.misc.call.**attrcall**(*name*, **args*, ***kwds*)

Return a callable which takes in an object, gets the method named name from that object, and calls it with the specified arguments and keywords.

INPUT:

- `name` – string of the name of the method you want to call
- `args, kwds` – arguments and keywords to be passed to the method

EXAMPLES:

```
sage: f = attrcall('core', 3); f
*.core(3)
sage: [f(p) for p in Partitions(5)]                                    #␣
↪needs sage.combinat
[[2], [1, 1], [1, 1], [3, 1, 1], [2], [2], [1, 1]]
```

```
>>> from sage.all import *
>>> f = attrcall('core', Integer(3)); f
*.core(3)
>>> [f(p) for p in Partitions(Integer(5))]
↪     # needs sage.combinat
[[2], [1, 1], [1, 1], [3, 1, 1], [2], [2], [1, 1]]
```

sage.misc.call.**call_method**(*obj*, *name*, **args*, ***kwds*)

Call the method `name` on `obj`.

This has to exist somewhere in Python!!!

See also

`operator.methodcaller()` `attrcal()`

EXAMPLES:

```
sage: from sage.misc.call import call_method
sage: call_method(1, "__add__", 2)
3
```

```
>>> from sage.all import *
>>> from sage.misc.call import call_method
>>> call_method(Integer(1), "__add__", Integer(2))
3
```

2.2 Lists and Iteration, etc.

2.2.1 Callable dictionaries

class sage.misc.callable_dict.**CallableDict**

Bases: `dict`

Callable dictionary.

This is a trivial subclass of `dict` with an alternative view as a function.

Typical use cases involve passing a dictionary *d* down to some tool that takes a function as input. The usual idiom in such use cases is to pass the `d.__getitem__` bound method. A pitfall is that this object is not picklable. When this feature is desired, a *CallableDict* can be used instead. Note however that, with the current implementation, *CallableDict* is slightly slower than `d.__getitem__` (see Issue #6484 for benchmarks, and Issue #18330 for potential for improvement).

EXAMPLES:

```
sage: from sage.misc.callable_dict import CallableDict
sage: d = CallableDict({'one': 1, 'zwei': 2, 'trois': 3})
sage: d['zwei']
2
sage: d('zwei')
2
```

```
>>> from sage.all import *
>>> from sage.misc.callable_dict import CallableDict
>>> d = CallableDict({'one': Integer(1), 'zwei': Integer(2), 'trois': Integer(3)})
>>> d['zwei']
2
>>> d('zwei')
2
```

In case the input is not in the dictionary, a `ValueError` is raised, for consistency with the function call syntax:

```
sage: d[1]
Traceback (most recent call last):
...
KeyError: 1
sage: d(1)
Traceback (most recent call last):
...
ValueError: 1 is not in dict
```

```
>>> from sage.all import *
>>> d[Integer(1)]
Traceback (most recent call last):
...
KeyError: 1
>>> d(Integer(1))
Traceback (most recent call last):
...
ValueError: 1 is not in dict
```

2.2.2 Converting Dictionary

At the moment, the only class contained in this module is a key converting dictionary, which applies some function (e.g. type conversion function) to all arguments used as keys.

AUTHORS:

- Martin von Gagern (2015-01-31): initial version

EXAMPLES:

A `KeyConvertingDict` will apply a conversion function to all method arguments which are keys:

```
sage: from sage.misc.converting_dict import KeyConvertingDict
sage: d = KeyConvertingDict(int)
sage: d["3"] = 42
sage: list(d.items())
[(3, 42)]
```

```
>>> from sage.all import *
>>> from sage.misc.converting_dict import KeyConvertingDict
>>> d = KeyConvertingDict(int)
>>> d["3"] = Integer(42)
>>> list(d.items())
[(3, 42)]
```

This is used e.g. in the result of a variety, to allow access to the result no matter how a generator is identified:

```
sage: # needs sage.libs.singular sage.rings.number_field
sage: K.<x,y> = QQ[]
sage: I = ideal([x^2 + 2*y - 5, x + y + 3])
sage: V = sorted(I.variety(AA), key=str)
sage: v = V[0]
sage: v['x'], v['y']
(-2.464101615137755?, -0.535898384862246?)
sage: list(v)[0].parent()
Multivariate Polynomial Ring in x, y over Algebraic Real Field
```

```
>>> from sage.all import *
>>> # needs sage.libs.singular sage.rings.number_field
>>> K = QQ['x, y']; (x, y,) = K._first_ngens(2)
>>> I = ideal([x**Integer(2) + Integer(2)*y - Integer(5), x + y + Integer(3)])
>>> V = sorted(I.variety(AA), key=str)
>>> v = V[Integer(0)]
>>> v['x'], v['y']
(-2.464101615137755?, -0.535898384862246?)
>>> list(v)[Integer(0)].parent()
Multivariate Polynomial Ring in x, y over Algebraic Real Field
```

class sage.misc.converting_dict.**KeyConvertingDict**(*key_conversion_function*, *data=None*)

Bases: `dict`

A dictionary which automatically applies a conversions to its keys.

The most common application is the case where the conversion function is the object representing some category, so that key conversion means a type conversion to adapt keys to that category. This allows different representations for keys which in turn makes accessing the correct element easier.

INPUT:

- `key_conversion_function` – a function which will be applied to all method arguments which represent keys
- `data` – (optional) dictionary or sequence of key-value pairs to initialize this mapping

EXAMPLES:

```
sage: from sage.misc.converting_dict import KeyConvertingDict
sage: d = KeyConvertingDict(int)
sage: d["3"] = 42
sage: list(d.items())
[(3, 42)]
sage: d[5.0] = 64
sage: d["05"]
64
```

```
>>> from sage.all import *
>>> from sage.misc.converting_dict import KeyConvertingDict
>>> d = KeyConvertingDict(int)
>>> d["3"] = Integer(42)
>>> list(d.items())
[(3, 42)]
```

(continues on next page)

(continued from previous page)

```
>>> d[RealNumber('5.0')] = Integer(64)
>>> d["05"]
64
```

pop(*key*, **args*)

Remove and retrieve a given element from the dictionary.

INPUT:

- `key` – a value identifying the element, will be converted
- `default` – the value to return if the element is not mapped, optional

EXAMPLES:

```
sage: from sage.misc.converting_dict import KeyConvertingDict
sage: d = KeyConvertingDict(int)
sage: d[3] = 42
sage: d.pop("3")
42
sage: d.pop("3", 33)
33
sage: d.pop("3")
Traceback (most recent call last):
...
KeyError: ...
```

```
>>> from sage.all import *
>>> from sage.misc.converting_dict import KeyConvertingDict
>>> d = KeyConvertingDict(int)
>>> d[Integer(3)] = Integer(42)
>>> d.pop("3")
42
>>> d.pop("3", Integer(33))
33
>>> d.pop("3")
Traceback (most recent call last):
...
KeyError: ...
```

setdefault(*key*, *default=None*)

Create a given mapping unless there already exists a mapping for that key.

INPUT:

- `key` – a value identifying the element, will be converted
- `default` – the value to associate with the key

EXAMPLES:

```
sage: from sage.misc.converting_dict import KeyConvertingDict
sage: d = KeyConvertingDict(int)
sage: d.setdefault("3")
sage: list(d.items())
[(3, None)]
```

```
>>> from sage.all import *
>>> from sage.misc.converting_dict import KeyConvertingDict
>>> d = KeyConvertingDict(int)
>>> d.setdefault("3")
>>> list(d.items())
[(3, None)]
```

update(**args*, ***kwds*)

Update the dictionary with key-value pairs from another dictionary, sequence of key-value pairs, or keyword arguments.

INPUT:

- `key` – a value identifying the element, will be converted
- `args` – a single dict or sequence of pairs
- `kwds` – named elements require that the conversion function accept strings

EXAMPLES:

```
sage: from sage.misc.converting_dict import KeyConvertingDict
sage: d = KeyConvertingDict(int)
sage: d.update([("3",1),(4,2)])
sage: d[3]
1
sage: d.update({"5": 7, "9": 12})
sage: d[9]
12
sage: d = KeyConvertingDict(QQ['x'])
sage: d.update(x=42)
sage: d
{x: 42}
```

```
>>> from sage.all import *
>>> from sage.misc.converting_dict import KeyConvertingDict
>>> d = KeyConvertingDict(int)
>>> d.update([("3",Integer(1)),(Integer(4),Integer(2))])
>>> d[Integer(3)]
1
>>> d.update({"5": Integer(7), "9": Integer(12)})
>>> d[Integer(9)]
12
>>> d = KeyConvertingDict(QQ['x'])
>>> d.update(x=Integer(42))
>>> d
{x: 42}
```

2.2.3 Flatten nested lists

sage.misc.flatten.**flatten**(*in_list*, *ltypes=(<class 'list'>, <class 'tuple'>)*, *max_level=9223372036854775807*)

Flatten a nested list.

INPUT:

- `in_list` – list or tuple

- `ltypes` – (optional) list of particular types to flatten
- `max_level` – the maximum level to flatten

OUTPUT: a flat list of the entries of `in_list`

EXAMPLES:

```
sage: flatten([[1,1],[1],2])
[1, 1, 1, 2]
sage: flatten([[1,2,3], (4,5), [[[1],[2]]]])
[1, 2, 3, 4, 5, 1, 2]
sage: flatten([[1,2,3], (4,5), [[[1],[2]]]], max_level=1)
[1, 2, 3, 4, 5, [[1], [2]]]
sage: flatten([[[3],[]]],max_level=0)
[[[3], []]]
sage: flatten([[[3],[]]],max_level=1)
[[3], []]
sage: flatten([[[3],[]]],max_level=2)
[3]
```

```
>>> from sage.all import *
>>> flatten([[Integer(1),Integer(1)],[Integer(1)],Integer(2)])
[1, 1, 1, 2]
>>> flatten([[Integer(1),Integer(2),Integer(3)], (Integer(4),Integer(5)),␣
↪[[[Integer(1)],[Integer(2)]]]])
[1, 2, 3, 4, 5, 1, 2]
>>> flatten([[Integer(1),Integer(2),Integer(3)], (Integer(4),Integer(5)),␣
↪[[[Integer(1)],[Integer(2)]]]], max_level=Integer(1))
[1, 2, 3, 4, 5, [[1], [2]]]
>>> flatten([[[Integer(3)],[]]],max_level=Integer(0))
[[[3], []]]
>>> flatten([[[Integer(3)],[]]],max_level=Integer(1))
[[3], []]
>>> flatten([[[Integer(3)],[]]],max_level=Integer(2))
[3]
```

In the following example, the vector is not flattened because it is not given in the `ltypes` input.

```
sage: flatten(['Hi', 2, vector(QQ, [1,2,3])], (4,5,6))
↪# needs sage.modules
['Hi', 2, (1, 2, 3), 4, 5, 6]
```

```
>>> from sage.all import *
>>> flatten(['Hi', Integer(2), vector(QQ, [Integer(1),Integer(2),Integer(3)])],␣
↪(Integer(4),Integer(5),Integer(6)))                    # needs sage.
↪modules
['Hi', 2, (1, 2, 3), 4, 5, 6]
```

We give the vector type and then even the vector gets flattened:

```
sage: tV = sage.modules.vector_rational_dense.Vector_rational_dense
↪# needs sage.modules
sage: flatten(['Hi', 2, vector(QQ, [1,2,3])], (4,5,6)),
↪# needs sage.modules
```

(continues on next page)

(continued from previous page)

```
....:         ltypes=(list, tuple, tV))
['Hi', 2, 1, 2, 3, 4, 5, 6]
```

```
>>> from sage.all import *
>>> tV = sage.modules.vector_rational_dense.Vector_rational_dense                #␣
↪needs sage.modules
>>> flatten((['Hi', Integer(2), vector(QQ, [Integer(1),Integer(2),Integer(3)])],␣
↪(Integer(4),Integer(5),Integer(6))),                          # needs sage.
↪modules
...          ltypes=(list, tuple, tV))
['Hi', 2, 1, 2, 3, 4, 5, 6]
```

We flatten a finite field.

```
sage: flatten(GF(5))
[0, 1, 2, 3, 4]
sage: flatten([GF(5)])
[Finite Field of size 5]
sage: tGF = type(GF(5))
sage: flatten([GF(5)], ltypes=(list, tuple, tGF))
[0, 1, 2, 3, 4]
```

```
>>> from sage.all import *
>>> flatten(GF(Integer(5)))
[0, 1, 2, 3, 4]
>>> flatten([GF(Integer(5))])
[Finite Field of size 5]
>>> tGF = type(GF(Integer(5)))
>>> flatten([GF(Integer(5))], ltypes=(list, tuple, tGF))
[0, 1, 2, 3, 4]
```

Degenerate cases:

```
sage: flatten([[],[]])
[]
sage: flatten([[[]]])
[]
```

```
>>> from sage.all import *
>>> flatten([[],[]])
[]
>>> flatten([[[]]])
[]
```

2.2.4 Searching a sorted list

This is like the `bisect` library module, but also returns whether or not the element is in the list, which saves having to do an extra comparison. Also, the function names make more sense.

`sage.misc.search.`**`search`**`(v, x)`

Return (True,i) where i is such that v[i] == x if there is such an i, or (False,j) otherwise, where j is the position where x should be inserted so that v remains sorted.

INPUT:

- v – list; which is assumed sorted
- x – Python object

OUTPUT: boolean, integer

This is implemented using the built-in bisect module.

EXAMPLES:

```
sage: from sage.misc.search import search
sage: search([1,4,6,7,8], 6)
(True, 2)
sage: search([1,4,6,7,8], 5)
(False, 2)
sage: search(['a','c','d','h','z'], 'e')
(False, 3)
```

```
>>> from sage.all import *
>>> from sage.misc.search import search
>>> search([Integer(1),Integer(4),Integer(6),Integer(7),Integer(8)], Integer(6))
(True, 2)
>>> search([Integer(1),Integer(4),Integer(6),Integer(7),Integer(8)], Integer(5))
(False, 2)
>>> search(['a','c','d','h','z'], 'e')
(False, 3)
```

2.2.5 Multidimensional enumeration

AUTHORS:

- Joel B. Mohler (2006-10-12)
- William Stein (2006-07-19)
- Jon Hanke

sage.misc.mrange.**cantor_product**(**args*, ***kwds*)

Return an iterator over the product of the inputs along the diagonals a la Cantor pairing.

INPUT:

- a certain number of iterables
- repeat – an optional integer. If it is provided, the input is repeated repeat times

Other keyword arguments are passed to sage.combinat.integer_lists.invlex.IntegerListsLex.

EXAMPLES:

```
sage: from sage.misc.mrange import cantor_product
sage: list(cantor_product([0, 1], repeat=3))
[(0, 0, 0),
 (1, 0, 0),
 (0, 1, 0),
 (0, 0, 1),
 (1, 1, 0),
 (1, 0, 1),
```

(continues on next page)

(continued from previous page)

```
 (0, 1, 1),
 (1, 1, 1)]
sage: list(cantor_product([0, 1], [0, 1, 2, 3]))
[(0, 0), (1, 0), (0, 1), (1, 1), (0, 2), (1, 2), (0, 3), (1, 3)]
```

```
>>> from sage.all import *
>>> from sage.misc.mrange import cantor_product
>>> list(cantor_product([Integer(0), Integer(1)], repeat=Integer(3)))
[(0, 0, 0),
 (1, 0, 0),
 (0, 1, 0),
 (0, 0, 1),
 (1, 1, 0),
 (1, 0, 1),
 (0, 1, 1),
 (1, 1, 1)]
>>> list(cantor_product([Integer(0), Integer(1)], [Integer(0), Integer(1),␣
↪Integer(2), Integer(3)]))
[(0, 0), (1, 0), (0, 1), (1, 1), (0, 2), (1, 2), (0, 3), (1, 3)]
```

Infinite iterators are valid input as well:

```
sage: from itertools import islice
sage: list(islice(cantor_product(ZZ, QQ), 14r))
 [(0, 0),
  (1, 0),
  (0, 1),
  (-1, 0),
  (1, 1),
  (0, -1),
  (2, 0),
  (-1, 1),
  (1, -1),
  (0, 1/2),
  (-2, 0),
  (2, 1),
  (-1, -1),
  (1, 1/2)]
```

```
>>> from sage.all import *
>>> from itertools import islice
>>> list(islice(cantor_product(ZZ, QQ), 14))
 [(0, 0),
  (1, 0),
  (0, 1),
  (-1, 0),
  (1, 1),
  (0, -1),
  (2, 0),
  (-1, 1),
  (1, -1),
  (0, 1/2),
```

(continues on next page)

(continued from previous page)

```
  (-2, 0),
  (2, 1),
  (-1, -1),
  (1, 1/2)]
```

sage.misc.mrange.**cartesian_product_iterator**(*X*)

Iterate over the Cartesian product.

INPUT:

- X – list or tuple of lists

OUTPUT: iterator over the Cartesian product of the elements of X

EXAMPLES:

```
sage: list(cartesian_product_iterator([[1,2], ['a','b']]))
[(1, 'a'), (1, 'b'), (2, 'a'), (2, 'b')]
sage: list(cartesian_product_iterator([]))
[()]
```

```
>>> from sage.all import *
>>> list(cartesian_product_iterator([[Integer(1),Integer(2)], ['a','b']]))
[(1, 'a'), (1, 'b'), (2, 'a'), (2, 'b')]
>>> list(cartesian_product_iterator([]))
[()]
```

sage.misc.mrange.**mrange**(*sizes*, *typ=<class 'list'>*)

Return the multirange list with given sizes and type.

This is the list version of *xmrange*. Use *xmrange* for the iterator.

More precisely, return the iterator over all objects of type typ of n-tuples of Python ints with entries between 0 and the integers in the sizes list. The iterator is empty if sizes is empty or contains any nonpositive integer.

INPUT:

- sizes – list of nonnegative integers
- typ – (default: list) a type or class; more generally, something that can be called with a list as input

OUTPUT: list

EXAMPLES:

```
sage: mrange([3,2])
[[0, 0], [0, 1], [1, 0], [1, 1], [2, 0], [2, 1]]
sage: mrange([3,2], tuple)
[(0, 0), (0, 1), (1, 0), (1, 1), (2, 0), (2, 1)]
sage: mrange([3,2], sum)
[0, 1, 1, 2, 2, 3]
```

```
>>> from sage.all import *
>>> mrange([Integer(3),Integer(2)])
[[0, 0], [0, 1], [1, 0], [1, 1], [2, 0], [2, 1]]
>>> mrange([Integer(3),Integer(2)], tuple)
[(0, 0), (0, 1), (1, 0), (1, 1), (2, 0), (2, 1)]
```

(continues on next page)

(continued from previous page)

```
>>> mrange([Integer(3),Integer(2)], sum)
[0, 1, 1, 2, 2, 3]
```

Examples that illustrate empty multi-ranges:

```
sage: mrange([5,3,-2])
[]
sage: mrange([5,3,0])
[]
```

```
>>> from sage.all import *
>>> mrange([Integer(5),Integer(3),-Integer(2)])
[]
>>> mrange([Integer(5),Integer(3),Integer(0)])
[]
```

This example is not empty, and should not be. See Issue #6561.

```
sage: mrange([])
[[]]
```

```
>>> from sage.all import *
>>> mrange([])
[[]]
```

AUTHORS:

- Jon Hanke
- William Stein

sage.misc.mrange.**mrange_iter**(*iter_list*, *typ=<class 'list'>*)

Return the multirange list derived from the given list of iterators.

This is the list version of *xmrange_iter()*. Use *xmrange_iter* for the iterator.

More precisely, return the iterator over all objects of type `typ` of n-tuples of Python ints with entries between 0 and the integers in the sizes list. The iterator is empty if sizes is empty or contains any nonpositive integer.

INPUT:

- `iter_list` – a finite iterable of finite iterables
- `typ` – (default: list) a type or class; more generally, something that can be called with a list as input

OUTPUT: list

EXAMPLES:

```
sage: mrange_iter([range(3),[0,2]])
[[0, 0], [0, 2], [1, 0], [1, 2], [2, 0], [2, 2]]
sage: mrange_iter([['Monty','Flying'],['Python','Circus']], tuple)
[('Monty', 'Python'), ('Monty', 'Circus'), ('Flying', 'Python'), ('Flying',
↪'Circus')]
sage: mrange_iter([[2,3,5,7],[1,2]], sum)
[3, 4, 4, 5, 6, 7, 8, 9]
```

```
>>> from sage.all import *
>>> mrange_iter([range(Integer(3)),[Integer(0),Integer(2)]])
[[0, 0], [0, 2], [1, 0], [1, 2], [2, 0], [2, 2]]
>>> mrange_iter([['Monty','Flying'],['Python','Circus']], tuple)
[('Monty', 'Python'), ('Monty', 'Circus'), ('Flying', 'Python'), ('Flying',
↪'Circus')]
>>> mrange_iter([[Integer(2),Integer(3),Integer(5),Integer(7)],[Integer(1),
↪Integer(2)]], sum)
[3, 4, 4, 5, 6, 7, 8, 9]
```

Examples that illustrate empty multi-ranges:

```
sage: mrange_iter([range(5),range(3),range(0)])
[]
sage: mrange_iter([range(5), range(3), range(-2)])
[]
```

```
>>> from sage.all import *
>>> mrange_iter([range(Integer(5)),range(Integer(3)),range(Integer(0))])
[]
>>> mrange_iter([range(Integer(5)), range(Integer(3)), range(-Integer(2))])
[]
```

This example is not empty, and should not be. See Issue #6561.

```
sage: mrange_iter([])
[[]]
```

```
>>> from sage.all import *
>>> mrange_iter([])
[[]]
```

AUTHORS:

- Joel B. Mohler

class sage.misc.mrange.**xmrange**(*sizes*, *typ=<class 'list'>*)

Bases: object

Return the multirange iterate with given sizes and type.

More precisely, return the iterator over all objects of type typ of n-tuples of Python ints with entries between 0 and the integers in the sizes list. The iterator is empty if sizes is empty or contains any nonpositive integer.

Use mrange for the non-iterator form.

INPUT:

- sizes – list of nonnegative integers
- typ – (default: list) a type or class; more generally, something that can be called with a list as input

OUTPUT: a generator

EXAMPLES: We create multi-range iterators, print them and also iterate through a tuple version.

```
sage: z = xmrange([3,2]);z
xmrange([3, 2])
sage: z = xmrange([3,2], tuple);z
xmrange([3, 2], <... 'tuple'>)
sage: for a in z:
....:     print(a)
(0, 0)
(0, 1)
(1, 0)
(1, 1)
(2, 0)
(2, 1)
```

```
>>> from sage.all import *
>>> z = xmrange([Integer(3),Integer(2)]);z
xmrange([3, 2])
>>> z = xmrange([Integer(3),Integer(2)], tuple);z
xmrange([3, 2], <... 'tuple'>)
>>> for a in z:
...     print(a)
(0, 0)
(0, 1)
(1, 0)
(1, 1)
(2, 0)
(2, 1)
```

We illustrate a few more iterations.

```
sage: list(xmrange([3,2]))
[[0, 0], [0, 1], [1, 0], [1, 1], [2, 0], [2, 1]]
sage: list(xmrange([3,2], tuple))
[(0, 0), (0, 1), (1, 0), (1, 1), (2, 0), (2, 1)]
```

```
>>> from sage.all import *
>>> list(xmrange([Integer(3),Integer(2)]))
[[0, 0], [0, 1], [1, 0], [1, 1], [2, 0], [2, 1]]
>>> list(xmrange([Integer(3),Integer(2)], tuple))
[(0, 0), (0, 1), (1, 0), (1, 1), (2, 0), (2, 1)]
```

Here we compute the sum of each element of the multi-range iterator:

```
sage: list(xmrange([3,2], sum))
[0, 1, 1, 2, 2, 3]
```

```
>>> from sage.all import *
>>> list(xmrange([Integer(3),Integer(2)], sum))
[0, 1, 1, 2, 2, 3]
```

Next we compute the product:

```
sage: list(xmrange([3,2], prod))
[0, 0, 0, 1, 0, 2]
```

```
>>> from sage.all import *
>>> list(xmrange([Integer(3),Integer(2)], prod))
[0, 0, 0, 1, 0, 2]
```

Examples that illustrate empty multi-ranges.

```
sage: list(xmrange([5,3,-2]))
[]
sage: list(xmrange([5,3,0]))
[]
```

```
>>> from sage.all import *
>>> list(xmrange([Integer(5),Integer(3),-Integer(2)]))
[]
>>> list(xmrange([Integer(5),Integer(3),Integer(0)]))
[]
```

This example is not empty, and should not be. See Issue #6561.

```
sage: list(xmrange([]))
[[]]
```

```
>>> from sage.all import *
>>> list(xmrange([]))
[[]]
```

We use a multi-range iterator to iterate through the Cartesian product of sets.

```
sage: X = ['red', 'apple', 389]
sage: Y = ['orange', 'horse']
sage: for i,j in xmrange([len(X), len(Y)]):
....:     print((X[i], Y[j]))
('red', 'orange')
('red', 'horse')
('apple', 'orange')
('apple', 'horse')
(389, 'orange')
(389, 'horse')
```

```
>>> from sage.all import *
>>> X = ['red', 'apple', Integer(389)]
>>> Y = ['orange', 'horse']
>>> for i,j in xmrange([len(X), len(Y)]):
...     print((X[i], Y[j]))
('red', 'orange')
('red', 'horse')
('apple', 'orange')
('apple', 'horse')
(389, 'orange')
(389, 'horse')
```

AUTHORS:

- Jon Hanke

- William Stein

class sage.misc.mrange.**xmrange_iter**(*iter_list*, *typ=<class 'list'>*)

Bases: object

Return the multirange iterate derived from the given iterators and type.

Note

This basically gives you the Cartesian product of sets.

More precisely, return the iterator over all objects of type typ of n-tuples of Python ints with entries between 0 and the integers in the sizes list. The iterator is empty if sizes is empty or contains any nonpositive integer.

Use *mrange_iter()* for the non-iterator form.

INPUT:

- iter_list – list of objects usable as iterators (possibly lists)
- typ – (default: list) a type or class; more generally, something that can be called with a list as input

OUTPUT: a generator

EXAMPLES: We create multi-range iterators, print them and also iterate through a tuple version.

```
sage: z = xmrange_iter([list(range(3)),list(range(2))], tuple);z
xmrange_iter([[0, 1, 2], [0, 1]], <... 'tuple'>)
sage: for a in z:
....:     print(a)
(0, 0)
(0, 1)
(1, 0)
(1, 1)
(2, 0)
(2, 1)
```

```
>>> from sage.all import *
>>> z = xmrange_iter([list(range(Integer(3))),list(range(Integer(2)))], tuple);z
xmrange_iter([[0, 1, 2], [0, 1]], <... 'tuple'>)
>>> for a in z:
...     print(a)
(0, 0)
(0, 1)
(1, 0)
(1, 1)
(2, 0)
(2, 1)
```

We illustrate a few more iterations.

```
sage: list(xmrange_iter([range(3),range(2)]))
[[0, 0], [0, 1], [1, 0], [1, 1], [2, 0], [2, 1]]
sage: list(xmrange_iter([range(3),range(2)], tuple))
[(0, 0), (0, 1), (1, 0), (1, 1), (2, 0), (2, 1)]
```

```
>>> from sage.all import *
>>> list(xmrange_iter([range(Integer(3)),range(Integer(2))]))
[[0, 0], [0, 1], [1, 0], [1, 1], [2, 0], [2, 1]]
>>> list(xmrange_iter([range(Integer(3)),range(Integer(2))], tuple))
[(0, 0), (0, 1), (1, 0), (1, 1), (2, 0), (2, 1)]
```

Here we compute the sum of each element of the multi-range iterator:

```
sage: list(xmrange_iter([range(3),range(2)], sum))
[0, 1, 1, 2, 2, 3]
```

```
>>> from sage.all import *
>>> list(xmrange_iter([range(Integer(3)),range(Integer(2))], sum))
[0, 1, 1, 2, 2, 3]
```

Next we compute the product:

```
sage: list(xmrange_iter([range(3),range(2)], prod))
[0, 0, 0, 1, 0, 2]
```

```
>>> from sage.all import *
>>> list(xmrange_iter([range(Integer(3)),range(Integer(2))], prod))
[0, 0, 0, 1, 0, 2]
```

Examples that illustrate empty multi-ranges.

```
sage: list(xmrange_iter([range(5),range(3),range(-2)]))
[]
sage: list(xmrange_iter([range(5),range(3),range(0)]))
[]
```

```
>>> from sage.all import *
>>> list(xmrange_iter([range(Integer(5)),range(Integer(3)),range(-Integer(2))]))
[]
>>> list(xmrange_iter([range(Integer(5)),range(Integer(3)),range(Integer(0))]))
[]
```

This example is not empty, and should not be. See Issue #6561.

```
sage: list(xmrange_iter([]))
[[]]
```

```
>>> from sage.all import *
>>> list(xmrange_iter([]))
[[]]
```

We use a multi-range iterator to iterate through the Cartesian product of sets.

```
sage: X = ['red', 'apple', 389]
sage: Y = ['orange', 'horse']
sage: for i,j in xmrange_iter([X, Y], tuple):
....:     print((i, j))
```

(continues on next page)

(continued from previous page)

```
('red', 'orange')
('red', 'horse')
('apple', 'orange')
('apple', 'horse')
(389, 'orange')
(389, 'horse')
```

```
>>> from sage.all import *
>>> X = ['red', 'apple', Integer(389)]
>>> Y = ['orange', 'horse']
>>> for i,j in xmrange_iter([X, Y], tuple):
...     print((i, j))
('red', 'orange')
('red', 'horse')
('apple', 'orange')
('apple', 'horse')
(389, 'orange')
(389, 'horse')
```

AUTHORS:

- Joel B. Mohler

cardinality()

Return the cardinality of this iterator.

EXAMPLES:

```
sage: C = cartesian_product_iterator([range(3),range(4)])
sage: C.cardinality()
12
sage: C = cartesian_product_iterator([ZZ,QQ])
sage: C.cardinality()
+Infinity
sage: C = cartesian_product_iterator([ZZ,[]])
sage: C.cardinality()
0
```

```
>>> from sage.all import *
>>> C = cartesian_product_iterator([range(Integer(3)),range(Integer(4))])
>>> C.cardinality()
12
>>> C = cartesian_product_iterator([ZZ,QQ])
>>> C.cardinality()
+Infinity
>>> C = cartesian_product_iterator([ZZ,[]])
>>> C.cardinality()
0
```

2.2.6 multi_replace

sage.misc.multireplace.**multiple_replace**(*dic*, *text*)

Replace in 'text' all occurrences of any key in the given dictionary by its corresponding value. Returns the new string.

EXAMPLES:

```
sage: from sage.misc.multireplace import multiple_replace
sage: txt = "This monkey really likes the bananas."
sage: dic = {'monkey': 'penguin', 'bananas': 'fish'}
sage: multiple_replace(dic, txt)
'This penguin really likes the fish.'
```

```
>>> from sage.all import *
>>> from sage.misc.multireplace import multiple_replace
>>> txt = "This monkey really likes the bananas."
>>> dic = {'monkey': 'penguin', 'bananas': 'fish'}
>>> multiple_replace(dic, txt)
'This penguin really likes the fish.'
```

2.2.7 Threaded map function

sage.misc.map_threaded.**map_threaded**(*function*, *sequence*)

Apply the function to the elements in the sequence by threading recursively through all sub-sequences in the sequence.

EXAMPLES:

```
sage: # needs sage.symbolic
sage: map_threaded(log, [[1,2], [3,e]])
[[0, log(2)], [log(3), 1]]
sage: map_threaded(log, [(1,2), (3,e)])
[[0, log(2)], [log(3), 1]]
sage: map_threaded(N, [[1,2], [3,e]])
[[1.00000000000000, 2.00000000000000], [3.00000000000000, 2.71828182845905]]
sage: map_threaded((x^2).function(x), [[1,2,3,5], [2,10]])
[[1, 4, 9, 25], [4, 100]]
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> map_threaded(log, [[Integer(1),Integer(2)], [Integer(3),e]])
[[0, log(2)], [log(3), 1]]
>>> map_threaded(log, [(Integer(1),Integer(2)), (Integer(3),e)])
[[0, log(2)], [log(3), 1]]
>>> map_threaded(N, [[Integer(1),Integer(2)], [Integer(3),e]])
[[1.00000000000000, 2.00000000000000], [3.00000000000000, 2.71828182845905]]
>>> map_threaded((x**Integer(2)).function(x), [[Integer(1),Integer(2),Integer(3),
↪Integer(5)], [Integer(2),Integer(10)]])
[[1, 4, 9, 25], [4, 100]]
```

map_threaded also works on any object with an apply_map method, e.g., on matrices:

```
sage: map_threaded(lambda x: x^2, matrix([[1,2], [3,4]]))                    #␣
↪needs sage.modules
[ 1  4]
[ 9 16]
```

```
>>> from sage.all import *
>>> map_threaded(lambda x: x**Integer(2), matrix([[Integer(1),Integer(2)],␣
↪[Integer(3),Integer(4)]]))                          # needs sage.modules
[ 1  4]
[ 9 16]
```

AUTHORS:

- William Stein (2007-12); based on feedback from Peter Doyle.

2.2.8 Ranges and the `[1,2,..,n]` notation

AUTHORS:

- Jeroen Demeyer (2016-02-22): moved here from `misc.py` and cleaned up.

`sage.arith.srange.`**`ellipsis_iter`**(*step=None*, **args*)

Same as ellipsis_range, but as an iterator (and may end with an Ellipsis).

See also ellipsis_range.

Use (1,2,…) notation.

EXAMPLES:

```
sage: A = ellipsis_iter(1,2,Ellipsis)
sage: [next(A) for _ in range(10)]
[1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
sage: next(A)
11
sage: A = ellipsis_iter(1,3,5,Ellipsis)
sage: [next(A) for _ in range(10)]
[1, 3, 5, 7, 9, 11, 13, 15, 17, 19]
sage: A = ellipsis_iter(1,2,Ellipsis,5,10,Ellipsis)
sage: [next(A) for _ in range(10)]
[1, 2, 3, 4, 5, 10, 11, 12, 13, 14]
```

```
>>> from sage.all import *
>>> A = ellipsis_iter(Integer(1),Integer(2),Ellipsis)
>>> [next(A) for _ in range(Integer(10))]
[1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
>>> next(A)
11
>>> A = ellipsis_iter(Integer(1),Integer(3),Integer(5),Ellipsis)
>>> [next(A) for _ in range(Integer(10))]
[1, 3, 5, 7, 9, 11, 13, 15, 17, 19]
>>> A = ellipsis_iter(Integer(1),Integer(2),Ellipsis,Integer(5),Integer(10),
↪Ellipsis)
>>> [next(A) for _ in range(Integer(10))]
[1, 2, 3, 4, 5, 10, 11, 12, 13, 14]
```

sage.arith.srange.**ellipsis_range**(*step=None*, **args*)

Return arithmetic sequence determined by the numeric arguments and ellipsis. Best illustrated by examples.

Use [1,2,..,n] notation.

EXAMPLES:

```
sage: ellipsis_range(1,Ellipsis,11,100)
[1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 100]
sage: ellipsis_range(0,2,Ellipsis,10,Ellipsis,20)
[0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20]
sage: ellipsis_range(0,2,Ellipsis,11,Ellipsis,20)
[0, 2, 4, 6, 8, 10, 11, 13, 15, 17, 19]
sage: ellipsis_range(0,2,Ellipsis,11,Ellipsis,20, step=3)
[0, 2, 5, 8, 11, 14, 17, 20]
sage: ellipsis_range(10,Ellipsis,0)
[]
```

```
>>> from sage.all import *
>>> ellipsis_range(Integer(1),Ellipsis,Integer(11),Integer(100))
[1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 100]
>>> ellipsis_range(Integer(0),Integer(2),Ellipsis,Integer(10),Ellipsis,
↪Integer(20))
[0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20]
>>> ellipsis_range(Integer(0),Integer(2),Ellipsis,Integer(11),Ellipsis,
↪Integer(20))
[0, 2, 4, 6, 8, 10, 11, 13, 15, 17, 19]
>>> ellipsis_range(Integer(0),Integer(2),Ellipsis,Integer(11),Ellipsis,
↪Integer(20), step=Integer(3))
[0, 2, 5, 8, 11, 14, 17, 20]
>>> ellipsis_range(Integer(10),Ellipsis,Integer(0))
[]
```

sage.arith.srange.**srange**(**args*, ***kwds*)

Return a list of numbers `start, start+step, ..., start+k*step`, where `start+k*step < end` and `start+(k+1)*step >= end`.

This provides one way to iterate over Sage integers as opposed to Python int's. It also allows you to specify step sizes for such an iteration.

INPUT:

- `start` – number (default: 0)
- `end` – number
- `step` – number (default: 1)
- `universe -- parent or type where all the elements should live (default: deduce from inputs). This is only used if ``coerce` is true.
- `coerce` – convert `start`, `end` and `step` to the same universe (either the universe given in `universe` or the automatically detected universe)
- `include_endpoint` – whether or not to include the endpoint (default: `False`). This is only relevant if `end` is actually of the form `start + k*step` for some integer k.

` endpoint_tolerance – used to determine whether or not the
endpoint is hit for inexact rings (default: `1e-5`)

OUTPUT: list

Note

This function is called `srange` to distinguish it from the built-in Python `range` command. The s at the beginning of the name stands for "Sage".

See also

`xsrange()` – iterator which is used to implement *`srange()`*.

EXAMPLES:

```
sage: v = srange(5); v
[0, 1, 2, 3, 4]
sage: type(v[2])
<class 'sage.rings.integer.Integer'>
sage: srange(1, 10)
[1, 2, 3, 4, 5, 6, 7, 8, 9]
sage: srange(10, 1, -1)
[10, 9, 8, 7, 6, 5, 4, 3, 2]
sage: srange(10,1,-1, include_endpoint=True)
[10, 9, 8, 7, 6, 5, 4, 3, 2, 1]
sage: srange(1, 10, universe=RDF)
[1.0, 2.0, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 9.0]

sage: srange(1, 10, 1/2)
[1, 3/2, 2, 5/2, 3, 7/2, 4, 9/2, 5, 11/2, 6, 13/2, 7, 15/2, 8, 17/2, 9, 19/2]

sage: # needs sage.rings.real_mpfr
sage: srange(1, 5, 0.5)
[1.00000000000000, 1.50000000000000, 2.00000000000000, 2.50000000000000,
 3.00000000000000, 3.50000000000000, 4.00000000000000, 4.50000000000000]
sage: srange(0, 1, 0.4)
[0.000000000000000, 0.400000000000000, 0.800000000000000]
sage: srange(1.0, 5.0, include_endpoint=True)
[1.00000000000000, 2.00000000000000, 3.00000000000000, 4.00000000000000,
 5.00000000000000]
sage: srange(1.0, 1.1)
[1.00000000000000]
sage: srange(1.0, 1.0)
[]

sage: V = VectorSpace(QQ, 2)                                                    #␣
↪needs sage.modules
sage: srange(V([0,0]), V([5,5]), step=V([2,2]))                                 #␣
↪needs sage.modules
[(0, 0), (2, 2), (4, 4)]
```

```
>>> from sage.all import *
>>> v = srange(Integer(5)); v
```

(continues on next page)

(continued from previous page)

```
[0, 1, 2, 3, 4]
>>> type(v[Integer(2)])
<class 'sage.rings.integer.Integer'>
>>> srange(Integer(1), Integer(10))
[1, 2, 3, 4, 5, 6, 7, 8, 9]
>>> srange(Integer(10), Integer(1), -Integer(1))
[10, 9, 8, 7, 6, 5, 4, 3, 2]
>>> srange(Integer(10),Integer(1),-Integer(1), include_endpoint=True)
[10, 9, 8, 7, 6, 5, 4, 3, 2, 1]
>>> srange(Integer(1), Integer(10), universe=RDF)
[1.0, 2.0, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 9.0]

>>> srange(Integer(1), Integer(10), Integer(1)/Integer(2))
[1, 3/2, 2, 5/2, 3, 7/2, 4, 9/2, 5, 11/2, 6, 13/2, 7, 15/2, 8, 17/2, 9, 19/2]

>>> # needs sage.rings.real_mpfr
>>> srange(Integer(1), Integer(5), RealNumber('0.5'))
[1.00000000000000, 1.50000000000000, 2.00000000000000, 2.50000000000000,
 3.00000000000000, 3.50000000000000, 4.00000000000000, 4.50000000000000]
>>> srange(Integer(0), Integer(1), RealNumber('0.4'))
[0.000000000000000, 0.400000000000000, 0.800000000000000]
>>> srange(RealNumber('1.0'), RealNumber('5.0'), include_endpoint=True)
[1.00000000000000, 2.00000000000000, 3.00000000000000, 4.00000000000000,
 5.00000000000000]
>>> srange(RealNumber('1.0'), RealNumber('1.1'))
[1.00000000000000]
>>> srange(RealNumber('1.0'), RealNumber('1.0'))
[]

>>> V = VectorSpace(QQ, Integer(2))
↪     # needs sage.modules
>>> srange(V([Integer(0),Integer(0)]), V([Integer(5),Integer(5)]),
↪step=V([Integer(2),Integer(2)]))                                    # needs sage.
↪modules
[(0, 0), (2, 2), (4, 4)]
```

Including the endpoint:

```
sage: srange(0, 10, step=2, include_endpoint=True)
[0, 2, 4, 6, 8, 10]
sage: srange(0, 10, step=3, include_endpoint=True)
[0, 3, 6, 9]
```

```
>>> from sage.all import *
>>> srange(Integer(0), Integer(10), step=Integer(2), include_endpoint=True)
[0, 2, 4, 6, 8, 10]
>>> srange(Integer(0), Integer(10), step=Integer(3), include_endpoint=True)
[0, 3, 6, 9]
```

Try some inexact rings:

```
sage: srange(0.5, 1.1, 0.1, universe=RDF, include_endpoint=False)
```

(continues on next page)

(continued from previous page)

```
[0.5, 0.6, 0.7, 0.7999999999999999, 0.8999999999999999, 0.9999999999999999]
sage: srange(0.5, 1, 0.1, universe=RDF, include_endpoint=False)
[0.5, 0.6, 0.7, 0.7999999999999999, 0.8999999999999999]
sage: srange(0.5, 0.9, 0.1, universe=RDF, include_endpoint=False)
[0.5, 0.6, 0.7, 0.7999999999999999]
sage: srange(0, 1.1, 0.1, universe=RDF, include_endpoint=True)
[0.0, 0.1, 0.2, 0.30000000000000004, 0.4, 0.5, 0.6, 0.7,
 0.7999999999999999, 0.8999999999999999, 0.9999999999999999, 1.1]
sage: srange(0, 0.2, 0.1, universe=RDF, include_endpoint=True)
[0.0, 0.1, 0.2]
sage: srange(0, 0.3, 0.1, universe=RDF, include_endpoint=True)
[0.0, 0.1, 0.2, 0.3]
```

```
>>> from sage.all import *
>>> srange(RealNumber('0.5'), RealNumber('1.1'), RealNumber('0.1'), universe=RDF,␣
↪include_endpoint=False)
[0.5, 0.6, 0.7, 0.7999999999999999, 0.8999999999999999, 0.9999999999999999]
>>> srange(RealNumber('0.5'), Integer(1), RealNumber('0.1'), universe=RDF,␣
↪include_endpoint=False)
[0.5, 0.6, 0.7, 0.7999999999999999, 0.8999999999999999]
>>> srange(RealNumber('0.5'), RealNumber('0.9'), RealNumber('0.1'), universe=RDF,␣
↪include_endpoint=False)
[0.5, 0.6, 0.7, 0.7999999999999999]
>>> srange(Integer(0), RealNumber('1.1'), RealNumber('0.1'), universe=RDF,␣
↪include_endpoint=True)
[0.0, 0.1, 0.2, 0.30000000000000004, 0.4, 0.5, 0.6, 0.7,
 0.7999999999999999, 0.8999999999999999, 0.9999999999999999, 1.1]
>>> srange(Integer(0), RealNumber('0.2'), RealNumber('0.1'), universe=RDF,␣
↪include_endpoint=True)
[0.0, 0.1, 0.2]
>>> srange(Integer(0), RealNumber('0.3'), RealNumber('0.1'), universe=RDF,␣
↪include_endpoint=True)
[0.0, 0.1, 0.2, 0.3]
```

More examples:

```
sage: Q = RationalField()
sage: srange(1, 10, Q('1/2'))
[1, 3/2, 2, 5/2, 3, 7/2, 4, 9/2, 5, 11/2, 6, 13/2, 7, 15/2, 8, 17/2, 9, 19/2]
sage: srange(1, 5, 0.5)                                                    #␣
↪needs sage.rings.real_mpfr
[1.00000000000000, 1.50000000000000, 2.00000000000000, 2.50000000000000,
 3.00000000000000, 3.50000000000000, 4.00000000000000, 4.50000000000000]
sage: srange(0, 1, 0.4)                                                    #␣
↪needs sage.rings.real_mpfr
[0.000000000000000, 0.400000000000000, 0.800000000000000]
```

```
>>> from sage.all import *
>>> Q = RationalField()
>>> srange(Integer(1), Integer(10), Q('1/2'))
[1, 3/2, 2, 5/2, 3, 7/2, 4, 9/2, 5, 11/2, 6, 13/2, 7, 15/2, 8, 17/2, 9, 19/2]
>>> srange(Integer(1), Integer(5), RealNumber('0.5'))                      ␣
```

(continues on next page)

(continued from previous page)

```
↪                              # needs sage.rings.real_mpfr
[1.00000000000000, 1.50000000000000, 2.00000000000000, 2.50000000000000,
 3.00000000000000, 3.50000000000000, 4.00000000000000, 4.50000000000000]
>>> srange(Integer(0), Integer(1), RealNumber('0.4'))                    ␣
↪                              # needs sage.rings.real_mpfr
[0.000000000000000, 0.400000000000000, 0.800000000000000]
```

Negative steps are also allowed:

```
sage: srange(4, 1, -1)
[4, 3, 2]
sage: srange(4, 1, -1/2)
[4, 7/2, 3, 5/2, 2, 3/2]
```

```
>>> from sage.all import *
>>> srange(Integer(4), Integer(1), -Integer(1))
[4, 3, 2]
>>> srange(Integer(4), Integer(1), -Integer(1)/Integer(2))
[4, 7/2, 3, 5/2, 2, 3/2]
```

sage.arith.srange.**xsrange**(*start*, *end=None*, *step=1*, *universe=None*, *coerce=True*, *include_endpoint=False*, *endpoint_tolerance=1e-05*)

Return an iterator over numbers `start, start+step, ..., start+k*step`, where `start+k*step < end` and `start+(k+1)*step >= end`.

This provides one way to iterate over Sage integers as opposed to Python int's. It also allows you to specify step sizes for such an iteration.

INPUT:

- `start` – number (default: 0)
- `end` – number
- `step` – number (default: 1)
- `universe` – parent or type where all the elements should live (default: deduce from inputs)
- `coerce` – convert `start`, `end` and `step` to the same universe (either the universe given in `universe` or the automatically detected universe)
- `include_endpoint` – whether or not to include the endpoint (default: `False`). This is only relevant if `end` is actually of the form `start + k*step` for some integer k.

` **endpoint_tolerance** – **used to determine whether or not the** endpoint is hit for inexact rings (default: 1e-5)

OUTPUT: iterator

Unlike `range()`, `start` and `end` can be any type of numbers, and the resulting iterator involves numbers of that type.

Warning

You need to be careful when using this function over inexact rings: the elements are computed via repeated addition rather than multiplication, which may produce slightly different results. For example:

```
sage: sum([1.1] * 10) == 1.1 * 10
False
>>> from sage.all import *
>>> sum([RealNumber('1.1')] * Integer(10)) == RealNumber('1.1') * Integer(10)
False
```

Also, the question of whether the endpoint is hit exactly for a given `start + k*step` is fuzzy for an inexact ring. If `start + k*step = end` for some k within `endpoint_tolerance` of being integral, it is considered an exact hit, thus avoiding spurious values falling just below the endpoint.

EXAMPLES:

```
sage: xsrange(10)
<...generator object at 0x...>
sage: for i in xsrange(1,5):
....:     print(i)
1
2
3
4
```

```
>>> from sage.all import *
>>> xsrange(Integer(10))
<...generator object at 0x...>
>>> for i in xsrange(Integer(1),Integer(5)):
...     print(i)
1
2
3
4
```

See *srange()* for more examples.

2.2.9 Elements with labels.

This module implements a simple wrapper class for pairs consisting of an "element" and a "label". For representation purposes (`repr`, `str`, `latex`), this pair behaves like its label, while the element is "silent". However, these pairs compare like usual pairs (i.e., both element and label have to be equal for two such pairs to be equal). This is used for visual representations of graphs and posets with vertex labels.

class sage.misc.element_with_label.**ElementWithLabel**(*element*, *label*)

Bases: `object`

Auxiliary class for showing/viewing `Poset`s with non-injective labelings. For hashing and equality testing the resulting object behaves like a tuple ``(element, label)`. For any presentation purposes it appears just as `label` would.

EXAMPLES:

```
sage: # needs sage.combinat sage.graphs
sage: P = Poset({1: [2,3]})
sage: labs = {i: P.rank(i) for i in range(1, 4)}
sage: print(labs)
```

(continues on next page)

(continued from previous page)

```
{1: 0, 2: 1, 3: 1}
sage: print(P.plot(element_labels=labs))                                    #␣
↪needs sage.plot
Graphics object consisting of 6 graphics primitives

sage: # needs sage.combinat sage.graphs sage.modules
sage: from sage.misc.element_with_label import ElementWithLabel
sage: W = WeylGroup("A1")
sage: P = W.bruhat_poset(facade=True)
sage: D = W.domain()
sage: v = D.rho() - D.fundamental_weight(1)
sage: nP = P.relabel(lambda w: ElementWithLabel(w, w.action(v)))
sage: list(nP)
[(0, 0), (0, 0)]
```

```
>>> from sage.all import *
>>> # needs sage.combinat sage.graphs
>>> P = Poset({Integer(1): [Integer(2),Integer(3)]})
>>> labs = {i: P.rank(i) for i in range(Integer(1), Integer(4))}
>>> print(labs)
{1: 0, 2: 1, 3: 1}
>>> print(P.plot(element_labels=labs))                                       #␣
↪needs sage.plot
Graphics object consisting of 6 graphics primitives

>>> # needs sage.combinat sage.graphs sage.modules
>>> from sage.misc.element_with_label import ElementWithLabel
>>> W = WeylGroup("A1")
>>> P = W.bruhat_poset(facade=True)
>>> D = W.domain()
>>> v = D.rho() - D.fundamental_weight(Integer(1))
>>> nP = P.relabel(lambda w: ElementWithLabel(w, w.action(v)))
>>> list(nP)
[(0, 0), (0, 0)]
```

2.3 File and OS Access

2.3.1 Temporary file handling

AUTHORS:

- Volker Braun, Jeroen Demeyer (2012-10-18): move these functions here from sage/misc/misc.py and make them secure, see Issue #13579.
- Jeroen Demeyer (2013-03-17): add *atomic_write*, see Issue #14292.
- Sebastian Oehms (2021-08-07): add *atomic_dir*, see Issue #32344

class sage.misc.temporary_file.**atomic_dir**(*target_directory*)

Bases: object

Write to a given directory using a temporary directory and then rename it to the target directory. This is for creating a directory whose contents are determined uniquely by the directory name. If multiple threads or processes attempt

to create it in parallel, then it does not matter which thread created it. Despite this assumption the contents of the directories differ in the examples for demonstration purpose.

See also *atomic_write*.

INPUT:

- `target_directory` – the name of the directory to be written; if it exists then the previous contents will be kept

EXAMPLES:

```
sage: from sage.misc.temporary_file import atomic_dir
sage: target_dir = tmp_dir()
sage: with atomic_dir(target_dir) as d:
....:     target_file = os.path.join(d.name, 'test')
....:     with open(target_file, 'w') as f:
....:         _ = f.write("First")
....:         f.flush()
....:     with atomic_dir(target_dir) as e:
....:         target_file2 = os.path.join(e.name, 'test')
....:         with open(target_file2, 'w') as g:
....:             _ = g.write("Second")
....:             g.flush()
....:     with open(target_file, 'r') as f:
....:         f.read()
'First'
sage: with atomic_dir(target_dir) as d:
....:     target_file = os.path.join(d.name, 'test')
....:     with open(target_file, 'w') as f:
....:         _ = f.write("Third")
sage: target = os.path.join(target_dir, 'test')
sage: with open(target, 'r') as h:
....:     h.read()
'Second'
```

```
>>> from sage.all import *
>>> from sage.misc.temporary_file import atomic_dir
>>> target_dir = tmp_dir()
>>> with atomic_dir(target_dir) as d:
...     target_file = os.path.join(d.name, 'test')
...     with open(target_file, 'w') as f:
...         _ = f.write("First")
...         f.flush()
...     with atomic_dir(target_dir) as e:
...         target_file2 = os.path.join(e.name, 'test')
...         with open(target_file2, 'w') as g:
...             _ = g.write("Second")
...             g.flush()
...     with open(target_file, 'r') as f:
...         f.read()
'First'
>>> with atomic_dir(target_dir) as d:
...     target_file = os.path.join(d.name, 'test')
...     with open(target_file, 'w') as f:
```

(continues on next page)

(continued from previous page)

```
...         _ = f.write("Third")
>>> target = os.path.join(target_dir, 'test')
>>> with open(target, 'r') as h:
...     h.read()
'Second'
```

class sage.misc.temporary_file.**atomic_write**(*target_filename*, *append=False*, *mode=438*, *binary=False*, ***kwargs*)

Bases: `object`

Write to a given file using a temporary file and then rename it to the target file. This renaming should be atomic on modern operating systems. Therefore, this class can be used to avoid race conditions when a file might be read while it is being written. It also avoids having partially written files due to exceptions or crashes.

This is to be used in a `with` statement, where a temporary file is created when entering the `with` and is moved in place of the target file when exiting the `with` (if no exceptions occurred).

INPUT:

- `target_filename` – the name of the file to be written Normally, the contents of this file will be overwritten
- `append` – boolean (default: `False`); if `True` and `target_filename` is an existing file, then copy the current contents of `target_filename` to the temporary file when entering the `with` statement. Otherwise, the temporary file is initially empty.
- `mode` – (default: `0o666`) mode bits for the file. The temporary file is created with mode `mode & ~umask` and the resulting file will also have these permissions (unless the mode bits of the file were changed manually). (Not to be confused with the file opening mode.)
- `binary` – boolean (default: `False`); the underlying file is opened in binary mode. If `False` then it is opened in text mode and an encoding with which to write the file may be supplied.
- `**kwargs` – additional keyword arguments passed to the underlying *io.open* call

EXAMPLES:

```
sage: from sage.misc.temporary_file import atomic_write
sage: target_file = tmp_filename()
sage: with open(target_file, 'w') as f:
....:     _ = f.write("Old contents")
sage: with atomic_write(target_file) as f:
....:     _ = f.write("New contents")
....:     f.flush()
....:     with open(target_file, 'r') as f2:
....:         f2.read()
'Old contents'
sage: with open(target_file, 'r') as f:
....:     f.read()
'New contents'
```

```
>>> from sage.all import *
>>> from sage.misc.temporary_file import atomic_write
>>> target_file = tmp_filename()
>>> with open(target_file, 'w') as f:
...     _ = f.write("Old contents")
>>> with atomic_write(target_file) as f:
```

(continues on next page)

(continued from previous page)

```
...     _ = f.write("New contents")
...     f.flush()
...     with open(target_file, 'r') as f2:
...         f2.read()
'Old contents'
>>> with open(target_file, 'r') as f:
...     f.read()
'New contents'
```

The name of the temporary file can be accessed using `f.name`. It is not a problem to close and re-open the temporary file:

```
sage: from sage.misc.temporary_file import atomic_write
sage: target_file = tmp_filename()
sage: with open(target_file, 'w') as f:
....:     _ = f.write("Old contents")
sage: with atomic_write(target_file) as f:
....:     f.close()
....:     with open(f.name, 'w') as f2:
....:         _ = f2.write("Newer contents")
sage: with open(target_file, 'r') as f:
....:     f.read()
'Newer contents'
```

```
>>> from sage.all import *
>>> from sage.misc.temporary_file import atomic_write
>>> target_file = tmp_filename()
>>> with open(target_file, 'w') as f:
...     _ = f.write("Old contents")
>>> with atomic_write(target_file) as f:
...     f.close()
...     with open(f.name, 'w') as f2:
...         _ = f2.write("Newer contents")
>>> with open(target_file, 'r') as f:
...     f.read()
'Newer contents'
```

If an exception occurs while writing the file, the target file is not touched:

```
sage: with atomic_write(target_file) as f:
....:     _ = f.write("Newest contents")
....:     raise RuntimeError
Traceback (most recent call last):
...
RuntimeError
sage: with open(target_file, 'r') as f:
....:     f.read()
'Newer contents'
```

```
>>> from sage.all import *
>>> with atomic_write(target_file) as f:
...     _ = f.write("Newest contents")
```

(continues on next page)

(continued from previous page)

```
...     raise RuntimeError
Traceback (most recent call last):
...
RuntimeError
>>> with open(target_file, 'r') as f:
...     f.read()
'Newer contents'
```

Some examples of using the `append` option. Note that the file is never opened in "append" mode, it is possible to overwrite existing data:

```
sage: target_file = tmp_filename()
sage: with atomic_write(target_file, append=True) as f:
....:     _ = f.write("Hello")
sage: with atomic_write(target_file, append=True) as f:
....:     _ = f.write(" World")
sage: with open(target_file, 'r') as f:
....:     f.read()
'Hello World'
sage: with atomic_write(target_file, append=True) as f:
....:     _ = f.seek(0)
....:     _ = f.write("HELLO")
sage: with open(target_file, 'r') as f:
....:     f.read()
'HELLO World'
```

```
>>> from sage.all import *
>>> target_file = tmp_filename()
>>> with atomic_write(target_file, append=True) as f:
...     _ = f.write("Hello")
>>> with atomic_write(target_file, append=True) as f:
...     _ = f.write(" World")
>>> with open(target_file, 'r') as f:
...     f.read()
'Hello World'
>>> with atomic_write(target_file, append=True) as f:
...     _ = f.seek(Integer(0))
...     _ = f.write("HELLO")
>>> with open(target_file, 'r') as f:
...     f.read()
'HELLO World'
```

If the target file is a symbolic link, the link is kept and the target of the link is written to:

```
sage: link_to_target = os.path.join(tmp_dir(), "templink")
sage: os.symlink(target_file, link_to_target)
sage: with atomic_write(link_to_target) as f:
....:     _ = f.write("Newest contents")
sage: with open(target_file, 'r') as f:
....:     f.read()
'Newest contents'
```

```
>>> from sage.all import *
>>> link_to_target = os.path.join(tmp_dir(), "templink")
>>> os.symlink(target_file, link_to_target)
>>> with atomic_write(link_to_target) as f:
...     _ = f.write("Newest contents")
>>> with open(target_file, 'r') as f:
...     f.read()
'Newest contents'
```

We check the permission bits of the new file. Note that the old permissions do not matter:

```
sage: os.chmod(target_file, 0o600)
sage: _ = os.umask(0o022)
sage: with atomic_write(target_file) as f:
....:     pass
sage: '{:#o}'.format(os.stat(target_file).st_mode & 0o777)
'0o644'
sage: _ = os.umask(0o077)
sage: with atomic_write(target_file, mode=0o777) as f:
....:     pass
sage: '{:#o}'.format(os.stat(target_file).st_mode & 0o777)
'0o700'
```

```
>>> from sage.all import *
>>> os.chmod(target_file, Integer(0o600))
>>> _ = os.umask(Integer(0o022))
>>> with atomic_write(target_file) as f:
...     pass
>>> '{:#o}'.format(os.stat(target_file).st_mode & Integer(0o777))
'0o644'
>>> _ = os.umask(Integer(0o077))
>>> with atomic_write(target_file, mode=Integer(0o777)) as f:
...     pass
>>> '{:#o}'.format(os.stat(target_file).st_mode & Integer(0o777))
'0o700'
```

Test writing twice to the same target file. The outermost `with` "wins":

```
sage: with open(target_file, 'w') as f:
....:     _ = f.write('>>> ')
sage: with atomic_write(target_file, append=True) as f,          ....:          ␣
↪atomic_write(target_file, append=True) as g:
....:     _ = f.write("AAA"); f.close()
....:     _ = g.write("BBB"); g.close()
sage: with open(target_file, 'r') as f:
....:     f.read()
'>>> AAA'
```

```
>>> from sage.all import *
>>> with open(target_file, 'w') as f:
...     _ = f.write('>>> ')
>>> with atomic_write(target_file, append=True) as f,          Ellipsis.:          ␣
↪atomic_write(target_file, append=True) as g:
```

(continues on next page)

(continued from previous page)

```
...     _ = f.write("AAA"); f.close()
...     _ = g.write("BBB"); g.close()
>>> with open(target_file, 'r') as f:
...     f.read()
'>>> AAA'
```

Supplying an encoding means we're writing the file in "text mode" (in the same sense as $io.open$) and so we must write unicode strings:

```
sage: target_file = tmp_filename()
sage: with atomic_write(target_file, binary=False,
....:                   encoding='utf-8') as f:
....:     _ = f.write(u'Hélas')
sage: import io
sage: with io.open(target_file, encoding='utf-8') as f:
....:     print(f.read())
Hélas
```

```
>>> from sage.all import *
>>> target_file = tmp_filename()
>>> with atomic_write(target_file, binary=False,
...                   encoding='utf-8') as f:
...     _ = f.write(u'Hélas')
>>> import io
>>> with io.open(target_file, encoding='utf-8') as f:
...     print(f.read())
Hélas
```

Supplying an encoding in binary mode (or other arguments that don't make sense to $io.open$ in binary mode) is an error:

```
sage: writer = atomic_write(target_file, binary=True,
....:                       encoding='utf-8')
sage: with writer as f:
....:     _ = f.write(u'Hello')
Traceback (most recent call last):
...
ValueError: binary mode doesn't take an encoding argument
sage: os.path.exists(writer.tempname)
False
```

```
>>> from sage.all import *
>>> writer = atomic_write(target_file, binary=True,
...                       encoding='utf-8')
>>> with writer as f:
...     _ = f.write(u'Hello')
Traceback (most recent call last):
...
ValueError: binary mode doesn't take an encoding argument
>>> os.path.exists(writer.tempname)
False
```

sage.misc.temporary_file.**spyx_tmp**()

The temporary directory used to store pyx files.

We cache the result of this function "by hand" so that the same temporary directory will always be returned. A function is used to delay creating a directory until (if) it is needed. The temporary directory is automatically removed when sage terminates.

sage.misc.temporary_file.**tmp_dir**(*name='dir_'*, *ext=''*)

Create and return a temporary directory in `$HOME/.sage/temp/hostname/pid/`

The temporary directory is deleted automatically when Sage exits.

INPUT:

- `name` – (default: `'dir_'`) a prefix for the directory name
- `ext` – (default: `''`) a suffix for the directory name

OUTPUT:

The absolute path of the temporary directory created, with a trailing slash (or whatever the path separator is on your OS).

EXAMPLES:

```
sage: d = tmp_dir('dir_testing_', '.extension')
sage: d   # random output
'/home/username/.sage/temp/hostname/7961/dir_testing_XgRu4p.extension/'
sage: os.chdir(d)
sage: f = open('file_inside_d', 'w')
```

```
>>> from sage.all import *
>>> d = tmp_dir('dir_testing_', '.extension')
>>> d   # random output
'/home/username/.sage/temp/hostname/7961/dir_testing_XgRu4p.extension/'
>>> os.chdir(d)
>>> f = open('file_inside_d', 'w')
```

Temporary directories are unaccessible by other users:

```
sage: os.stat(d).st_mode & 0o077
0
sage: f.close()
```

```
>>> from sage.all import *
>>> os.stat(d).st_mode & Integer(0o077)
0
>>> f.close()
```

sage.misc.temporary_file.**tmp_filename**(*name='tmp_'*, *ext=''*)

Create and return a temporary file in `$HOME/.sage/temp/hostname/pid/`

The temporary file is deleted automatically when Sage exits.

Warning

If you need a particular file extension always use `tmp_filename(ext='.foo')`, this will ensure that the file does not yet exist. If you were to use `tmp_filename()+".foo"`, then you might overwrite an existing file!

INPUT:

- `name` – (default: `'tmp_'`) a prefix for the file name
- `ext` – (default: `''`) a suffix for the file name. If you want a filename extension in the usual sense, this should start with a dot.

OUTPUT: the absolute path of the temporary file created

EXAMPLES:

```
sage: fn = tmp_filename('just_for_testing_', '.extension')
sage: fn  # random
'/home/username/.sage/temp/hostname/8044/just_for_testing_tVVHsn.extension'
sage: f = open(fn, 'w')
```

```
>>> from sage.all import *
>>> fn = tmp_filename('just_for_testing_', '.extension')
>>> fn  # random
'/home/username/.sage/temp/hostname/8044/just_for_testing_tVVHsn.extension'
>>> f = open(fn, 'w')
```

Temporary files are unaccessible by other users:

```
sage: os.stat(fn).st_mode & 0o077
0
sage: f.close()
```

```
>>> from sage.all import *
>>> os.stat(fn).st_mode & Integer(0o077)
0
>>> f.close()
```

2.3.2 get_remote_file

`sage.misc.remote_file.`**`get_remote_file`**(*filename*, *verbose=True*)

INPUT:

- `filename` – the URL of a file on the web, e.g., `'http://modular.math.washington.edu/myfile.txt'`
- `verbose` – whether to display download status

OUTPUT:

This creates a file in the temp directory and returns the absolute path to that file as a `Path` object.

EXAMPLES:

```
sage: url = 'https://www.sagemath.org/files/loadtest.py'
sage: g = get_remote_file(url, verbose=False)       # optional - internet
sage: with open(g) as f: print(f.read())            # optional - internet
print("hi from the net")
```

(continues on next page)

(continued from previous page)

```
print(2 + 3)
```

```
>>> from sage.all import *
>>> url = 'https://www.sagemath.org/files/loadtest.py'
>>> g = get_remote_file(url, verbose=False)       # optional - internet
>>> with open(g) as f: print(f.read())            # optional - internet
print("hi from the net")
<BLANKLINE>
print(2 + 3)
```

2.3.3 Message delivery

Various interfaces to messaging services. Currently:

- `pushover` – a platform for sending and receiving push notifications

is supported.

AUTHORS:

- Martin Albrecht (2012) - initial implementation

`sage.misc.messaging.`**`pushover`**(*message*, ***kwds*)

Send a push notification with `message` to `user` using https://pushover.net/.

Pushover is a platform for sending and receiving push notifications. On the server side, it provides an HTTP API for queueing messages to deliver to devices. On the device side, iOS and Android clients receive those push notifications, show them to the user, and store them for offline viewing.

An account on https://pushover.net is required and the Pushover app must be installed on your phone for this function to be able to deliver messages to you.

INPUT:

- `message` – your message
- `user` – the user key (not e-mail address) of your user (or you), viewable when logged into the Pushover dashboard. (default: `None`)
- `device` – your user's device identifier to send the message directly to that device, rather than all of the user's devices (default: `None`)
- `title` – your message's title, otherwise uses your app's name (default: `None`)
- `url` – a supplementary URL to show with your message (default: `None`)
- `url_title` – a title for your supplementary URL (default: `None`)
- `priority` – set to 1 to display as high-priority and bypass quiet hours, or -1 to always send as a quiet notification (default: `0`)
- `timestamp` – set to a unix timestamp to have your message show with a particular time, rather than now (default: `None`)
- `sound` – set to the name of one of the sounds supported by device clients to override the user's default sound choice (default: `None`)
- `token` – your application's API token (default: Sage's default App token)

EXAMPLES:

```
sage: import sage.misc.messaging
sage: sage.misc.messaging.pushover("Hi, how are you?", user="XXX") # not tested
```

```
>>> from sage.all import *
>>> import sage.misc.messaging
>>> sage.misc.messaging.pushover("Hi, how are you?", user="XXX") # not tested
```

To set default values populate `pushover_defaults`:

```
sage: sage.misc.messaging.pushover_defaults["user"] = "USER_TOKEN"
sage: sage.misc.messaging.pushover("Hi, how are you?") # not tested
```

```
>>> from sage.all import *
>>> sage.misc.messaging.pushover_defaults["user"] = "USER_TOKEN"
>>> sage.misc.messaging.pushover("Hi, how are you?") # not tested
```

Note

You may want to populate `sage.misc.messaging.pushover_defaults` with default values such as the default user in `$HOME/.sage/init.sage`.

2.3.4 Miscellaneous operating system functions

`sage.misc.sage_ostools.`**`have_program`**(*program*, *path=None*)

Return `True` if a `program` executable is found in the path given by `path`.

INPUT:

- `program` – string, the name of the program to check
- `path` – string or `None`. Paths to search for `program`, separated by `os.pathsep`. If `None`, use the `PATH` environment variable.

OUTPUT: boolean

EXAMPLES:

```
sage: from sage.misc.sage_ostools import have_program
sage: have_program('ls')
True
sage: have_program('there_is_not_a_program_with_this_name')
False
sage: have_program('sh', '/bin')
True
sage: have_program('sage', '/there_is_not_a_path_with_this_name')
False
sage: have_program('there_is_not_a_program_with_this_name', "/bin")
False
```

```
>>> from sage.all import *
>>> from sage.misc.sage_ostools import have_program
>>> have_program('ls')
True
```

(continues on next page)

(continued from previous page)

```
>>> have_program('there_is_not_a_program_with_this_name')
False
>>> have_program('sh', '/bin')
True
>>> have_program('sage', '/there_is_not_a_path_with_this_name')
False
>>> have_program('there_is_not_a_program_with_this_name', "/bin")
False
```

class sage.misc.sage_ostools.**redirection**

Bases: object

Context to implement redirection of files, analogous to the `>file` or `1>&2` syntax in POSIX shells.

Unlike the `redirect_stdout` and `redirect_stderr` contexts in the Python 3.4 standard library, this acts on the OS level, not on the Python level. This implies that it only works for true files, not duck-type file objects such as `StringIO`.

INPUT:

- `source` – the file to be redirected
- `dest` – where the source file should be redirected to
- `close` – boolean (default: `True`); whether to close the destination file upon exiting the context. This is only supported if `dest` is a Python file.

The `source` and `dest` arguments can be either Python files or file descriptors.

EXAMPLES:

```
sage: from sage.misc.sage_ostools import redirection
sage: fn = tmp_filename()
```

```
>>> from sage.all import *
>>> from sage.misc.sage_ostools import redirection
>>> fn = tmp_filename()
```

```
sage: with redirection(sys.stdout, open(fn, 'w')):
....:     print("hello world!")
sage: with open(fn) as f:
....:     _ = sys.stdout.write(f.read())
hello world!
```

```
>>> from sage.all import *
>>> with redirection(sys.stdout, open(fn, 'w')):
...     print("hello world!")
>>> with open(fn) as f:
...     _ = sys.stdout.write(f.read())
hello world!
```

We can do the same using a file descriptor as source:

```
sage: fd = sys.stdout.fileno()
sage: with redirection(fd, open(fn, 'wb')):
```

(continues on next page)

(continued from previous page)

```
....:     _ = os.write(fd, b"hello world!\n")
sage: with open(fn) as f:
....:     _ = sys.stdout.write(f.read())
hello world!
```

```
>>> from sage.all import *
>>> fd = sys.stdout.fileno()
>>> with redirection(fd, open(fn, 'wb')):
...     _ = os.write(fd, b"hello world!\n")
>>> with open(fn) as f:
...     _ = sys.stdout.write(f.read())
hello world!
```

The converse also works:

```
sage: with open(fn, 'w') as f:
....:     _ = f.write("This goes to the file\n")
....:     with redirection(f, sys.stdout, close=False):
....:         _ = f.write("This goes to stdout\n")
....:     _ = f.write("This goes to the file again\n")
This goes to stdout
sage: with open(fn) as f:
....:     _ = sys.stdout.write(f.read())
This goes to the file
This goes to the file again
```

```
>>> from sage.all import *
>>> with open(fn, 'w') as f:
...     _ = f.write("This goes to the file\n")
...     with redirection(f, sys.stdout, close=False):
...         _ = f.write("This goes to stdout\n")
...     _ = f.write("This goes to the file again\n")
This goes to stdout
>>> with open(fn) as f:
...     _ = sys.stdout.write(f.read())
This goes to the file
This goes to the file again
```

The same *redirection* instance can be reused multiple times, provided that `close=False`:

```
sage: f = open(fn, 'w+')
sage: r = redirection(sys.stdout, f, close=False)
sage: with r:
....:     print("Line 1")
sage: with r:
....:     print("Line 2")
sage: with f:
....:     _ = f.seek(0)
....:     _ = sys.stdout.write(f.read())
Line 1
Line 2
```

```
>>> from sage.all import *
>>> f = open(fn, 'w+')
>>> r = redirection(sys.stdout, f, close=False)
>>> with r:
...     print("Line 1")
>>> with r:
...     print("Line 2")
>>> with f:
...     _ = f.seek(Integer(0))
...     _ = sys.stdout.write(f.read())
Line 1
Line 2
```

The redirection also works for subprocesses:

```
sage: import subprocess
sage: with redirection(sys.stdout, open(fn, 'w')):
....:     _ = subprocess.call(["echo", "hello world"])
sage: with open(fn) as f:
....:     _ = sys.stdout.write(f.read())
hello world
```

```
>>> from sage.all import *
>>> import subprocess
>>> with redirection(sys.stdout, open(fn, 'w')):
...     _ = subprocess.call(["echo", "hello world"])
>>> with open(fn) as f:
...     _ = sys.stdout.write(f.read())
hello world
```

dest_fd

dest_file

dup_source_fd

source_fd

source_file

sage.misc.sage_ostools.**restore_cwd**(*chdir=None*)

Context manager that restores the original working directory upon exiting.

INPUT:

- `chdir` – optionally change directories to the given directory upon entering the context manager

EXAMPLES:

```
sage: from sage.misc.sage_ostools import restore_cwd
sage: import tempfile
sage: orig_cwd = os.getcwd()
sage: with tempfile.TemporaryDirectory() as d:
....:     with restore_cwd(d):
....:         print(os.getcwd() == orig_cwd)
```

(continues on next page)

(continued from previous page)

```
False
sage: os.getcwd() == orig_cwd
True
```

```
>>> from sage.all import *
>>> from sage.misc.sage_ostools import restore_cwd
>>> import tempfile
>>> orig_cwd = os.getcwd()
>>> with tempfile.TemporaryDirectory() as d:
...     with restore_cwd(d):
...         print(os.getcwd() == orig_cwd)
False
>>> os.getcwd() == orig_cwd
True
```

2.4 Database Access

2.4.1 Relational (sqlite) Databases Module

INFO:

This module implements classes (SQLDatabase and SQLQuery (pythonic implementation for the user with little or no knowledge of sqlite)) that wrap the basic functionality of sqlite.

Databases are constructed via a triple indexed dictionary called a skeleton. A skeleton should be constructed to fit the following format:

```
| - skeleton -- a triple-indexed dictionary
|     - outer key -- table name
|         - inner key -- column name
|             - inner inner key -- one of the following:
|                 - ``primary_key`` -- boolean, whether column has been set␣
↪as
                    primary key
|                 - ``index`` -- boolean, whether column has been set as␣
↪index
|                 - ``unique`` -- boolean, whether column has been set as␣
↪unique
|                 - ``sql`` -- one of ``'TEXT'``, ``'BOOLEAN'``, ``'INTEGER
↪'``,
                    ``'REAL'``, or other user defined type
```

An example skeleton of a database with one table, that table with one column:

```
{'table1':{'col1':{'primary_key':False, 'index':True, 'sql':'REAL'}}}
```

SQLDatabases can also be constructed via the add, drop, and commit functions. The vacuum function is also useful for restoring hard disk space after a database has shrunk in size.

A SQLQuery can be constructed by providing a query_dict, which is a dictionary with the following sample format:

```
{'table_name': 'tblname', 'display_cols': ['col1', 'col2', 'col3'],
↪'expression':[col, operator, value]}
```

Finally a SQLQuery also allows the user to directly input the query string for a database, and also supports the '?' syntax by allowing an argument for a tuple of parameters to query.

For full details, please see the tutorial. sage.graphs.graph_database.py is an example of implementing a database class in Sage using this interface.

AUTHORS:

- R. Andrew Ohana (2011-07-16): refactored and rewrote most of the code; merged the Generic classes into the non-Generic versions; changed the skeleton format to include a boolean indicating whether the column stores unique keys; changed the index names so as to avoid potential ambiguity
- Emily A. Kirkman (2008-09-20): added functionality to generate plots and reformat output in show
- Emily A. Kirkman and Robert L. Miller (2007-06-17): initial version

class sage.databases.sql_db.**SQLDatabase**(*filename=None*, *read_only=None*, *skeleton=None*)

Bases: SageObject

A SQL Database object corresponding to a database file.

INPUT:

- filename – string
- skeleton – a triple-indexed dictionary:

```
| - outer key -- table name
|   - inner key -- column name
|     - inner inner key -- one of the following:
|       - ``primary_key`` -- boolean, whether column has been set
          as primary key
|       - ``index`` -- boolean, whether column has been set as
          index
|       - ``unique`` -- boolean, whether column has been set as
          unique
|       - ``sql`` -- one of ``'TEXT'``, ``'BOOLEAN'``,
          ``'INTEGER'``, ``'REAL'``, or other user defined type
```

TUTORIAL:

The SQLDatabase class is for interactively building databases intended for queries. This may sound redundant, but it is important. If you want a database intended for quick lookup of entries in very large tables, much like a hash table (such as a Python dictionary), a SQLDatabase may not be what you are looking for. The strength of SQLDatabases is in queries, searches through the database with complicated criteria.

For example, we create a new database for storing isomorphism classes of simple graphs:

```
sage: D = SQLDatabase()
```

```
>>> from sage.all import *
>>> D = SQLDatabase()
```

In order to generate representatives for the classes, we will import a function which generates all labeled graphs (noting that this is not the optimal way):

```
sage: from sage.groups.perm_gps.partn_ref.refinement_graphs import all_labeled_
↪graphs
```

```
>>> from sage.all import *
>>> from sage.groups.perm_gps.partn_ref.refinement_graphs import all_labeled_
↪graphs
```

We will need a table in the database in which to store the graphs, and we specify its structure with a Python dictionary, each of whose keys is the name of a column:

```
sage: from collections import OrderedDict
sage: table_skeleton = OrderedDict([
....: ('graph6',{'sql':'TEXT', 'index':True, 'primary_key':True}),
....: ('vertices', {'sql':'INTEGER'}),
....: ('edges', {'sql':'INTEGER'})
....: ])
```

```
>>> from sage.all import *
>>> from collections import OrderedDict
>>> table_skeleton = OrderedDict([
... ('graph6',{'sql':'TEXT', 'index':True, 'primary_key':True}),
... ('vertices', {'sql':'INTEGER'}),
... ('edges', {'sql':'INTEGER'})
... ])
```

Then we create the table:

```
sage: D.create_table('simon', table_skeleton)
sage: D.show('simon')
graph6               vertices            edges
------------------------------------------------------------
```

```
>>> from sage.all import *
>>> D.create_table('simon', table_skeleton)
>>> D.show('simon')
graph6               vertices            edges
------------------------------------------------------------
```

Now that we have the table, we will begin to populate the table with rows. First, add the graph on zero vertices.:

```
sage: G = Graph()
sage: D.add_row('simon',(G.graph6_string(), 0, 0))
sage: D.show('simon')
graph6               vertices            edges
------------------------------------------------------------
?                    0                   0
```

```
>>> from sage.all import *
>>> G = Graph()
>>> D.add_row('simon',(G.graph6_string(), Integer(0), Integer(0)))
>>> D.show('simon')
graph6               vertices            edges
```

(continues on next page)

(continued from previous page)

```
------------------------------------------------------------
?                    0                    0
```

Next, add the graph on one vertex.:

```
sage: G.add_vertex()
0
sage: D.add_row('simon',(G.graph6_string(), 1, 0))
sage: D.show('simon')
graph6               vertices             edges
------------------------------------------------------------
?                    0                    0
@                    1                    0
```

```
>>> from sage.all import *
>>> G.add_vertex()
0
>>> D.add_row('simon',(G.graph6_string(), Integer(1), Integer(0)))
>>> D.show('simon')
graph6               vertices             edges
------------------------------------------------------------
?                    0                    0
@                    1                    0
```

Say we want a database of graphs on four or less vertices:

```
sage: labels = {}
sage: for i in range(2, 5):
....:     labels[i] = []
....:     for g in all_labeled_graphs(i):
....:         g = g.canonical_label(algorithm='sage')
....:         if g not in labels[i]:
....:             labels[i].append(g)
....:             D.add_row('simon', (g.graph6_string(), g.order(), g.size()))
sage: D.show('simon')
graph6               vertices             edges
------------------------------------------------------------
?                    0                    0
@                    1                    0
A?                   2                    0
A_                   2                    1
B?                   3                    0
BG                   3                    1
BW                   3                    2
Bw                   3                    3
C?                   4                    0
C@                   4                    1
CB                   4                    2
CF                   4                    3
CJ                   4                    3
CK                   4                    2
CL                   4                    3
```

(continues on next page)

(continued from previous page)

```
CN                    4                     4
C]                    4                     4
C^                    4                     5
C~                    4                     6
```

```
>>> from sage.all import *
>>> labels = {}
>>> for i in range(Integer(2), Integer(5)):
...     labels[i] = []
...     for g in all_labeled_graphs(i):
...         g = g.canonical_label(algorithm='sage')
...         if g not in labels[i]:
...             labels[i].append(g)
...             D.add_row('simon', (g.graph6_string(), g.order(), g.size()))
>>> D.show('simon')
graph6                vertices              edges
--------------------------------------------------------------
?                     0                     0
@                     1                     0
A?                    2                     0
A_                    2                     1
B?                    3                     0
BG                    3                     1
BW                    3                     2
Bw                    3                     3
C?                    4                     0
C@                    4                     1
CB                    4                     2
CF                    4                     3
CJ                    4                     3
CK                    4                     2
CL                    4                     3
CN                    4                     4
C]                    4                     4
C^                    4                     5
C~                    4                     6
```

We can then query the database – let's ask for all the graphs on four vertices with three edges. We do so by creating two queries and asking for rows that satisfy them both:

```
sage: Q = SQLQuery(D, {'table_name':'simon', 'display_cols':['graph6'],
↪'expression':['vertices','=',4]})
sage: Q2 = SQLQuery(D, {'table_name':'simon', 'display_cols':['graph6'],
↪'expression':['edges','=',3]})
sage: Q = Q.intersect(Q2)
sage: len(Q.query_results())
3
sage: Q.query_results() # random
[('CF', 'CF'), ('CJ', 'CJ'), ('CL', 'CL')]
```

```
>>> from sage.all import *
>>> Q = SQLQuery(D, {'table_name':'simon', 'display_cols':['graph6'], 'expression
```

(continues on next page)

(continued from previous page)

```
↪':['vertices','=',Integer(4)]})
>>> Q2 = SQLQuery(D, {'table_name':'simon', 'display_cols':['graph6'], 'expression
↪':['edges','=',Integer(3)]})
>>> Q = Q.intersect(Q2)
>>> len(Q.query_results())
3
>>> Q.query_results() # random
[('CF', 'CF'), ('CJ', 'CJ'), ('CL', 'CL')]
```

NOTE: The values of `display_cols` are always concatenated in intersections and unions.

Of course, we can save the database to file. Here we use a temporary directory that we clean up afterwards:

```
sage: import tempfile
sage: d = tempfile.TemporaryDirectory()
sage: dbpath = os.path.join(d.name, 'simon.db')
sage: D.save(dbpath)
```

```
>>> from sage.all import *
>>> import tempfile
>>> d = tempfile.TemporaryDirectory()
>>> dbpath = os.path.join(d.name, 'simon.db')
>>> D.save(dbpath)
```

Now the database's hard link is to this file, and not the temporary db file. For example, let's say we open the same file with another class instance. We can load the file as an immutable database:

```
sage: E = SQLDatabase(dbpath)
sage: E.show('simon')
graph6                vertices              edges
--------------------------------------------------------------
?                     0                     0
@                     1                     0
A?                    2                     0
A_                    2                     1
B?                    3                     0
BG                    3                     1
BW                    3                     2
Bw                    3                     3
C?                    4                     0
C@                    4                     1
CB                    4                     2
CF                    4                     3
CJ                    4                     3
CK                    4                     2
CL                    4                     3
CN                    4                     4
C]                    4                     4
C^                    4                     5
C~                    4                     6
sage: E.drop_table('simon')
Traceback (most recent call last):
...
```

(continues on next page)

(continued from previous page)

```
RuntimeError: Cannot drop tables from a read only database.
```

```
>>> from sage.all import *
>>> E = SQLDatabase(dbpath)
>>> E.show('simon')
graph6                vertices              edges
------------------------------------------------------------
?                     0                     0
@                     1                     0
A?                    2                     0
A_                    2                     1
B?                    3                     0
BG                    3                     1
BW                    3                     2
Bw                    3                     3
C?                    4                     0
C@                    4                     1
CB                    4                     2
CF                    4                     3
CJ                    4                     3
CK                    4                     2
CL                    4                     3
CN                    4                     4
C]                    4                     4
C^                    4                     5
C~                    4                     6
>>> E.drop_table('simon')
Traceback (most recent call last):
...
RuntimeError: Cannot drop tables from a read only database.
```

Call `cleanup()` on the temporary directory to, well, clean it up:

```
sage: d.cleanup()
```

```
>>> from sage.all import *
>>> d.cleanup()
```

add_column(*table_name*, *col_name*, *col_dict*, *default='NULL'*)

Add a column named `col_name` to table `table_name`, whose data types are described by `col_dict`. The format for this is:

```
{'col1':{'primary_key':False, 'unique': True, 'index':True, 'sql':'REAL'}}
```

INPUT:

- `col_dict` – dictionary:
  - key – column name
    - inner key – one of the following:
      - `primary_key` – boolean, whether column has been set as primary key
      - `index` – boolean, whether column has been set as index

- `unique` – boolean, whether column has been set as unique
- `sql` – one of `'TEXT'`, `'BOOLEAN'`, `'INTEGER'`, `'REAL'`, or other user defined type

EXAMPLES:

```
sage: from collections import OrderedDict
sage: MonicPolys = SQLDatabase()
sage: MonicPolys.create_table('simon', OrderedDict([('n', {'sql':'INTEGER',
↪'index':True})]))
sage: for n in range(20): MonicPolys.add_row('simon', (n,))
sage: MonicPolys.add_column('simon', 'n_squared', {'sql':'INTEGER', 'index
↪':False}, 0)
sage: MonicPolys.show('simon')
n                    n_squared
-----------------------------------------
0                    0
1                    0
2                    0
3                    0
4                    0
5                    0
6                    0
7                    0
8                    0
9                    0
10                   0
11                   0
12                   0
13                   0
14                   0
15                   0
16                   0
17                   0
18                   0
19                   0
```

```
>>> from sage.all import *
>>> from collections import OrderedDict
>>> MonicPolys = SQLDatabase()
>>> MonicPolys.create_table('simon', OrderedDict([('n', {'sql':'INTEGER',
↪'index':True})]))
>>> for n in range(Integer(20)): MonicPolys.add_row('simon', (n,))
>>> MonicPolys.add_column('simon', 'n_squared', {'sql':'INTEGER', 'index
↪':False}, Integer(0))
>>> MonicPolys.show('simon')
n                    n_squared
-----------------------------------------
0                    0
1                    0
2                    0
3                    0
4                    0
5                    0
```

(continues on next page)

(continued from previous page)

```
6                   0
7                   0
8                   0
9                   0
10                  0
11                  0
12                  0
13                  0
14                  0
15                  0
16                  0
17                  0
18                  0
19                  0
```

add_data(*table_name*, *rows*, *entry_order=None*)

INPUT:

- `rows` – list of tuples that represent one row of data to add (types should match col types in order)
- `entry_order` – an ordered list or tuple overrides normal order with user defined order

EXAMPLES:

```
sage: DB = SQLDatabase()
sage: DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
sage: DB.add_rows('simon',[(0,0),(1,1),(1,2)])
sage: DB.add_rows('simon',[(0,0),(4,0),(5,1)], ['b2','a1'])
sage: cur = DB.get_cursor()
sage: (cur.execute('select * from simon')).fetchall()
[(0, 0), (1, 1), (1, 2), (0, 0), (0, 4), (1, 5)]
```

```
>>> from sage.all import *
>>> DB = SQLDatabase()
>>> DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
>>> DB.add_rows('simon',[(Integer(0),Integer(0)),(Integer(1),Integer(1)),
↪(Integer(1),Integer(2))])
>>> DB.add_rows('simon',[(Integer(0),Integer(0)),(Integer(4),Integer(0)),
↪(Integer(5),Integer(1))], ['b2','a1'])
>>> cur = DB.get_cursor()
>>> (cur.execute('select * from simon')).fetchall()
[(0, 0), (1, 1), (1, 2), (0, 0), (0, 4), (1, 5)]
```

add_row(*table_name*, *values*, *entry_order=None*)

Add the row described by `values` to the table `table_name`. Values should be a tuple, of same length and order as columns in given table.

NOTE:

If `values` is of length one, be sure to specify that it is a tuple of length one, by using a comma, e.g.:

```
sage: values = (6,)
```

```
>>> from sage.all import *
>>> values = (Integer(6),)
```

EXAMPLES:

```
sage: DB = SQLDatabase()
sage: DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
sage: DB.add_row('simon',(0,1))
sage: cur = DB.get_cursor()
sage: (cur.execute('select * from simon')).fetchall()
[(0, 1)]
```

```
>>> from sage.all import *
>>> DB = SQLDatabase()
>>> DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
>>> DB.add_row('simon',(Integer(0),Integer(1)))
>>> cur = DB.get_cursor()
>>> (cur.execute('select * from simon')).fetchall()
[(0, 1)]
```

add_rows(*table_name*, *rows*, *entry_order=None*)

INPUT:

- `rows` – list of tuples that represent one row of data to add (types should match col types in order)
- `entry_order` – an ordered list or tuple overrides normal order with user defined order

EXAMPLES:

```
sage: DB = SQLDatabase()
sage: DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
sage: DB.add_rows('simon',[(0,0),(1,1),(1,2)])
sage: DB.add_rows('simon',[(0,0),(4,0),(5,1)], ['b2','a1'])
sage: cur = DB.get_cursor()
sage: (cur.execute('select * from simon')).fetchall()
[(0, 0), (1, 1), (1, 2), (0, 0), (0, 4), (1, 5)]
```

```
>>> from sage.all import *
>>> DB = SQLDatabase()
>>> DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
>>> DB.add_rows('simon',[(Integer(0),Integer(0)),(Integer(1),Integer(1)),
↪(Integer(1),Integer(2))])
>>> DB.add_rows('simon',[(Integer(0),Integer(0)),(Integer(4),Integer(0)),
↪(Integer(5),Integer(1))], ['b2','a1'])
>>> cur = DB.get_cursor()
>>> (cur.execute('select * from simon')).fetchall()
[(0, 0), (1, 1), (1, 2), (0, 0), (0, 4), (1, 5)]
```

commit()

Commit changes to file.

EXAMPLES:

```
sage: DB = SQLDatabase()
sage: DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
sage: DB.add_row('simon',(0,1))
sage: DB.add_data('simon',[(0,0),(1,1),(1,2)])
sage: DB.add_data('simon',[(0,0),(4,0),(5,1)], ['b2','a1'])
sage: DB.drop_column('simon','b2')
sage: DB.commit()
sage: DB.vacuum()
```

```
>>> from sage.all import *
>>> DB = SQLDatabase()
>>> DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
>>> DB.add_row('simon',(Integer(0),Integer(1)))
>>> DB.add_data('simon',[(Integer(0),Integer(0)),(Integer(1),Integer(1)),
↪(Integer(1),Integer(2))])
>>> DB.add_data('simon',[(Integer(0),Integer(0)),(Integer(4),Integer(0)),
↪(Integer(5),Integer(1))], ['b2','a1'])
>>> DB.drop_column('simon','b2')
>>> DB.commit()
>>> DB.vacuum()
```

create_table(*table_name*, *table_skeleton*)

Create a new table in the database.

To create a table, a column structure must be specified. The form for this is a Python dict, for example:

```
{'col1': {'sql':'INTEGER', 'index':False, 'unique':True, 'primary_key':False},
↪ ...}
```

INPUT:

- `table_name` – string
- `table_skeleton` – a double-indexed dictionary
  - outer key – column name
    - inner key – one of the following:
      - `primary_key` – boolean, whether column has been set asprimary key
      - `index` – boolean, whether column has been set as index
      - `unique` – boolean, whether column has been set as unique
      - `sql` – one of `'TEXT'`, `'BOOLEAN'`, `'INTEGER'`, `'REAL'`, or other user defined type

NOTE:

Some SQL features, such as automatically incrementing primary key, require the full word `'INTEGER'`, not just `'INT'`.

EXAMPLES:

```
sage: from collections import OrderedDict
sage: D = SQLDatabase()
sage: table_skeleton = OrderedDict([
....: ('graph6', {'sql':'TEXT', 'index':True, 'primary_key':True}),
```

(continues on next page)

(continued from previous page)

```
....: ('vertices', {'sql':'INTEGER'}),
....: ('edges', {'sql':'INTEGER'})
....: ])
sage: D.create_table('simon', table_skeleton)
sage: D.show('simon')
graph6                vertices             edges
------------------------------------------------------------
```

```
>>> from sage.all import *
>>> from collections import OrderedDict
>>> D = SQLDatabase()
>>> table_skeleton = OrderedDict([
... ('graph6', {'sql':'TEXT', 'index':True, 'primary_key':True}),
... ('vertices', {'sql':'INTEGER'}),
... ('edges', {'sql':'INTEGER'})
... ])
>>> D.create_table('simon', table_skeleton)
>>> D.show('simon')
graph6                vertices             edges
------------------------------------------------------------
```

delete_rows(*query*)

Use a `SQLQuery` instance to modify (delete rows from) the database.

`SQLQuery` must have no join statements. (As of now, you can only delete from one table at a time – ideas and patches are welcome).

To remove all data that satisfies a `SQLQuery`, send the query as an argument to `delete_rows`. Be careful, test your query first.

Recommended use: have some kind of row identification primary key column that you use as a parameter in the query. (See example below).

INPUT:

- `query` – a `SQLQuery` (Delete the rows returned when query is run)

EXAMPLES:

```
sage: from collections import OrderedDict
sage: DB = SQLDatabase()
sage: DB.create_table('lucy', OrderedDict([
....: ('id', {'sql':'INTEGER', 'primary_key':True, 'index':True}),
....: ('a1', {'sql':'bool'}),
....: ('b2', {'sql':'int'})]))
sage: DB.add_rows('lucy', [(0,1,1),(1,1,4),(2,0,7),(3,1,384), (4,1,978932)],[
↪'id','a1','b2'])
sage: DB.show('lucy')
id                    a1                   b2
------------------------------------------------------------
0                     1                    1
1                     1                    4
2                     0                    7
3                     1                    384
4                     1                    978932
```

(continues on next page)

(continued from previous page)

```
sage: Q = SQLQuery(DB, {'table_name':'lucy', 'display_cols':['id','a1','b2'],
↪'expression':['id','>=',3]})
sage: DB.delete_rows(Q)
sage: DB.show('lucy')
id                   a1                   b2
-------------------------------------------------------------
0                    1                    1
1                    1                    4
2                    0                    7
```

```
>>> from sage.all import *
>>> from collections import OrderedDict
>>> DB = SQLDatabase()
>>> DB.create_table('lucy', OrderedDict([
... ('id', {'sql':'INTEGER', 'primary_key':True, 'index':True}),
... ('a1', {'sql':'bool'}),
... ('b2', {'sql':'int'})]))
>>> DB.add_rows('lucy', [(Integer(0),Integer(1),Integer(1)),(Integer(1),
↪Integer(1),Integer(4)),(Integer(2),Integer(0),Integer(7)),(Integer(3),
↪Integer(1),Integer(384)), (Integer(4),Integer(1),Integer(978932))],['id','a1
↪','b2'])
>>> DB.show('lucy')
id                   a1                   b2
-------------------------------------------------------------
0                    1                    1
1                    1                    4
2                    0                    7
3                    1                    384
4                    1                    978932
>>> Q = SQLQuery(DB, {'table_name':'lucy', 'display_cols':['id','a1','b2'],
↪'expression':['id','>=',Integer(3)]})
>>> DB.delete_rows(Q)
>>> DB.show('lucy')
id                   a1                   b2
-------------------------------------------------------------
0                    1                    1
1                    1                    4
2                    0                    7
```

drop_column (*table_name*, *col_name*)

Drop the column `col_name` from table `table_name`.

EXAMPLES:

```
sage: MonicPolys = SQLDatabase()
sage: MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True}})
sage: for n in range(20): MonicPolys.add_row('simon', (n,))
sage: MonicPolys.add_column('simon', 'n_squared', {'sql':'INTEGER'}, 0)
sage: MonicPolys.drop_column('simon', 'n_squared')
sage: MonicPolys.show('simon')
n
--------------------
```

(continues on next page)

(continued from previous page)

```
0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
```

```
>>> from sage.all import *
>>> MonicPolys = SQLDatabase()
>>> MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True}})
>>> for n in range(Integer(20)): MonicPolys.add_row('simon', (n,))
>>> MonicPolys.add_column('simon', 'n_squared', {'sql':'INTEGER'}, Integer(0))
>>> MonicPolys.drop_column('simon', 'n_squared')
>>> MonicPolys.show('simon')
n
--------------------
0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
```

drop_data_from_table(*table_name*)

Remove all rows from `table_name`.

EXAMPLES:

```
sage: D = SQLDatabase()
sage: D.create_table('simon',{'col1':{'sql':'INTEGER'}})
sage: D.add_row('simon',(9,))
sage: D.show('simon')
col1
--------------------
9
sage: D.drop_data_from_table('simon')
sage: D.show('simon')
col1
--------------------
```

```
>>> from sage.all import *
>>> D = SQLDatabase()
>>> D.create_table('simon',{'col1':{'sql':'INTEGER'}})
>>> D.add_row('simon',(Integer(9),))
>>> D.show('simon')
col1
--------------------
9
>>> D.drop_data_from_table('simon')
>>> D.show('simon')
col1
--------------------
```

drop_index(*table_name*, *index_name*)

Set the column `index_name` in table `table_name` to not be an index. See `make_index()`

EXAMPLES:

```
sage: MonicPolys = SQLDatabase()
sage: MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True},
↪'n2':{'sql':'INTEGER'}})
sage: MonicPolys.drop_index('simon', 'n')
sage: MonicPolys.get_skeleton()
{'simon': {'n': {'index': False,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': False,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False}}}
```

```
>>> from sage.all import *
>>> MonicPolys = SQLDatabase()
>>> MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True}, 'n2
↪':{'sql':'INTEGER'}})
>>> MonicPolys.drop_index('simon', 'n')
>>> MonicPolys.get_skeleton()
```

(continues on next page)

(continued from previous page)

```
{'simon': {'n': {'index': False,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': False,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False}}}
```

drop_primary_key(*table_name*, *col_name*)

Set the column `col_name` in table `table_name` not to be a primary key.

A primary key is something like an index, but its main purpose is to link different tables together. This allows searches to be executed on multiple tables that represent maybe different data about the same objects.

NOTE:

This function only changes the column to be non-primary, it does not delete it.

EXAMPLES:

```
sage: MonicPolys = SQLDatabase()
sage: MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True},
↪'n2':{'sql':'INTEGER'}})
sage: MonicPolys.make_primary_key('simon', 'n2')
sage: MonicPolys.drop_primary_key('simon', 'n2')
sage: MonicPolys.get_skeleton()
{'simon': {'n': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': False,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': True}}}
```

```
>>> from sage.all import *
>>> MonicPolys = SQLDatabase()
>>> MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True}, 'n2
↪':{'sql':'INTEGER'}})
>>> MonicPolys.make_primary_key('simon', 'n2')
>>> MonicPolys.drop_primary_key('simon', 'n2')
>>> MonicPolys.get_skeleton()
{'simon': {'n': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': False,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': True}}}
```

drop_table(*table_name*)

Delete table `table_name` from database.

INPUT:

- `table_name` – string

EXAMPLES:

```
sage: D = SQLDatabase()
sage: D.create_table('simon',{'col1':{'sql':'INTEGER'}})
sage: D.show('simon')
col1
--------------------
sage: D.drop_table('simon')
sage: D.get_skeleton()
{}
```

```
>>> from sage.all import *
>>> D = SQLDatabase()
>>> D.create_table('simon',{'col1':{'sql':'INTEGER'}})
>>> D.show('simon')
col1
--------------------
>>> D.drop_table('simon')
>>> D.get_skeleton()
{}
```

drop_unique(*table_name*, *col_name*)

Set the column `col_name` in table `table_name` not store unique values.

NOTE:

This function only removes the requirement for entries in `col_name` to be unique, it does not delete it.

EXAMPLES:

```
sage: MonicPolys = SQLDatabase()
sage: MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True},
↪'n2':{'sql':'INTEGER'}})
sage: MonicPolys.make_unique('simon', 'n2')
sage: MonicPolys.drop_unique('simon', 'n2')
sage: MonicPolys.get_skeleton()
{'simon': {'n': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': False,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False}}}
```

```
>>> from sage.all import *
>>> MonicPolys = SQLDatabase()
>>> MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True}, 'n2
↪':{'sql':'INTEGER'}})
>>> MonicPolys.make_unique('simon', 'n2')
>>> MonicPolys.drop_unique('simon', 'n2')
```

(continues on next page)

(continued from previous page)

```
>>> MonicPolys.get_skeleton()
{'simon': {'n': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': False,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False}}}
```

get_connection(*ignore_warning=None*)

Return a pysqlite connection to the database.

You most likely want `get_cursor()` instead, which is used for executing sqlite commands on the database.

Recommended for more advanced users only.

EXAMPLES:

```
sage: D = SQLDatabase(read_only=True)
sage: con = D.get_connection()
doctest:...: RuntimeWarning: Database is read only, using the connection can␣
↪alter the stored data. Set self.ignore_warnings to True in order to mute␣
↪future warnings.
sage: con = D.get_connection(True)
sage: D.ignore_warnings = True
sage: con = D.get_connection()
sage: t = con.execute('CREATE TABLE simon(n INTEGER, n2 INTEGER)')
sage: for n in range(10):
....:   t = con.execute('INSERT INTO simon VALUES(%d,%d)'%(n,n^2))
sage: D.show('simon')
n                    n2
-----------------------------------------
0                    0
1                    1
2                    4
3                    9
4                    16
5                    25
6                    36
7                    49
8                    64
9                    81
```

```
>>> from sage.all import *
>>> D = SQLDatabase(read_only=True)
>>> con = D.get_connection()
doctest:...: RuntimeWarning: Database is read only, using the connection can␣
↪alter the stored data. Set self.ignore_warnings to True in order to mute␣
↪future warnings.
>>> con = D.get_connection(True)
>>> D.ignore_warnings = True
>>> con = D.get_connection()
```

(continues on next page)

(continued from previous page)

```
>>> t = con.execute('CREATE TABLE simon(n INTEGER, n2 INTEGER)')
>>> for n in range(Integer(10)):
...   t = con.execute('INSERT INTO simon VALUES(%d,%d)'%(n,n**Integer(2)))
>>> D.show('simon')
n                    n2
---------------------------------------
0                    0
1                    1
2                    4
3                    9
4                    16
5                    25
6                    36
7                    49
8                    64
9                    81
```

get_cursor(*ignore_warning=None*)

Return a pysqlite cursor for the database connection.

A cursor is an input from which you can execute sqlite commands on the database.

Recommended for more advanced users only.

EXAMPLES:

```
sage: DB = SQLDatabase()
sage: DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
sage: DB.add_row('simon',(0,1))
sage: DB.add_rows('simon',[(0,0),(1,1),(1,2)])
sage: DB.add_rows('simon',[(0,0),(4,0),(5,1)], ['b2','a1'])
sage: cur = DB.get_cursor()
sage: (cur.execute('select * from simon')).fetchall()
[(0, 1), (0, 0), (1, 1), (1, 2), (0, 0), (0, 4), (1, 5)]
```

```
>>> from sage.all import *
>>> DB = SQLDatabase()
>>> DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
>>> DB.add_row('simon',(Integer(0),Integer(1)))
>>> DB.add_rows('simon',[(Integer(0),Integer(0)),(Integer(1),Integer(1)),
↪(Integer(1),Integer(2))])
>>> DB.add_rows('simon',[(Integer(0),Integer(0)),(Integer(4),Integer(0)),
↪(Integer(5),Integer(1))], ['b2','a1'])
>>> cur = DB.get_cursor()
>>> (cur.execute('select * from simon')).fetchall()
[(0, 1), (0, 0), (1, 1), (1, 2), (0, 0), (0, 4), (1, 5)]
```

get_skeleton(*check=False*)

Return a dictionary representing the hierarchical structure of the database, in the following format:

```
| - skeleton -- a triple-indexed dictionary
|   - outer key -- table name
|     - inner key -- column name
```

(continues on next page)

(continued from previous page)

```
|       - inner inner key -- one of the following:
|         - ``primary_key`` -- boolean, whether column has been set as
            primary key
|         - ``index`` -- boolean, whether column has been set as index
|         - ``unique`` -- boolean, whether column has been set as unique
|         - ``sql`` -- one of ```'TEXT'``, ```'BOOLEAN'``, ```'INTEGER'``,
            ```'REAL'``, or other user defined type
```

For example:

```
{'table1':{'col1':{'primary_key':False, 'index':True, 'unique': False,'sql':
↪'REAL'}}}
```

INPUT:

- `check` – if `True`, checks to make sure the database's actual structure matches the skeleton on record

EXAMPLES:

```
sage: GDB = GraphDatabase()
sage: GDB.get_skeleton()              # slightly random output
{'aut_grp': {'aut_grp_size': {'index': True,
                              'unique': False,
                              'primary_key': False,
                              'sql': 'INTEGER'},
             ...
             'num_vertices': {'index': True,
                              'unique': False,
                              'primary_key': False,
                              'sql': 'INTEGER'}}}
```

```
>>> from sage.all import *
>>> GDB = GraphDatabase()
>>> GDB.get_skeleton()              # slightly random output
{'aut_grp': {'aut_grp_size': {'index': True,
                              'unique': False,
                              'primary_key': False,
                              'sql': 'INTEGER'},
             ...
             'num_vertices': {'index': True,
                              'unique': False,
                              'primary_key': False,
                              'sql': 'INTEGER'}}}
```

make_index(*col_name*, *table_name*, *unique=False*)

Set the column `col_name` in table `table_name` to be an index, that is, a column set up to do quick searches on.

INPUT:

- `col_name` – string
- `table_name` – string
- `unique` – requires that there are no multiple entries in the column, makes searching faster
```

EXAMPLES:

```
sage: MonicPolys = SQLDatabase()
sage: MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True},
↪'n2':{'sql':'INTEGER'}})
sage: MonicPolys.make_index('n2','simon')
sage: MonicPolys.get_skeleton()
{'simon': {'n': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False}}}
```

```
>>> from sage.all import *
>>> MonicPolys = SQLDatabase()
>>> MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True}, 'n2
↪':{'sql':'INTEGER'}})
>>> MonicPolys.make_index('n2','simon')
>>> MonicPolys.get_skeleton()
{'simon': {'n': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False}}}
```

make_primary_key(*table_name*, *col_name*)

Set the column `col_name` in table `table_name` to be a primary key.

A primary key is something like an index, but its main purpose is to link different tables together. This allows searches to be executed on multiple tables that represent maybe different data about the same objects.

NOTE:

Some SQL features, such as automatically incrementing primary key, require the full word `'INTEGER'`, not just `'INT'`.

EXAMPLES:

```
sage: MonicPolys = SQLDatabase()
sage: MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True},
↪'n2':{'sql':'INTEGER'}})
sage: MonicPolys.make_primary_key('simon', 'n2')
sage: MonicPolys.get_skeleton()
{'simon': {'n': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': False,
   'primary_key': True,
```

(continues on next page)

(continued from previous page)

```
   'sql': 'INTEGER',
   'unique': True}}}
```

```
>>> from sage.all import *
>>> MonicPolys = SQLDatabase()
>>> MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True}, 'n2
↪':{'sql':'INTEGER'}})
>>> MonicPolys.make_primary_key('simon', 'n2')
>>> MonicPolys.get_skeleton()
{'simon': {'n': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': False,
   'primary_key': True,
   'sql': 'INTEGER',
   'unique': True}}}
```

make_unique(*table_name*, *col_name*)

Set the column `col_name` in table `table_name` to store unique values.

NOTE:

This function only adds the requirement for entries in `col_name` to be unique, it does not change the values.

EXAMPLES:

```
sage: MonicPolys = SQLDatabase()
sage: MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True},
↪'n2':{'sql':'INTEGER'}})
sage: MonicPolys.make_unique('simon', 'n2')
sage: MonicPolys.get_skeleton()
{'simon': {'n': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': False,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': True}}}
```

```
>>> from sage.all import *
>>> MonicPolys = SQLDatabase()
>>> MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True}, 'n2
↪':{'sql':'INTEGER'}})
>>> MonicPolys.make_unique('simon', 'n2')
>>> MonicPolys.get_skeleton()
{'simon': {'n': {'index': True,
   'primary_key': False,
   'sql': 'INTEGER',
   'unique': False},
  'n2': {'index': False,
   'primary_key': False,
```

(continues on next page)

(continued from previous page)

```
   'sql': 'INTEGER',
   'unique': True}}}
```

query(**args*, ***kwds*)

Create a `SQLQuery` on this database.

For full class details, type `SQLQuery?` and press `Shift` + `Enter`.

EXAMPLES:

```
sage: D = SQLDatabase()
sage: D.create_table('simon', {'wolf':{'sql':'BOOLEAN'}, 'tag':{'sql':'INTEGER
↪'}})
sage: q = D.query({'table_name':'simon', 'display_cols':['tag'], 'expression
↪':['wolf','=',1]})
sage: q.get_query_string()
'SELECT simon.tag FROM simon WHERE simon.wolf = ?'
sage: q.__param_tuple__
('1',)
sage: q = D.query(query_string='SELECT tag FROM simon WHERE wolf=?',param_
↪tuple=(1,))
sage: q.get_query_string()
'SELECT tag FROM simon WHERE wolf=?'
sage: q.__param_tuple__
('1',)
```

```
>>> from sage.all import *
>>> D = SQLDatabase()
>>> D.create_table('simon', {'wolf':{'sql':'BOOLEAN'}, 'tag':{'sql':'INTEGER'}
↪})
>>> q = D.query({'table_name':'simon', 'display_cols':['tag'], 'expression':[
↪'wolf','=',Integer(1)]})
>>> q.get_query_string()
'SELECT simon.tag FROM simon WHERE simon.wolf = ?'
>>> q.__param_tuple__
('1',)
>>> q = D.query(query_string='SELECT tag FROM simon WHERE wolf=?',param_
↪tuple=(Integer(1),))
>>> q.get_query_string()
'SELECT tag FROM simon WHERE wolf=?'
>>> q.__param_tuple__
('1',)
```

rename_table(*table_name*, *new_name*)

Rename the table `table_name` to `new_name`.

EXAMPLES:

```
sage: D = SQLDatabase()
sage: D.create_table('simon',{'col1':{'sql':'INTEGER'}})
sage: D.show('simon')
col1
--------------------
```

(continues on next page)

(continued from previous page)

```
sage: D.rename_table('simon', 'lucy')
sage: D.show('simon')
Traceback (most recent call last):
...
RuntimeError: Failure to fetch data.
sage: D.show('lucy')
col1
--------------------
```

```
>>> from sage.all import *
>>> D = SQLDatabase()
>>> D.create_table('simon',{'col1':{'sql':'INTEGER'}})
>>> D.show('simon')
col1
--------------------
>>> D.rename_table('simon', 'lucy')
>>> D.show('simon')
Traceback (most recent call last):
...
RuntimeError: Failure to fetch data.
>>> D.show('lucy')
col1
--------------------
```

save (*filename*)

Save the database to the specified location.

EXAMPLES:

```
sage: MonicPolys = SQLDatabase()
sage: MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True}})
sage: for n in range(20): MonicPolys.add_row('simon', (n,))
sage: import tempfile
sage: with tempfile.TemporaryDirectory() as d:
....:     dbpath = os.path.join(d, "sage.db")
....:     MonicPolys.save(dbpath)
....:     N = SQLDatabase(dbpath)
....:     N.show('simon')
n
--------------------
0
1
2
3
4
5
6
7
8
9
10
11
```

(continues on next page)

(continued from previous page)

```
12
13
14
15
16
17
18
19
```

```
>>> from sage.all import *
>>> MonicPolys = SQLDatabase()
>>> MonicPolys.create_table('simon', {'n':{'sql':'INTEGER', 'index':True}})
>>> for n in range(Integer(20)): MonicPolys.add_row('simon', (n,))
>>> import tempfile
>>> with tempfile.TemporaryDirectory() as d:
...     dbpath = os.path.join(d, "sage.db")
...     MonicPolys.save(dbpath)
...     N = SQLDatabase(dbpath)
...     N.show('simon')
n
--------------------
0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
```

show(*table_name*, ***kwds*)

Show an entire table from the database.

EXAMPLES:

```
sage: DB = SQLDatabase()
sage: DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
sage: DB.add_data('simon',[(0,0),(1,1),(1,2)])
sage: DB.show('simon')
a1                  b2
```

(continues on next page)

(continued from previous page)

```
----------------------------------------
0                    0
1                    1
1                    2
```

```
>>> from sage.all import *
>>> DB = SQLDatabase()
>>> DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
>>> DB.add_data('simon',[(Integer(0),Integer(0)),(Integer(1),Integer(1)),
↪(Integer(1),Integer(2))])
>>> DB.show('simon')
a1                   b2
----------------------------------------
0                    0
1                    1
1                    2
```

vacuum()

Clean the extra hard disk space used up by a database that has recently shrunk.

EXAMPLES:

```
sage: DB = SQLDatabase()
sage: DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
sage: DB.add_row('simon',(0,1))
sage: DB.add_data('simon',[(0,0),(1,1),(1,2)])
sage: DB.add_data('simon',[(0,0),(4,0),(5,1)], ['b2','a1'])
sage: DB.drop_column('simon','b2')
sage: DB.commit()
sage: DB.vacuum()
```

```
>>> from sage.all import *
>>> DB = SQLDatabase()
>>> DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
>>> DB.add_row('simon',(Integer(0),Integer(1)))
>>> DB.add_data('simon',[(Integer(0),Integer(0)),(Integer(1),Integer(1)),
↪(Integer(1),Integer(2))])
>>> DB.add_data('simon',[(Integer(0),Integer(0)),(Integer(4),Integer(0)),
↪(Integer(5),Integer(1))], ['b2','a1'])
>>> DB.drop_column('simon','b2')
>>> DB.commit()
>>> DB.vacuum()
```

class sage.databases.sql_db.**SQLQuery**(*database*, **args*, ***kwds*)

Bases: SageObject

A query for a SQLite database.

INPUT:

- database – a SQLDatabase object
- query_dict – dictionary specifying the query itself. The format is:

```
{'table_name':'tblname', 'display_cols':['col1', 'col2','col3'], 'expression
↪': [col, operator, value]}
```

NOTE:

Every SQL type we are using is ultimately represented as a string, so if you wish to save actual strings to a database, you actually need to do something like: "'value"'.

See the documentation of `SQLDatabase` for an introduction to using SQLite in Sage.

EXAMPLES:

```
sage: D = SQLDatabase()
sage: D.create_table('simon',{'a1':{'sql':'bool', 'primary_key':False}, 'b2':{'sql
↪':'int'}})
sage: D.add_data('simon',[(0,0),(1,2),(2,4)])
sage: r = SQLQuery(D, {'table_name':'simon', 'display_cols':['a1'], 'expression':[
↪'b2','<=', 3]})
sage: r.show()
a1
--------------------
0
1
```

```
>>> from sage.all import *
>>> D = SQLDatabase()
>>> D.create_table('simon',{'a1':{'sql':'bool', 'primary_key':False}, 'b2':{'sql':
↪'int'}})
>>> D.add_data('simon',[(Integer(0),Integer(0)),(Integer(1),Integer(2)),
↪(Integer(2),Integer(4))])
>>> r = SQLQuery(D, {'table_name':'simon', 'display_cols':['a1'], 'expression':[
↪'b2','<=', Integer(3)]})
>>> r.show()
a1
--------------------
0
1
```

Test that Issue #27562 is fixed:

```
sage: D = SQLDatabase()
sage: r = SQLQuery(D, {'table_name':'simon', 'display_cols':['a1'], 'expression':[
↪'b2','<=', 3]})
Traceback (most recent call last):
...
ValueError: Database has no table simon
sage: D.create_table('simon',{'a1':{'sql':'bool', 'primary_key':False}, 'b2':{'sql
↪':'int'}})
sage: D.create_table('simon',{'a1':{'sql':'bool', 'primary_key':False}, 'b2':{'sql
↪':'int'}})
Traceback (most recent call last):
...
ValueError: Database already has a table named simon
sage: SQLQuery(D, {'table_name':'simon', 'display_cols':['a1'], 'expression':['c1
```

(continues on next page)

(continued from previous page)

```
↪','>',2]})
Traceback (most recent call last):
    ...
ValueError: Table has no column c1
```

```
>>> from sage.all import *
>>> D = SQLDatabase()
>>> r = SQLQuery(D, {'table_name':'simon', 'display_cols':['a1'], 'expression':[
↪'b2','<=', Integer(3)]})
Traceback (most recent call last):
...
ValueError: Database has no table simon
>>> D.create_table('simon',{'a1':{'sql':'bool', 'primary_key':False}, 'b2':{'sql':
↪'int'}})
>>> D.create_table('simon',{'a1':{'sql':'bool', 'primary_key':False}, 'b2':{'sql':
↪'int'}})
Traceback (most recent call last):
...
ValueError: Database already has a table named simon
>>> SQLQuery(D, {'table_name':'simon', 'display_cols':['a1'], 'expression':['c1',
↪'>',Integer(2)]})
Traceback (most recent call last):
    ...
ValueError: Table has no column c1
```

get_query_string()

Return a copy of the query string.

EXAMPLES:

```
sage: G = GraphDatabase()
sage: q = 'SELECT graph_id,graph6,num_vertices,num_edges FROM graph_data␣
↪WHERE graph_id<=(?) AND num_vertices=(?)'
sage: param = (22,5)
sage: SQLQuery(G,q,param).get_query_string()
'SELECT graph_id,graph6,num_vertices,num_edges FROM graph_data
WHERE graph_id<=(?) AND num_vertices=(?)'
sage: r = 'SELECT graph6 FROM graph_data WHERE num_vertices<=3'
sage: SQLQuery(G,r).get_query_string()
'SELECT graph6 FROM graph_data WHERE num_vertices<=3'
```

```
>>> from sage.all import *
>>> G = GraphDatabase()
>>> q = 'SELECT graph_id,graph6,num_vertices,num_edges FROM graph_data WHERE␣
↪graph_id<=(?) AND num_vertices=(?)'
>>> param = (Integer(22),Integer(5))
>>> SQLQuery(G,q,param).get_query_string()
'SELECT graph_id,graph6,num_vertices,num_edges FROM graph_data
WHERE graph_id<=(?) AND num_vertices=(?)'
>>> r = 'SELECT graph6 FROM graph_data WHERE num_vertices<=3'
>>> SQLQuery(G,r).get_query_string()
'SELECT graph6 FROM graph_data WHERE num_vertices<=3'
```

intersect(*other*, *join_table=None*, *join_dict=None*, *in_place=False*)

Return a new `SQLQuery` that is the intersection of `self` and `other`. `join_table` and `join_dict` can be `None` iff the two queries only search one table in the database. All display columns will be concatenated in order: `self` display cols + other display cols.

INPUT:

- `other` – the `SQLQuery` to intersect with
- `join_table` – base table to join on (This table should have at least one column in each table to join on).
- `join_dict` – dictionary that represents the join structure for the new query. (Must include a mapping for all tables, including those previously joined in either query). Structure is given by:

```
{'join_table1':('corr_base_col1', 'col1'), 'join_table2':('corr_base_col2
↪', 'col2')}
```

where `join_table1` is to be joined with `join_table` on `join_table.corr_base_col1 = join_table1.col1`

EXAMPLES:

```
sage: DB = SQLDatabase()
sage: DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
sage: DB.create_table('lucy',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
sage: DB.add_data('simon', [(0,5),(1,4)])
sage: DB.add_data('lucy', [(1,1),(1,4)])
sage: q = SQLQuery(DB, {'table_name':'lucy', 'display_cols':['b2'],
↪'expression':['a1','=',1]})
sage: r = SQLQuery(DB, {'table_name':'simon', 'display_cols':['a1'],
↪'expression':['b2','<=', 6]})
sage: s = q.intersect(r, 'simon', {'lucy':('a1','a1')})
sage: s.get_query_string()
'SELECT lucy.b2,simon.a1 FROM simon INNER JOIN lucy ON
simon.a1=lucy.a1 WHERE ( lucy.a1 = ? ) AND ( simon.b2 <= ? )'
sage: s.query_results()
[(1, 1), (4, 1)]
sage: s = q.intersect(r)
Traceback (most recent call last):
...
ValueError: Input queries query different tables but join
    parameters are NoneType
sage: s.__query_string__ == q.__query_string__
False
sage: q.intersect(r, 'simon', {'lucy':('a1','a1')}, True)
sage: q.__query_string__ == s.__query_string__
True
```

```
>>> from sage.all import *
>>> DB = SQLDatabase()
>>> DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
>>> DB.create_table('lucy',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
>>> DB.add_data('simon', [(Integer(0),Integer(5)),(Integer(1),Integer(4))])
>>> DB.add_data('lucy', [(Integer(1),Integer(1)),(Integer(1),Integer(4))])
>>> q = SQLQuery(DB, {'table_name':'lucy', 'display_cols':['b2'], 'expression
```

(continues on next page)

(continued from previous page)

```
↪':['a1','=',Integer(1)]})
>>> r = SQLQuery(DB, {'table_name':'simon', 'display_cols':['a1'], 'expression
↪':['b2','<=', Integer(6)]})
>>> s = q.intersect(r, 'simon', {'lucy':('a1','a1')})
>>> s.get_query_string()
'SELECT lucy.b2,simon.a1 FROM simon INNER JOIN lucy ON
simon.a1=lucy.a1 WHERE ( lucy.a1 = ? ) AND ( simon.b2 <= ? )'
>>> s.query_results()
[(1, 1), (4, 1)]
>>> s = q.intersect(r)
Traceback (most recent call last):
...
ValueError: Input queries query different tables but join
    parameters are NoneType
>>> s.__query_string__ == q.__query_string__
False
>>> q.intersect(r, 'simon', {'lucy':('a1','a1')}, True)
>>> q.__query_string__ == s.__query_string__
True
```

query_results()

Run the query by executing the `__query_string__`. Return the results of the query in a list.

EXAMPLES:

```
sage: G = GraphDatabase()
sage: q = 'SELECT graph_id,graph6,num_vertices,num_edges FROM graph_data␣
↪WHERE graph_id<=(?) AND num_vertices=(?)'
sage: param = (22,5)
sage: Q = SQLQuery(G,q,param)
sage: Q.query_results()
[(18, 'D??', 5, 0), (19, 'D?C', 5, 1), (20, 'D?K', 5, 2),
 (21, 'D@O', 5, 2), (22, 'D?[', 5, 3)]
sage: R = SQLQuery(G,{'table_name':'graph_data', 'display_cols':['graph6'],
↪'expression':['num_vertices','=',4]})
sage: R.query_results()
[('C?',), ('C@',), ('CB',), ('CK',), ('CF',), ('CJ',),
 ('CL',), ('CN',), ('C]',), ('C^',), ('C~',)]
```

```
>>> from sage.all import *
>>> G = GraphDatabase()
>>> q = 'SELECT graph_id,graph6,num_vertices,num_edges FROM graph_data WHERE␣
↪graph_id<=(?) AND num_vertices=(?)'
>>> param = (Integer(22),Integer(5))
>>> Q = SQLQuery(G,q,param)
>>> Q.query_results()
[(18, 'D??', 5, 0), (19, 'D?C', 5, 1), (20, 'D?K', 5, 2),
 (21, 'D@O', 5, 2), (22, 'D?[', 5, 3)]
>>> R = SQLQuery(G,{'table_name':'graph_data', 'display_cols':['graph6'],
↪'expression':['num_vertices','=',Integer(4)]})
>>> R.query_results()
[('C?',), ('C@',), ('CB',), ('CK',), ('CF',), ('CJ',),
```

(continues on next page)

(continued from previous page)

```
 ('CL',), ('CN',), ('C]',), ('C^',), ('C~',)]
```

show(***kwds*)

Display the result of the query in table format.

KEYWORDS:

- `max_field_size` – how wide each field can be
- `format_cols` – dictionary that allows the user to specify the format of a column's output by supplying a function. The format of the dictionary is:

```
{'column_name':(lambda x: format_function(x))}
```

- `plot_cols` – dictionary that allows the user to specify that a plot should be drawn by the object generated by a data slice. Note that plot kwds are permitted. The dictionary format is:

```
{'column_name':((lambda x: plot_function(x)), **kwds)}
```

- `relabel_cols` – dictionary to specify a relabeling of column headers. The dictionary format is:

```
{'table_name':{'old_col_name':'new_col_name'}}
```

- `id_col` – reference to a column that can be used as an object identifier for each row

EXAMPLES:

```
sage: DB = SQLDatabase()
sage: DB.create_table('simon',{'a1':{'sql':'bool', 'primary_key':False}, 'b2':
↪{'sql':'int'}})
sage: DB.add_data('simon',[(0,0),(1,1),(1,2)])
sage: r = SQLQuery(DB, {'table_name':'simon', 'display_cols':['a1'],
↪'expression':['b2','<=', 6]})
sage: r.show()
a1
--------------------
0
1
1
sage: D = GraphDatabase()
sage: from sage.graphs.graph_database import valid_kwds, data_to_degseq
sage: relabel = {}
sage: for col in valid_kwds:
....:     relabel[col] = ' '.join([word.capitalize() for word in col.split('_
↪')])
sage: q = GraphQuery(display_cols=['graph6','degree_sequence'], num_
↪vertices=4)
sage: SQLQuery.show(q, format_cols={'degree_sequence':(lambda x,y: data_to_
↪degseq(x,y))}, relabel_cols=relabel, id_col='graph6')
Graph6               Degree Sequence
-----------------------------------------
C?                   [0, 0, 0, 0]
C@                   [0, 0, 1, 1]
CB                   [0, 1, 1, 2]
CF                   [1, 1, 1, 3]
```

(continues on next page)

(continued from previous page)

```
CJ                    [0, 2, 2, 2]
CK                    [1, 1, 1, 1]
CL                    [1, 1, 2, 2]
CN                    [1, 2, 2, 3]
C]                    [2, 2, 2, 2]
C^                    [2, 2, 3, 3]
C~                    [3, 3, 3, 3]
```

```
>>> from sage.all import *
>>> DB = SQLDatabase()
>>> DB.create_table('simon',{'a1':{'sql':'bool', 'primary_key':False}, 'b2':{
↪'sql':'int'}})
>>> DB.add_data('simon',[(Integer(0),Integer(0)),(Integer(1),Integer(1)),
↪(Integer(1),Integer(2))])
>>> r = SQLQuery(DB, {'table_name':'simon', 'display_cols':['a1'], 'expression
↪':['b2','<=', Integer(6)]})
>>> r.show()
a1
--------------------
0
1
1
>>> D = GraphDatabase()
>>> from sage.graphs.graph_database import valid_kwds, data_to_degseq
>>> relabel = {}
>>> for col in valid_kwds:
...     relabel[col] = ' '.join([word.capitalize() for word in col.split('_
↪')])
>>> q = GraphQuery(display_cols=['graph6','degree_sequence'], num_
↪vertices=Integer(4))
>>> SQLQuery.show(q, format_cols={'degree_sequence':(lambda x,y: data_to_
↪degseq(x,y))}, relabel_cols=relabel, id_col='graph6')
Graph6                Degree Sequence
----------------------------------------
C?                    [0, 0, 0, 0]
C@                    [0, 0, 1, 1]
CB                    [0, 1, 1, 2]
CF                    [1, 1, 1, 3]
CJ                    [0, 2, 2, 2]
CK                    [1, 1, 1, 1]
CL                    [1, 1, 2, 2]
CN                    [1, 2, 2, 3]
C]                    [2, 2, 2, 2]
C^                    [2, 2, 3, 3]
C~                    [3, 3, 3, 3]
```

union(*other*, *join_table=None*, *join_dict=None*, *in_place=False*)

Return a new `SQLQuery` that is the union of `self` and `other`. `join_table` and `join_dict` can be `None` iff the two queries only search one table in the database. All display columns will be concatenated in order: `self` display cols + other display cols.

INPUT:

- `other` – the `SQLQuery` to union with
- `join_table` – base table to join on (This table should have at least one column in each table to join on).
- `join_dict` – dictionary that represents the join structure for the new query. (Must include a mapping for all tables, including those previously joined in either query). Structure is given by:

```
{'join_table1':('corr_base_col1', 'col1'), 'join_table2':('corr_base_col2
↪', 'col2')}
```

where `join_table1` is to be joined with `join_table` on `join_table.corr_base_col1=join_table1.col1`

EXAMPLES:

```
sage: DB = SQLDatabase()
sage: DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
sage: DB.create_table('lucy',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
sage: DB.add_data('simon', [(0,5),(1,4)])
sage: DB.add_data('lucy', [(1,1),(1,4)])
sage: q = SQLQuery(DB, {'table_name':'lucy', 'display_cols':['b2'],
↪'expression':['a1','=',1]})
sage: r = SQLQuery(DB, {'table_name':'simon', 'display_cols':['a1'],
↪'expression':['b2','<=', 6]})
sage: s = q.union(r, 'simon', {'lucy':('a1','a1')})
sage: s.get_query_string()
'SELECT lucy.b2,simon.a1 FROM simon INNER JOIN lucy ON
simon.a1=lucy.a1 WHERE ( lucy.a1 = ? ) OR ( simon.b2 <= ? )'
sage: s.query_results()
[(1, 1), (4, 1)]
```

```
>>> from sage.all import *
>>> DB = SQLDatabase()
>>> DB.create_table('simon',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
>>> DB.create_table('lucy',{'a1':{'sql':'bool'}, 'b2':{'sql':'int'}})
>>> DB.add_data('simon', [(Integer(0),Integer(5)),(Integer(1),Integer(4))])
>>> DB.add_data('lucy', [(Integer(1),Integer(1)),(Integer(1),Integer(4))])
>>> q = SQLQuery(DB, {'table_name':'lucy', 'display_cols':['b2'], 'expression
↪':['a1','=',Integer(1)]})
>>> r = SQLQuery(DB, {'table_name':'simon', 'display_cols':['a1'], 'expression
↪':['b2','<=', Integer(6)]})
>>> s = q.union(r, 'simon', {'lucy':('a1','a1')})
>>> s.get_query_string()
'SELECT lucy.b2,simon.a1 FROM simon INNER JOIN lucy ON
simon.a1=lucy.a1 WHERE ( lucy.a1 = ? ) OR ( simon.b2 <= ? )'
>>> s.query_results()
[(1, 1), (4, 1)]
```

`sage.databases.sql_db.`**`construct_skeleton`**(*database*)

Construct a database skeleton from the sql data. The skeleton data structure is a triple indexed dictionary of the following format:

```
| - skeleton -- a triple-indexed dictionary
|   - outer key -- table name
```

(continues on next page)

(continued from previous page)

```
|     - inner key -- column name
|       - inner inner key -- one of the following:
|         - ``primary_key`` -- boolean, whether column has been set as
            primary key
|         - ``index`` -- boolean, whether column has been set as index
|         - ``unique`` -- boolean, whether column has been set as unique
|         - ``sql`` -- one of ``'TEXT'``, ``'BOOLEAN'``, ``'INTEGER'``,
            ``'REAL'``, or other user defined type
```

An example skeleton of a database with one table, that table with one column:

```
{'table1':{'col1':{'primary_key':False, 'unique': True, 'index':True, 'sql':'REAL
↪'}}}
```

EXAMPLES:

```
sage: G = SQLDatabase(GraphDatabase().__dblocation__, False)
sage: from sage.databases.sql_db import construct_skeleton
sage: sorted(construct_skeleton(G))
['aut_grp', 'degrees', 'graph_data', 'misc', 'spectrum']
```

```
>>> from sage.all import *
>>> G = SQLDatabase(GraphDatabase().__dblocation__, False)
>>> from sage.databases.sql_db import construct_skeleton
>>> sorted(construct_skeleton(G))
['aut_grp', 'degrees', 'graph_data', 'misc', 'spectrum']
```

sage.databases.sql_db.**regexp**(*expr*, *item*)

Function to define regular expressions in pysqlite.

OUTPUT:

- `True` if parameter `item` matches the regular expression parameter `expr`
- `False` otherwise (i.e.: no match)

REFERENCES:

- [Ha2005]

EXAMPLES:

```
sage: from sage.databases.sql_db import regexp
sage: regexp('.s.*','cs')
True
sage: regexp('.s.*','ccs')
False
sage: regexp('.s.*','cscccc')
True
```

```
>>> from sage.all import *
>>> from sage.databases.sql_db import regexp
>>> regexp('.s.*','cs')
True
>>> regexp('.s.*','ccs')
```

(continues on next page)

(continued from previous page)

```
False
>>> regexp('.s.*','cscccc')
True
```

sage.databases.sql_db.**verify_column**(*col_dict*)

Verify that `col_dict` is in proper format, and return a dict with default values filled in. Proper format:

```
{'primary_key':False, 'index':False, 'unique': False, 'sql':'REAL'}
```

EXAMPLES:

```
sage: from sage.databases.sql_db import verify_column
sage: col = {'sql':'BOOLEAN'}
sage: verify_column(col)
{'index': False, 'primary_key': False, 'sql': 'BOOLEAN', 'unique': False}
sage: col = {'primary_key':True, 'sql':'INTEGER'}
sage: verify_column(col)
{'index': True, 'primary_key': True, 'sql': 'INTEGER', 'unique': True}
sage: verify_column({})
Traceback (most recent call last):
...
ValueError: SQL type must be declared, e.g. {'sql':'REAL'}.
```

```
>>> from sage.all import *
>>> from sage.databases.sql_db import verify_column
>>> col = {'sql':'BOOLEAN'}
>>> verify_column(col)
{'index': False, 'primary_key': False, 'sql': 'BOOLEAN', 'unique': False}
>>> col = {'primary_key':True, 'sql':'INTEGER'}
>>> verify_column(col)
{'index': True, 'primary_key': True, 'sql': 'INTEGER', 'unique': True}
>>> verify_column({})
Traceback (most recent call last):
...
ValueError: SQL type must be declared, e.g. {'sql':'REAL'}.
```

sage.databases.sql_db.**verify_operator**(*operator*)

Check that `operator` is one of the allowed strings. Legal operators include the following strings:

- '='
- '<='
- '>='
- '<'
- '>'
- '<>'
- 'like'
- 'regexp'
- 'is null'

- 'is not null'

EXAMPLES:

```
sage: from sage.databases.sql_db import verify_operator
sage: verify_operator('<=')
True
sage: verify_operator('regexp')
True
sage: verify_operator('is null')
True
sage: verify_operator('not_an_operator')
Traceback (most recent call last):
...
TypeError: not_an_operator is not a legal operator.
```

```
>>> from sage.all import *
>>> from sage.databases.sql_db import verify_operator
>>> verify_operator('<=')
True
>>> verify_operator('regexp')
True
>>> verify_operator('is null')
True
>>> verify_operator('not_an_operator')
Traceback (most recent call last):
...
TypeError: not_an_operator is not a legal operator.
```

sage.databases.sql_db.**verify_type**(*type*)

Verify that the specified `type` is one of the allowed strings.

EXAMPLES:

```
sage: from sage.databases.sql_db import verify_type
sage: verify_type('INT')
True
sage: verify_type('int')
True
sage: verify_type('float')
Traceback (most recent call last):
...
TypeError: float is not a legal type.
```

```
>>> from sage.all import *
>>> from sage.databases.sql_db import verify_type
>>> verify_type('INT')
True
>>> verify_type('int')
True
>>> verify_type('float')
Traceback (most recent call last):
...
TypeError: float is not a legal type.
```

2.5 Warnings

2.5.1 Stopgaps

exception sage.misc.stopgap.**StopgapWarning**

Bases: Warning

This class is used to warn users of a known issue that may produce mathematically incorrect results.

sage.misc.stopgap.**set_state**(*mode*)

Enable or disable the stopgap warnings.

INPUT:

- mode – boolean; if True, enable stopgaps. Otherwise, disable.

EXAMPLES:

```
sage: import sage.misc.stopgap
sage: sage.misc.stopgap.set_state(False)
sage: sage.misc.stopgap.stopgap("Displays nothing.", 12345)
sage: sage.misc.stopgap.set_state(True)
sage: sage.misc.stopgap.stopgap("Displays something.", 123456)
doctest:...:
...StopgapWarning: Displays something.
This issue is being tracked at https://github.com/sagemath/sage/issues/123456.
sage: sage.misc.stopgap.set_state(False)
```

```
>>> from sage.all import *
>>> import sage.misc.stopgap
>>> sage.misc.stopgap.set_state(False)
>>> sage.misc.stopgap.stopgap("Displays nothing.", Integer(12345))
>>> sage.misc.stopgap.set_state(True)
>>> sage.misc.stopgap.stopgap("Displays something.", Integer(123456))
doctest:...:
...StopgapWarning: Displays something.
This issue is being tracked at https://github.com/sagemath/sage/issues/123456.
>>> sage.misc.stopgap.set_state(False)
```

sage.misc.stopgap.**stopgap**(*message*, *issue_no*)

Issue a stopgap warning.

INPUT:

- message – an explanation of how an incorrect answer might be produced
- issue_no – integer; giving the number of the Github issue tracking the underlying issue

EXAMPLES:

```
sage: import sage.misc.stopgap
sage: sage.misc.stopgap.set_state(True)
sage: sage.misc.stopgap.stopgap("Computation of heights on elliptic curves over␣
↪number fields can return very imprecise results.", 12509)
doctest:...
...StopgapWarning: Computation of heights on elliptic curves over number fields␣
↪can return very imprecise results.
```

(continues on next page)

(continued from previous page)

```
This issue is being tracked at https://github.com/sagemath/sage/issues/12509.
sage: sage.misc.stopgap.stopgap("This is not printed", 12509)
sage: sage.misc.stopgap.set_state(False)  # so rest of doctesting fine
```

```
>>> from sage.all import *
>>> import sage.misc.stopgap
>>> sage.misc.stopgap.set_state(True)
>>> sage.misc.stopgap.stopgap("Computation of heights on elliptic curves over␣
↪number fields can return very imprecise results.", Integer(12509))
doctest:...
...StopgapWarning: Computation of heights on elliptic curves over number fields␣
↪can return very imprecise results.
This issue is being tracked at https://github.com/sagemath/sage/issues/12509.
>>> sage.misc.stopgap.stopgap("This is not printed", Integer(12509))
>>> sage.misc.stopgap.set_state(False)  # so rest of doctesting fine
```

2.5.2 Handling Superseded Functionality

The main mechanism in Sage to deal with superseded functionality is to add a deprecation warning. This will be shown once, the first time that the deprecated function is called.

Note that all doctests in the following use the github issue number Issue #13109, which is where this mandatory argument to *deprecation()* was introduced.

Functions and classes

class sage.misc.superseded.**DeprecatedFunctionAlias**(*issue_number*, *func*, *module*, *instance=None*, *unbound=None*)

Bases: object

A wrapper around methods or functions which automatically prints a deprecation message. See *deprecated_function_alias()*.

AUTHORS:

- Florent Hivert (2009-11-23), with the help of Mike Hansen.
- Luca De Feo (2011-07-11), printing the full module path when different from old path

sage.misc.superseded.**deprecated_function_alias**(*issue_number*, *func*)

Create an aliased version of a function or a method which raises a deprecation warning message.

If f is a function or a method, write `g = deprecated_function_alias(issue_number, f)` to make a deprecated aliased version of f.

INPUT:

- `issue_number` – integer; the github issue number where the deprecation is introduced
- `func` – the function or method to be aliased

EXAMPLES:

```
sage: from sage.misc.superseded import deprecated_function_alias
sage: g = deprecated_function_alias(13109, number_of_partitions)                #␣
↪needs sage.combinat sage.libs.flint
sage: g(5)                                                                      #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.combinat sage.libs.flint
doctest:...: DeprecationWarning: g is deprecated.
Please use sage.combinat.partition.number_of_partitions instead.
See https://github.com/sagemath/sage/issues/13109 for details.
7
```

```
>>> from sage.all import *
>>> from sage.misc.superseded import deprecated_function_alias
>>> g = deprecated_function_alias(Integer(13109), number_of_partitions)␣
↪     # needs sage.combinat sage.libs.flint
>>> g(Integer(5))␣
↪     # needs sage.combinat sage.libs.flint
doctest:...: DeprecationWarning: g is deprecated.
Please use sage.combinat.partition.number_of_partitions instead.
See https://github.com/sagemath/sage/issues/13109 for details.
7
```

This also works for methods:

```
sage: class cls():
....:     def new_meth(self): return 42
....:     old_meth = deprecated_function_alias(13109, new_meth)
sage: cls().old_meth()
doctest:...: DeprecationWarning: old_meth is deprecated. Please use new_meth␣
↪instead.
See https://github.com/sagemath/sage/issues/13109 for details.
42
```

```
>>> from sage.all import *
>>> class cls():
...     def new_meth(self): return Integer(42)
...     old_meth = deprecated_function_alias(Integer(13109), new_meth)
>>> cls().old_meth()
doctest:...: DeprecationWarning: old_meth is deprecated. Please use new_meth␣
↪instead.
See https://github.com/sagemath/sage/issues/13109 for details.
42
```

Issue #11585:

```
sage: def a(): pass
sage: b = deprecated_function_alias(13109, a)
sage: b()
doctest:...: DeprecationWarning: b is deprecated. Please use a instead.
See https://github.com/sagemath/sage/issues/13109 for details.
```

```
>>> from sage.all import *
>>> def a(): pass
>>> b = deprecated_function_alias(Integer(13109), a)
>>> b()
doctest:...: DeprecationWarning: b is deprecated. Please use a instead.
See https://github.com/sagemath/sage/issues/13109 for details.
```

AUTHORS:

- Florent Hivert (2009-11-23), with the help of Mike Hansen.
- Luca De Feo (2011-07-11), printing the full module path when different from old path

sage.misc.superseded.**deprecation**(*issue_number*, *message*, *stacklevel=4*)

Issue a deprecation warning.

INPUT:

- `issue_number` – integer; the github issue number where the deprecation is introduced
- `message` – string; an explanation why things are deprecated and by what it should be replaced
- `stack_level` – integer (default: 4); this is passed on to `warnings.warn()`

EXAMPLES:

```
sage: def foo():
....:  sage.misc.superseded.deprecation(13109, 'the function foo is replaced by␣
↪bar')
sage: foo()
doctest:...: DeprecationWarning: the function foo is replaced by bar
See https://github.com/sagemath/sage/issues/13109 for details.
```

```
>>> from sage.all import *
>>> def foo():
...  sage.misc.superseded.deprecation(Integer(13109), 'the function foo is␣
↪replaced by bar')
>>> foo()
doctest:...: DeprecationWarning: the function foo is replaced by bar
See https://github.com/sagemath/sage/issues/13109 for details.
```

See also

experimental(), *warning()*.

sage.misc.superseded.**deprecation_cython**(*issue_number*, *message*, *stacklevel=3*)

Issue a deprecation warning – for use in cython functions.

class sage.misc.superseded.**experimental**(*issue_number*, *stacklevel=4*)

Bases: `object`

A decorator which warns about the experimental/unstable status of the decorated class/method/function.

INPUT:

- `issue_number` – integer; the github issue number where this code was introduced
- `stack_level` – integer (default: 4); this is passed on to `warnings.warn()`

EXAMPLES:

```
sage: @sage.misc.superseded.experimental(issue_number=79997)
....: def foo(*args, **kwargs):
....:     print("{} {}".format(args, kwargs))
sage: foo(7, what='Hello')
```

(continues on next page)

(continued from previous page)

```
doctest:...: FutureWarning: This class/method/function is
marked as experimental. It, its functionality or its
interface might change without a formal deprecation.
See https://github.com/sagemath/sage/issues/79997 for details.
(7,) {'what': 'Hello'}
```

```
>>> from sage.all import *
>>> @sage.misc.superseded.experimental(issue_number=Integer(79997))
... def foo(*args, **kwargs):
...     print("{} {}".format(args, kwargs))
>>> foo(Integer(7), what='Hello')
doctest:...: FutureWarning: This class/method/function is
marked as experimental. It, its functionality or its
interface might change without a formal deprecation.
See https://github.com/sagemath/sage/issues/79997 for details.
(7,) {'what': 'Hello'}
```

```
sage: class bird(SageObject):
....:     @sage.misc.superseded.experimental(issue_number=99999)
....:     def __init__(self, *args, **kwargs):
....:         print("piep {} {}".format(args, kwargs))
sage: _ = bird(99)
doctest:...: FutureWarning: This class/method/function is
marked as experimental. It, its functionality or its
interface might change without a formal deprecation.
See https://github.com/sagemath/sage/issues/99999 for details.
piep (99,) {}
```

```
>>> from sage.all import *
>>> class bird(SageObject):
...     @sage.misc.superseded.experimental(issue_number=Integer(99999))
...     def __init__(self, *args, **kwargs):
...         print("piep {} {}".format(args, kwargs))
>>> _ = bird(Integer(99))
doctest:...: FutureWarning: This class/method/function is
marked as experimental. It, its functionality or its
interface might change without a formal deprecation.
See https://github.com/sagemath/sage/issues/99999 for details.
piep (99,) {}
```

See also

experimental(), *warning()*, *deprecation()*.

sage.misc.superseded.**experimental_warning**(*issue_number*, *message*, *stacklevel=4*)

Issue a warning that the functionality or class is experimental and might change in future.

INPUT:

- `issue_number` – integer; the github issue number where the experimental functionality was introduced
- `message` – string; an explanation what is going on

- `stack_level` – integer (default: 4); this is passed on to `warnings.warn()`

EXAMPLES:

```
sage: def foo():
....:     sage.misc.superseded.experimental_warning(
....:         66666, 'This function is experimental and '
....:                'might change in future.')
sage: foo()
doctest:...: FutureWarning: This function is experimental and
might change in future.
See https://github.com/sagemath/sage/issues/66666 for details.
```

```
>>> from sage.all import *
>>> def foo():
...     sage.misc.superseded.experimental_warning(
...         Integer(66666), 'This function is experimental and '
...                'might change in future.')
>>> foo()
doctest:...: FutureWarning: This function is experimental and
might change in future.
See https://github.com/sagemath/sage/issues/66666 for details.
```

See also

`mark_as_experimental`, *`warning()`*, *`deprecation()`*.

`sage.misc.superseded.`**`warning`**(*issue_number*, *message*, *warning_class=<class 'Warning'>*, *stacklevel=3*)

Issue a warning.

INPUT:

- `issue_number` – integer; the github issue number where the deprecation is introduced
- `message` – string; an explanation what is going on
- `warning_class` – (default: `Warning`) a class inherited from a Python `Warning`
- `stack_level` – integer (default: 3); this is passed on to `warnings.warn()`

EXAMPLES:

```
sage: def foo():
....:     sage.misc.superseded.warning(
....:         99999,
....:         'The syntax will change in future.',
....:         FutureWarning)
sage: foo()
doctest:...: FutureWarning: The syntax will change in future.
See https://github.com/sagemath/sage/issues/99999 for details.
```

```
>>> from sage.all import *
>>> def foo():
...     sage.misc.superseded.warning(
...         Integer(99999),
```

(continues on next page)

(continued from previous page)

```
...         'The syntax will change in future.',
...         FutureWarning)
>>> foo()
doctest:...: FutureWarning: The syntax will change in future.
See https://github.com/sagemath/sage/issues/99999 for details.
```

See also

deprecation(), *experimental()*, exceptions.Warning.

2.6 Miscellaneous Useful Functions

2.6.1 Miscellaneous functions

AUTHORS:

- William Stein
- William Stein (2006-04-26): added workaround for Windows where most users' home directory has a space in it.
- Robert Bradshaw (2007-09-20): Ellipsis range/iterator.

class sage.misc.misc.**BackslashOperator**

Bases: object

Implement Matlab-style backslash operator for solving systems:

```
A \ b
```

The preparser converts this to multiplications using `BackslashOperator()`.

EXAMPLES:

```
sage: preparse("A \\ matrix(QQ,2,1,[1/3,'2/3'])")
"A  * BackslashOperator() * matrix(QQ,Integer(2),Integer(1),[Integer(1)/
↪Integer(3),'2/3'])"
sage: preparse("A \\ matrix(QQ,2,1,[1/3,2*3])")
'A  * BackslashOperator() * matrix(QQ,Integer(2),Integer(1),[Integer(1)/
↪Integer(3),Integer(2)*Integer(3)])'
sage: preparse("A \\ B + C")
'A  * BackslashOperator() * B + C'
sage: preparse("A \\ eval('C+D')")
"A  * BackslashOperator() * eval('C+D')"
sage: preparse("A \\ x / 5")
'A  * BackslashOperator() * x / Integer(5)'
sage: preparse("A^3 \\ b")
'A**Integer(3)  * BackslashOperator() * b'
```

```
>>> from sage.all import *
>>> preparse("A \\ matrix(QQ,2,1,[1/3,'2/3'])")
"A  * BackslashOperator() * matrix(QQ,Integer(2),Integer(1),[Integer(1)/
↪Integer(3),'2/3'])"
>>> preparse("A \\ matrix(QQ,2,1,[1/3,2*3])")
```

(continues on next page)

(continued from previous page)

```
'A  * BackslashOperator() * matrix(QQ,Integer(2),Integer(1),[Integer(1)/
↪Integer(3),Integer(2)*Integer(3)])'
>>> preparse("A \\ B + C")
'A  * BackslashOperator() * B + C'
>>> preparse("A \\ eval('C+D')")
"A  * BackslashOperator() * eval('C+D')"
>>> preparse("A \\ x / 5")
'A  * BackslashOperator() * x / Integer(5)'
>>> preparse("A^3 \\ b")
'A**Integer(3)  * BackslashOperator() * b'
```

sage.misc.misc.**compose**(f, g)

Return the composition of one-variable functions: $f \circ g$.

See also *nest()*

INPUT:

- f – a function of one variable
- g – another function of one variable

OUTPUT: a function, such that compose(f,g)(x) = f(g(x))

EXAMPLES:

```
sage: def g(x): return 3*x
sage: def f(x): return x + 1
sage: h1 = compose(f, g)
sage: h2 = compose(g, f)
sage: _ = var('x')                                                    #␣
↪needs sage.symbolic
sage: h1(x)                                                           #␣
↪needs sage.symbolic
3*x + 1
sage: h2(x)                                                           #␣
↪needs sage.symbolic
3*x + 3
```

```
>>> from sage.all import *
>>> def g(x): return Integer(3)*x
>>> def f(x): return x + Integer(1)
>>> h1 = compose(f, g)
>>> h2 = compose(g, f)
>>> _ = var('x')                                                      #␣
↪needs sage.symbolic
>>> h1(x)                                                             #␣
↪needs sage.symbolic
3*x + 1
>>> h2(x)                                                             #␣
↪needs sage.symbolic
3*x + 3
```

```
sage: _ = function('f g')                                                    #␣
↪needs sage.symbolic
sage: _ = var('x')                                                           #␣
↪needs sage.symbolic
sage: compose(f, g)(x)                                                       #␣
↪needs sage.symbolic
f(g(x))
```

```
>>> from sage.all import *
>>> _ = function('f g')                                                      #␣
↪needs sage.symbolic
>>> _ = var('x')                                                            #␣
↪needs sage.symbolic
>>> compose(f, g)(x)                                                        #␣
↪needs sage.symbolic
f(g(x))
```

sage.misc.misc.**exactly_one_is_true**(*iterable*)

Return whether exactly one element of `iterable` evaluates `True`.

INPUT:

- `iterable` – an iterable object

OUTPUT: boolean

Note

The implementation is suggested by stackoverflow entry.

EXAMPLES:

```
sage: from sage.misc.misc import exactly_one_is_true
sage: exactly_one_is_true([])
False
sage: exactly_one_is_true([True])
True
sage: exactly_one_is_true([False])
False
sage: exactly_one_is_true([True, True])
False
sage: exactly_one_is_true([False, True])
True
sage: exactly_one_is_true([True, False, True])
False
sage: exactly_one_is_true([False, True, False])
True
```

```
>>> from sage.all import *
>>> from sage.misc.misc import exactly_one_is_true
>>> exactly_one_is_true([])
False
>>> exactly_one_is_true([True])
```

(continues on next page)

(continued from previous page)

```
True
>>> exactly_one_is_true([False])
False
>>> exactly_one_is_true([True, True])
False
>>> exactly_one_is_true([False, True])
True
>>> exactly_one_is_true([True, False, True])
False
>>> exactly_one_is_true([False, True, False])
True
```

sage.misc.misc.**exists**(*S*, *P*)

If S contains an element x such that P(x) is `True`, this function returns `True` and the element x. Otherwise it returns `False` and None.

Note that this function is NOT suitable to be used in an if-statement or in any place where a boolean expression is expected. For those situations, use the Python built-in

any(P(x) for x in S)

INPUT:

- `S` – object (that supports enumeration)
- `P` – function that returns `True` or `False`

OUTPUT:

- `bool` – whether or not P is `True` for some element x of S
- `object` – x

EXAMPLES: lambda functions are very useful when using the exists function:

```
sage: exists([1,2,5], lambda x : x > 7)
(False, None)
sage: exists([1,2,5], lambda x : x > 3)
(True, 5)
```

```
>>> from sage.all import *
>>> exists([Integer(1),Integer(2),Integer(5)], lambda x : x > Integer(7))
(False, None)
>>> exists([Integer(1),Integer(2),Integer(5)], lambda x : x > Integer(3))
(True, 5)
```

The following example is similar to one in the MAGMA handbook. We check whether certain integers are a sum of two (small) cubes:

```
sage: cubes = [t**3 for t in range(-10,11)]
sage: exists([(x,y) for x in cubes for y in cubes], lambda v : v[0]+v[1] == 218)
(True, (-125, 343))
sage: exists([(x,y) for x in cubes for y in cubes], lambda v : v[0]+v[1] == 219)
(False, None)
```

```
>>> from sage.all import *
>>> cubes = [t**Integer(3) for t in range(-Integer(10),Integer(11))]
>>> exists([(x,y) for x in cubes for y in cubes], lambda v :␣
↪v[Integer(0)]+v[Integer(1)] == Integer(218))
(True, (-125, 343))
>>> exists([(x,y) for x in cubes for y in cubes], lambda v :␣
↪v[Integer(0)]+v[Integer(1)] == Integer(219))
(False, None)
```

sage.misc.misc.**forall**(*S*, *P*)

If $P(x)$ is true every x in S, return `True` and `None`. If there is some element x in S such that P is not `True`, return `False` and x.

Note that this function is NOT suitable to be used in an if-statement or in any place where a boolean expression is expected. For those situations, use the Python built-in

all(P(x) for x in S)

INPUT:

- `S` – object (that supports enumeration)
- `P` – function that returns `True` or `False`

OUTPUT:

- `bool` – whether or not P is `True` for all elements of S
- `object` – x

EXAMPLES: lambda functions are very useful when using the forall function. As a toy example we test whether certain integers are greater than 3.

```
sage: forall([1,2,5], lambda x : x > 3)
(False, 1)
sage: forall([1,2,5], lambda x : x > 0)
(True, None)
```

```
>>> from sage.all import *
>>> forall([Integer(1),Integer(2),Integer(5)], lambda x : x > Integer(3))
(False, 1)
>>> forall([Integer(1),Integer(2),Integer(5)], lambda x : x > Integer(0))
(True, None)
```

Next we ask whether every positive integer less than 100 is a product of at most 2 prime factors:

```
sage: forall(range(1,100),  lambda n : len(factor(n)) <= 2)
(False, 30)
```

```
>>> from sage.all import *
>>> forall(range(Integer(1),Integer(100)),  lambda n : len(factor(n)) <=␣
↪Integer(2))
(False, 30)
```

The answer is no, and 30 is a counterexample. However, every positive integer 100 is a product of at most 3 primes.

```
sage: forall(range(1,100),  lambda n : len(factor(n)) <= 3)
(True, None)
```

```
>>> from sage.all import *
>>> forall(range(Integer(1),Integer(100)),  lambda n : len(factor(n)) <=␣
↪Integer(3))
(True, None)
```

sage.misc.misc.**get_main_globals**()

Return the main global namespace.

EXAMPLES:

```
sage: from sage.misc.misc import get_main_globals
sage: G = get_main_globals()
sage: bla = 1
sage: G['bla']
1
sage: bla = 2
sage: G['bla']
2
sage: G['ble'] = 5
sage: ble
5
```

```
>>> from sage.all import *
>>> from sage.misc.misc import get_main_globals
>>> G = get_main_globals()
>>> bla = Integer(1)
>>> G['bla']
1
>>> bla = Integer(2)
>>> G['bla']
2
>>> G['ble'] = Integer(5)
>>> ble
5
```

This is analogous to `globals()`, except that it can be called from any function, even if it is in a Python module:

```
sage: def f():
....:     G = get_main_globals()
....:     assert G['bli'] == 14
....:     G['blo'] = 42
sage: bli = 14
sage: f()
sage: blo
42
```

```
>>> from sage.all import *
>>> def f():
...     G = get_main_globals()
```

(continues on next page)

(continued from previous page)

```
...     assert G['bli'] == Integer(14)
...     G['blo'] = Integer(42)
>>> bli = Integer(14)
>>> f()
>>> blo
42
```

ALGORITHM:

The main global namespace is discovered by going up the frame stack until the frame for the `__main__` module is found. Should this frame not be found (this should not occur in normal operation), an exception "ValueError: call stack is not deep enough" will be raised by `_getframe`.

See *`inject_variable_test()`* for a real test that this works within deeply nested calls in a function defined in a Python module.

`sage.misc.misc.`**`increase_recursion_limit`**(**args*, ***kwds*)

Context manager to temporarily change the Python maximum recursion depth.

INPUT:

- `increment` – increment to add to the current limit

EXAMPLES:

```
sage: from sage.misc.misc import increase_recursion_limit
sage: def rec(n): None if n == 0 else rec(n-1)
sage: rec(10000)
Traceback (most recent call last):
...
RecursionError: maximum recursion depth exceeded...
sage: with increase_recursion_limit(10000): rec(10000)
sage: rec(10000)
Traceback (most recent call last):
...
RecursionError: maximum recursion depth exceeded...
```

```
>>> from sage.all import *
>>> from sage.misc.misc import increase_recursion_limit
>>> def rec(n): None if n == Integer(0) else rec(n-Integer(1))
>>> rec(Integer(10000))
Traceback (most recent call last):
...
RecursionError: maximum recursion depth exceeded...
>>> with increase_recursion_limit(Integer(10000)): rec(Integer(10000))
>>> rec(Integer(10000))
Traceback (most recent call last):
...
RecursionError: maximum recursion depth exceeded...
```

`sage.misc.misc.`**`inject_variable`**(*name*, *value*, *warn=True*)

Inject a variable into the main global namespace.

INPUT:

- `name` – string

- `value` – anything
- `warn` – boolean (default: `False`)

EXAMPLES:

```
sage: from sage.misc.misc import inject_variable
sage: inject_variable("a", 314)
sage: a
314
```

```
>>> from sage.all import *
>>> from sage.misc.misc import inject_variable
>>> inject_variable("a", Integer(314))
>>> a
314
```

A warning is issued the first time an existing value is overwritten:

```
sage: inject_variable("a", 271)
doctest:...: RuntimeWarning: redefining global value `a`
sage: a
271
sage: inject_variable("a", 272)
sage: a
272
```

```
>>> from sage.all import *
>>> inject_variable("a", Integer(271))
doctest:...: RuntimeWarning: redefining global value `a`
>>> a
271
>>> inject_variable("a", Integer(272))
>>> a
272
```

That's because warn seem to not reissue twice the same warning:

```
sage: from warnings import warn
sage: warn("blah")
doctest:...: UserWarning: blah
sage: warn("blah")
```

```
>>> from sage.all import *
>>> from warnings import warn
>>> warn("blah")
doctest:...: UserWarning: blah
>>> warn("blah")
```

Warnings can be disabled:

```
sage: b = 3
sage: inject_variable("b", 42, warn=False)
sage: b
42
```

```
>>> from sage.all import *
>>> b = Integer(3)
>>> inject_variable("b", Integer(42), warn=False)
>>> b
42
```

Use with care!

sage.misc.misc.**inject_variable_test**(*name*, *value*, *depth*)

A function for testing deep calls to `inject_variable`.

EXAMPLES:

```
sage: from sage.misc.misc import inject_variable_test
sage: inject_variable_test("a0", 314, 0)
sage: a0
314
sage: inject_variable_test("a1", 314, 1)
sage: a1
314
sage: inject_variable_test("a2", 314, 2)
sage: a2
314
sage: inject_variable_test("a2", 271, 2)
doctest:...: RuntimeWarning: redefining global value `a2`
sage: a2
271
```

```
>>> from sage.all import *
>>> from sage.misc.misc import inject_variable_test
>>> inject_variable_test("a0", Integer(314), Integer(0))
>>> a0
314
>>> inject_variable_test("a1", Integer(314), Integer(1))
>>> a1
314
>>> inject_variable_test("a2", Integer(314), Integer(2))
>>> a2
314
>>> inject_variable_test("a2", Integer(271), Integer(2))
doctest:...: RuntimeWarning: redefining global value `a2`
>>> a2
271
```

sage.misc.misc.**is_in_string**(*line*, *pos*)

Return `True` if the character at position `pos` in `line` occurs within a string.

EXAMPLES:

```
sage: from sage.misc.misc import is_in_string
sage: line = 'test(\'#\')'
sage: is_in_string(line, line.rfind('#'))
True
```

(continues on next page)

(continued from previous page)

```
sage: is_in_string(line, line.rfind(')'))
False
```

```
>>> from sage.all import *
>>> from sage.misc.misc import is_in_string
>>> line = 'test(\'#\')'
>>> is_in_string(line, line.rfind('#'))
True
>>> is_in_string(line, line.rfind(')'))
False
```

sage.misc.misc.**is_iterator**(*it*)

Test if it is an iterator.

The mantra `if hasattr(it, 'next')` was used to tests if `it` is an iterator. This is not quite correct since `it` could have a `next` methods with a different semantic.

EXAMPLES:

```
sage: it = iter([1,2,3])
sage: is_iterator(it)
True

sage: class wrong():
....:     def __init__(self): self.n = 5
....:     def __next__(self):
....:         self.n -= 1
....:         if self.n == 0: raise StopIteration
....:         return self.n
sage: x = wrong()
sage: is_iterator(x)
False
sage: list(x)
Traceback (most recent call last):
...
TypeError: 'wrong' object is not iterable

sage: class good(wrong):
....:     def __iter__(self): return self
sage: x = good()
sage: is_iterator(x)
True
sage: list(x)
[4, 3, 2, 1]

sage: P = Partitions(3)                                                    #␣
↪needs sage.combinat
sage: is_iterator(P)                                                       #␣
↪needs sage.combinat
False
sage: is_iterator(iter(P))                                                 #␣
↪needs sage.combinat
True
```

```
>>> from sage.all import *
>>> it = iter([Integer(1),Integer(2),Integer(3)])
>>> is_iterator(it)
True

>>> class wrong():
...     def __init__(self): self.n = Integer(5)
...     def __next__(self):
...         self.n -= Integer(1)
...         if self.n == Integer(0): raise StopIteration
...         return self.n
>>> x = wrong()
>>> is_iterator(x)
False
>>> list(x)
Traceback (most recent call last):
...
TypeError: 'wrong' object is not iterable

>>> class good(wrong):
...     def __iter__(self): return self
>>> x = good()
>>> is_iterator(x)
True
>>> list(x)
[4, 3, 2, 1]

>>> P = Partitions(Integer(3))
↪     # needs sage.combinat
>>> is_iterator(P)
↪needs sage.combinat
False
>>> is_iterator(iter(P))
↪needs sage.combinat
True
```

sage.misc.misc.**is_sublist**(*X*, *Y*)

Test whether `X` is a sublist of `Y`.

EXAMPLES:

```
sage: from sage.misc.misc import is_sublist
sage: S = [1, 7, 3, 4, 18]
sage: is_sublist([1, 7], S)
True
sage: is_sublist([1, 3, 4], S)
True
sage: is_sublist([1, 4, 3], S)
False
sage: is_sublist(S, S)
True
```

```
>>> from sage.all import *
>>> from sage.misc.misc import is_sublist
>>> S = [Integer(1), Integer(7), Integer(3), Integer(4), Integer(18)]
>>> is_sublist([Integer(1), Integer(7)], S)
True
>>> is_sublist([Integer(1), Integer(3), Integer(4)], S)
True
>>> is_sublist([Integer(1), Integer(4), Integer(3)], S)
False
>>> is_sublist(S, S)
True
```

sage.misc.misc.**nest**(f, n, x)

Return $f(f(...f(x)...))$, where the composition occurs n times.

See also *compose()* and self_compose()

INPUT:

- f – a function of one variable
- n – nonnegative integer
- x – any input for f

OUTPUT: $f(f(...f(x)...))$, where the composition occurs n times

EXAMPLES:

```
sage: def f(x): return x^2 + 1
sage: x = var('x')                                                          #␣
↪needs sage.symbolic
sage: nest(f, 3, x)                                                         #␣
↪needs sage.symbolic
((x^2 + 1)^2 + 1)^2 + 1
```

```
>>> from sage.all import *
>>> def f(x): return x**Integer(2) + Integer(1)
>>> x = var('x')                                                          #␣
↪needs sage.symbolic
>>> nest(f, Integer(3), x)                                                 ␣
↪     # needs sage.symbolic
((x^2 + 1)^2 + 1)^2 + 1
```

```
sage: _ = function('f')                                                     #␣
↪needs sage.symbolic
sage: _ = var('x')                                                          #␣
↪needs sage.symbolic
sage: nest(f, 10, x)                                                        #␣
↪needs sage.symbolic
f(f(f(f(f(f(f(f(f(f(x)))))))))
```

```
>>> from sage.all import *
>>> _ = function('f')                                                     #␣
↪needs sage.symbolic
```

(continues on next page)

(continued from previous page)

```
>>> _ = var('x')                                                    #␣
↪needs sage.symbolic
>>> nest(f, Integer(10), x)                                          ␣
↪     # needs sage.symbolic
f(f(f(f(f(f(f(f(f(f(x)))))))))
```

```
sage: _ = function('f')                                             #␣
↪needs sage.symbolic
sage: _ = var('x')                                                  #␣
↪needs sage.symbolic
sage: nest(f, 0, x)                                                 #␣
↪needs sage.symbolic
x
```

```
>>> from sage.all import *
>>> _ = function('f')                                               #␣
↪needs sage.symbolic
>>> _ = var('x')                                                    #␣
↪needs sage.symbolic
>>> nest(f, Integer(0), x)                                           ␣
↪     # needs sage.symbolic
x
```

sage.misc.misc.**newton_method_sizes**(N)

Return a sequence of integers $1 = a_1 \leq a_2 \leq \cdots \leq a_n = N$ such that $a_j = \lceil a_{j+1}/2 \rceil$ for all j.

This is useful for Newton-style algorithms that double the precision at each stage. For example if you start at precision 1 and want an answer to precision 17, then it's better to use the intermediate stages 1, 2, 3, 5, 9, 17 than to use 1, 2, 4, 8, 16, 17.

INPUT:

- `N` – positive integer

EXAMPLES:

```
sage: newton_method_sizes(17)
[1, 2, 3, 5, 9, 17]
sage: newton_method_sizes(16)
[1, 2, 4, 8, 16]
sage: newton_method_sizes(1)
[1]
```

```
>>> from sage.all import *
>>> newton_method_sizes(Integer(17))
[1, 2, 3, 5, 9, 17]
>>> newton_method_sizes(Integer(16))
[1, 2, 4, 8, 16]
>>> newton_method_sizes(Integer(1))
[1]
```

AUTHORS:

- David Harvey (2006-09-09)

sage.misc.misc.**pad_zeros**(*s*, *size=3*)

EXAMPLES:

```
sage: pad_zeros(100)
'100'
sage: pad_zeros(10)
'010'
sage: pad_zeros(10, 5)
'00010'
sage: pad_zeros(389, 5)
'00389'
sage: pad_zeros(389, 10)
'0000000389'
```

```
>>> from sage.all import *
>>> pad_zeros(Integer(100))
'100'
>>> pad_zeros(Integer(10))
'010'
>>> pad_zeros(Integer(10), Integer(5))
'00010'
>>> pad_zeros(Integer(389), Integer(5))
'00389'
>>> pad_zeros(Integer(389), Integer(10))
'0000000389'
```

sage.misc.misc.**random_sublist**(*X*, *s*)

Return a pseudo-random sublist of the list X where the probability of including a particular element is s.

INPUT:

- X – list
- s – floating point number between 0 and 1

OUTPUT: list

EXAMPLES:

```
sage: from sage.misc.misc import is_sublist
sage: S = [1,7,3,4,18]
sage: sublist = random_sublist(S, 0.5); sublist  # random
[1, 3, 4]
sage: is_sublist(sublist, S)
True
sage: sublist = random_sublist(S, 0.5); sublist  # random
[1, 3]
sage: is_sublist(sublist, S)
True
```

```
>>> from sage.all import *
>>> from sage.misc.misc import is_sublist
>>> S = [Integer(1),Integer(7),Integer(3),Integer(4),Integer(18)]
>>> sublist = random_sublist(S, RealNumber('0.5')); sublist  # random
[1, 3, 4]
```

(continues on next page)

(continued from previous page)

```
>>> is_sublist(sublist, S)
True
>>> sublist = random_sublist(S, RealNumber('0.5')); sublist  # random
[1, 3]
>>> is_sublist(sublist, S)
True
```

sage.misc.misc.**run_once**(*func*)

Run a function (successfully) only once.

The running can be reset by setting the `has_run` attribute to False

sage.misc.misc.**some_tuples**(*elements*, *repeat*, *bound*, *max_samples=None*)

Return an iterator over at most `bound` number of `repeat`-tuples of `elements`.

INPUT:

- `elements` – an iterable
- `repeat` – integer (default: `None`); the length of the tuples to be returned. If `None`, just returns entries from `elements`.
- `bound` – the maximum number of tuples returned (ignored if `max_samples` given)
- `max_samples` – nonnegative integer (default: `None`); if given, then a sample of the possible tuples will be returned, instead of the first few in the standard order

OUTPUT:

If `max_samples` is not provided, an iterator over the first `bound` tuples of length `repeat`, in the standard nested-for-loop order.

If `max_samples` is provided, a list of at most `max_samples` tuples, sampled uniformly from the possibilities. In this case, `elements` must be finite.

sage.misc.misc.**strunc**(*s*, *n=60*)

Truncate at first space after position n, adding '…' if nontrivial truncation.

sage.misc.misc.**try_read**(*obj*, *splitlines=False*)

Determine if a given object is a readable file-like object and if so read and return its contents.

That is, the object has a callable method named `read()` which takes no arguments (except `self`) then the method is executed and the contents are returned.

Alternatively, if the `splitlines=True` is given, first `splitlines()` is tried, then if that fails `read().splitlines()`.

If either method fails, `None` is returned.

INPUT:

- `obj` – typically a $file$ or $io.BaseIO$ object, but any other object with a `read()` method is accepted
- `splitlines` – boolean (default: `False`); if `True`, return a list of lines instead of a string

EXAMPLES:

```
sage: import io
sage: filename = tmp_filename()
sage: from sage.misc.misc import try_read
sage: with open(filename, 'w') as fobj:
```

(continues on next page)

(continued from previous page)

```
....:     _ = fobj.write('a\nb\nc')
sage: with open(filename) as fobj:
....:     print(try_read(fobj))
a
b
c
sage: with open(filename) as fobj:
....:     try_read(fobj, splitlines=True)
['a\n', 'b\n', 'c']
```

```
>>> from sage.all import *
>>> import io
>>> filename = tmp_filename()
>>> from sage.misc.misc import try_read
>>> with open(filename, 'w') as fobj:
...     _ = fobj.write('a\nb\nc')
>>> with open(filename) as fobj:
...     print(try_read(fobj))
a
b
c
>>> with open(filename) as fobj:
...     try_read(fobj, splitlines=True)
['a\n', 'b\n', 'c']
```

The following example is identical to the above example on Python 3, but different on Python 2 where `open != io.open`:

```
sage: with io.open(filename) as fobj:
....:     print(try_read(fobj))
a
b
c
```

```
>>> from sage.all import *
>>> with io.open(filename) as fobj:
...     print(try_read(fobj))
a
b
c
```

I/O buffers:

```
sage: buf = io.StringIO('a\nb\nc')
sage: print(try_read(buf))
a
b
c
sage: _ = buf.seek(0); try_read(buf, splitlines=True)
['a\n', 'b\n', 'c']
sage: buf = io.BytesIO(b'a\nb\nc')
sage: try_read(buf) == b'a\nb\nc'
```

(continues on next page)

(continued from previous page)

```
True
sage: _ = buf.seek(0)
sage: try_read(buf, splitlines=True) == [b'a\n', b'b\n', b'c']
True
```

```
>>> from sage.all import *
>>> buf = io.StringIO('a\nb\nc')
>>> print(try_read(buf))
a
b
c
>>> _ = buf.seek(Integer(0)); try_read(buf, splitlines=True)
['a\n', 'b\n', 'c']
>>> buf = io.BytesIO(b'a\nb\nc')
>>> try_read(buf) == b'a\nb\nc'
True
>>> _ = buf.seek(Integer(0))
>>> try_read(buf, splitlines=True) == [b'a\n', b'b\n', b'c']
True
```

Custom readable:

```
sage: class MyFile():
....:     def read(self): return 'Hello world!'
sage: try_read(MyFile())
'Hello world!'
sage: try_read(MyFile(), splitlines=True)
['Hello world!']
```

```
>>> from sage.all import *
>>> class MyFile():
...     def read(self): return 'Hello world!'
>>> try_read(MyFile())
'Hello world!'
>>> try_read(MyFile(), splitlines=True)
['Hello world!']
```

Not readable:

```
sage: try_read(1) is None
True
```

```
>>> from sage.all import *
>>> try_read(Integer(1)) is None
True
```

sage.misc.misc.**word_wrap**(*s*, *ncols=85*)

2.6.2 Miscellaneous functions (Cython)

This file contains support for products, running totals, balanced sums, and also a function to flush output from external library calls.

AUTHORS:

- William Stein (2005)
- Joel B. Mohler (2007-10-03): Reimplemented in Cython and optimized
- Robert Bradshaw (2007-10-26): Balanced product tree, other optimizations, (lazy) generator support
- Robert Bradshaw (2008-03-26): Balanced product tree for generators and iterators
- Stefan van Zwam (2013-06-06): Added bitset tests, some docstring cleanup

class sage.misc.misc_c.**NonAssociative**(*left*, *right=None*)

Bases: object

This class is to test the balance nature of prod.

EXAMPLES:

```
sage: from sage.misc.misc_c import NonAssociative
sage: L = [NonAssociative(label) for label in 'abcdef']
sage: prod(L)
(((a*b)*c)*((d*e)*f))
sage: L = [NonAssociative(label) for label in range(20)]
sage: prod(L, recursion_cutoff=5)
((((((0*1)*2)*3)*4)*((((5*6)*7)*8)*9))*(((((10*11)*12)*13)*14)*((((15*16)*17)*18)*
↪19)))
sage: prod(L, recursion_cutoff=1)
(((((0*1)*2)*(3*4))*(((5*6)*7)*(8*9)))*((((10*11)*12)*(13*14))*(((15*16)*17)*(18*1
↪9))))
sage: L = [NonAssociative(label) for label in range(14)]
sage: prod(L, recursion_cutoff=1)
((((0*1)*(2*3))*((4*5)*6))*(((7*8)*(9*10))*((11*12)*13)))
```

```
>>> from sage.all import *
>>> from sage.misc.misc_c import NonAssociative
>>> L = [NonAssociative(label) for label in 'abcdef']
>>> prod(L)
(((a*b)*c)*((d*e)*f))
>>> L = [NonAssociative(label) for label in range(Integer(20))]
>>> prod(L, recursion_cutoff=Integer(5))
((((((0*1)*2)*3)*4)*((((5*6)*7)*8)*9))*(((((10*11)*12)*13)*14)*((((15*16)*17)*18)*
↪19)))
>>> prod(L, recursion_cutoff=Integer(1))
(((((0*1)*2)*(3*4))*(((5*6)*7)*(8*9)))*((((10*11)*12)*(13*14))*(((15*16)*17)*(18*1
↪9))))
>>> L = [NonAssociative(label) for label in range(Integer(14))]
>>> prod(L, recursion_cutoff=Integer(1))
((((0*1)*(2*3))*((4*5)*6))*(((7*8)*(9*10))*((11*12)*13)))
```

sage.misc.misc_c.**balanced_sum**(*x*, *z=None*, *recursion_cutoff=5*)

Return the sum of the elements in the list x. If optional argument z is not given, start the sum with the first element of the list, otherwise use z. The empty product is the int 0 if z is not specified, and is z if given. The sum is

computed recursively, where the sum is split up if the list is greater than recursion_cutoff. recursion_cutoff must be at least 3.

This assumes that your addition is associative; we do not promise which end of the list we start at.

EXAMPLES:

```
sage: balanced_sum([1,2,34])
37
sage: balanced_sum([2,3], 5)
10
sage: balanced_sum((1,2,3), 5)
11
```

```
>>> from sage.all import *
>>> balanced_sum([Integer(1),Integer(2),Integer(34)])
37
>>> balanced_sum([Integer(2),Integer(3)], Integer(5))
10
>>> balanced_sum((Integer(1),Integer(2),Integer(3)), Integer(5))
11
```

Order should be preserved:

```
sage: balanced_sum([[i] for i in range(10)], [], recursion_cutoff=3)
[0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
```

```
>>> from sage.all import *
>>> balanced_sum([[i] for i in range(Integer(10))], [], recursion_
↪cutoff=Integer(3))
[0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
```

We make copies when appropriate so that we do not accidentally modify the arguments:

```
sage: list(range(10^5))==balanced_sum([[i] for i in range(10^5)], [])
True
sage: list(range(10^5))==balanced_sum([[i] for i in range(10^5)], [])
True
```

```
>>> from sage.all import *
>>> list(range(Integer(10)**Integer(5)))==balanced_sum([[i] for i in␣
↪range(Integer(10)**Integer(5))], [])
True
>>> list(range(Integer(10)**Integer(5)))==balanced_sum([[i] for i in␣
↪range(Integer(10)**Integer(5))], [])
True
```

AUTHORS:

- Joel B. Mohler (2007-10-03): Reimplemented in Cython and optimized
- Robert Bradshaw (2007-10-26): Balanced product tree, other optimizations, (lazy) generator support

sage.misc.misc_c.**cyflush**()

Flush any output left over from external library calls.

Starting with Python 3, some output from external libraries (like FLINT) is not flushed, and so if a doctest produces such output, the output may not appear until a later doctest. See Issue #28649.

Use this function after a doctest which produces potentially unflushed output to force it to be flushed.

EXAMPLES:

```
sage: R.<t> = QQ[]
sage: t^(sys.maxsize//2)                                                    #␣
↪needs sage.libs.flint
Traceback (most recent call last):
...
RuntimeError: FLINT exception
sage: from sage.misc.misc_c import cyflush
sage: cyflush()
...
```

```
>>> from sage.all import *
>>> R = QQ['t']; (t,) = R._first_ngens(1)
>>> t**(sys.maxsize//Integer(2))                                            ␣
↪      # needs sage.libs.flint
Traceback (most recent call last):
...
RuntimeError: FLINT exception
>>> from sage.misc.misc_c import cyflush
>>> cyflush()
...
```

sage.misc.misc_c.**iterator_prod**(*L*, *z=None*)

Attempt to do a balanced product of an arbitrary and unknown length sequence (such as a generator). Intermediate multiplications are always done with subproducts of the same size (measured by the number of original factors) up until the iterator terminates. This is optimal when and only when there are exactly a power of two number of terms.

A StopIteration is raised if the iterator is empty and z is not given.

EXAMPLES:

```
sage: from sage.misc.misc_c import iterator_prod
sage: iterator_prod(1..5)
120
sage: iterator_prod([], z='anything')
'anything'

sage: from sage.misc.misc_c import NonAssociative
sage: L = [NonAssociative(label) for label in 'abcdef']
sage: iterator_prod(L)
(((a*b)*(c*d))*(e*f))
```

```
>>> from sage.all import *
>>> from sage.misc.misc_c import iterator_prod
>>> iterator_prod(ellipsis_iter(Integer(1),Ellipsis,Integer(5)))
120
>>> iterator_prod([], z='anything')
'anything'
```

(continues on next page)

(continued from previous page)

```
>>> from sage.misc.misc_c import NonAssociative
>>> L = [NonAssociative(label) for label in 'abcdef']
>>> iterator_prod(L)
(((a*b)*(c*d))*(e*f))
```

sage.misc.misc_c.**normalize_index**(*key*, *size*)

Normalize an index key and return a valid index or list of indices within the range(0, size).

INPUT:

- `key` – the index key, which can be either an integer, a tuple/list of integers, or a slice
- `size` – the size of the collection

OUTPUT:

A tuple (SINGLE, VALUE), where SINGLE is True (i.e., 1) if VALUE is an integer and False (i.e., 0) if VALUE is a list.

EXAMPLES:

```
sage: from sage.misc.misc_c import normalize_index
sage: normalize_index(-6,5)
Traceback (most recent call last):
...
IndexError: index out of range
sage: normalize_index(-5,5)
[0]
sage: normalize_index(-4,5)
[1]
sage: normalize_index(-3,5)
[2]
sage: normalize_index(-2,5)
[3]
sage: normalize_index(-1,5)
[4]
sage: normalize_index(0,5)
[0]
sage: normalize_index(1,5)
[1]
sage: normalize_index(2,5)
[2]
sage: normalize_index(3,5)
[3]
sage: normalize_index(4,5)
[4]
sage: normalize_index(5,5)
Traceback (most recent call last):
...
IndexError: index out of range
sage: normalize_index(6,5)
Traceback (most recent call last):
...
IndexError: index out of range
```

(continues on next page)

(continued from previous page)

```
sage: normalize_index((4,-6),5)
Traceback (most recent call last):
...
IndexError: index out of range
sage: normalize_index((-2,3),5)
[3, 3]
sage: normalize_index((5,0),5)
Traceback (most recent call last):
...
IndexError: index out of range
sage: normalize_index((-5,2),5)
[0, 2]
sage: normalize_index((0,-2),5)
[0, 3]
sage: normalize_index((2,-3),5)
[2, 2]
sage: normalize_index((3,3),5)
[3, 3]
sage: normalize_index((-2,-5),5)
[3, 0]
sage: normalize_index((-2,-4),5)
[3, 1]
sage: normalize_index([-2,-1,3],5)
[3, 4, 3]
sage: normalize_index([4,2,1],5)
[4, 2, 1]
sage: normalize_index([-2,-3,-4],5)
[3, 2, 1]
sage: normalize_index([3,-2,-3],5)
[3, 3, 2]
sage: normalize_index([-5,2,-3],5)
[0, 2, 2]
sage: normalize_index([4,4,-5],5)
[4, 4, 0]
sage: s=slice(None,None,None); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(None,None,-2); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(None,None,4); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(None,-2,None); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(None,-2,-2); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(None,-2,4); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(None,4,None); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(None,4,-2); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(None,4,4); normalize_index(s,5)==list(range(5))[s]
True
```

(continues on next page)

(continued from previous page)

```
sage: s=slice(-2,None,None); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(-2,None,-2); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(-2,None,4); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(-2,-2,None); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(-2,-2,-2); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(-2,-2,4); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(-2,4,None); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(-2,4,-2); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(-2,4,4); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(4,None,None); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(4,None,-2); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(4,None,4); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(4,-2,None); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(4,-2,-2); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(4,-2,4); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(4,4,None); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(4,4,-2); normalize_index(s,5)==list(range(5))[s]
True
sage: s=slice(4,4,4); normalize_index(s,5)==list(range(5))[s]
True
```

```
>>> from sage.all import *
>>> from sage.misc.misc_c import normalize_index
>>> normalize_index(-Integer(6),Integer(5))
Traceback (most recent call last):
...
IndexError: index out of range
>>> normalize_index(-Integer(5),Integer(5))
[0]
>>> normalize_index(-Integer(4),Integer(5))
[1]
>>> normalize_index(-Integer(3),Integer(5))
[2]
>>> normalize_index(-Integer(2),Integer(5))
[3]
>>> normalize_index(-Integer(1),Integer(5))
```

(continues on next page)

(continued from previous page)

```
[4]
>>> normalize_index(Integer(0),Integer(5))
[0]
>>> normalize_index(Integer(1),Integer(5))
[1]
>>> normalize_index(Integer(2),Integer(5))
[2]
>>> normalize_index(Integer(3),Integer(5))
[3]
>>> normalize_index(Integer(4),Integer(5))
[4]
>>> normalize_index(Integer(5),Integer(5))
Traceback (most recent call last):
...
IndexError: index out of range
>>> normalize_index(Integer(6),Integer(5))
Traceback (most recent call last):
...
IndexError: index out of range
>>> normalize_index((Integer(4),-Integer(6)),Integer(5))
Traceback (most recent call last):
...
IndexError: index out of range
>>> normalize_index((-Integer(2),Integer(3)),Integer(5))
[3, 3]
>>> normalize_index((Integer(5),Integer(0)),Integer(5))
Traceback (most recent call last):
...
IndexError: index out of range
>>> normalize_index((-Integer(5),Integer(2)),Integer(5))
[0, 2]
>>> normalize_index((Integer(0),-Integer(2)),Integer(5))
[0, 3]
>>> normalize_index((Integer(2),-Integer(3)),Integer(5))
[2, 2]
>>> normalize_index((Integer(3),Integer(3)),Integer(5))
[3, 3]
>>> normalize_index((-Integer(2),-Integer(5)),Integer(5))
[3, 0]
>>> normalize_index((-Integer(2),-Integer(4)),Integer(5))
[3, 1]
>>> normalize_index([-Integer(2),-Integer(1),Integer(3)],Integer(5))
[3, 4, 3]
>>> normalize_index([Integer(4),Integer(2),Integer(1)],Integer(5))
[4, 2, 1]
>>> normalize_index([-Integer(2),-Integer(3),-Integer(4)],Integer(5))
[3, 2, 1]
>>> normalize_index([Integer(3),-Integer(2),-Integer(3)],Integer(5))
[3, 3, 2]
>>> normalize_index([-Integer(5),Integer(2),-Integer(3)],Integer(5))
[0, 2, 2]
>>> normalize_index([Integer(4),Integer(4),-Integer(5)],Integer(5))
```

(continues on next page)

(continued from previous page)

```
[4, 4, 0]
>>> s=slice(None,None,None); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(None,None,-Integer(2)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(None,None,Integer(4)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(None,-Integer(2),None); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(None,-Integer(2),-Integer(2)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(None,-Integer(2),Integer(4)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(None,Integer(4),None); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(None,Integer(4),-Integer(2)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(None,Integer(4),Integer(4)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(-Integer(2),None,None); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(-Integer(2),None,-Integer(2)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(-Integer(2),None,Integer(4)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(-Integer(2),-Integer(2),None); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(-Integer(2),-Integer(2),-Integer(2)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(-Integer(2),-Integer(2),Integer(4)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(-Integer(2),Integer(4),None); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(-Integer(2),Integer(4),-Integer(2)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
```

(continues on next page)

(continued from previous page)

```
>>> s=slice(-Integer(2),Integer(4),Integer(4)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(Integer(4),None,None); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(Integer(4),None,-Integer(2)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(Integer(4),None,Integer(4)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(Integer(4),-Integer(2),None); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(Integer(4),-Integer(2),-Integer(2)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(Integer(4),-Integer(2),Integer(4)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(Integer(4),Integer(4),None); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(Integer(4),Integer(4),-Integer(2)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
>>> s=slice(Integer(4),Integer(4),Integer(4)); normalize_index(s,
↪Integer(5))==list(range(Integer(5)))[s]
True
```

sage.misc.misc_c.**prod**(*x*, *z=None*, *recursion_cutoff=5*)

Return the product of the elements in the list x.

If optional argument z is not given, start the product with the first element of the list, otherwise use z. The empty product is the int 1 if z is not specified, and is z if given.

This assumes that your multiplication is associative; we do not promise which end of the list we start at.

See also

For the symbolic product function, see `sage.calculus.calculus.symbolic_product()`.

EXAMPLES:

```
sage: prod([1,2,34])
68
sage: prod([2,3], 5)
30
sage: prod((1,2,3), 5)
30
sage: F = factor(-2006); F
```

(continues on next page)

(continued from previous page)

```
-1 * 2 * 17 * 59
sage: prod(F)
-2006
```

```
>>> from sage.all import *
>>> prod([Integer(1),Integer(2),Integer(34)])
68
>>> prod([Integer(2),Integer(3)], Integer(5))
30
>>> prod((Integer(1),Integer(2),Integer(3)), Integer(5))
30
>>> F = factor(-Integer(2006)); F
-1 * 2 * 17 * 59
>>> prod(F)
-2006
```

AUTHORS:

- Joel B. Mohler (2007-10-03): Reimplemented in Cython and optimized
- Robert Bradshaw (2007-10-26): Balanced product tree, other optimizations, (lazy) generator support
- Robert Bradshaw (2008-03-26): Balanced product tree for generators and iterators

sage.misc.misc_c.**running_total**(*L*, *start=None*)

Return a list where the i-th entry is the sum of all entries up to (and including) i.

INPUT:

- `L` – the list
- `start` – (optional) a default start value

EXAMPLES:

```
sage: running_total(range(5))
[0, 1, 3, 6, 10]
sage: running_total("abcdef")
['a', 'ab', 'abc', 'abcd', 'abcde', 'abcdef']
sage: running_total("abcdef", start="%")
['%a', '%ab', '%abc', '%abcd', '%abcde', '%abcdef']
sage: running_total([1..10], start=100)
[101, 103, 106, 110, 115, 121, 128, 136, 145, 155]
sage: running_total([])
[]
```

```
>>> from sage.all import *
>>> running_total(range(Integer(5)))
[0, 1, 3, 6, 10]
>>> running_total("abcdef")
['a', 'ab', 'abc', 'abcd', 'abcde', 'abcdef']
>>> running_total("abcdef", start="%")
['%a', '%ab', '%abc', '%abcd', '%abcde', '%abcdef']
>>> running_total((ellipsis_range(Integer(1),Ellipsis,Integer(10))),␣
↪start=Integer(100))
```

(continues on next page)

(continued from previous page)

```
[101, 103, 106, 110, 115, 121, 128, 136, 145, 155]
>>> running_total([])
[]
```

class sage.misc.misc_c.**sized_iter**

Bases: object

Wrapper for an iterator to verify that it has a specified length.

INPUT:

- iterable – object to be iterated over
- length – (optional) the required length; if this is not given, then len(iterable) will be used

If the iterable does not have the given length, a ValueError is raised during iteration.

EXAMPLES:

```
sage: from sage.misc.misc_c import sized_iter
sage: list(sized_iter(range(4)))
[0, 1, 2, 3]
sage: list(sized_iter(range(4), 4))
[0, 1, 2, 3]
sage: list(sized_iter(range(5), 4))
Traceback (most recent call last):
...
ValueError: sequence too long (expected length 4, got more)
sage: list(sized_iter(range(3), 4))
Traceback (most recent call last):
...
ValueError: sequence too short (expected length 4, got 3)
```

```
>>> from sage.all import *
>>> from sage.misc.misc_c import sized_iter
>>> list(sized_iter(range(Integer(4))))
[0, 1, 2, 3]
>>> list(sized_iter(range(Integer(4)), Integer(4)))
[0, 1, 2, 3]
>>> list(sized_iter(range(Integer(5)), Integer(4)))
Traceback (most recent call last):
...
ValueError: sequence too long (expected length 4, got more)
>>> list(sized_iter(range(Integer(3)), Integer(4)))
Traceback (most recent call last):
...
ValueError: sequence too short (expected length 4, got 3)
```

If the iterable is too long, we get the error on the last entry:

```
sage: it = sized_iter(range(5), 2)
sage: next(it)
0
sage: next(it)
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
ValueError: sequence too long (expected length 2, got more)
```

```
>>> from sage.all import *
>>> it = sized_iter(range(Integer(5)), Integer(2))
>>> next(it)
0
>>> next(it)
Traceback (most recent call last):
...
ValueError: sequence too long (expected length 2, got more)
```

When the expected length is zero, the iterator is checked on construction:

```
sage: list(sized_iter([], 0))
[]
sage: sized_iter([1], 0)
Traceback (most recent call last):
...
ValueError: sequence too long (expected length 0, got more)
```

```
>>> from sage.all import *
>>> list(sized_iter([], Integer(0)))
[]
>>> sized_iter([Integer(1)], Integer(0))
Traceback (most recent call last):
...
ValueError: sequence too long (expected length 0, got more)
```

If no `length` is given, the iterable must implement `__len__`:

```
sage: sized_iter(x for x in range(4))
Traceback (most recent call last):
...
TypeError: object of type 'generator' has no len()
```

```
>>> from sage.all import *
>>> sized_iter(x for x in range(Integer(4)))
Traceback (most recent call last):
...
TypeError: object of type 'generator' has no len()
```

2.6.3 Verbosity System and Logging in SageMath

Howto: Logging

Using Python's Logging Module

Import it:

```
sage: import logging
sage: logging.basicConfig()  # only needed once
```

```
>>> from sage.all import *
>>> import logging
>>> logging.basicConfig()  # only needed once
```

Setting the level:

```
sage: logging.getLogger().setLevel(logging.INFO)
```

```
>>> from sage.all import *
>>> logging.getLogger().setLevel(logging.INFO)
```

Log something:

```
sage: logger = logging.getLogger(__name__)
sage: logger.info('Hello. I am talking to you.')
INFO:__main__:Hello. I am talking to you.
```

```
>>> from sage.all import *
>>> logger = logging.getLogger(__name__)
>>> logger.info('Hello. I am talking to you.')
INFO:__main__:Hello. I am talking to you.
```

If we haven't set the logging level to `logging.INFO`, then the previous wouldn't have been shown.

```
sage: logger.debug('Hello. I am really talking a lot.')
```

```
>>> from sage.all import *
>>> logger.debug('Hello. I am really talking a lot.')
```

The latter is not shown as the current logging level is only `logging.INFO` and not `logging.DEBUG`.

Reset the level:

```
sage: logging.getLogger().setLevel(logging.WARNING)
```

```
>>> from sage.all import *
>>> logging.getLogger().setLevel(logging.WARNING)
```

Warnings are still shown at this default level (`logging.WARNING`):

```
sage: logger.warning('Hello. I am warning you.')
WARNING:__main__:Hello. I am warning you.
```

```
>>> from sage.all import *
>>> logger.warning('Hello. I am warning you.')
WARNING:__main__:Hello. I am warning you.
```

And that's all.

There are a lot more features, see Logging facility for Python.

Using SageMath's Verbosity System

Alternatively, this module provides *verbose()*, *set_verbose()*, *get_verbose()* which can be used as follows:

```
sage: from sage.misc.verbose import verbose, set_verbose, get_verbose
sage: set_verbose(1)
sage: t = verbose("This is SageMath.", level=0)
verbose 0 (<module>) This is SageMath.
sage: t = verbose("This is SageMath.", level=1)
verbose 1 (<module>) This is SageMath.
sage: t = verbose("This is SageMath.", level=2)
```

```
>>> from sage.all import *
>>> from sage.misc.verbose import verbose, set_verbose, get_verbose
>>> set_verbose(Integer(1))
>>> t = verbose("This is SageMath.", level=Integer(0))
verbose 0 (<module>) This is SageMath.
>>> t = verbose("This is SageMath.", level=Integer(1))
verbose 1 (<module>) This is SageMath.
>>> t = verbose("This is SageMath.", level=Integer(2))
```

Logging Levels of SageMath and Python

SageMath	Python
-2	`logging.CRITICAL`
-1	`logging.ERROR`
0	`logging.WARNING`
1	`logging.INFO`
2	`logging.DEBUG`

Various

AUTHORS:

- Daniel Krenn (2016)

Functions

`sage.misc.verbose.`**`get_verbose`**`()`

Return the global Sage verbosity level.

EXAMPLES:

```
sage: get_verbose()
0
sage: set_verbose(2)
sage: get_verbose()
2
sage: set_verbose(0)
```

```
>>> from sage.all import *
>>> get_verbose()
0
```

(continues on next page)

(continued from previous page)

```
>>> set_verbose(Integer(2))
>>> get_verbose()
2
>>> set_verbose(Integer(0))
```

sage.misc.verbose.**get_verbose_files**()

sage.misc.verbose.**set_verbose**(*level*, *files='all'*)

Set the global Sage verbosity level.

INPUT:

- `level` – integer between 0 and 2, inclusive
- `files` – (default: `'all'`) list of files to make verbose, or 'all' to make ALL files verbose (the default)

OUTPUT: changes the state of the verbosity flag and possibly appends to the list of files that are verbose

EXAMPLES:

```
sage: set_verbose(2)
sage: verbose("This is Sage.", level=1)  # not tested
VERBOSE1 (?): This is Sage.
sage: verbose("This is Sage.", level=2)  # not tested
VERBOSE2 (?): This is Sage.
sage: verbose("This is Sage.", level=3)  # not tested
[no output]
sage: set_verbose(0)
```

```
>>> from sage.all import *
>>> set_verbose(Integer(2))
>>> verbose("This is Sage.", level=Integer(1))  # not tested
VERBOSE1 (?): This is Sage.
>>> verbose("This is Sage.", level=Integer(2))  # not tested
VERBOSE2 (?): This is Sage.
>>> verbose("This is Sage.", level=Integer(3))  # not tested
[no output]
>>> set_verbose(Integer(0))
```

sage.misc.verbose.**set_verbose_files**(*file_name*)

sage.misc.verbose.**unset_verbose_files**(*file_name*)

sage.misc.verbose.**verbose**(*mesg=''*, *t=0*, *level=1*, *caller_name=None*)

Print a message if the current verbosity is at least level.

INPUT:

- `mesg` – string; a message to print
- `t` – integer (optional); if included, will also print `cputime(t)`, which is the time since time `t`. Thus `t` should have been obtained with `t=cputime()`
- `level` – integer (default: 1); the verbosity level of what we are printing
- `caller_name` – string (default: `None`); the name of the calling function. In most cases Python can deduce this, so it need not be provided.

OUTPUT: possibly prints a message to stdout; also returns `cputime()`

EXAMPLES:

```
sage: set_verbose(1)
sage: t = cputime()
sage: t = verbose("This is Sage.", t, level=1, caller_name="william")       # not␣
↪tested
VERBOSE1 (william): This is Sage. (time = 0.0)
sage: set_verbose(0)
```

```
>>> from sage.all import *
>>> set_verbose(Integer(1))
>>> t = cputime()
>>> t = verbose("This is Sage.", t, level=Integer(1), caller_name="william")     ␣
↪ # not tested
VERBOSE1 (william): This is Sage. (time = 0.0)
>>> set_verbose(Integer(0))
```

2.7 Laziness

2.7.1 Lazy attributes

AUTHORS:

- Nicolas Thiery (2008): Initial version
- Nils Bruin (2013-05): Cython version

class sage.misc.lazy_attribute.**lazy_attribute**(*f*)

Bases: `_lazy_attribute`

A lazy attribute for an object is like a usual attribute, except that, instead of being computed when the object is constructed (i.e. in `__init__`), it is computed on the fly the first time it is accessed.

For constant values attached to an object, lazy attributes provide a shorter syntax and automatic caching (unlike methods), while playing well with inheritance (like methods): a subclass can easily override a given attribute; you don't need to call the super class constructor, etc.

Technically, a *lazy_attribute* is a non-data descriptor (see Invoking Descriptors in the Python reference manual).

EXAMPLES:

We create a class whose instances have a lazy attribute `x`:

```
sage: class A():
....:     def __init__(self):
....:         self.a=2 # just to have some data to calculate from
....:
....:     @lazy_attribute
....:     def x(self):
....:         print("calculating x in A")
....:         return self.a + 1
....:
```

```
>>> from sage.all import *
>>> class A():
...     def __init__(self):
...         self.a=Integer(2) # just to have some data to calculate from
....:
>>>     @lazy_attribute
...     def x(self):
...         print("calculating x in A")
...         return self.a + Integer(1)
....:
```

For an instance `a` of `A`, `a.x` is calculated the first time it is accessed, and then stored as a usual attribute:

```
sage: a = A()
sage: a.x
calculating x in A
3
sage: a.x
3
```

```
>>> from sage.all import *
>>> a = A()
>>> a.x
calculating x in A
3
>>> a.x
3
```

Implementation details

We redo the same example, but opening the hood to see what happens to the internal dictionary of the object:

```
sage: a = A()
sage: a.__dict__
{'a': 2}
sage: a.x
calculating x in A
3
sage: a.__dict__
{'a': 2, 'x': 3}
sage: a.x
3
sage: timeit('a.x') # random
625 loops, best of 3: 89.6 ns per loop
```

```
>>> from sage.all import *
>>> a = A()
>>> a.__dict__
{'a': 2}
>>> a.x
calculating x in A
3
```

(continues on next page)

(continued from previous page)

```
>>> a.__dict__
{'a': 2, 'x': 3}
>>> a.x
3
>>> timeit('a.x') # random
625 loops, best of 3: 89.6 ns per loop
```

This shows that, after the first calculation, the attribute `x` becomes a usual attribute; in particular, there is no time penalty to access it.

A lazy attribute may be set as usual, even before its first access, in which case the lazy calculation is completely ignored:

```
sage: a = A()
sage: a.x = 4
sage: a.x
4
sage: a.__dict__
{'a': 2, 'x': 4}
```

```
>>> from sage.all import *
>>> a = A()
>>> a.x = Integer(4)
>>> a.x
4
>>> a.__dict__
{'a': 2, 'x': 4}
```

Class binding results in the lazy attribute itself:

```
sage: A.x
<sage.misc.lazy_attribute.lazy_attribute object at ...>
```

```
>>> from sage.all import *
>>> A.x
<sage.misc.lazy_attribute.lazy_attribute object at ...>
```

Conditional definitions

The function calculating the attribute may return NotImplemented to declare that, after all, it is not able to do it. In that case, the attribute lookup proceeds in the super class hierarchy:

```
sage: class B(A):
....:     @lazy_attribute
....:     def x(self):
....:         if hasattr(self, "y"):
....:             print("calculating x from y in B")
....:             return self.y
....:         else:
....:             print("y not there; B does not define x")
....:             return NotImplemented
....:
```

(continues on next page)

(continued from previous page)

```
sage: b = B()
sage: b.x
y not there; B does not define x
calculating x in A
3
sage: b = B()
sage: b.y = 1
sage: b.x
calculating x from y in B
1
```

```
>>> from sage.all import *
>>> class B(A):
...     @lazy_attribute
...     def x(self):
...         if hasattr(self, "y"):
...             print("calculating x from y in B")
...             return self.y
...         else:
...             print("y not there; B does not define x")
...             return NotImplemented
....:
>>> b = B()
>>> b.x
y not there; B does not define x
calculating x in A
3
>>> b = B()
>>> b.y = Integer(1)
>>> b.x
calculating x from y in B
1
```

Attribute existence testing

Testing for the existence of an attribute with hasattr currently always triggers its full calculation, which may not be desirable when the calculation is expensive:

```
sage: a = A()
sage: hasattr(a, "x")
calculating x in A
True
```

```
>>> from sage.all import *
>>> a = A()
>>> hasattr(a, "x")
calculating x in A
True
```

It would be great if we could take over the control somehow, if at all possible without a special implementation of hasattr, so as to allow for something like:

```
sage: class A ():
....:     @lazy_attribute
....:     def x(self, existence_only=False):
....:         if existence_only:
....:             print("testing for x existence")
....:             return True
....:         else:
....:             print("calculating x in A")
....:             return 3
....:
sage: a = A()
sage: hasattr(a, "x") # todo: not implemented
testing for x existence
sage: a.x
calculating x in A
3
sage: a.x
3
```

```
>>> from sage.all import *
>>> class A ():
...     @lazy_attribute
...     def x(self, existence_only=False):
...         if existence_only:
...             print("testing for x existence")
...             return True
...         else:
...             print("calculating x in A")
...             return Integer(3)
....:
>>> a = A()
>>> hasattr(a, "x") # todo: not implemented
testing for x existence
>>> a.x
calculating x in A
3
>>> a.x
3
```

Here is a full featured example, with both conditional definition and existence testing:

```
sage: class B(A):
....:     @lazy_attribute
....:     def x(self, existence_only=False):
....:         if hasattr(self, "y"):
....:             if existence_only:
....:                 print("testing for x existence in B")
....:                 return True
....:             else:
....:                 print("calculating x from y in B")
....:                 return self.y
....:         else:
....:             print("y not there; B does not define x")
```

(continues on next page)

(continued from previous page)

```
....:             return NotImplemented
....:
sage: b = B()
sage: hasattr(b, "x") # todo: not implemented
y not there; B does not define x
testing for x existence
True
sage: b.x
y not there; B does not define x
calculating x in A
3
sage: b = B()
sage: b.y = 1
sage: hasattr(b, "x") # todo: not implemented
testing for x existence in B
True
sage: b.x
calculating x from y in B
1
```

```
>>> from sage.all import *
>>> class B(A):
...     @lazy_attribute
...     def x(self, existence_only=False):
...         if hasattr(self, "y"):
...             if existence_only:
...                 print("testing for x existence in B")
...                 return True
...             else:
...                 print("calculating x from y in B")
...                 return self.y
...         else:
...             print("y not there; B does not define x")
...             return NotImplemented
....:
>>> b = B()
>>> hasattr(b, "x") # todo: not implemented
y not there; B does not define x
testing for x existence
True
>>> b.x
y not there; B does not define x
calculating x in A
3
>>> b = B()
>>> b.y = Integer(1)
>>> hasattr(b, "x") # todo: not implemented
testing for x existence in B
True
>>> b.x
calculating x from y in B
1
```

lazy attributes and introspection

Todo

Make the following work nicely:

```
sage: b.x?                 # todo: not implemented
sage: b.x??                # todo: not implemented
```

```
>>> from sage.all import *
>>> b.x?                  # todo: not implemented
>>> b.x??                 # todo: not implemented
```

Right now, the first one includes the doc of this class, and the second one brings up the code of this class, both being not very useful.

Lazy attributes and Cython

This attempts to check that lazy attributes work with built-in functions like cpdef methods:

```
sage: class A:
....:     def __len__(x):
....:         return int(5)
....:     len = lazy_attribute(len)
....:
sage: A().len
5
```

```
>>> from sage.all import *
>>> class A:
...     def __len__(x):
...         return int(Integer(5))
...     len = lazy_attribute(len)
....:
>>> A().len
5
```

Since Issue #11115, extension classes derived from `Parent` can inherit a lazy attribute, such as `element_class`:

```
sage: cython_code = ["from sage.structure.parent cimport Parent",
....: "from sage.structure.element cimport Element",
....: "cdef class MyElement(Element): pass",
....: "cdef class MyParent(Parent):",
....: "    Element = MyElement"]
sage: cython('\n'.join(cython_code))                                    #␣
↪needs sage.misc.cython
sage: P = MyParent(category=Rings())                                    #␣
↪needs sage.misc.cython
sage: P.element_class    # indirect doctest                             #␣
↪needs sage.misc.cython
<class '...MyElement'>
```

```
>>> from sage.all import *
>>> cython_code = ["from sage.structure.parent cimport Parent",
... "from sage.structure.element cimport Element",
... "cdef class MyElement(Element): pass",
... "cdef class MyParent(Parent):",
... "    Element = MyElement"]
>>> cython('\n'.join(cython_code))                                    #␣
↪needs sage.misc.cython
>>> P = MyParent(category=Rings())                                    #␣
↪needs sage.misc.cython
>>> P.element_class    # indirect doctest                             #␣
↪needs sage.misc.cython
<class '...MyElement'>
```

About descriptor specifications

The specifications of descriptors (see 3.4.2.3 Invoking Descriptors in the Python reference manual) are incomplete w.r.t. inheritance, and maybe even ill-implemented. We illustrate this on a simple class hierarchy, with an instrumented descriptor:

```
sage: class descriptor():
....:     def __get__(self, obj, cls):
....:         print(cls)
....:         return 1
sage: class A():
....:     x = descriptor()
sage: class B(A):
....:     pass
....:
```

```
>>> from sage.all import *
>>> class descriptor():
...     def __get__(self, obj, cls):
...         print(cls)
...         return Integer(1)
>>> class A():
...     x = descriptor()
>>> class B(A):
...     pass
....:
```

This is fine:

```
sage: A.x
<class '__main__.A'>
1
```

```
>>> from sage.all import *
>>> A.x
<class '__main__.A'>
1
```

The behaviour for the following case is not specified (see Instance Binding) when `x` is not in the dictionary of `B` but

in that of some super category:

```
sage: B().x
<class '__main__.B'>
1
```

```
>>> from sage.all import *
>>> B().x
<class '__main__.B'>
1
```

It would seem more natural (and practical!) to get `A` rather than `B`.

From the specifications for Super Binding, it would be expected to get `A` and not `B` as cls parameter:

```
sage: super(B, B()).x
<class '__main__.B'>
1
```

```
>>> from sage.all import *
>>> super(B, B()).x
<class '__main__.B'>
1
```

Due to this, the natural implementation runs into an infinite loop in the following example:

```
sage: class A():
....:     @lazy_attribute
....:     def unimplemented_A(self):
....:         return NotImplemented
....:     @lazy_attribute
....:     def unimplemented_AB(self):
....:         return NotImplemented
....:     @lazy_attribute
....:     def unimplemented_B_implemented_A(self):
....:         return 1
....:
sage: class B(A):
....:     @lazy_attribute
....:     def unimplemented_B(self):
....:         return NotImplemented
....:     @lazy_attribute
....:     def unimplemented_AB(self):
....:         return NotImplemented
....:     @lazy_attribute
....:     def unimplemented_B_implemented_A(self):
....:         return NotImplemented
....:
sage: class C(B):
....:     pass
....:
```

```
>>> from sage.all import *
>>> class A():
```

(continues on next page)

(continued from previous page)

```
...       @lazy_attribute
...       def unimplemented_A(self):
...           return NotImplemented
...       @lazy_attribute
...       def unimplemented_AB(self):
...           return NotImplemented
...       @lazy_attribute
...       def unimplemented_B_implemented_A(self):
...           return Integer(1)
....:
>>> class B(A):
...       @lazy_attribute
...       def unimplemented_B(self):
...           return NotImplemented
...       @lazy_attribute
...       def unimplemented_AB(self):
...           return NotImplemented
...       @lazy_attribute
...       def unimplemented_B_implemented_A(self):
...           return NotImplemented
....:
>>> class C(B):
...       pass
....:
```

This is the simplest case where, without workaround, we get an infinite loop:

```
sage: hasattr(B(), "unimplemented_A") # todo: not implemented
False
```

```
>>> from sage.all import *
>>> hasattr(B(), "unimplemented_A") # todo: not implemented
False
```

Todo

Improve the error message:

```
sage: B().unimplemented_A # todo: not implemented
Traceback (most recent call last):
...
AttributeError: 'super' object has no attribute 'unimplemented_A'...
```

```
>>> from sage.all import *
>>> B().unimplemented_A # todo: not implemented
Traceback (most recent call last):
...
AttributeError: 'super' object has no attribute 'unimplemented_A'...
```

We now make some systematic checks:

```
sage: B().unimplemented_A
Traceback (most recent call last):
...
AttributeError: '...' object has no attribute 'unimplemented_A'...
sage: B().unimplemented_B
Traceback (most recent call last):
...
AttributeError: '...' object has no attribute 'unimplemented_B'...
sage: B().unimplemented_AB
Traceback (most recent call last):
...
AttributeError: '...' object has no attribute 'unimplemented_AB'...
sage: B().unimplemented_B_implemented_A
1

sage: C().unimplemented_A()
Traceback (most recent call last):
...
AttributeError: '...' object has no attribute 'unimplemented_A'...
sage: C().unimplemented_B()
Traceback (most recent call last):
...
AttributeError: '...' object has no attribute 'unimplemented_B'...
sage: C().unimplemented_AB()
Traceback (most recent call last):
...
AttributeError: '...' object has no attribute 'unimplemented_AB'...
sage: C().unimplemented_B_implemented_A # todo: not implemented
1
```

```
>>> from sage.all import *
>>> B().unimplemented_A
Traceback (most recent call last):
...
AttributeError: '...' object has no attribute 'unimplemented_A'...
>>> B().unimplemented_B
Traceback (most recent call last):
...
AttributeError: '...' object has no attribute 'unimplemented_B'...
>>> B().unimplemented_AB
Traceback (most recent call last):
...
AttributeError: '...' object has no attribute 'unimplemented_AB'...
>>> B().unimplemented_B_implemented_A
1

>>> C().unimplemented_A()
Traceback (most recent call last):
...
AttributeError: '...' object has no attribute 'unimplemented_A'...
>>> C().unimplemented_B()
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
AttributeError: '...' object has no attribute 'unimplemented_B'...
>>> C().unimplemented_AB()
Traceback (most recent call last):
...
AttributeError: '...' object has no attribute 'unimplemented_AB'...
>>> C().unimplemented_B_implemented_A # todo: not implemented
1
```

class sage.misc.lazy_attribute.**lazy_class_attribute**(*f*)

Bases: *lazy_attribute*

A lazy class attribute for a class is like a usual class attribute, except that, instead of being computed when the class is constructed, it is computed on the fly the first time it is accessed, either through the class itself or through one of its objects.

This is very similar to *lazy_attribute* except that the attribute is a class attribute. More precisely, once computed, the lazy class attribute is stored in the class rather than in the object. The lazy class attribute is only computed once for all the objects:

```
sage: class Cl():
....:     @lazy_class_attribute
....:     def x(cls):
....:         print("computing x")
....:         return 1
sage: Cl.x
computing x
1
sage: Cl.x
1
```

```
>>> from sage.all import *
>>> class Cl():
...     @lazy_class_attribute
...     def x(cls):
...         print("computing x")
...         return Integer(1)
>>> Cl.x
computing x
1
>>> Cl.x
1
```

As for a any usual class attribute it is also possible to access it from an object:

```
sage: b = Cl()
sage: b.x
1
```

```
>>> from sage.all import *
>>> b = Cl()
>>> b.x
1
```

First access from an object also properly triggers the computation:

```
sage: class Cl1():
....:     @lazy_class_attribute
....:     def x(cls):
....:         print("computing x")
....:         return 1
sage: Cl1().x
computing x
1
sage: Cl1().x
1
```

```
>>> from sage.all import *
>>> class Cl1():
...     @lazy_class_attribute
...     def x(cls):
...         print("computing x")
...         return Integer(1)
>>> Cl1().x
computing x
1
>>> Cl1().x
1
```

Warning

The behavior of lazy class attributes with respect to inheritance is not specified. It currently depends on the evaluation order:

```
sage: class A():
....:     @lazy_class_attribute
....:     def x(cls):
....:         print("computing x")
....:         return str(cls)
....:     @lazy_class_attribute
....:     def y(cls):
....:         print("computing y")
....:         return str(cls)
sage: class B(A):
....:     pass

sage: A.x
computing x
"<class '__main__.A'>"
sage: B.x
"<class '__main__.A'>"

sage: B.y
computing y
"<class '__main__.B'>"
sage: A.y
computing y
"<class '__main__.A'>"
```

```
sage: B.y
"<class '__main__.B'>"
>>> from sage.all import *
>>> class A():
...       @lazy_class_attribute
...       def x(cls):
...           print("computing x")
...           return str(cls)
...       @lazy_class_attribute
...       def y(cls):
...           print("computing y")
...           return str(cls)
>>> class B(A):
...       pass

>>> A.x
computing x
"<class '__main__.A'>"
>>> B.x
"<class '__main__.A'>"

>>> B.y
computing y
"<class '__main__.B'>"
>>> A.y
computing y
"<class '__main__.A'>"
>>> B.y
"<class '__main__.B'>"
```

2.7.2 Lazy format strings

class sage.misc.lazy_format.**LazyFormat**

Bases: `str`

Lazy format strings.

Note

We recommend to use *sage.misc.lazy_string.lazy_string()* instead, which is both faster and more flexible.

An instance of *LazyFormat* behaves like a usual format string, except that the evaluation of the `__repr__` method of the formatted arguments it postponed until actual printing.

EXAMPLES:

Under normal circumstances, `Lazyformat` strings behave as usual:

```
sage: from sage.misc.lazy_format import LazyFormat
sage: LazyFormat("Got `%s`; expected a list")%3
Got `3`; expected a list
```

(continues on next page)

(continued from previous page)

```
sage: LazyFormat("Got `%s`; expected %s")%(3, 2/3)
Got `3`; expected 2/3
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_format import LazyFormat
>>> LazyFormat("Got `%s`; expected a list")%Integer(3)
Got `3`; expected a list
>>> LazyFormat("Got `%s`; expected %s")%(Integer(3), Integer(2)/Integer(3))
Got `3`; expected 2/3
```

To demonstrate the laziness, let us build an object with a broken `__repr__` method:

```
sage: class IDontLikeBeingPrinted():
....:     def __repr__(self):
....:         raise ValueError("do not ever try to print me")
```

```
>>> from sage.all import *
>>> class IDontLikeBeingPrinted():
...     def __repr__(self):
...         raise ValueError("do not ever try to print me")
```

There is no error when binding a lazy format with the broken object:

```
sage: lf = LazyFormat("<%s>")%IDontLikeBeingPrinted()
```

```
>>> from sage.all import *
>>> lf = LazyFormat("<%s>")%IDontLikeBeingPrinted()
```

The error only occurs upon printing:

```
sage: lf
<repr(<sage.misc.lazy_format.LazyFormat at 0x...>) failed: ValueError: do not␣
↪ever try to print me>
```

```
>>> from sage.all import *
>>> lf
<repr(<sage.misc.lazy_format.LazyFormat at 0x...>) failed: ValueError: do not␣
↪ever try to print me>
```

Common use case:

Most of the time, `__repr__` methods are only called during user interaction, and therefore need not be fast; and indeed there are objects `x` in Sage such `x.__repr__()` is time consuming.

There are however some uses cases where many format strings are constructed but not actually printed. This includes error handling messages in `unittest` or *`TestSuite`* executions:

```
sage: QQ._tester().assertIn(0, QQ,
....:                       "%s doesn't contain 0"%QQ)
```

```
>>> from sage.all import *
>>> QQ._tester().assertIn(Integer(0), QQ,
...                "%s doesn't contain 0"%QQ)
```

In the above `QQ.__repr__()` has been called, and the result immediately discarded. To demonstrate this we replace `QQ` in the format string argument with our broken object:

```
sage: QQ._tester().assertTrue(True,
....:                "%s doesn't contain 0"%IDontLikeBeingPrinted())
Traceback (most recent call last):
...
ValueError: do not ever try to print me
```

```
>>> from sage.all import *
>>> QQ._tester().assertTrue(True,
...                "%s doesn't contain 0"%IDontLikeBeingPrinted())
Traceback (most recent call last):
...
ValueError: do not ever try to print me
```

This behavior can induce major performance penalties when testing. Note that this issue does not impact the usual assert:

```
sage: assert True, "%s is wrong"%IDontLikeBeingPrinted()
```

```
>>> from sage.all import *
>>> assert True, "%s is wrong"%IDontLikeBeingPrinted()
```

We now check that *LazyFormat* indeed solves the assertion problem:

```
sage: QQ._tester().assertTrue(True,
....:                LazyFormat("%s is wrong")%IDontLikeBeingPrinted())
sage: QQ._tester().assertTrue(False,
....:                LazyFormat("%s is wrong")%IDontLikeBeingPrinted())
Traceback (most recent call last):
...
AssertionError: ...
```

```
>>> from sage.all import *
>>> QQ._tester().assertTrue(True,
...                LazyFormat("%s is wrong")%IDontLikeBeingPrinted())
>>> QQ._tester().assertTrue(False,
...                LazyFormat("%s is wrong")%IDontLikeBeingPrinted())
Traceback (most recent call last):
...
AssertionError: ...
```

2.7.3 Lazy imports

This module allows one to lazily import objects into a namespace, where the actual import is delayed until the object is actually called or inspected. This is useful for modules that are expensive to import or may cause circular references, though there is some overhead in its use.

EXAMPLES:

```
sage: lazy_import('sage.rings.integer_ring', 'ZZ')
sage: type(ZZ)
<class 'sage.misc.lazy_import.LazyImport'>
sage: ZZ(4.0)
4
```

```
>>> from sage.all import *
>>> lazy_import('sage.rings.integer_ring', 'ZZ')
>>> type(ZZ)
<class 'sage.misc.lazy_import.LazyImport'>
>>> ZZ(RealNumber('4.0'))
4
```

By default, a warning is issued if a lazy import module is resolved during Sage's startup. In case a lazy import's sole purpose is to break a circular reference and it is known to be resolved at startup time, one can use the `at_startup` option:

```
sage: lazy_import('sage.rings.integer_ring', 'ZZ', at_startup=True)
```

```
>>> from sage.all import *
>>> lazy_import('sage.rings.integer_ring', 'ZZ', at_startup=True)
```

This option can also be used as an intermediate step toward not importing by default a module that is used in several places, some of which can already afford to lazy import the module but not all.

A lazy import that is marked as "at_startup" will print a message if it is actually resolved after the startup, so that the developer knows that (s)he can remove the flag:

```
sage: ZZ
doctest:warning...
UserWarning: Option ``at_startup=True`` for lazy import ZZ not needed anymore
Integer Ring
```

```
>>> from sage.all import *
>>> ZZ
doctest:warning...
UserWarning: Option ``at_startup=True`` for lazy import ZZ not needed anymore
Integer Ring
```

See also

lazy_import(), *LazyImport*

AUTHOR:

- Robert Bradshaw

class sage.misc.lazy_import.**LazyImport**

Bases: `object`

EXAMPLES:

```
sage: from sage.misc.lazy_import import LazyImport
sage: my_integer = LazyImport('sage.rings.integer', 'Integer')
sage: my_integer(4)
4
sage: my_integer('101', base=2)
5
sage: my_integer(3/2)
Traceback (most recent call last):
...
TypeError: no conversion of this rational to integer
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_import import LazyImport
>>> my_integer = LazyImport('sage.rings.integer', 'Integer')
>>> my_integer(Integer(4))
4
>>> my_integer('101', base=Integer(2))
5
>>> my_integer(Integer(3)/Integer(2))
Traceback (most recent call last):
...
TypeError: no conversion of this rational to integer
```

sage.misc.lazy_import.**attributes**(*a*)

Return the private attributes of a *LazyImport* object in a dictionary.

This is for debugging and doctesting purposes only.

EXAMPLES:

```
sage: from sage.misc.lazy_import import attributes
sage: lazy_import("sage.structure.unique_representation", "foo")
sage: attributes(foo)['_namespace'] is globals()
True
sage: D = attributes(foo)
sage: del D['_namespace']
sage: D
{'_as_name': 'foo',
 '_at_startup': False,
 '_deprecation': None,
 '_module': 'sage.structure.unique_representation',
 '_name': 'foo',
 '_object': None}
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_import import attributes
>>> lazy_import("sage.structure.unique_representation", "foo")
>>> attributes(foo)['_namespace'] is globals()
True
>>> D = attributes(foo)
>>> del D['_namespace']
>>> D
{'_as_name': 'foo',
```

(continues on next page)

(continued from previous page)

```
 '_at_startup': False,
 '_deprecation': None,
 '_module': 'sage.structure.unique_representation',
 '_name': 'foo',
 '_object': None}
```

sage.misc.lazy_import.**clean_namespace**(*namespace=None*)

Adjust *LazyImport* bindings in given namespace to refer to this actual namespace.

When *LazyImport* objects are imported into other namespaces via normal `import` instructions, the data stored on a *LazyImport* object that helps it to adjust the binding in the namespace to the actual imported object upon access is not adjusted. This routine fixes that.

INPUT:

- `namespace` – the namespace where importing the names; by default, import the names to current namespace

EXAMPLES:

```
sage: # needs sage.symbolic
sage: from sage.misc.lazy_import import attributes, clean_namespace
sage: from sage.calculus.calculus import maxima as C
sage: attributes(C)['_as_name']
'maxima'
sage: attributes(C)['_namespace'] is sage.calculus.calculus.__dict__
True
sage: clean_namespace(globals())
sage: attributes(C)['_as_name']
'C'
sage: attributes(C)['_namespace'] is globals()
True
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.misc.lazy_import import attributes, clean_namespace
>>> from sage.calculus.calculus import maxima as C
>>> attributes(C)['_as_name']
'maxima'
>>> attributes(C)['_namespace'] is sage.calculus.calculus.__dict__
True
>>> clean_namespace(globals())
>>> attributes(C)['_as_name']
'C'
>>> attributes(C)['_namespace'] is globals()
True
```

sage.misc.lazy_import.**ensure_startup_finished**()

Make sure that the startup phase is finished.

In contrast to *finish_startup()*, this function can be called repeatedly.

sage.misc.lazy_import.**finish_startup**()

Finish the startup phase.

This function must be called exactly once at the end of the Sage import process (`all`).

sage.misc.lazy_import.**get_star_imports**(*module_name*)

Lookup the list of names in a module that would be imported with "import *" either via a cache or actually importing.

EXAMPLES:

```
sage: from sage.misc.lazy_import import get_star_imports
sage: 'get_star_imports' in get_star_imports('sage.misc.lazy_import')
True
sage: 'EllipticCurve' in get_star_imports('sage.schemes.all')                    #␣
↪needs sage.schemes
True
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_import import get_star_imports
>>> 'get_star_imports' in get_star_imports('sage.misc.lazy_import')
True
>>> 'EllipticCurve' in get_star_imports('sage.schemes.all')                    #␣
↪needs sage.schemes
True
```

sage.misc.lazy_import.**is_during_startup**()

Return whether Sage is currently starting up.

OUTPUT: boolean

sage.misc.lazy_import.**lazy_import**(*module*, *names*, *as_=None*, *at_startup=False*, *namespace=None*, *deprecation=None*, *feature=None*)

Create a lazy import object and inject it into the caller's global namespace. For the purposes of introspection and calling, this is like performing a lazy "from module import name" where the import is delayed until the object actually is used or inspected.

INPUT:

- `module` – string representing the module to import
- `names` – string or list of strings representing the names to import from module
- `as_` – (optional) a string or list of strings representing the names of the objects in the importing module. This is analogous to `from ... import ... as ...`.
- `at_startup` – boolean (default: `False`); whether the lazy import is supposed to be resolved at startup time
- `namespace` – the namespace where importing the names; by default, import the names to current namespace
- `deprecation` – (optional) if not `None`, a deprecation warning will be issued when the object is actually imported; `deprecation` should be either a trac number (integer) or a pair `(issue_number, message)`
- `feature` – a python module (optional), if it cannot be imported an appropriate error is raised

See also

sage.misc.lazy_import, *LazyImport*

EXAMPLES:

```
sage: lazy_import('sage.rings.integer_ring', 'ZZ')
sage: type(ZZ)
<class 'sage.misc.lazy_import.LazyImport'>
sage: ZZ(4.0)
4
sage: lazy_import('sage.rings.real_double', 'RDF', 'my_RDF')
sage: my_RDF._get_object() is RDF
True
sage: my_RDF(1/2)
0.5

sage: lazy_import('sage.rings.rational_field', ['QQ', 'frac'], ['my_QQ', 'my_frac
↪'])
sage: my_QQ._get_object() is QQ
True
sage: my_frac._get_object() is sage.rings.rational_field.frac
True
```

```
>>> from sage.all import *
>>> lazy_import('sage.rings.integer_ring', 'ZZ')
>>> type(ZZ)
<class 'sage.misc.lazy_import.LazyImport'>
>>> ZZ(RealNumber('4.0'))
4
>>> lazy_import('sage.rings.real_double', 'RDF', 'my_RDF')
>>> my_RDF._get_object() is RDF
True
>>> my_RDF(Integer(1)/Integer(2))
0.5

>>> lazy_import('sage.rings.rational_field', ['QQ', 'frac'], ['my_QQ', 'my_frac'])
>>> my_QQ._get_object() is QQ
True
>>> my_frac._get_object() is sage.rings.rational_field.frac
True
```

Upon the first use, the object is injected directly into the calling namespace:

```
sage: lazy_import('sage.rings.integer_ring', 'ZZ', 'my_ZZ')
sage: my_ZZ is ZZ
False
sage: my_ZZ(37)
37
sage: my_ZZ is ZZ
True
```

```
>>> from sage.all import *
>>> lazy_import('sage.rings.integer_ring', 'ZZ', 'my_ZZ')
>>> my_ZZ is ZZ
False
>>> my_ZZ(Integer(37))
37
```

(continues on next page)

(continued from previous page)

```
>>> my_ZZ is ZZ
True
```

We check that *lazy_import()* also works for methods:

```
sage: class Foo():
....:     lazy_import('sage.plot.plot', 'plot')
sage: class Bar(Foo):
....:     pass
sage: type(Foo.__dict__['plot'])
<class 'sage.misc.lazy_import.LazyImport'>
sage: 'EXAMPLES' in Bar.plot.__doc__                                    #␣
↪needs sage.plot
True
sage: type(Foo.__dict__['plot'])                                        #␣
↪needs sage.plot
<... 'function'>
```

```
>>> from sage.all import *
>>> class Foo():
...     lazy_import('sage.plot.plot', 'plot')
>>> class Bar(Foo):
...     pass
>>> type(Foo.__dict__['plot'])
<class 'sage.misc.lazy_import.LazyImport'>
>>> 'EXAMPLES' in Bar.plot.__doc__                                      #␣
↪needs sage.plot
True
>>> type(Foo.__dict__['plot'])                                          #␣
↪needs sage.plot
<... 'function'>
```

If deprecated then a deprecation warning is issued:

```
sage: lazy_import('sage.rings.padics.factory', 'Qp', 'my_Qp',
....:             deprecation=14275)
sage: my_Qp(5)                                                          #␣
↪needs sage.rings.padics
doctest:...: DeprecationWarning:
Importing my_Qp from here is deprecated;
please use "from sage.rings.padics.factory import Qp as my_Qp" instead.
See https://github.com/sagemath/sage/issues/14275 for details.
5-adic Field with capped relative precision 20
```

```
>>> from sage.all import *
>>> lazy_import('sage.rings.padics.factory', 'Qp', 'my_Qp',
...             deprecation=Integer(14275))
>>> my_Qp(Integer(5))                                                   ␣
↪     # needs sage.rings.padics
doctest:...: DeprecationWarning:
Importing my_Qp from here is deprecated;
please use "from sage.rings.padics.factory import Qp as my_Qp" instead.
```

(continues on next page)

(continued from previous page)

```
See https://github.com/sagemath/sage/issues/14275 for details.
5-adic Field with capped relative precision 20
```

An example of deprecation with a message:

```
sage: lazy_import('sage.rings.padics.factory', 'Qp', 'my_Qp_msg',
....:             deprecation=(14275, "This is an example."))
sage: my_Qp_msg(5)                                                              #␣
↪needs sage.rings.padics
doctest:...: DeprecationWarning: This is an example.
See https://github.com/sagemath/sage/issues/14275 for details.
5-adic Field with capped relative precision 20
```

```
>>> from sage.all import *
>>> lazy_import('sage.rings.padics.factory', 'Qp', 'my_Qp_msg',
...             deprecation=(Integer(14275), "This is an example."))
>>> my_Qp_msg(Integer(5))                                                       ␣
↪     # needs sage.rings.padics
doctest:...: DeprecationWarning: This is an example.
See https://github.com/sagemath/sage/issues/14275 for details.
5-adic Field with capped relative precision 20
```

An example of an import relying on a feature:

```
sage: from sage.features import PythonModule
sage: lazy_import('ppl', 'equation',
....:             feature=PythonModule('ppl', spkg='pplpy', type='standard'))
sage: equation                                                                  #␣
↪needs pplpy
<cyfunction equation at ...>
sage: lazy_import('PyNormaliz', 'NmzListConeProperties',
....:             feature=PythonModule('PyNormaliz', spkg='pynormaliz'))
sage: NmzListConeProperties                             # optional - pynormaliz
<built-in function NmzListConeProperties>
sage: lazy_import('foo', 'not_there',
....:             feature=PythonModule('foo', spkg='non-existing-package'))
sage: not_there
Failed lazy import:
foo is not available.
Importing not_there failed: No module named 'foo'...
No equivalent system packages for ... are known to Sage...
```

```
>>> from sage.all import *
>>> from sage.features import PythonModule
>>> lazy_import('ppl', 'equation',
...             feature=PythonModule('ppl', spkg='pplpy', type='standard'))
>>> equation                                                                    #␣
↪needs pplpy
<cyfunction equation at ...>
>>> lazy_import('PyNormaliz', 'NmzListConeProperties',
...             feature=PythonModule('PyNormaliz', spkg='pynormaliz'))
>>> NmzListConeProperties                               # optional - pynormaliz
```

(continues on next page)

(continued from previous page)

```
<built-in function NmzListConeProperties>
>>> lazy_import('foo', 'not_there',
...             feature=PythonModule('foo', spkg='non-existing-package'))
>>> not_there
Failed lazy import:
foo is not available.
Importing not_there failed: No module named 'foo'...
No equivalent system packages for ... are known to Sage...
```

sage.misc.lazy_import.**save_cache_file**()

Used to save the cached * import names.

sage.misc.lazy_import.**test_fake_startup**()

For testing purposes only.

Switch the startup lazy import guard back on.

EXAMPLES:

```
sage: sage.misc.lazy_import.test_fake_startup()
sage: lazy_import('sage.rings.integer_ring', 'ZZ', 'my_ZZ')
sage: my_ZZ(123)
doctest:warning...
UserWarning: Resolving lazy import ZZ during startup
123
sage: sage.misc.lazy_import.finish_startup()
```

```
>>> from sage.all import *
>>> sage.misc.lazy_import.test_fake_startup()
>>> lazy_import('sage.rings.integer_ring', 'ZZ', 'my_ZZ')
>>> my_ZZ(Integer(123))
doctest:warning...
UserWarning: Resolving lazy import ZZ during startup
123
>>> sage.misc.lazy_import.finish_startup()
```

2.7.4 Lazy import cache

sage.misc.lazy_import_cache.**get_cache_file**()

Return the canonical filename for caching names of lazily imported modules.

EXAMPLES:

```
sage: from sage.misc.lazy_import_cache import get_cache_file
sage: get_cache_file()
'...-lazy_import_cache.pickle'
sage: get_cache_file().startswith(DOT_SAGE)
True
sage: 'cache' in get_cache_file()
True
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_import_cache import get_cache_file
```

(continues on next page)

(continued from previous page)

```
>>> get_cache_file()
'...-lazy_import_cache.pickle'
>>> get_cache_file().startswith(DOT_SAGE)
True
>>> 'cache' in get_cache_file()
True
```

It should not matter whether DOT_SAGE ends with a slash:

```
sage: OLD = DOT_SAGE
sage: sage.misc.lazy_import_cache.DOT_SAGE = '/tmp'
sage: get_cache_file().startswith('/tmp/')
True
sage: sage.misc.lazy_import_cache.DOT_SAGE = OLD
```

```
>>> from sage.all import *
>>> OLD = DOT_SAGE
>>> sage.misc.lazy_import_cache.DOT_SAGE = '/tmp'
>>> get_cache_file().startswith('/tmp/')
True
>>> sage.misc.lazy_import_cache.DOT_SAGE = OLD
```

2.7.5 Lazy lists

A lazy list is an iterator that behaves like a list and possesses a cache mechanism. A lazy list is potentially infinite and speed performances of the cache is comparable with Python lists. One major difference with original Python list is that lazy list are immutable. The advantage is that slices share memory.

EXAMPLES:

```
sage: from sage.misc.lazy_list import lazy_list
sage: P = lazy_list(Primes())
sage: P[100]                                                                #␣
↪needs sage.libs.pari
547
sage: P[10:34]                                                              #␣
↪needs sage.libs.pari
lazy list [31, 37, 41, ...]
sage: P[12:23].list()                                                       #␣
↪needs sage.libs.pari
[41, 43, 47, 53, 59, 61, 67, 71, 73, 79, 83]

sage: f = lazy_list((i**2 - 3*i for i in range(10)))
sage: print(" ".join(str(i) for i in f))
0 -2 -2 0 4 10 18 28 40 54
sage: i1 = iter(f)
sage: i2 = iter(f)
sage: [next(i1), next(i1)]
[0, -2]
sage: [next(i2), next(i2)]
[0, -2]
sage: [next(i1), next(i2)]
[-2, -2]
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_list import lazy_list
>>> P = lazy_list(Primes())
>>> P[Integer(100)]                                                    ⌙
↪     # needs sage.libs.pari
547
>>> P[Integer(10):Integer(34)]                                         ⌙
↪              # needs sage.libs.pari
lazy list [31, 37, 41, ...]
>>> P[Integer(12):Integer(23)].list()                                  ⌙
↪              # needs sage.libs.pari
[41, 43, 47, 53, 59, 61, 67, 71, 73, 79, 83]

>>> f = lazy_list((i**Integer(2) - Integer(3)*i for i in range(Integer(10))))
>>> print(" ".join(str(i) for i in f))
0 -2 -2 0 4 10 18 28 40 54
>>> i1 = iter(f)
>>> i2 = iter(f)
>>> [next(i1), next(i1)]
[0, -2]
>>> [next(i2), next(i2)]
[0, -2]
>>> [next(i1), next(i2)]
[-2, -2]
```

It is possible to prepend a list to a lazy list:

```
sage: from itertools import count
sage: l = [3,7] + lazy_list(i**2 for i in count())
sage: l
lazy list [3, 7, 0, ...]
```

```
>>> from sage.all import *
>>> from itertools import count
>>> l = [Integer(3),Integer(7)] + lazy_list(i**Integer(2) for i in count())
>>> l
lazy list [3, 7, 0, ...]
```

But, naturally, not the other way around:

```
sage: lazy_list(i-1 for i in count()) + [3,2,5]
Traceback (most recent call last):
...
TypeError: can only add list to lazy_list
```

```
>>> from sage.all import *
>>> lazy_list(i-Integer(1) for i in count()) + [Integer(3),Integer(2),Integer(5)]
Traceback (most recent call last):
...
TypeError: can only add list to lazy_list
```

You can easily create your own class inheriting from *lazy_list_generic*. You should call the *lazy_list_generic* constructor (optionally with some precomputed values for the cache) and implement the method `_new_slice` that returns

a new chunk of data at each call. Here is an example of implementation of the Thue–Morse word that is obtained as the fixed point of the substitution $0 \to 01$ and $1 \to 10$:

```
sage: from sage.misc.lazy_list import lazy_list_generic
sage: class MyThueMorseWord(lazy_list_generic):
....:     def __init__(self):
....:         self.i = 1
....:         lazy_list_generic.__init__(self, cache=[0,1])
....:     def _new_slice(self):
....:         letter = self.get(self.i)
....:         self.i += 1
....:         return [0,1] if letter == 0 else [1,0]
sage: w = MyThueMorseWord()
sage: w
lazy list [0, 1, 1, ...]
sage: all(w[i] == ZZ(i).popcount()%2 for i in range(100))
True
sage: w[:500].list() == w[:1000:2].list()
True
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_list import lazy_list_generic
>>> class MyThueMorseWord(lazy_list_generic):
...     def __init__(self):
...         self.i = Integer(1)
...         lazy_list_generic.__init__(self, cache=[Integer(0),Integer(1)])
...     def _new_slice(self):
...         letter = self.get(self.i)
...         self.i += Integer(1)
...         return [Integer(0),Integer(1)] if letter == Integer(0) else [Integer(1),
↪Integer(0)]
>>> w = MyThueMorseWord()
>>> w
lazy list [0, 1, 1, ...]
>>> all(w[i] == ZZ(i).popcount()%Integer(2) for i in range(Integer(100)))
True
>>> w[:Integer(500)].list() == w[:Integer(1000):Integer(2)].list()
True
```

Alternatively, you can create the lazy list from an update function:

```
sage: def thue_morse_update(values):
....:     n = len(values)
....:     if n == 0:
....:         letter = 0
....:     else:
....:         assert n%2 == 0
....:         letter = values[n//2]
....:     values.append(letter)
....:     values.append(1-letter)
sage: w2 = lazy_list(update_function=thue_morse_update)
sage: w2
lazy list [0, 1, 1, ...]
```

(continues on next page)

(continued from previous page)

```
sage: w2[:500].list() == w[:500].list()
True
```

```
>>> from sage.all import *
>>> def thue_morse_update(values):
...     n = len(values)
...     if n == Integer(0):
...         letter = Integer(0)
...     else:
...         assert n%Integer(2) == Integer(0)
...         letter = values[n//Integer(2)]
...     values.append(letter)
...     values.append(Integer(1)-letter)
>>> w2 = lazy_list(update_function=thue_morse_update)
>>> w2
lazy list [0, 1, 1, ...]
>>> w2[:Integer(500)].list() == w[:Integer(500)].list()
True
```

You can also create user-defined classes (Python) and extension types (Cython) inheriting from *lazy_list_generic*. In that case you would better implement directly the method `_update_cache_up_to`. See the examples in this file with the classes *lazy_list_from_iterator* and *lazy_list_from_function*.

Classes and Methods

`sage.misc.lazy_list.`**`lazy_list`**(*data=None*, *initial_values=None*, *start=None*, *stop=None*, *step=None*, *update_function=None*)

Return a lazy list.

INPUT:

- `data` – data to create a lazy list from. This can be
  1. a (possibly infinite) iterable,
  2. a function (that takes as input an integer `n` and return the `n`-th term of the list),
  3. or a standard Python container `list` or `tuple`.
- `initial_values` – the beginning of the sequence that will not be computed from the `data` provided
- `update_function` – you can also construct a lazy list from a function that takes as input a list of precomputed values and updates it with some more values

Note

If you want finer tuning of the constructor you can directly instantiate the classes associated to lazy lists that are *lazy_list_generic*, *lazy_list_from_iterator*, *lazy_list_from_function*.

EXAMPLES:

The basic construction of lazy lists.

```
sage: from sage.misc.lazy_list import lazy_list
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_list import lazy_list
```

1. Iterators:

```
sage: from itertools import count
sage: lazy_list(count())
lazy list [0, 1, 2, ...]
```

```
>>> from sage.all import *
>>> from itertools import count
>>> lazy_list(count())
lazy list [0, 1, 2, ...]
```

2. Functions:

```
sage: lazy_list(lambda n: (n**2)%17)
lazy list [0, 1, 4, ...]
```

```
>>> from sage.all import *
>>> lazy_list(lambda n: (n**Integer(2))%Integer(17))
lazy list [0, 1, 4, ...]
```

3. Plain lists:

```
sage: lazy_list([1,5,7,2])
lazy list [1, 5, 7, ...]
```

```
>>> from sage.all import *
>>> lazy_list([Integer(1),Integer(5),Integer(7),Integer(2)])
lazy list [1, 5, 7, ...]
```

If a function is only defined for large values, you can provide the beginning of the sequence manually:

```
sage: l = lazy_list(divisors, [None])
sage: l
lazy list [None, [1], [1, 2], ...]
```

```
>>> from sage.all import *
>>> l = lazy_list(divisors, [None])
>>> l
lazy list [None, [1], [1, 2], ...]
```

Lazy lists behave like lists except that they are immutable:

```
sage: l[3::5]
lazy list [[1, 3], [1, 2, 4, 8], [1, 13], ...]
```

```
>>> from sage.all import *
>>> l[Integer(3)::Integer(5)]
lazy list [[1, 3], [1, 2, 4, 8], [1, 13], ...]
```

If your lazy list is finite, you can obtain the underlying list with the method *.list()*:

```
sage: l[30:50:5].list()
[[1, 2, 3, 5, 6, 10, 15, 30],
 [1, 5, 7, 35],
 [1, 2, 4, 5, 8, 10, 20, 40],
 [1, 3, 5, 9, 15, 45]]
```

```
>>> from sage.all import *
>>> l[Integer(30):Integer(50):Integer(5)].list()
[[1, 2, 3, 5, 6, 10, 15, 30],
 [1, 5, 7, 35],
 [1, 2, 4, 5, 8, 10, 20, 40],
 [1, 3, 5, 9, 15, 45]]
```

sage.misc.lazy_list.**lazy_list_formatter**(*L*, *name='lazy list'*, *separator=', '*, *more='...'*, *opening_delimiter='['*, *closing_delimiter=']'*, *preview=3*)

Return a string representation of `L`.

INPUT:

- `L` – an iterable object
- `name` – (default: `'lazy list'`) a string appearing at first position (i.e., in front of the actual values) in the representation
- `opening_delimiter` – (default: `'['`) a string heading the shown entries
- `closing_delimiter` – (default: `']'`) a string trailing the shown entries
- `separator` – (default: `', '`) a string appearing between two entries
- `more` – (default: `'...'`) a string indicating that not all entries of the list are shown
- `preview` – (default: `3`) an integer specifying the number of elements shown in the representation string

OUTPUT: string

EXAMPLES:

```
sage: from sage.misc.lazy_list import lazy_list_formatter
sage: lazy_list_formatter(srange(3, 1000, 5), name='list')
'list [3, 8, 13, ...]'
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_list import lazy_list_formatter
>>> lazy_list_formatter(srange(Integer(3), Integer(1000), Integer(5)), name='list
↪')
'list [3, 8, 13, ...]'
```

```
sage: # needs sage.libs.pari
sage: from sage.misc.lazy_list import lazy_list
sage: L = lazy_list(Primes()); L
lazy list [2, 3, 5, ...]
sage: repr(L) == lazy_list_formatter(L)
True
sage: lazy_list_formatter(L, name='primes')
```

(continues on next page)

(continued from previous page)

```
'primes [2, 3, 5, ...]'
sage: lazy_list_formatter(L, opening_delimiter='(', closing_delimiter=')')
'lazy list (2, 3, 5, ...)'
sage: lazy_list_formatter(L, opening_delimiter='', closing_delimiter='')
'lazy list 2, 3, 5, ...'
sage: lazy_list_formatter(L, separator='--')
'lazy list [2--3--5--...]'
sage: lazy_list_formatter(L, more='and more')
'lazy list [2, 3, 5, and more]'
sage: lazy_list_formatter(L, preview=10)
'lazy list [2, 3, 5, 7, 11, 13, 17, 19, 23, 29, ...]'
sage: lazy_list_formatter(L, name='primes',
....:                     opening_delimiter='', closing_delimiter='',
....:                     separator=' ', more='->', preview=7)
'primes 2 3 5 7 11 13 17 ->'
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari
>>> from sage.misc.lazy_list import lazy_list
>>> L = lazy_list(Primes()); L
lazy list [2, 3, 5, ...]
>>> repr(L) == lazy_list_formatter(L)
True
>>> lazy_list_formatter(L, name='primes')
'primes [2, 3, 5, ...]'
>>> lazy_list_formatter(L, opening_delimiter='(', closing_delimiter=')')
'lazy list (2, 3, 5, ...)'
>>> lazy_list_formatter(L, opening_delimiter='', closing_delimiter='')
'lazy list 2, 3, 5, ...'
>>> lazy_list_formatter(L, separator='--')
'lazy list [2--3--5--...]'
>>> lazy_list_formatter(L, more='and more')
'lazy list [2, 3, 5, and more]'
>>> lazy_list_formatter(L, preview=Integer(10))
'lazy list [2, 3, 5, 7, 11, 13, 17, 19, 23, 29, ...]'
>>> lazy_list_formatter(L, name='primes',
...                     opening_delimiter='', closing_delimiter='',
...                     separator=' ', more='->', preview=Integer(7))
'primes 2 3 5 7 11 13 17 ->'
```

class sage.misc.lazy_list.**lazy_list_from_function**

Bases: *lazy_list_generic*

INPUT:

- `function` – a function that maps `n` to the element at position `n` (this function only needs to be defined for length larger than the length of the cache)
- `cache` – an optional list to be used as the cache. Be careful that there is no copy
- `stop` – an optional integer to specify the length of this lazy list (Otherwise it is considered infinite)

EXAMPLES:

```
sage: from sage.misc.lazy_list import lazy_list_from_function
sage: lazy_list_from_function(euler_phi)                                    #␣
↪needs sage.libs.pari
lazy list [0, 1, 1, ...]
sage: lazy_list_from_function(divisors, [None])
lazy list [None, [1], [1, 2], ...]
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_list import lazy_list_from_function
>>> lazy_list_from_function(euler_phi)                                      # needs␣
↪sage.libs.pari
lazy list [0, 1, 1, ...]
>>> lazy_list_from_function(divisors, [None])
lazy list [None, [1], [1, 2], ...]
```

class sage.misc.lazy_list.**lazy_list_from_iterator**

Bases: *lazy_list_generic*

Lazy list built from an iterator.

EXAMPLES:

```
sage: from sage.misc.lazy_list import lazy_list
sage: from itertools import count
sage: m = lazy_list(count()); m
lazy list [0, 1, 2, ...]

sage: m2 = lazy_list(count())[8:20551:2]
sage: m2
lazy list [8, 10, 12, ...]

sage: x = iter(m)
sage: [next(x), next(x), next(x)]
[0, 1, 2]
sage: y = iter(m)
sage: [next(y), next(y), next(y)]
[0, 1, 2]
sage: [next(x), next(y)]
[3, 3]
sage: loads(dumps(m))
lazy list [0, 1, 2, ...]
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_list import lazy_list
>>> from itertools import count
>>> m = lazy_list(count()); m
lazy list [0, 1, 2, ...]

>>> m2 = lazy_list(count())[Integer(8):Integer(20551):Integer(2)]
>>> m2
lazy list [8, 10, 12, ...]

>>> x = iter(m)
```

(continues on next page)

(continued from previous page)

```
>>> [next(x), next(x), next(x)]
[0, 1, 2]
>>> y = iter(m)
>>> [next(y), next(y), next(y)]
[0, 1, 2]
>>> [next(x), next(y)]
[3, 3]
>>> loads(dumps(m))
lazy list [0, 1, 2, ...]
```

class sage.misc.lazy_list.**lazy_list_from_update_function**

Bases: *lazy_list_generic*

INPUT:

- `function` – a function that updates a list of precomputed values The update function should take as input a list and make it longer (using either the methods `append` or `extend`). If after a call to the update function the list of values is shorter a `RuntimeError` will occur. If no value is added then the lazy list is considered finite.
- `cache` – an optional list to be used as the cache. Be careful that there is no copy
- `stop` – an optional integer to specify the length of this lazy list (otherwise it is considered infinite)

class sage.misc.lazy_list.**lazy_list_generic**

Bases: `object`

A lazy list.

EXAMPLES:

```
sage: from sage.misc.lazy_list import lazy_list
sage: l = lazy_list(Primes())
sage: l                                                                     #␣
↪needs sage.libs.pari
lazy list [2, 3, 5, ...]
sage: l[200]                                                                #␣
↪needs sage.libs.pari
1229
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_list import lazy_list
>>> l = lazy_list(Primes())
>>> l                                                                       #␣
↪needs sage.libs.pari
lazy list [2, 3, 5, ...]
>>> l[Integer(200)]                                                          ␣
↪     # needs sage.libs.pari
1229
```

get(*i*)

Return the element at position `i`.

If the index is not an integer, then raise a `TypeError`. If the argument is negative then raise a `ValueError`. Finally, if the argument is beyond the size of that lazy list it raises a `IndexError`.

EXAMPLES:

```
sage: from sage.misc.lazy_list import lazy_list
sage: from itertools import chain, repeat
sage: f = lazy_list(chain(iter([1,2,3]), repeat('a')))
sage: f.get(0)
1
sage: f.get(3)
'a'
sage: f.get(0)
1
sage: f.get(4)
'a'

sage: g = f[:10]
sage: g.get(5)
'a'
sage: g.get(10)
Traceback (most recent call last):
...
IndexError: lazy list index out of range
sage: g.get(1/2)
Traceback (most recent call last):
...
TypeError: unable to convert rational 1/2 to an integer
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_list import lazy_list
>>> from itertools import chain, repeat
>>> f = lazy_list(chain(iter([Integer(1),Integer(2),Integer(3)]), repeat('a
↪')))
>>> f.get(Integer(0))
1
>>> f.get(Integer(3))
'a'
>>> f.get(Integer(0))
1
>>> f.get(Integer(4))
'a'

>>> g = f[:Integer(10)]
>>> g.get(Integer(5))
'a'
>>> g.get(Integer(10))
Traceback (most recent call last):
...
IndexError: lazy list index out of range
>>> g.get(Integer(1)/Integer(2))
Traceback (most recent call last):
...
TypeError: unable to convert rational 1/2 to an integer
```

list()

Return the list made of the elements of `self`.

Note

If the iterator is sufficiently large, this will build a list of length `PY_SSIZE_T_MAX` which should be beyond the capacity of your RAM!

EXAMPLES:

```
sage: from sage.misc.lazy_list import lazy_list
sage: P = lazy_list(Primes())
sage: P[2:143:5].list()                                                     #␣
↪needs sage.libs.pari
[5, 19, 41, 61, 83, 107, 137, 163, 191, 223, 241, 271, 307, 337, 367,
 397, 431, 457, 487, 521, 563, 593, 617, 647, 677, 719, 751, 787, 823]
sage: P = lazy_list(iter([1,2,3]))
sage: P.list()
[1, 2, 3]
sage: P[:100000].list()
[1, 2, 3]
sage: P[1:7:2].list()
[2]
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_list import lazy_list
>>> P = lazy_list(Primes())
>>> P[Integer(2):Integer(143):Integer(5)].list()                            ␣
↪                        # needs sage.libs.pari
[5, 19, 41, 61, 83, 107, 137, 163, 191, 223, 241, 271, 307, 337, 367,
 397, 431, 457, 487, 521, 563, 593, 617, 647, 677, 719, 751, 787, 823]
>>> P = lazy_list(iter([Integer(1),Integer(2),Integer(3)]))
>>> P.list()
[1, 2, 3]
>>> P[:Integer(100000)].list()
[1, 2, 3]
>>> P[Integer(1):Integer(7):Integer(2)].list()
[2]
```

`sage.misc.lazy_list.`**`slice_unpickle`**(*master*, *start*, *stop*, *step*)

Unpickle helper.

2.7.6 Lazy strings

Based on speaklater: https://github.com/mitsuhiko/speaklater.

A lazy string is an object that behaves almost exactly like a string but where the value is not computed until needed. To define a lazy string you specify a function that produces a string together with the appropriate arguments for that function.

EXAMPLES:

```
sage: from sage.misc.lazy_string import lazy_string
sage: L = []
sage: s = lazy_string(lambda x: str(len(x)), L)
sage: L.append(5)
sage: s
l'1'
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_string import lazy_string
>>> L = []
>>> s = lazy_string(lambda x: str(len(x)), L)
>>> L.append(Integer(5))
>>> s
l'1'
```

Note that the function is recomputed each time:

```
sage: L.append(6)
sage: s
l'2'
```

```
>>> from sage.all import *
>>> L.append(Integer(6))
>>> s
l'2'
```

sage.misc.lazy_string.**is_lazy_string**(*obj*)

Check if the given object is a lazy string.

EXAMPLES:

```
sage: from sage.misc.lazy_string import lazy_string, is_lazy_string
sage: f = lambda: "laziness"
sage: s = lazy_string(f)
sage: is_lazy_string(s)
True
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_string import lazy_string, is_lazy_string
>>> f = lambda: "laziness"
>>> s = lazy_string(f)
>>> is_lazy_string(s)
True
```

sage.misc.lazy_string.**lazy_string**(*f*, **args*, ***kwargs*)

Create a lazy string.

INPUT:

- `f` – either a callable or a (format) string
- positional arguments that are given to `f`, either by calling or by applying it as a format string
- named arguments that are forwarded to `f` if it is not a string

EXAMPLES:

```
sage: from sage.misc.lazy_string import lazy_string
sage: f = lambda x: "laziness in "+str(x)
sage: s = lazy_string(f, ZZ); s
l'laziness in Integer Ring'
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_string import lazy_string
>>> f = lambda x: "laziness in "+str(x)
>>> s = lazy_string(f, ZZ); s
l'laziness in Integer Ring'
```

Here, we demonstrate that the evaluation is postponed until the value is needed, and that the result is not cached:

```
sage: class C:
....:     def __repr__(self):
....:         print("determining string representation")
....:         return "a test"
sage: c = C()
sage: s = lazy_string("this is %s", c)
sage: s
determining string representation
l'this is a test'
sage: s == 'this is a test'
determining string representation
True
```

```
>>> from sage.all import *
>>> class C:
...     def __repr__(self):
...         print("determining string representation")
...         return "a test"
>>> c = C()
>>> s = lazy_string("this is %s", c)
>>> s
determining string representation
l'this is a test'
>>> s == 'this is a test'
determining string representation
True
```

2.8 Caching

2.8.1 Cached Functions and Methods

AUTHORS:

- William Stein: initial version, (inspired by conversation with Justin Walker)
- Mike Hansen: added doctests and made it work with class methods.
- Willem Jan Palenstijn: add CachedMethodCaller for binding cached methods to instances.
- Tom Boothby: added DiskCachedFunction.
- Simon King: improved performance, more doctests, cython version, CachedMethodCallerNoArgs, weak cached function, cached special methods.
- Julian Rueth (2014-03-19, 2014-05-09, 2014-05-12): added `key` parameter, allow caching for unhashable elements, added `do_pickle` parameter

EXAMPLES:

By Issue #11115, cached functions and methods are now also available in Cython code. The following examples cover various ways of usage.

Python functions:

```
sage: @cached_function
....: def test_pfunc(x):
....:     '''
....:     Some documentation
....:     '''
....:     return -x
sage: test_pfunc(5) is test_pfunc(5)
True
```

```
>>> from sage.all import *
>>> @cached_function
... def test_pfunc(x):
...     '''
...     Some documentation
...     '''
...     return -x
>>> test_pfunc(Integer(5)) is test_pfunc(Integer(5))
True
```

In some cases, one would only want to keep the result in cache as long as there is any other reference to the result. By Issue #12215, this is enabled for `UniqueRepresentation`, which is used to create unique parents: If an algebraic structure, such as a finite field, is only temporarily used, then it will not stay in cache forever. That behaviour is implemented using `weak_cached_function`, that behaves the same as `cached_function`, except that it uses a *CachedWeakValueDictionary* for storing the results.

Cython cdef functions do not allow arbitrary decorators. However, one can wrap a Cython function and turn it into a cached function, by Issue #11115. We need to provide the name that the wrapped method or function should have, since otherwise the name of the original function would be used:

```
sage: # needs sage.misc.cython
sage: cython('''cpdef test_funct(x): return -x''')
sage: wrapped_funct = cached_function(test_funct, name='wrapped_funct')
sage: wrapped_funct
Cached version of <cyfunction test_funct at ...>
sage: wrapped_funct.__name__
'wrapped_funct'
sage: wrapped_funct(5)
-5
sage: wrapped_funct(5) is wrapped_funct(5)
True
```

```
>>> from sage.all import *
>>> # needs sage.misc.cython
>>> cython('''cpdef test_funct(x): return -x''')
>>> wrapped_funct = cached_function(test_funct, name='wrapped_funct')
>>> wrapped_funct
Cached version of <cyfunction test_funct at ...>
>>> wrapped_funct.__name__
'wrapped_funct'
```

(continues on next page)

(continued from previous page)

```
>>> wrapped_funct(Integer(5))
-5
>>> wrapped_funct(Integer(5)) is wrapped_funct(Integer(5))
True
```

We can proceed similarly for cached methods of Cython classes, provided that they allow attribute assignment or have a public attribute `_cached_methods` of type `<dict>`. Since Issue #11115, this is the case for all classes inheriting from `Parent`. See below for a more explicit example. By Issue #12951, cached methods of extension classes can be defined by simply using the decorator. However, an indirect approach is still needed for cpdef methods:

```
sage: # needs sage.misc.cython
sage: cython_code = ['cpdef test_meth(self, x):',
....: '    "some doc for a wrapped cython method"',
....: '    return -x',
....: 'from sage.misc.cachefunc import cached_method',
....: 'from sage.structure.parent cimport Parent',
....: 'cdef class MyClass(Parent):',
....: '    @cached_method',
....: '    def direct_method(self, x):',
....: '        "Some doc for direct method"',
....: '        return 2*x',
....: '    wrapped_method = cached_method(test_meth,name="wrapped_method")']
sage: cython(os.linesep.join(cython_code))
sage: O = MyClass()
sage: O.direct_method
Cached version of <cyfunction MyClass.direct_method at ...>
sage: O.wrapped_method
Cached version of <cyfunction test_meth at ...>
sage: O.wrapped_method.__name__
'wrapped_method'
sage: O.wrapped_method(5)
-5
sage: O.wrapped_method(5) is O.wrapped_method(5)
True
sage: O.direct_method(5)
10
sage: O.direct_method(5) is O.direct_method(5)
True
```

```
>>> from sage.all import *
>>> # needs sage.misc.cython
>>> cython_code = ['cpdef test_meth(self, x):',
... '    "some doc for a wrapped cython method"',
... '    return -x',
... 'from sage.misc.cachefunc import cached_method',
... 'from sage.structure.parent cimport Parent',
... 'cdef class MyClass(Parent):',
... '    @cached_method',
... '    def direct_method(self, x):',
... '        "Some doc for direct method"',
... '        return 2*x',
... '    wrapped_method = cached_method(test_meth,name="wrapped_method")']
```

(continues on next page)

(continued from previous page)

```
>>> cython(os.linesep.join(cython_code))
>>> O = MyClass()
>>> O.direct_method
Cached version of <cyfunction MyClass.direct_method at ...>
>>> O.wrapped_method
Cached version of <cyfunction test_meth at ...>
>>> O.wrapped_method.__name__
'wrapped_method'
>>> O.wrapped_method(Integer(5))
-5
>>> O.wrapped_method(Integer(5)) is O.wrapped_method(Integer(5))
True
>>> O.direct_method(Integer(5))
10
>>> O.direct_method(Integer(5)) is O.direct_method(Integer(5))
True
```

By Issue #11115, even if a parent does not allow attribute assignment, it can inherit a cached method from the parent class of a category (previously, the cache would have been broken):

```
sage: cython_code = ["from sage.misc.cachefunc import cached_method",
....: "from sage.misc.cachefunc import cached_in_parent_method",
....: "from sage.categories.category import Category",
....: "from sage.categories.objects import Objects",
....: "class MyCategory(Category):",
....: "    @cached_method",
....: "    def super_categories(self):",
....: "        return [Objects()]",
....: "    class ElementMethods:",
....: "        @cached_method",
....: "        def element_cache_test(self):",
....: "            return -self",
....: "        @cached_in_parent_method",
....: "        def element_via_parent_test(self):",
....: "            return -self",
....: "    class ParentMethods:",
....: "        @cached_method",
....: "        def one(self):",
....: "            return self.element_class(self,1)",
....: "        @cached_method",
....: "        def invert(self, x):",
....: "            return -x"]
sage: cython('\n'.join(cython_code))                                    #␣
↪needs sage.misc.cython
sage: C = MyCategory()                                                  #␣
↪needs sage.misc.cython
```

```
>>> from sage.all import *
>>> cython_code = ["from sage.misc.cachefunc import cached_method",
... "from sage.misc.cachefunc import cached_in_parent_method",
... "from sage.categories.category import Category",
... "from sage.categories.objects import Objects",
```

(continues on next page)

(continued from previous page)

```
... "class MyCategory(Category):",
... "    @cached_method",
... "    def super_categories(self):",
... "        return [Objects()]",
... "    class ElementMethods:",
... "        @cached_method",
... "        def element_cache_test(self):",
... "            return -self",
... "        @cached_in_parent_method",
... "        def element_via_parent_test(self):",
... "            return -self",
... "    class ParentMethods:",
... "        @cached_method",
... "        def one(self):",
... "            return self.element_class(self,1)",
... "        @cached_method",
... "        def invert(self, x):",
... "            return -x"]
>>> cython('\n'.join(cython_code))                                    #␣
↪needs sage.misc.cython
>>> C = MyCategory()                                                  #␣
↪needs sage.misc.cython
```

In order to keep the memory footprint of elements small, it was decided to not support the same freedom of using cached methods for elements: If an instance of a class derived from `Element` does not allow attribute assignment, then a cached method inherited from the category of its parent will break, as in the class `MyBrokenElement` below.

However, there is a class `ElementWithCachedMethod` that has generally a slower attribute access, but fully supports cached methods. We remark, however, that cached methods are *much* faster if attribute access works. So, we expect that `ElementWithCachedMethod` will hardly be used.

```
sage: # needs sage.misc.cython
sage: cython_code = ["from sage.structure.element cimport Element,␣
↪ElementWithCachedMethod", "from cpython.object cimport PyObject_RichCompare",
....: "cdef class MyBrokenElement(Element):",
....: "    cdef public object x",
....: "    def __init__(self, P, x):",
....: "        self.x=x",
....: "        Element.__init__(self,P)",
....: "    def __neg__(self):",
....: "        return MyBrokenElement(self.parent(),-self.x)",
....: "    def _repr_(self):",
....: "        return '<%s>'%self.x",
....: "    def __hash__(self):",
....: "        return hash(self.x)",
....: "    cpdef _richcmp_(left, right, int op):",
....: "        return PyObject_RichCompare(left.x, right.x, op)",
....: "    def raw_test(self):",
....: "        return -self",
....: "cdef class MyElement(ElementWithCachedMethod):",
....: "    cdef public object x",
....: "    def __init__(self, P, x):",
....: "        self.x=x",
```

(continues on next page)

(continued from previous page)

```
....:         ElementWithCachedMethod.__init__(self,P)",
....:     def __neg__(self):",
....:         return MyElement(self.parent(),-self.x)",
....:     def _repr_(self):",
....:         return '<%s>'%self.x",
....:     def __hash__(self):",
....:         return hash(self.x)",
....:     cpdef _richcmp_(left, right, int op):",
....:         return PyObject_RichCompare(left.x, right.x, op)",
....:     def raw_test(self):",
....:         return -self",
....: "from sage.structure.parent cimport Parent",
....: "cdef class MyParent(Parent):",
....:     Element = MyElement"]
sage: cython('\n'.join(cython_code))
sage: P = MyParent(category=C)
sage: ebroken = MyBrokenElement(P, 5)
sage: e = MyElement(P, 5)
```

```
>>> from sage.all import *
>>> # needs sage.misc.cython
>>> cython_code = ["from sage.structure.element cimport Element,␣
↪ElementWithCachedMethod", "from cpython.object cimport PyObject_RichCompare",
... "cdef class MyBrokenElement(Element):",
... "    cdef public object x",
... "    def __init__(self, P, x):",
... "        self.x=x",
... "        Element.__init__(self,P)",
... "    def __neg__(self):",
... "        return MyBrokenElement(self.parent(),-self.x)",
... "    def _repr_(self):",
... "        return '<%s>'%self.x",
... "    def __hash__(self):",
... "        return hash(self.x)",
... "    cpdef _richcmp_(left, right, int op):",
... "        return PyObject_RichCompare(left.x, right.x, op)",
... "    def raw_test(self):",
... "        return -self",
... "cdef class MyElement(ElementWithCachedMethod):",
... "    cdef public object x",
... "    def __init__(self, P, x):",
... "        self.x=x",
... "        ElementWithCachedMethod.__init__(self,P)",
... "    def __neg__(self):",
... "        return MyElement(self.parent(),-self.x)",
... "    def _repr_(self):",
... "        return '<%s>'%self.x",
... "    def __hash__(self):",
... "        return hash(self.x)",
... "    cpdef _richcmp_(left, right, int op):",
... "        return PyObject_RichCompare(left.x, right.x, op)",
... "    def raw_test(self):",
```

(continues on next page)

(continued from previous page)

```
... "        return -self",
... "from sage.structure.parent cimport Parent",
... "cdef class MyParent(Parent):",
... "    Element = MyElement"]
>>> cython('\n'.join(cython_code))
>>> P = MyParent(category=C)
>>> ebroken = MyBrokenElement(P, Integer(5))
>>> e = MyElement(P, Integer(5))
```

The cached methods inherited by the parent works:

```
sage: # needs sage.misc.cython
sage: P.one()
<1>
sage: P.one() is P.one()
True
sage: P.invert(e)
<-5>
sage: P.invert(e) is P.invert(e)
True
```

```
>>> from sage.all import *
>>> # needs sage.misc.cython
>>> P.one()
<1>
>>> P.one() is P.one()
True
>>> P.invert(e)
<-5>
>>> P.invert(e) is P.invert(e)
True
```

The cached methods inherited by `MyElement` works:

```
sage: # needs sage.misc.cython
sage: e.element_cache_test()
<-5>
sage: e.element_cache_test() is e.element_cache_test()
True
sage: e.element_via_parent_test()
<-5>
sage: e.element_via_parent_test() is e.element_via_parent_test()
True
```

```
>>> from sage.all import *
>>> # needs sage.misc.cython
>>> e.element_cache_test()
<-5>
>>> e.element_cache_test() is e.element_cache_test()
True
>>> e.element_via_parent_test()
<-5>
```

(continues on next page)

(continued from previous page)

```
>>> e.element_via_parent_test() is e.element_via_parent_test()
True
```

The other element class can only inherit a `cached_in_parent_method`, since the cache is stored in the parent. In fact, equal elements share the cache, even if they are of different types:

```
sage: e == ebroken                                                          #␣
↪needs sage.misc.cython
True
sage: type(e) == type(ebroken)                                              #␣
↪needs sage.misc.cython
False
sage: ebroken.element_via_parent_test() is e.element_via_parent_test()      #␣
↪needs sage.misc.cython
True
```

```
>>> from sage.all import *
>>> e == ebroken                                                            #␣
↪needs sage.misc.cython
True
>>> type(e) == type(ebroken)                                                #␣
↪needs sage.misc.cython
False
>>> ebroken.element_via_parent_test() is e.element_via_parent_test()        #␣
↪needs sage.misc.cython
True
```

However, the cache of the other inherited method breaks, although the method as such works:

```
sage: ebroken.element_cache_test()                                          #␣
↪needs sage.misc.cython
<-5>
sage: ebroken.element_cache_test() is ebroken.element_cache_test()          #␣
↪needs sage.misc.cython
False
```

```
>>> from sage.all import *
>>> ebroken.element_cache_test()                                            #␣
↪needs sage.misc.cython
<-5>
>>> ebroken.element_cache_test() is ebroken.element_cache_test()            #␣
↪needs sage.misc.cython
False
```

The cache can be emptied:

```
sage: # needs sage.misc.cython
sage: a = test_pfunc(5)
sage: test_pfunc.clear_cache()
sage: a is test_pfunc(5)
False
sage: a = P.one()
```

(continues on next page)

(continued from previous page)

```
sage: P.one.clear_cache()
sage: a is P.one()
False
```

```
>>> from sage.all import *
>>> # needs sage.misc.cython
>>> a = test_pfunc(Integer(5))
>>> test_pfunc.clear_cache()
>>> a is test_pfunc(Integer(5))
False
>>> a = P.one()
>>> P.one.clear_cache()
>>> a is P.one()
False
```

Since `e` and `ebroken` share the cache, when we empty it for one element it is empty for the other as well:

```
sage: b = ebroken.element_via_parent_test()                                 #␣
↪needs sage.misc.cython
sage: e.element_via_parent_test.clear_cache()                               #␣
↪needs sage.misc.cython
sage: b is ebroken.element_via_parent_test()                                #␣
↪needs sage.misc.cython
False
```

```
>>> from sage.all import *
>>> b = ebroken.element_via_parent_test()                                 #␣
↪needs sage.misc.cython
>>> e.element_via_parent_test.clear_cache()                               #␣
↪needs sage.misc.cython
>>> b is ebroken.element_via_parent_test()                                #␣
↪needs sage.misc.cython
False
```

Introspection works:

```
sage: # needs sage.misc.cython
sage: from sage.misc.edit_module import file_and_line
sage: from sage.misc.sageinspect import sage_getdoc, sage_getfile, sage_getsource
sage: print(sage_getdoc(test_pfunc))
   Some documentation
sage: print(sage_getdoc(O.wrapped_method))
some doc for a wrapped cython method

sage: print(sage_getdoc(O.direct_method))
Some doc for direct method

sage: print(sage_getsource(O.wrapped_method))
cpdef test_meth(self, x):
    "some doc for a wrapped cython method"
    return -x
sage: print(sage_getsource(O.direct_method))
```

(continues on next page)

(continued from previous page)

```
@cached_method
def direct_method(self, x):
    "Some doc for direct method"
    return 2*x
```

```
>>> from sage.all import *
>>> # needs sage.misc.cython
>>> from sage.misc.edit_module import file_and_line
>>> from sage.misc.sageinspect import sage_getdoc, sage_getfile, sage_getsource
>>> print(sage_getdoc(test_pfunc))
   Some documentation
>>> print(sage_getdoc(O.wrapped_method))
some doc for a wrapped cython method
<BLANKLINE>
>>> print(sage_getdoc(O.direct_method))
Some doc for direct method
<BLANKLINE>
>>> print(sage_getsource(O.wrapped_method))
cpdef test_meth(self, x):
    "some doc for a wrapped cython method"
    return -x
>>> print(sage_getsource(O.direct_method))
@cached_method
def direct_method(self, x):
    "Some doc for direct method"
    return 2*x
```

It is a very common special case to cache a method that has no arguments. In that special case, the time needed to access the cache can be drastically reduced by using a special implementation. The cached method decorator automatically determines which implementation ought to be chosen. A typical example is `sage.rings.polynomial.multi_polynomial_ideal.MPolynomialIdeal.gens()` (no arguments) versus `sage.rings.polynomial.multi_polynomial_ideal.MPolynomialIdeal.groebner_basis()` (several arguments):

```
sage: P.<a,b,c,d> = QQ[]
sage: I = P * [a, b]
sage: I.gens()
[a, b]
sage: I.gens() is I.gens()
True
sage: I.groebner_basis()                                                    #␣
↪needs sage.libs.singular
[a, b]
sage: I.groebner_basis() is I.groebner_basis()                              #␣
↪needs sage.libs.singular
True
sage: type(I.gens)
<class 'sage.misc.cachefunc.CachedMethodCallerNoArgs'>
sage: type(I.groebner_basis)
<class 'sage.misc.cachefunc.CachedMethodCaller'>
```

```
>>> from sage.all import *
>>> P = QQ['a, b, c, d']; (a, b, c, d,) = P._first_ngens(4)
```

(continues on next page)

(continued from previous page)

```
>>> I = P * [a, b]
>>> I.gens()
[a, b]
>>> I.gens() is I.gens()
True
>>> I.groebner_basis()                                                    #␣
↪needs sage.libs.singular
[a, b]
>>> I.groebner_basis() is I.groebner_basis()                              #␣
↪needs sage.libs.singular
True
>>> type(I.gens)
<class 'sage.misc.cachefunc.CachedMethodCallerNoArgs'>
>>> type(I.groebner_basis)
<class 'sage.misc.cachefunc.CachedMethodCaller'>
```

By Issue #12951, the cached_method decorator is also supported on non-c(p)def methods of extension classes, as long as they either support attribute assignment or have a public attribute of type `<dict>` called `_cached_methods`. The latter is easy:

```
sage: # needs sage.misc.cython
sage: cython_code = [
....: "from sage.misc.cachefunc import cached_method",
....: "cdef class MyClass:",
....: "    cdef public dict _cached_methods",
....: "    @cached_method",
....: "    def f(self, a, b):",
....: "        return a*b"]
sage: cython(os.linesep.join(cython_code))
sage: P = MyClass()
sage: P.f(2, 3)
6
sage: P.f(2, 3) is P.f(2, 3)
True
```

```
>>> from sage.all import *
>>> # needs sage.misc.cython
>>> cython_code = [
... "from sage.misc.cachefunc import cached_method",
... "cdef class MyClass:",
... "    cdef public dict _cached_methods",
... "    @cached_method",
... "    def f(self, a, b):",
... "        return a*b"]
>>> cython(os.linesep.join(cython_code))
>>> P = MyClass()
>>> P.f(Integer(2), Integer(3))
6
>>> P.f(Integer(2), Integer(3)) is P.f(Integer(2), Integer(3))
True
```

Providing attribute access is a bit more tricky, since it is needed that an attribute inherited by the instance from its class can be overridden on the instance. That is why providing a `__getattr__` would not be enough in the following example:

```
sage: # needs sage.misc.cython
sage: cython_code = [
....: "from sage.misc.cachefunc import cached_method",
....: "cdef class MyOtherClass:",
....: "    cdef dict D",
....: "    def __init__(self):",
....: "        self.D = {}",
....: "    def __setattr__(self, n, v):",
....: "        self.D[n] = v",
....: "    def __getattribute__(self, n):",
....: "        try:",
....: "            return self.D[n]",
....: "        except KeyError:",
....: "            pass",
....: "        return getattr(type(self),n).__get__(self)",
....: "    @cached_method",
....: "    def f(self, a, b):",
....: "        return a+b"]
sage: cython(os.linesep.join(cython_code))
sage: Q = MyOtherClass()
sage: Q.f(2, 3)
5
sage: Q.f(2, 3) is Q.f(2, 3)
True
```

```
>>> from sage.all import *
>>> # needs sage.misc.cython
>>> cython_code = [
... "from sage.misc.cachefunc import cached_method",
... "cdef class MyOtherClass:",
... "    cdef dict D",
... "    def __init__(self):",
... "        self.D = {}",
... "    def __setattr__(self, n, v):",
... "        self.D[n] = v",
... "    def __getattribute__(self, n):",
... "        try:",
... "            return self.D[n]",
... "        except KeyError:",
... "            pass",
... "        return getattr(type(self),n).__get__(self)",
... "    @cached_method",
... "    def f(self, a, b):",
... "        return a+b"]
>>> cython(os.linesep.join(cython_code))
>>> Q = MyOtherClass()
>>> Q.f(Integer(2), Integer(3))
5
>>> Q.f(Integer(2), Integer(3)) is Q.f(Integer(2), Integer(3))
True
```

Note that supporting attribute access is somehow faster than the easier method:

```
sage: timeit("a = P.f(2,3)")   # random                                    #␣
↪needs sage.misc.cython
625 loops, best of 3: 1.3 µs per loop
sage: timeit("a = Q.f(2,3)")   # random                                    #␣
↪needs sage.misc.cython
625 loops, best of 3: 931 ns per loop
```

```
>>> from sage.all import *
>>> timeit("a = P.f(2,3)")   # random                                    #␣
↪needs sage.misc.cython
625 loops, best of 3: 1.3 µs per loop
>>> timeit("a = Q.f(2,3)")   # random                                    #␣
↪needs sage.misc.cython
625 loops, best of 3: 931 ns per loop
```

Some immutable objects (such as p-adic numbers) cannot implement a reasonable hash function because their == operator has been modified to return `True` for objects which might behave differently in some computations:

```
sage: # needs sage.rings.padics
sage: K.<a> = Qq(9)
sage: b = a.add_bigoh(1)
sage: c = a + 3
sage: b
a + O(3)
sage: c
a + 3 + O(3^20)
sage: b == c
True
sage: b == a
True
sage: c == a
False
```

```
>>> from sage.all import *
>>> # needs sage.rings.padics
>>> K = Qq(Integer(9), names=('a',)); (a,) = K._first_ngens(1)
>>> b = a.add_bigoh(Integer(1))
>>> c = a + Integer(3)
>>> b
a + O(3)
>>> c
a + 3 + O(3^20)
>>> b == c
True
>>> b == a
True
>>> c == a
False
```

If such objects defined a non-trivial hash function, this would break caching in many places. However, such objects should still be usable in caches. This can be achieved by defining an appropriate method `_cache_key`:

```
sage: # needs sage.rings.padics
sage: hash(b)
Traceback (most recent call last):
...
TypeError: unhashable type: 'sage.rings.padics.qadic_flint_CR.
↪qAdicCappedRelativeElement'
sage: from sage.misc.cachefunc import cached_method
sage: @cached_method
....: def f(x): return x == a
sage: f(b)
True
sage: f(c)  # if b and c were hashable, this would return True
False
sage: b._cache_key()
(..., ((0, 1),), 0, 1)
sage: c._cache_key()
(..., ((0, 1), (1,)), 0, 20)
```

```
>>> from sage.all import *
>>> # needs sage.rings.padics
>>> hash(b)
Traceback (most recent call last):
...
TypeError: unhashable type: 'sage.rings.padics.qadic_flint_CR.
↪qAdicCappedRelativeElement'
>>> from sage.misc.cachefunc import cached_method
>>> @cached_method
... def f(x): return x == a
>>> f(b)
True
>>> f(c)  # if b and c were hashable, this would return True
False
>>> b._cache_key()
(..., ((0, 1),), 0, 1)
>>> c._cache_key()
(..., ((0, 1), (1,)), 0, 20)
```

Note

This attribute will only be accessed if the object itself is not hashable.

An implementation must make sure that for elements `a` and `b`, if `a != b`, then also `a._cache_key() != b._cache_key()`. In practice this means that the `_cache_key` should always include the parent as its first argument:

```
sage: S.<a> = Qq(4)                                                    #␣
↪needs sage.rings.padics
sage: d = a.add_bigoh(1)                                               #␣
↪needs sage.rings.padics
sage: b._cache_key() == d._cache_key()  # this would be True if the parents were not␣
↪included
False
```

```
>>> from sage.all import *
>>> S = Qq(Integer(4), names=('a',)); (a,) = S._first_ngens(1)# needs sage.rings.
↪padics
>>> d = a.add_bigoh(Integer(1))
↪     # needs sage.rings.padics
>>> b._cache_key() == d._cache_key()  # this would be True if the parents were not␣
↪included
False
```

Note that shallow copy of mutable objects may behave unexpectedly:

```
sage: class Foo:
....:     @cached_method
....:     def f(self):
....:         return self.x
sage: from copy import copy, deepcopy
sage: a = Foo()
sage: a.x = 1
sage: a.f()
1
sage: b = copy(a)
sage: b.x = 2
sage: b.f()  # incorrect!
1
sage: b.f is a.f  # this is the problem
True
sage: b = deepcopy(a)
sage: b.x = 2
sage: b.f()  # correct
2
sage: b.f is a.f
False
```

```
>>> from sage.all import *
>>> class Foo:
...     @cached_method
...     def f(self):
...         return self.x
>>> from copy import copy, deepcopy
>>> a = Foo()
>>> a.x = Integer(1)
>>> a.f()
1
>>> b = copy(a)
>>> b.x = Integer(2)
>>> b.f()  # incorrect!
1
>>> b.f is a.f  # this is the problem
True
>>> b = deepcopy(a)
>>> b.x = Integer(2)
>>> b.f()  # correct
2
```

(continues on next page)

(continued from previous page)

```
>>> b.f is a.f
False
```

class sage.misc.cachefunc.**CacheDict**

Bases: dict

class sage.misc.cachefunc.**CachedFunction**

Bases: object

Create a cached version of a function, which only recomputes values it hasn't already computed. Synonyme: cached_function

INPUT:

- f – a function
- name – (optional string) name that the cached version of f should be provided with
- key – (optional callable) takes the input and returns a key for the cache, typically one would use this to normalize input
- do_pickle – (optional boolean) whether or not the contents of the cache should be included when pickling this function; the default is not to include them.

If f is a function, do either g = CachedFunction(f) or g = cached_function(f) to make a cached version of f, or put @cached_function right before the definition of f (i.e., use Python decorators):

```
@cached_function
def f(...):
    ....
```

The inputs to the function must be hashable or they must define sage.structure.sage_object.SageObject._cache_key().

EXAMPLES:

```
sage: @cached_function
....: def mul(x, y=2):
....:     return x*y
sage: mul(3)
6
```

```
>>> from sage.all import *
>>> @cached_function
... def mul(x, y=Integer(2)):
...     return x*y
>>> mul(Integer(3))
6
```

We demonstrate that the result is cached, and that, moreover, the cache takes into account the various ways of providing default arguments:

```
sage: mul(3) is mul(3,2)
True
sage: mul(3,y=2) is mul(3,2)
True
```

```
>>> from sage.all import *
>>> mul(Integer(3)) is mul(Integer(3),Integer(2))
True
>>> mul(Integer(3),y=Integer(2)) is mul(Integer(3),Integer(2))
True
```

The user can clear the cache:

```
sage: a = mul(4)
sage: mul.clear_cache()
sage: a is mul(4)
False
```

```
>>> from sage.all import *
>>> a = mul(Integer(4))
>>> mul.clear_cache()
>>> a is mul(Integer(4))
False
```

It is also possible to explicitly override the cache with a different value:

```
sage: mul.set_cache('foo',5)
sage: mul(5,2)
'foo'
```

```
>>> from sage.all import *
>>> mul.set_cache('foo',Integer(5))
>>> mul(Integer(5),Integer(2))
'foo'
```

The parameter `key` can be used to ignore parameters for caching. In this example we ignore the parameter `algorithm`:

```
sage: @cached_function(key=lambda x,y,algorithm: (x,y))
....: def mul(x, y, algorithm='default'):
....:     return x*y
sage: mul(1,1,algorithm='default') is mul(1,1,algorithm='algorithm') is mul(1,1)␣
↪is mul(1,1,'default')
True
```

```
>>> from sage.all import *
>>> @cached_function(key=lambda x,y,algorithm: (x,y))
... def mul(x, y, algorithm='default'):
...     return x*y
>>> mul(Integer(1),Integer(1),algorithm='default') is mul(Integer(1),Integer(1),
↪algorithm='algorithm') is mul(Integer(1),Integer(1)) is mul(Integer(1),
↪Integer(1),'default')
True
```

cache

cached(**args*, ***kwds*)

Return the result from the cache if available. If the value is not cached, raise `KeyError`.

EXAMPLES:

```
sage: @cached_function
....: def f(x):
....:     return x
sage: f.cached(5)
Traceback (most recent call last):
...
KeyError: ((5,), ())
sage: f(5)
5
sage: f.cached(5)
5
```

```
>>> from sage.all import *
>>> @cached_function
... def f(x):
...     return x
>>> f.cached(Integer(5))
Traceback (most recent call last):
...
KeyError: ((5,), ())
>>> f(Integer(5))
5
>>> f.cached(Integer(5))
5
```

clear_cache()

Clear the cache dictionary.

EXAMPLES:

```
sage: # needs sage.combinat
sage: g = CachedFunction(number_of_partitions)
sage: a = g(5)                                                              #␣
↪needs sage.libs.flint
sage: g.cache                                                               #␣
↪needs sage.libs.flint
{((5, 'default'), ()): 7}
sage: g.clear_cache()
sage: g.cache
{}
```

```
>>> from sage.all import *
>>> # needs sage.combinat
>>> g = CachedFunction(number_of_partitions)
>>> a = g(Integer(5))                                                        ␣
↪     # needs sage.libs.flint
>>> g.cache                                                                #␣
↪needs sage.libs.flint
{((5, 'default'), ()): 7}
>>> g.clear_cache()
>>> g.cache
{}
```

f

get_key(**args*, ***kwds*)

Return the key in the cache to be used when `args` and `kwds` are passed in as parameters.

EXAMPLES:

```
sage: @cached_function
....: def foo(x):
....:     return x^2
sage: foo(2)
4
sage: foo.get_key(2)
((2,), ())
sage: foo.get_key(x=3)
((3,), ())
```

```
>>> from sage.all import *
>>> @cached_function
... def foo(x):
...     return x**Integer(2)
>>> foo(Integer(2))
4
>>> foo.get_key(Integer(2))
((2,), ())
>>> foo.get_key(x=Integer(3))
((3,), ())
```

Examples for cached methods:

```
sage: class Foo:
....:     def __init__(self, x):
....:         self._x = x
....:     @cached_method
....:     def f(self, y, z=0):
....:         return self._x * y + z
sage: a = Foo(2)
sage: z = a.f(37)
sage: k = a.f.get_key(37); k
((37, 0), ())
sage: a.f.cache[k] is z
True
```

```
>>> from sage.all import *
>>> class Foo:
...     def __init__(self, x):
...         self._x = x
...     @cached_method
...     def f(self, y, z=Integer(0)):
...         return self._x * y + z
>>> a = Foo(Integer(2))
>>> z = a.f(Integer(37))
>>> k = a.f.get_key(Integer(37)); k
((37, 0), ())
```

(continues on next page)

(continued from previous page)

```
>>> a.f.cache[k] is z
True
```

Note that the method does not test whether there are too many arguments, or wrong argument names:

```
sage: a.f.get_key(1,2,3,x=4,y=5,z=6)
((1, 2, 3), (('x', 4), ('y', 5), ('z', 6)))
```

```
>>> from sage.all import *
>>> a.f.get_key(Integer(1),Integer(2),Integer(3),x=Integer(4),y=Integer(5),
↪z=Integer(6))
((1, 2, 3), (('x', 4), ('y', 5), ('z', 6)))
```

It does, however, take into account the different ways of providing named arguments, possibly with a default value:

```
sage: a.f.get_key(5)
((5, 0), ())
sage: a.f.get_key(y=5)
((5, 0), ())
sage: a.f.get_key(5,0)
((5, 0), ())
sage: a.f.get_key(5,z=0)
((5, 0), ())
sage: a.f.get_key(y=5,z=0)
((5, 0), ())
```

```
>>> from sage.all import *
>>> a.f.get_key(Integer(5))
((5, 0), ())
>>> a.f.get_key(y=Integer(5))
((5, 0), ())
>>> a.f.get_key(Integer(5),Integer(0))
((5, 0), ())
>>> a.f.get_key(Integer(5),z=Integer(0))
((5, 0), ())
>>> a.f.get_key(y=Integer(5),z=Integer(0))
((5, 0), ())
```

is_in_cache(**args*, ***kwds*)

Check if the argument list is in the cache.

EXAMPLES:

```
sage: class Foo:
....:     def __init__(self, x):
....:         self._x = x
....:     @cached_method
....:     def f(self, z, y=0):
....:         return self._x*z+y
sage: a = Foo(2)
sage: a.f.is_in_cache(3)
```

(continues on next page)

(continued from previous page)

```
False
sage: a.f(3)
6
sage: a.f.is_in_cache(3,y=0)
True
```

```
>>> from sage.all import *
>>> class Foo:
...     def __init__(self, x):
...         self._x = x
...     @cached_method
...     def f(self, z, y=Integer(0)):
...         return self._x*z+y
>>> a = Foo(Integer(2))
>>> a.f.is_in_cache(Integer(3))
False
>>> a.f(Integer(3))
6
>>> a.f.is_in_cache(Integer(3),y=Integer(0))
True
```

precompute(*arglist*, *num_processes=1*)

Cache values for a number of inputs. Do the computation in parallel, and only bother to compute values that we haven't already cached.

INPUT:

- `arglist` – list (or iterables) of arguments for which the method shall be precomputed
- `num_processes` – number of processes used by `parallel()`

EXAMPLES:

```
sage: @cached_function
....: def oddprime_factors(n):
....:     l = [p for p,e in factor(n) if p != 2]
....:     return len(l)
sage: oddprime_factors.precompute(range(1,100), 4)
sage: oddprime_factors.cache[(25,),()]
1
```

```
>>> from sage.all import *
>>> @cached_function
... def oddprime_factors(n):
...     l = [p for p,e in factor(n) if p != Integer(2)]
...     return len(l)
>>> oddprime_factors.precompute(range(Integer(1),Integer(100)), Integer(4))
>>> oddprime_factors.cache[(Integer(25),),()]
1
```

set_cache(*value*, **args*, ***kwds*)

Set the value for those args and keyword args Mind the unintuitive syntax (value first). Any idea on how to improve that welcome!

EXAMPLES:

```
sage: # needs sage.combinat sage.libs.flint
sage: g = CachedFunction(number_of_partitions)
sage: a = g(5)
sage: g.cache
{((5, 'default'), ()): 7}
sage: g.set_cache(17, 5)
sage: g.cache
{((5, 'default'), ()): 17}
sage: g(5)
17
```

```
>>> from sage.all import *
>>> # needs sage.combinat sage.libs.flint
>>> g = CachedFunction(number_of_partitions)
>>> a = g(Integer(5))
>>> g.cache
{((5, 'default'), ()): 7}
>>> g.set_cache(Integer(17), Integer(5))
>>> g.cache
{((5, 'default'), ()): 17}
>>> g(Integer(5))
17
```

class sage.misc.cachefunc.**CachedInParentMethod**

Bases: *CachedMethod*

A decorator that creates a cached version of an instance method of a class.

In contrast to *CachedMethod*, the cache dictionary is an attribute of the parent of the instance to which the method belongs.

ASSUMPTION:

This way of caching works only if

- the instances *have* a parent, and
- the instances are hashable (they are part of the cache key) or they define `sage.structure.sage_object.SageObject._cache_key()`

NOTE:

For proper behavior, the method must be a pure function (no side effects). If this decorator is used on a method, it will have identical output on equal elements. This is since the element is part of the hash key. Arguments to the method must be hashable or define `sage.structure.sage_object.SageObject._cache_key()`. The instance it is assigned to must be hashable.

Examples can be found at *cachefunc*.

class sage.misc.cachefunc.**CachedMethod**

Bases: `object`

A decorator that creates a cached version of an instance method of a class.

Note

For proper behavior, the method must be a pure function (no side effects). Arguments to the method must be hashable or transformed into something hashable using `key` or they must define `sage.structure.sage_object.SageObject._cache_key()`.

EXAMPLES:

```
sage: class Foo():
....:     @cached_method
....:     def f(self, t, x=2):
....:         print('computing')
....:         return t**x
sage: a = Foo()
```

```
>>> from sage.all import *
>>> class Foo():
...     @cached_method
...     def f(self, t, x=Integer(2)):
...         print('computing')
...         return t**x
>>> a = Foo()
```

The example shows that the actual computation takes place only once, and that the result is identical for equivalent input:

```
sage: res = a.f(3, 2); res
computing
9
sage: a.f(t = 3, x = 2) is res
True
sage: a.f(3) is res
True
```

```
>>> from sage.all import *
>>> res = a.f(Integer(3), Integer(2)); res
computing
9
>>> a.f(t = Integer(3), x = Integer(2)) is res
True
>>> a.f(Integer(3)) is res
True
```

Note, however, that accessing the attribute directly will call `__get__()`, and returns a *CachedMethodCaller* or *CachedMethodCallerNoArgs*.

```
sage: P.<a,b,c,d> = QQ[]
sage: I = P*[a,b]
sage: type(I.__class__.gens)
<class 'sage.misc.cachefunc.CachedMethodCallerNoArgs'>
sage: type(I.__class__.__dict__["gens"])
<class 'sage.misc.cachefunc.CachedMethod'>
```

```
>>> from sage.all import *
>>> P = QQ['a, b, c, d']; (a, b, c, d,) = P._first_ngens(4)
>>> I = P*[a,b]
>>> type(I.__class__.gens)
<class 'sage.misc.cachefunc.CachedMethodCallerNoArgs'>
>>> type(I.__class__.__dict__["gens"])
<class 'sage.misc.cachefunc.CachedMethod'>
```

The parameter `key` can be used to pass a function which creates a custom cache key for inputs. In the following example, this parameter is used to ignore the `algorithm` keyword for caching:

```
sage: class A():
....:     def _f_normalize(self, x, algorithm): return x
....:     @cached_method(key=_f_normalize)
....:     def f(self, x, algorithm='default'): return x
sage: a = A()
sage: a.f(1, algorithm='default') is a.f(1) is a.f(1, algorithm='algorithm')
True
```

```
>>> from sage.all import *
>>> class A():
...     def _f_normalize(self, x, algorithm): return x
...     @cached_method(key=_f_normalize)
...     def f(self, x, algorithm='default'): return x
>>> a = A()
>>> a.f(Integer(1), algorithm='default') is a.f(Integer(1)) is a.f(Integer(1),␣
↪algorithm='algorithm')
True
```

The parameter `do_pickle` can be used to enable pickling of the cache. Usually the cache is not stored when pickling:

```
sage: class A():
....:     @cached_method
....:     def f(self, x): return None
sage: import __main__
sage: __main__.A = A
sage: a = A()
sage: a.f(1)
sage: len(a.f.cache)
1
sage: b = loads(dumps(a))
sage: len(b.f.cache)
0
```

```
>>> from sage.all import *
>>> class A():
...     @cached_method
...     def f(self, x): return None
>>> import __main__
>>> __main__.A = A
>>> a = A()
>>> a.f(Integer(1))
```

(continues on next page)

(continued from previous page)

```
>>> len(a.f.cache)
1
>>> b = loads(dumps(a))
>>> len(b.f.cache)
0
```

When `do_pickle` is set, the pickle contains the contents of the cache:

```
sage: class A():
....:     @cached_method(do_pickle=True)
....:     def f(self, x): return None
sage: __main__.A = A
sage: a = A()
sage: a.f(1)
sage: len(a.f.cache)
1
sage: b = loads(dumps(a))
sage: len(b.f.cache)
1
```

```
>>> from sage.all import *
>>> class A():
...     @cached_method(do_pickle=True)
...     def f(self, x): return None
>>> __main__.A = A
>>> a = A()
>>> a.f(Integer(1))
>>> len(a.f.cache)
1
>>> b = loads(dumps(a))
>>> len(b.f.cache)
1
```

Cached methods cannot be copied like usual methods, see Issue #12603. Copying them can lead to very surprising results:

```
sage: class A:
....:     @cached_method
....:     def f(self):
....:         return 1
sage: class B:
....:     g=A.f
....:     def f(self):
....:         return 2

sage: b=B()
sage: b.f()
2
sage: b.g()
1
sage: b.f()
1
```

```
>>> from sage.all import *
>>> class A:
...     @cached_method
...     def f(self):
...         return Integer(1)
>>> class B:
...     g=A.f
...     def f(self):
...         return Integer(2)

>>> b=B()
>>> b.f()
2
>>> b.g()
1
>>> b.f()
1
```

class sage.misc.cachefunc.**CachedMethodCaller**

Bases: *CachedFunction*

Utility class that is used by *CachedMethod* to bind a cached method to an instance.

Note

Since Issue #11115, there is a special implementation *CachedMethodCallerNoArgs* for methods that do not take arguments.

EXAMPLES:

```
sage: class A:
....:     @cached_method
....:     def bar(self, x):
....:         return x^2
sage: a = A()
sage: a.bar
Cached version of <function ...bar at 0x...>
sage: type(a.bar)
<class 'sage.misc.cachefunc.CachedMethodCaller'>
sage: a.bar(2) is a.bar(x=2)
True
```

```
>>> from sage.all import *
>>> class A:
...     @cached_method
...     def bar(self, x):
...         return x**Integer(2)
>>> a = A()
>>> a.bar
Cached version of <function ...bar at 0x...>
>>> type(a.bar)
<class 'sage.misc.cachefunc.CachedMethodCaller'>
```

(continues on next page)

(continued from previous page)

```
>>> a.bar(Integer(2)) is a.bar(x=Integer(2))
True
```

cached(**args*, ***kwds*)

Return the result from the cache if available. If the value is not cached, raise `KeyError`.

EXAMPLES:

```
sage: class CachedMethodTest():
....:     @cached_method
....:     def f(self, x):
....:         return x
sage: o = CachedMethodTest()
sage: CachedMethodTest.f.cached(o, 5)
Traceback (most recent call last):
...
KeyError: ((5,), ())
sage: o.f.cached(5)
Traceback (most recent call last):
...
KeyError: ((5,), ())
sage: o.f(5)
5
sage: CachedMethodTest.f.cached(o, 5)
5
sage: o.f.cached(5)
5
```

```
>>> from sage.all import *
>>> class CachedMethodTest():
...     @cached_method
...     def f(self, x):
...         return x
>>> o = CachedMethodTest()
>>> CachedMethodTest.f.cached(o, Integer(5))
Traceback (most recent call last):
...
KeyError: ((5,), ())
>>> o.f.cached(Integer(5))
Traceback (most recent call last):
...
KeyError: ((5,), ())
>>> o.f(Integer(5))
5
>>> CachedMethodTest.f.cached(o, Integer(5))
5
>>> o.f.cached(Integer(5))
5
```

precompute(*arglist*, *num_processes=1*)

Cache values for a number of inputs. Do the computation in parallel, and only bother to compute values that we haven't already cached.

INPUT:

- `arglist` – list (or iterables) of arguments for which the method shall be precomputed
- `num_processes` – number of processes used by `parallel()`

EXAMPLES:

```
sage: class Foo():
....:     @cached_method
....:     def f(self, i):
....:         return i^2
sage: foo = Foo()
sage: foo.f(3)
9
sage: foo.f(1)
1
sage: foo.f.precompute(range(2), 2)
sage: foo.f.cache == {((0,), ()): 0, ((1,), ()): 1, ((3,), ()): 9}
True
```

```
>>> from sage.all import *
>>> class Foo():
...     @cached_method
...     def f(self, i):
...         return i**Integer(2)
>>> foo = Foo()
>>> foo.f(Integer(3))
9
>>> foo.f(Integer(1))
1
>>> foo.f.precompute(range(Integer(2)), Integer(2))
>>> foo.f.cache == {((Integer(0),), ()): Integer(0), ((Integer(1),), ()):␣
↪Integer(1), ((Integer(3),), ()): Integer(9)}
True
```

class sage.misc.cachefunc.**CachedMethodCallerNoArgs**

Bases: *CachedFunction*

Utility class that is used by *CachedMethod* to bind a cached method to an instance, in the case of a method that does not accept any arguments except `self`.

Note

The return value `None` would not be cached. So, if you have a method that does not accept arguments and may return `None` after a lengthy computation, then `@cached_method` should not be used.

EXAMPLES:

```
sage: P.<a,b,c,d> = QQ[]
sage: I = P*[a,b]
sage: I.gens
Cached version of <function ...gens at 0x...>
sage: type(I.gens)
```

(continues on next page)

(continued from previous page)

```
<class 'sage.misc.cachefunc.CachedMethodCallerNoArgs'>
sage: I.gens is I.gens
True
sage: I.gens() is I.gens()
True
```

```
>>> from sage.all import *
>>> P = QQ['a, b, c, d']; (a, b, c, d,) = P._first_ngens(4)
>>> I = P*[a,b]
>>> I.gens
Cached version of <function ...gens at 0x...>
>>> type(I.gens)
<class 'sage.misc.cachefunc.CachedMethodCallerNoArgs'>
>>> I.gens is I.gens
True
>>> I.gens() is I.gens()
True
```

AUTHOR:

- Simon King (2011-04)

clear_cache()

Clear the cache dictionary.

EXAMPLES:

```
sage: P.<a,b,c,d> = QQ[]
sage: I = P*[a,b]
sage: I.gens()
[a, b]
sage: I.gens.set_cache('bar')
sage: I.gens()
'bar'
```

```
>>> from sage.all import *
>>> P = QQ['a, b, c, d']; (a, b, c, d,) = P._first_ngens(4)
>>> I = P*[a,b]
>>> I.gens()
[a, b]
>>> I.gens.set_cache('bar')
>>> I.gens()
'bar'
```

The cache can be emptied and thus the original value will be reconstructed:

```
sage: I.gens.clear_cache()
sage: I.gens()
[a, b]
```

```
>>> from sage.all import *
>>> I.gens.clear_cache()
```

(continues on next page)

(continued from previous page)

```
>>> I.gens()
[a, b]
```

is_in_cache()

Answers whether the return value is already in the cache.

Note

Recall that a cached method without arguments cannot cache the return value `None`.

EXAMPLES:

```
sage: P.<x,y> = QQ[]
sage: I = P*[x,y]
sage: I.gens.is_in_cache()
False
sage: I.gens()
[x, y]
sage: I.gens.is_in_cache()
True
```

```
>>> from sage.all import *
>>> P = QQ['x, y']; (x, y,) = P._first_ngens(2)
>>> I = P*[x,y]
>>> I.gens.is_in_cache()
False
>>> I.gens()
[x, y]
>>> I.gens.is_in_cache()
True
```

set_cache(*value*)

Override the cache with a specific value.

Note

`None` is not suitable for a cached value. It would be interpreted as an empty cache, forcing a new computation.

EXAMPLES:

```
sage: P.<a,b,c,d> = QQ[]
sage: I = P*[a,b]
sage: I.gens()
[a, b]
sage: I.gens.set_cache('bar')
sage: I.gens()
'bar'
```

```
>>> from sage.all import *
>>> P = QQ['a, b, c, d']; (a, b, c, d,) = P._first_ngens(4)
>>> I = P*[a,b]
>>> I.gens()
[a, b]
>>> I.gens.set_cache('bar')
>>> I.gens()
'bar'
```

The cache can be emptied and thus the original value will be reconstructed:

```
sage: I.gens.clear_cache()
sage: I.gens()
[a, b]
```

```
>>> from sage.all import *
>>> I.gens.clear_cache()
>>> I.gens()
[a, b]
```

The attempt to assign `None` to the cache fails:

```
sage: I.gens.set_cache(None)
sage: I.gens()
[a, b]
```

```
>>> from sage.all import *
>>> I.gens.set_cache(None)
>>> I.gens()
[a, b]
```

class sage.misc.cachefunc.**CachedMethodPickle**(*inst*, *name*, *cache=None*)

Bases: `object`

This class helps to unpickle cached methods.

Note

Since Issue #8611, a cached method is an attribute of the instance (provided that it has a `__dict__`). Hence, when pickling the instance, it would be attempted to pickle that attribute as well, but this is a problem, since functions cannot be pickled, currently. Therefore, we replace the actual cached method by a place holder, that kills itself as soon as any attribute is requested. Then, the original cached attribute is reinstated. But the cached values are in fact saved (if `do_pickle` is set.)

EXAMPLES:

```
sage: R.<x, y, z> = PolynomialRing(QQ, 3)
sage: I = R * (x^3 + y^3 + z^3, x^4 - y^4)
sage: I.groebner_basis()                                                    #␣
↪needs sage.libs.singular
[y^5*z^3 - 1/4*x^2*z^6 + 1/2*x*y*z^6 + 1/4*y^2*z^6,
 x^2*y*z^3 - x*y^2*z^3 + 2*y^3*z^3 + z^6,
```

(continues on next page)

(continued from previous page)

```
 x*y^3 + y^4 + x*z^3, x^3 + y^3 + z^3]
sage: I.groebner_basis
Cached version of <function ...groebner_basis at 0x...>
```

```
>>> from sage.all import *
>>> R = PolynomialRing(QQ, Integer(3), names=('x', 'y', 'z',)); (x, y, z,) = R._
↪first_ngens(3)
>>> I = R * (x**Integer(3) + y**Integer(3) + z**Integer(3), x**Integer(4) -␣
↪y**Integer(4))
>>> I.groebner_basis()                                                    #␣
↪needs sage.libs.singular
[y^5*z^3 - 1/4*x^2*z^6 + 1/2*x*y*z^6 + 1/4*y^2*z^6,
 x^2*y*z^3 - x*y^2*z^3 + 2*y^3*z^3 + z^6,
 x*y^3 + y^4 + x*z^3, x^3 + y^3 + z^3]
>>> I.groebner_basis
Cached version of <function ...groebner_basis at 0x...>
```

We now pickle and unpickle the ideal. The cached method `groebner_basis` is replaced by a placeholder:

```
sage: J = loads(dumps(I))
sage: J.groebner_basis
Pickle of the cached method "groebner_basis"
```

```
>>> from sage.all import *
>>> J = loads(dumps(I))
>>> J.groebner_basis
Pickle of the cached method "groebner_basis"
```

But as soon as any other attribute is requested from the placeholder, it replaces itself by the cached method, and the entries of the cache are actually preserved:

```
sage: J.groebner_basis.is_in_cache()                                       #␣
↪needs sage.libs.singular
True
sage: J.groebner_basis
Cached version of <function ...groebner_basis at 0x...>
sage: J.groebner_basis() == I.groebner_basis()                             #␣
↪needs sage.libs.singular
True
```

```
>>> from sage.all import *
>>> J.groebner_basis.is_in_cache()                                         #␣
↪needs sage.libs.singular
True
>>> J.groebner_basis
Cached version of <function ...groebner_basis at 0x...>
>>> J.groebner_basis() == I.groebner_basis()                               #␣
↪needs sage.libs.singular
True
```

AUTHOR:

- Simon King (2011-01)

class sage.misc.cachefunc.**CachedSpecialMethod**

Bases: *CachedMethod*

Cached version of *special* python methods.

IMPLEMENTATION:

For new style classes `C`, it is not possible to override a special method, such as `__hash__`, in the `__dict__` of an instance `c` of `C`, because Python will always use what is provided by the class, not by the instance to avoid metaclass confusion. See https://docs.python.org/3/reference/datamodel.html#special-method-lookup.

By consequence, if `__hash__` would be wrapped by using *CachedMethod*, then `hash(c)` will access `C.__hash__` and bind it to `c`, which means that the `__get__` method of *CachedMethod* will be called. But there, we assume that Python has already inspected `__dict__`, and thus a *CachedMethodCaller* will be created over and over again.

Here, the `__get__` method will explicitly access the `__dict__`, so that `hash(c)` will rely on a single *CachedMethodCaller* stored in the `__dict__`.

EXAMPLES:

```
sage: class C:
....:     @cached_method
....:     def __hash__(self):
....:         print("compute hash")
....:         return int(5)
....:
sage: c = C()
sage: type(C.__hash__)
<class 'sage.misc.cachefunc.CachedMethodCallerNoArgs'>
```

```
>>> from sage.all import *
>>> class C:
...     @cached_method
...     def __hash__(self):
...         print("compute hash")
...         return int(Integer(5))
....:
>>> c = C()
>>> type(C.__hash__)
<class 'sage.misc.cachefunc.CachedMethodCallerNoArgs'>
```

The hash is computed only once, subsequent calls will use the value from the cache. This was implemented in Issue #12601.

```
sage: hash(c)       # indirect doctest
compute hash
5
sage: hash(c)
5
```

```
>>> from sage.all import *
>>> hash(c)       # indirect doctest
compute hash
5
```

(continues on next page)

(continued from previous page)

```
>>> hash(c)
5
```

class sage.misc.cachefunc.**DiskCachedFunction**(*f*, *dir*, *memory_cache=False*, *key=None*)

Bases: *CachedFunction*

Works similar to CachedFunction, but instead, we keep the cache on disk (optionally, we keep it in memory too).

EXAMPLES:

```
sage: from sage.misc.cachefunc import DiskCachedFunction
sage: dir = tmp_dir()
sage: factor = DiskCachedFunction(factor, dir, memory_cache=True)
sage: f = factor(2775); f
3 * 5^2 * 37
sage: f is factor(2775)
True
```

```
>>> from sage.all import *
>>> from sage.misc.cachefunc import DiskCachedFunction
>>> dir = tmp_dir()
>>> factor = DiskCachedFunction(factor, dir, memory_cache=True)
>>> f = factor(Integer(2775)); f
3 * 5^2 * 37
>>> f is factor(Integer(2775))
True
```

class sage.misc.cachefunc.**FileCache**(*dir*, *prefix=''*, *memory_cache=False*)

Bases: `object`

FileCache is a dictionary-like class which stores keys and values on disk. The keys take the form of a tuple `(A,K)`

- `A` – tuple of objects `t` where each `t` is an exact object which is uniquely identified by a short string
- `K` – tuple of tuples `(s,v)` where `s` is a valid variable name and `v` is an exact object which is uniquely identified by a short string with letters [a-zA-Z0-9-._]

The primary use case is the *DiskCachedFunction*. If `memory_cache == True`, we maintain a cache of objects seen during this session in memory – but we don't load them from disk until necessary. The keys and values are stored in a pair of files:

- `prefix-argstring.key.sobj` contains the `key` only,
- `prefix-argstring.sobj` contains the tuple `(key,val)`

where `self[key] == val`.

Note

We assume that each *FileCache* lives in its own directory. Use **extreme** caution if you wish to break that assumption.

clear()

Clear all key, value pairs from `self` and unlink the associated files from the file cache.

EXAMPLES:

```
sage: from sage.misc.cachefunc import FileCache
sage: dir = tmp_dir()
sage: FC1 = FileCache(dir, memory_cache=False, prefix='foo')
sage: FC2 = FileCache(dir, memory_cache=False, prefix='foo')
sage: k1 = ((), (('a', 1),))
sage: t1 = randint(0, 1000)
sage: k2 = ((), (('b', 1),))
sage: t2 = randint(0, 1000)
sage: FC1[k1] = t1
sage: FC2[k2] = t2
sage: FC2.clear()
sage: k1 in FC1
False
sage: k2 in FC1
False
```

```
>>> from sage.all import *
>>> from sage.misc.cachefunc import FileCache
>>> dir = tmp_dir()
>>> FC1 = FileCache(dir, memory_cache=False, prefix='foo')
>>> FC2 = FileCache(dir, memory_cache=False, prefix='foo')
>>> k1 = ((), (('a', Integer(1)),))
>>> t1 = randint(Integer(0), Integer(1000))
>>> k2 = ((), (('b', Integer(1)),))
>>> t2 = randint(Integer(0), Integer(1000))
>>> FC1[k1] = t1
>>> FC2[k2] = t2
>>> FC2.clear()
>>> k1 in FC1
False
>>> k2 in FC1
False
```

file_list()

Return the list of files corresponding to `self`.

EXAMPLES:

```
sage: from sage.misc.cachefunc import FileCache
sage: dir = tmp_dir()
sage: FC = FileCache(dir, memory_cache = True, prefix='t')
sage: FC[((),())] = 1
sage: FC[((1,2),())] = 2
sage: FC[((1,),(('a',1),))] = 3
sage: for f in sorted(FC.file_list()): print(f[len(dir):])
t-.key.sobj
t-.sobj
t-1_2.key.sobj
t-1_2.sobj
t-a-1.1.key.sobj
t-a-1.1.sobj
```

```
>>> from sage.all import *
>>> from sage.misc.cachefunc import FileCache
>>> dir = tmp_dir()
>>> FC = FileCache(dir, memory_cache = True, prefix='t')
>>> FC[((),())] = Integer(1)
>>> FC[((Integer(1),Integer(2)),())] = Integer(2)
>>> FC[((Integer(1),),(('a',Integer(1)),))] = Integer(3)
>>> for f in sorted(FC.file_list()): print(f[len(dir):])
t-.key.sobj
t-.sobj
t-1_2.key.sobj
t-1_2.sobj
t-a-1.1.key.sobj
t-a-1.1.sobj
```

items()

Return a list of tuples `(k,v)` where `self[k] = v`.

EXAMPLES:

```
sage: from sage.misc.cachefunc import FileCache
sage: dir = tmp_dir()
sage: FC = FileCache(dir, memory_cache = False)
sage: FC[((),())] = 1
sage: FC[((1,2),())] = 2
sage: FC[((1,),(('a',1),))] = 3
sage: I = FC.items()
sage: I.sort(); I
[((((), ()), 1), (((1,), (('a', 1),)), 3), (((1, 2), ()), 2)]
```

```
>>> from sage.all import *
>>> from sage.misc.cachefunc import FileCache
>>> dir = tmp_dir()
>>> FC = FileCache(dir, memory_cache = False)
>>> FC[((),())] = Integer(1)
>>> FC[((Integer(1),Integer(2)),())] = Integer(2)
>>> FC[((Integer(1),),(('a',Integer(1)),))] = Integer(3)
>>> I = FC.items()
>>> I.sort(); I
[((((), ()), 1), (((1,), (('a', 1),)), 3), (((1, 2), ()), 2)]
```

keys()

Return a list of keys `k` where `self[k]` is defined.

EXAMPLES:

```
sage: from sage.misc.cachefunc import FileCache
sage: dir = tmp_dir()
sage: FC = FileCache(dir, memory_cache = False)
sage: FC[((),())] = 1
sage: FC[((1,2),())] = 2
sage: FC[((1,),(('a',1),))] = 3
sage: K = FC.keys()
```

(continues on next page)

(continued from previous page)

```
sage: K.sort(); K
[((), ()), ((1,), (('a', 1),)), ((1, 2), ())]
```

```
>>> from sage.all import *
>>> from sage.misc.cachefunc import FileCache
>>> dir = tmp_dir()
>>> FC = FileCache(dir, memory_cache = False)
>>> FC[((),())] = Integer(1)
>>> FC[((Integer(1),Integer(2)),())] = Integer(2)
>>> FC[((Integer(1),),(('a',Integer(1)),))] = Integer(3)
>>> K = FC.keys()
>>> K.sort(); K
[((), ()), ((1,), (('a', 1),)), ((1, 2), ())]
```

values()

Return a list of values that are stored in `self`.

EXAMPLES:

```
sage: from sage.misc.cachefunc import FileCache
sage: dir = tmp_dir()
sage: FC = FileCache(dir, memory_cache = False)
sage: FC[((),())] = 1
sage: FC[((1,2),())] = 2
sage: FC[((1,),(('a',1),))] = 3
sage: FC[((),(('a',1),))] = 4
sage: v = FC.values()
sage: v.sort(); v
[1, 2, 3, 4]
```

```
>>> from sage.all import *
>>> from sage.misc.cachefunc import FileCache
>>> dir = tmp_dir()
>>> FC = FileCache(dir, memory_cache = False)
>>> FC[((),())] = Integer(1)
>>> FC[((Integer(1),Integer(2)),())] = Integer(2)
>>> FC[((Integer(1),),(('a',Integer(1)),))] = Integer(3)
>>> FC[((),(('a',Integer(1)),))] = Integer(4)
>>> v = FC.values()
>>> v.sort(); v
[1, 2, 3, 4]
```

class sage.misc.cachefunc.**GloballyCachedMethodCaller**

Bases: *CachedMethodCaller*

Implementation of cached methods in case that the cache is not stored in the instance, but in some global object. In particular, it is used to implement *CachedInParentMethod*.

The only difference is that the instance is used as part of the key.

class sage.misc.cachefunc.**NonpicklingDict**

Bases: `dict`

A special dict which does not pickle its contents.

EXAMPLES:

```
sage: from sage.misc.cachefunc import NonpicklingDict
sage: d = NonpicklingDict()
sage: d[0] = 0
sage: loads(dumps(d))
{}
```

```
>>> from sage.all import *
>>> from sage.misc.cachefunc import NonpicklingDict
>>> d = NonpicklingDict()
>>> d[Integer(0)] = Integer(0)
>>> loads(dumps(d))
{}
```

class sage.misc.cachefunc.**WeakCachedFunction**

Bases: *CachedFunction*

A version of *CachedFunction* using weak references on the values.

If `f` is a function, do either `g = weak_cached_function(f)` to make a cached version of `f`, or put `@weak_cached_function` right before the definition of `f` (i.e., use Python decorators):

```
@weak_cached_function
def f(...):
    ...
```

As an exception meant to improve performance, the most recently computed values are strongly referenced. The number of strongly cached values can be controlled by the `cache` keyword.

EXAMPLES:

```
sage: from sage.misc.cachefunc import weak_cached_function
sage: class A: pass
sage: @weak_cached_function(cache=0)
....: def f():
....:     print("doing a computation")
....:     return A()
sage: a = f()
doing a computation
```

```
>>> from sage.all import *
>>> from sage.misc.cachefunc import weak_cached_function
>>> class A: pass
>>> @weak_cached_function(cache=Integer(0))
... def f():
...     print("doing a computation")
...     return A()
>>> a = f()
doing a computation
```

The result is cached:

```
sage: b = f()
sage: a is b
True
```

```
>>> from sage.all import *
>>> b = f()
>>> a is b
True
```

However, if there are no strong references left, the result is deleted, and thus a new computation takes place:

```
sage: del a
sage: del b
sage: a = f()
doing a computation
```

```
>>> from sage.all import *
>>> del a
>>> del b
>>> a = f()
doing a computation
```

Above, we used the `cache=0` keyword. With a larger value, the most recently computed values are cached anyway, even if they are not referenced:

```
sage: @weak_cached_function(cache=3)
....: def f(x):
....:     print("doing a computation for x={}".format(x))
....:     return A()
sage: a = f(1); del a
doing a computation for x=1
sage: a = f(2), f(1); del a
doing a computation for x=2
sage: a = f(3), f(1); del a
doing a computation for x=3
sage: a = f(4), f(1); del a
doing a computation for x=4
doing a computation for x=1
sage: a = f(5), f(1); del a
doing a computation for x=5
```

```
>>> from sage.all import *
>>> @weak_cached_function(cache=Integer(3))
... def f(x):
...     print("doing a computation for x={}".format(x))
...     return A()
>>> a = f(Integer(1)); del a
doing a computation for x=1
>>> a = f(Integer(2)), f(Integer(1)); del a
doing a computation for x=2
>>> a = f(Integer(3)), f(Integer(1)); del a
doing a computation for x=3
```

(continues on next page)

(continued from previous page)

```
>>> a = f(Integer(4)), f(Integer(1)); del a
doing a computation for x=4
doing a computation for x=1
>>> a = f(Integer(5)), f(Integer(1)); del a
doing a computation for x=5
```

The parameter `key` can be used to ignore parameters for caching. In this example we ignore the parameter `algorithm`:

```
sage: @weak_cached_function(key=lambda x,algorithm: x)
....: def mod_ring(x, algorithm='default'):
....:     return IntegerModRing(x)
sage: mod_ring(1,algorithm='default') is mod_ring(1,algorithm='algorithm') is mod_
↪ring(1) is mod_ring(1,'default')
True
```

```
>>> from sage.all import *
>>> @weak_cached_function(key=lambda x,algorithm: x)
... def mod_ring(x, algorithm='default'):
...     return IntegerModRing(x)
>>> mod_ring(Integer(1),algorithm='default') is mod_ring(Integer(1),algorithm=
↪'algorithm') is mod_ring(Integer(1)) is mod_ring(Integer(1),'default')
True
```

`sage.misc.cachefunc.`**`cache_key`**`(`*`o`*`)`

Helper function to return a hashable key for `o` which can be used for caching.

This function is intended for objects which are not hashable such as p-adic numbers. The difference from calling an object's `_cache_key` method directly, is that it also works for tuples and unpacks them recursively (if necessary, i.e., if they are not hashable).

EXAMPLES:

```
sage: from sage.misc.cachefunc import cache_key
sage: K.<u> = Qq(9)                                                          #␣
↪needs sage.rings.padics
sage: a = K(1); a                                                            #␣
↪needs sage.rings.padics
1 + O(3^20)
sage: cache_key(a)                                                           #␣
↪needs sage.rings.padics
(..., ((1,),), 0, 20)
```

```
>>> from sage.all import *
>>> from sage.misc.cachefunc import cache_key
>>> K = Qq(Integer(9), names=('u',)); (u,) = K._first_ngens(1)# needs sage.rings.
↪padics
>>> a = K(Integer(1)); a                                                      ␣
↪     # needs sage.rings.padics
1 + O(3^20)
>>> cache_key(a)                                                            #␣
↪needs sage.rings.padics
(..., ((1,),), 0, 20)
```

This function works if `o` is a tuple. In this case it unpacks its entries recursively:

```
sage: o = (1, 2, (3, a))                                                    #␣
↪needs sage.rings.padics
sage: cache_key(o)                                                          #␣
↪needs sage.rings.padics
(1, 2, (3, (..., ((1,),), 0, 20)))
```

```
>>> from sage.all import *
>>> o = (Integer(1), Integer(2), (Integer(3), a))                                ␣
↪                        # needs sage.rings.padics
>>> cache_key(o)                                                             #␣
↪needs sage.rings.padics
(1, 2, (3, (..., ((1,),), 0, 20)))
```

Note that tuples are only partially unpacked if some of its entries are hashable:

```
sage: o = (1/2, a)                                                          #␣
↪needs sage.rings.padics
sage: cache_key(o)                                                          #␣
↪needs sage.rings.padics
(1/2, (..., ((1,),), 0, 20))
```

```
>>> from sage.all import *
>>> o = (Integer(1)/Integer(2), a)                                               ␣
↪               # needs sage.rings.padics
>>> cache_key(o)                                                             #␣
↪needs sage.rings.padics
(1/2, (..., ((1,),), 0, 20))
```

sage.misc.cachefunc.**cached_function**(*self*, **args*, ***kwds*)

Create a cached version of a function, which only recomputes values it hasn't already computed. Synonyme: `cached_function`

INPUT:

- `f` – a function
- `name` – (optional string) name that the cached version of `f` should be provided with
- `key` – (optional callable) takes the input and returns a key for the cache, typically one would use this to normalize input
- `do_pickle` – (optional boolean) whether or not the contents of the cache should be included when pickling this function; the default is not to include them.

If `f` is a function, do either `g = CachedFunction(f)` or `g = cached_function(f)` to make a cached version of `f`, or put `@cached_function` right before the definition of `f` (i.e., use Python decorators):

```
@cached_function
def f(...):
    ....
```

The inputs to the function must be hashable or they must define `sage.structure.sage_object.SageObject._cache_key()`.

EXAMPLES:

```
sage: @cached_function
....: def mul(x, y=2):
....:     return x*y
sage: mul(3)
6
```

```
>>> from sage.all import *
>>> @cached_function
... def mul(x, y=Integer(2)):
...     return x*y
>>> mul(Integer(3))
6
```

We demonstrate that the result is cached, and that, moreover, the cache takes into account the various ways of providing default arguments:

```
sage: mul(3) is mul(3,2)
True
sage: mul(3,y=2) is mul(3,2)
True
```

```
>>> from sage.all import *
>>> mul(Integer(3)) is mul(Integer(3),Integer(2))
True
>>> mul(Integer(3),y=Integer(2)) is mul(Integer(3),Integer(2))
True
```

The user can clear the cache:

```
sage: a = mul(4)
sage: mul.clear_cache()
sage: a is mul(4)
False
```

```
>>> from sage.all import *
>>> a = mul(Integer(4))
>>> mul.clear_cache()
>>> a is mul(Integer(4))
False
```

It is also possible to explicitly override the cache with a different value:

```
sage: mul.set_cache('foo',5)
sage: mul(5,2)
'foo'
```

```
>>> from sage.all import *
>>> mul.set_cache('foo',Integer(5))
>>> mul(Integer(5),Integer(2))
'foo'
```

The parameter `key` can be used to ignore parameters for caching. In this example we ignore the parameter `algorithm`:

```
sage: @cached_function(key=lambda x,y,algorithm: (x,y))
....: def mul(x, y, algorithm='default'):
....:     return x*y
sage: mul(1,1,algorithm='default') is mul(1,1,algorithm='algorithm') is mul(1,1)␣
↪is mul(1,1,'default')
True
```

```
>>> from sage.all import *
>>> @cached_function(key=lambda x,y,algorithm: (x,y))
... def mul(x, y, algorithm='default'):
...     return x*y
>>> mul(Integer(1),Integer(1),algorithm='default') is mul(Integer(1),Integer(1),
↪algorithm='algorithm') is mul(Integer(1),Integer(1)) is mul(Integer(1),
↪Integer(1),'default')
True
```

sage.misc.cachefunc.**cached_in_parent_method**(*self*, *inst*, **args*, ***kwds*)

A decorator that creates a cached version of an instance method of a class.

In contrast to *CachedMethod*, the cache dictionary is an attribute of the parent of the instance to which the method belongs.

ASSUMPTION:

This way of caching works only if

- the instances *have* a parent, and
- the instances are hashable (they are part of the cache key) or they define `sage.structure.sage_object.SageObject._cache_key()`

NOTE:

For proper behavior, the method must be a pure function (no side effects). If this decorator is used on a method, it will have identical output on equal elements. This is since the element is part of the hash key. Arguments to the method must be hashable or define `sage.structure.sage_object.SageObject._cache_key()`. The instance it is assigned to must be hashable.

Examples can be found at *cachefunc*.

sage.misc.cachefunc.**cached_method**(*f*, *name=None*, *key=None*, *do_pickle=None*)

A decorator for cached methods.

EXAMPLES:

In the following examples, one can see how a cached method works in application. Below, we demonstrate what is done behind the scenes:

```
sage: class C:
....:     @cached_method
....:     def __hash__(self):
....:         print("compute hash")
....:         return int(5)
....:     @cached_method
....:     def f(self, x):
....:         print("computing cached method")
....:         return x*2
sage: c = C()
```

(continues on next page)

(continued from previous page)

```
sage: type(C.__hash__)
<class 'sage.misc.cachefunc.CachedMethodCallerNoArgs'>
sage: hash(c)
compute hash
5
```

```
>>> from sage.all import *
>>> class C:
...     @cached_method
...     def __hash__(self):
...         print("compute hash")
...         return int(Integer(5))
...     @cached_method
...     def f(self, x):
...         print("computing cached method")
...         return x*Integer(2)
>>> c = C()
>>> type(C.__hash__)
<class 'sage.misc.cachefunc.CachedMethodCallerNoArgs'>
>>> hash(c)
compute hash
5
```

When calling a cached method for the second time with the same arguments, the value is gotten from the cache, so that a new computation is not needed:

```
sage: hash(c)
5
sage: c.f(4)
computing cached method
8
sage: c.f(4) is c.f(4)
True
```

```
>>> from sage.all import *
>>> hash(c)
5
>>> c.f(Integer(4))
computing cached method
8
>>> c.f(Integer(4)) is c.f(Integer(4))
True
```

Different instances have distinct caches:

```
sage: d = C()
sage: d.f(4) is c.f(4)
computing cached method
False
sage: d.f.clear_cache()
sage: c.f(4)
8
```

(continues on next page)

(continued from previous page)

```
sage: d.f(4)
computing cached method
8
```

```
>>> from sage.all import *
>>> d = C()
>>> d.f(Integer(4)) is c.f(Integer(4))
computing cached method
False
>>> d.f.clear_cache()
>>> c.f(Integer(4))
8
>>> d.f(Integer(4))
computing cached method
8
```

Using cached methods for the hash and other special methods was implemented in Issue #12601, by means of *CachedSpecialMethod*. We show that it is used behind the scenes:

```
sage: cached_method(c.__hash__)
<sage.misc.cachefunc.CachedSpecialMethod object at ...>
sage: cached_method(c.f)
<sage.misc.cachefunc.CachedMethod object at ...>
```

```
>>> from sage.all import *
>>> cached_method(c.__hash__)
<sage.misc.cachefunc.CachedSpecialMethod object at ...>
>>> cached_method(c.f)
<sage.misc.cachefunc.CachedMethod object at ...>
```

The parameter `do_pickle` can be used if the contents of the cache should be stored in a pickle of the cached method. This can be dangerous with special methods such as `__hash__`:

```
sage: class C:
....:     @cached_method(do_pickle=True)
....:     def __hash__(self):
....:         return id(self)

sage: import __main__
sage: __main__.C = C
sage: c = C()
sage: hash(c)  # random output
sage: d = loads(dumps(c))
sage: hash(d) == hash(c)
True
```

```
>>> from sage.all import *
>>> class C:
...     @cached_method(do_pickle=True)
...     def __hash__(self):
...         return id(self)
```

(continues on next page)

(continued from previous page)

```
>>> import __main__
>>> __main__.C = C
>>> c = C()
>>> hash(c)  # random output
>>> d = loads(dumps(c))
>>> hash(d) == hash(c)
True
```

However, the contents of a method's cache are not pickled unless `do_pickle` is set:

```
sage: class C:
....:     @cached_method
....:     def __hash__(self):
....:         return id(self)

sage: __main__.C = C
sage: c = C()
sage: hash(c)  # random output
sage: d = loads(dumps(c))
sage: hash(d) == hash(c)
False
```

```
>>> from sage.all import *
>>> class C:
...     @cached_method
...     def __hash__(self):
...         return id(self)

>>> __main__.C = C
>>> c = C()
>>> hash(c)  # random output
>>> d = loads(dumps(c))
>>> hash(d) == hash(c)
False
```

`sage.misc.cachefunc.`**`dict_key`**`(o)`

Return a key to cache object `o` in a dict.

This is different from `cache_key` since the `cache_key` might get confused with the key of a hashable object. Therefore, such keys include `unhashable_key` which acts as a unique marker which is certainly not stored in the dictionary otherwise.

EXAMPLES:

```
sage: from sage.misc.cachefunc import dict_key
sage: dict_key(42)
42
sage: K.<u> = Qq(9)                                                    #␣
↪needs sage.rings.padics
sage: dict_key(u)                                                      #␣
↪needs sage.rings.padics
(<object object at ...>, (..., 20))
```

```
>>> from sage.all import *
>>> from sage.misc.cachefunc import dict_key
>>> dict_key(Integer(42))
42
>>> K = Qq(Integer(9), names=('u',)); (u,) = K._first_ngens(1)# needs sage.rings.
↪padics
>>> dict_key(u)                                                                #␣
↪needs sage.rings.padics
(<object object at ...>, (..., 20))
```

class sage.misc.cachefunc.**disk_cached_function**(*dir*, *memory_cache=False*, *key=None*)

Bases: `object`

Decorator for *DiskCachedFunction*.

EXAMPLES:

```
sage: dir = tmp_dir()
sage: @disk_cached_function(dir)
....: def foo(x): return next_prime(2^x)%x
sage: x = foo(200); x                                                       #␣
↪needs sage.libs.pari
11
sage: @disk_cached_function(dir)
....: def foo(x): return 1/x
sage: foo(200)                                                              #␣
↪needs sage.libs.pari
11
sage: foo.clear_cache()
sage: foo(200)
1/200
```

```
>>> from sage.all import *
>>> dir = tmp_dir()
>>> @disk_cached_function(dir)
... def foo(x): return next_prime(Integer(2)**x)%x
>>> x = foo(Integer(200)); x                                                 ␣
↪     # needs sage.libs.pari
11
>>> @disk_cached_function(dir)
... def foo(x): return Integer(1)/x
>>> foo(Integer(200))                                                        ␣
↪     # needs sage.libs.pari
11
>>> foo.clear_cache()
>>> foo(Integer(200))
1/200
```

sage.misc.cachefunc.**weak_cached_function**(*self*, **args*, ***kwds*)

A version of *CachedFunction* using weak references on the values.

If `f` is a function, do either `g = weak_cached_function(f)` to make a cached version of `f`, or put `@weak_cached_function` right before the definition of `f` (i.e., use Python decorators):

```
@weak_cached_function
def f(...):
    ...
```

As an exception meant to improve performance, the most recently computed values are strongly referenced. The number of strongly cached values can be controlled by the `cache` keyword.

EXAMPLES:

```
sage: from sage.misc.cachefunc import weak_cached_function
sage: class A: pass
sage: @weak_cached_function(cache=0)
....: def f():
....:     print("doing a computation")
....:     return A()
sage: a = f()
doing a computation
```

```
>>> from sage.all import *
>>> from sage.misc.cachefunc import weak_cached_function
>>> class A: pass
>>> @weak_cached_function(cache=Integer(0))
... def f():
...     print("doing a computation")
...     return A()
>>> a = f()
doing a computation
```

The result is cached:

```
sage: b = f()
sage: a is b
True
```

```
>>> from sage.all import *
>>> b = f()
>>> a is b
True
```

However, if there are no strong references left, the result is deleted, and thus a new computation takes place:

```
sage: del a
sage: del b
sage: a = f()
doing a computation
```

```
>>> from sage.all import *
>>> del a
>>> del b
>>> a = f()
doing a computation
```

Above, we used the `cache=0` keyword. With a larger value, the most recently computed values are cached anyway, even if they are not referenced:

```
sage: @weak_cached_function(cache=3)
....: def f(x):
....:     print("doing a computation for x={}".format(x))
....:     return A()
sage: a = f(1); del a
doing a computation for x=1
sage: a = f(2), f(1); del a
doing a computation for x=2
sage: a = f(3), f(1); del a
doing a computation for x=3
sage: a = f(4), f(1); del a
doing a computation for x=4
doing a computation for x=1
sage: a = f(5), f(1); del a
doing a computation for x=5
```

```
>>> from sage.all import *
>>> @weak_cached_function(cache=Integer(3))
... def f(x):
...     print("doing a computation for x={}".format(x))
...     return A()
>>> a = f(Integer(1)); del a
doing a computation for x=1
>>> a = f(Integer(2)), f(Integer(1)); del a
doing a computation for x=2
>>> a = f(Integer(3)), f(Integer(1)); del a
doing a computation for x=3
>>> a = f(Integer(4)), f(Integer(1)); del a
doing a computation for x=4
doing a computation for x=1
>>> a = f(Integer(5)), f(Integer(1)); del a
doing a computation for x=5
```

The parameter `key` can be used to ignore parameters for caching. In this example we ignore the parameter `algorithm`:

```
sage: @weak_cached_function(key=lambda x,algorithm: x)
....: def mod_ring(x, algorithm='default'):
....:     return IntegerModRing(x)
sage: mod_ring(1,algorithm='default') is mod_ring(1,algorithm='algorithm') is mod_
↪ring(1) is mod_ring(1,'default')
True
```

```
>>> from sage.all import *
>>> @weak_cached_function(key=lambda x,algorithm: x)
... def mod_ring(x, algorithm='default'):
...     return IntegerModRing(x)
>>> mod_ring(Integer(1),algorithm='default') is mod_ring(Integer(1),algorithm=
↪'algorithm') is mod_ring(Integer(1)) is mod_ring(Integer(1),'default')
True
```

2.8.2 Fast and safe weak value dictionary

AUTHORS:

- Simon King (2013-10)
- Nils Bruin (2013-10)
- Julian Rueth (2014-03-16): improved handling of unhashable objects

Python's `weakref` module provides `WeakValueDictionary`. This behaves similar to a dictionary, but it does not prevent its values from garbage collection. Hence, it stores the values by weak references with callback functions: The callback function deletes a key-value pair from the dictionary, as soon as the value becomes subject to garbage collection.

However, a problem arises if hash and comparison of the key depend on the value that is being garbage collected:

```
sage: import weakref
sage: class Vals(): pass
sage: class Keys:
....:     def __init__(self, val):
....:         self.val = weakref.ref(val)
....:     def __hash__(self):
....:         return hash(self.val())
....:     def __eq__(self, other):
....:         return self.val() == other.val()
....:     def __ne__(self, other):
....:         return self.val() != other.val()
sage: ValList = [Vals() for _ in range(10)]
sage: D = weakref.WeakValueDictionary()
sage: for v in ValList:
....:     D[Keys(v)] = v
sage: len(D)
10
sage: del ValList, v
sage: len(D) > 1
True
```

```
>>> from sage.all import *
>>> import weakref
>>> class Vals(): pass
>>> class Keys:
...     def __init__(self, val):
...         self.val = weakref.ref(val)
...     def __hash__(self):
...         return hash(self.val())
...     def __eq__(self, other):
...         return self.val() == other.val()
...     def __ne__(self, other):
...         return self.val() != other.val()
>>> ValList = [Vals() for _ in range(Integer(10))]
>>> D = weakref.WeakValueDictionary()
>>> for v in ValList:
...     D[Keys(v)] = v
>>> len(D)
10
>>> del ValList, v
```

(continues on next page)

(continued from previous page)

```
>>> len(D) > Integer(1)
True
```

Hence, the defunct items have not been removed from the dictionary.

Therefore, Sage provides an alternative implementation *sage.misc.weak_dict.WeakValueDictionary*, using a callback that removes the defunct item not based on hash and equality check of the key (this is what fails in the example above), but based on comparison by identity. This is possible, since references with callback function are distinct even if they point to the same object. Hence, even if the same object `o` occurs as value for several keys, each reference to `o` corresponds to a unique key. We see no error messages, and the items get correctly removed:

```
sage: ValList = [Vals() for _ in range(10)]
sage: import sage.misc.weak_dict
sage: D = sage.misc.weak_dict.WeakValueDictionary()
sage: for v in ValList:
....:     D[Keys(v)] = v
sage: len(D)
10
sage: del ValList
sage: len(D)
1
sage: del v
sage: len(D)
0
```

```
>>> from sage.all import *
>>> ValList = [Vals() for _ in range(Integer(10))]
>>> import sage.misc.weak_dict
>>> D = sage.misc.weak_dict.WeakValueDictionary()
>>> for v in ValList:
...     D[Keys(v)] = v
>>> len(D)
10
>>> del ValList
>>> len(D)
1
>>> del v
>>> len(D)
0
```

Another problem arises when iterating over the items of a dictionary: If garbage collection occurs during iteration, then the content of the dictionary changes, and the iteration breaks for `weakref.WeakValueDictionary`:

```
sage: class Cycle:
....:     def __init__(self):
....:         self.selfref = self
sage: C = [Cycle() for n in range(10)]
sage: D = weakref.WeakValueDictionary(enumerate(C))
sage: import gc
sage: gc.disable()
sage: del C[:5]
sage: len(D)
10
```

```
>>> from sage.all import *
>>> class Cycle:
...     def __init__(self):
...         self.selfref = self
>>> C = [Cycle() for n in range(Integer(10))]
>>> D = weakref.WeakValueDictionary(enumerate(C))
>>> import gc
>>> gc.disable()
>>> del C[:Integer(5)]
>>> len(D)
10
```

With *WeakValueDictionary*, the behaviour is safer. Note that iteration over a WeakValueDictionary is non-deterministic, since the lifetime of values (and hence the presence of keys) in the dictionary may depend on when garbage collection occurs. The method implemented here will at least postpone dictionary mutations due to garbage collection callbacks. This means that as long as there is at least one iterator active on a dictionary, none of its keys will be deallocated (which could have side-effects). Which entries are returned is of course still dependent on when garbage collection occurs. Note that when a key gets returned as "present" in the dictionary, there is no guarantee one can actually retrieve its value: it may have been garbage collected in the mean time.

The variant *CachedWeakValueDictionary* additionally adds strong references to the most recently added values. This ensures that values will not be immediately deleted after adding them to the dictionary. This is mostly useful to implement cached functions.

Note that Sage's weak value dictionary is actually an instance of `dict`, in contrast to `weakref`'s weak value dictionary:

```
sage: issubclass(weakref.WeakValueDictionary, dict)
False
sage: issubclass(sage.misc.weak_dict.WeakValueDictionary, dict)
True
```

```
>>> from sage.all import *
>>> issubclass(weakref.WeakValueDictionary, dict)
False
>>> issubclass(sage.misc.weak_dict.WeakValueDictionary, dict)
True
```

See Issue #13394 for a discussion of some of the design considerations.

class sage.misc.weak_dict.**CachedWeakValueDictionary**

Bases: *WeakValueDictionary*

This class extends *WeakValueDictionary* with a strong cache to the most recently added values. It is meant to solve the case where significant performance losses can occur if a value is deleted too early, but where keeping a value alive too long does not hurt much. This is typically the case with cached functions.

EXAMPLES:

We illustrate the difference between *WeakValueDictionary* and *CachedWeakValueDictionary*. An item is removed from a *WeakValueDictionary* as soon as there are no references to it:

```
sage: from sage.misc.weak_dict import WeakValueDictionary
sage: D = WeakValueDictionary()
sage: class Test(): pass
sage: tmp = Test()
```

(continues on next page)

(continued from previous page)

```
sage: D[0] = tmp
sage: 0 in D
True
sage: del tmp
sage: 0 in D
False
```

```
>>> from sage.all import *
>>> from sage.misc.weak_dict import WeakValueDictionary
>>> D = WeakValueDictionary()
>>> class Test(): pass
>>> tmp = Test()
>>> D[Integer(0)] = tmp
>>> Integer(0) in D
True
>>> del tmp
>>> Integer(0) in D
False
```

So, if you have a cached function repeatedly creating the same temporary object and deleting it (in a helper function called from a loop for example), this caching will not help at all. With *CachedWeakValueDictionary*, the most recently added values are not deleted. After adding enough new values, the item is removed anyway:

```
sage: from sage.misc.weak_dict import CachedWeakValueDictionary
sage: D = CachedWeakValueDictionary(cache=4)
sage: class Test(): pass
sage: tmp = Test()
sage: D[0] = tmp
sage: 0 in D
True
sage: del tmp
sage: 0 in D
True
sage: for i in range(5):
....:     D[1] = Test()
....:     print(0 in D)
True
True
True
False
False
```

```
>>> from sage.all import *
>>> from sage.misc.weak_dict import CachedWeakValueDictionary
>>> D = CachedWeakValueDictionary(cache=Integer(4))
>>> class Test(): pass
>>> tmp = Test()
>>> D[Integer(0)] = tmp
>>> Integer(0) in D
True
>>> del tmp
>>> Integer(0) in D
```

(continues on next page)

(continued from previous page)

```
True
>>> for i in range(Integer(5)):
...       D[Integer(1)] = Test()
...       print(Integer(0) in D)
True
True
True
False
False
```

class sage.misc.weak_dict.**WeakValueDictEraser**

Bases: object

Erases items from a *sage.misc.weak_dict.WeakValueDictionary* when a weak reference becomes invalid.

This is of internal use only. Instances of this class will be passed as a callback function when creating a weak reference.

EXAMPLES:

```
sage: from sage.misc.weak_dict import WeakValueDictionary
sage: v = frozenset([1])
sage: D = WeakValueDictionary({1 : v})
sage: len(D)
1
sage: del v
sage: len(D)
0
```

```
>>> from sage.all import *
>>> from sage.misc.weak_dict import WeakValueDictionary
>>> v = frozenset([Integer(1)])
>>> D = WeakValueDictionary({Integer(1) : v})
>>> len(D)
1
>>> del v
>>> len(D)
0
```

AUTHOR:

- Nils Bruin (2013-11)

class sage.misc.weak_dict.**WeakValueDictionary**

Bases: dict

IMPLEMENTATION:

The *WeakValueDictionary* inherits from dict. In its implementation, it stores weakrefs to the actual values under the keys. All access routines are wrapped to transparently place and remove these weakrefs.

NOTE:

In contrast to weakref.WeakValueDictionary in Python's weakref module, the callback does not need to assume that the dictionary key is a valid Python object when it is called. There is no need to compute the hash or compare the dictionary keys. This is why the example below would not work with weakref.WeakValueDictionary, but does work with *sage.misc.weak_dict.WeakValueDictionary*.

EXAMPLES:

```
sage: import weakref
sage: class Vals(): pass
sage: class Keys:
....:     def __init__(self, val):
....:         self.val = weakref.ref(val)
....:     def __hash__(self):
....:         return hash(self.val())
....:     def __eq__(self, other):
....:         return self.val() == other.val()
....:     def __ne__(self, other):
....:         return self.val() != other.val()
sage: ValList = [Vals() for _ in range(10)]
sage: import sage.misc.weak_dict
sage: D = sage.misc.weak_dict.WeakValueDictionary()
sage: for v in ValList:
....:     D[Keys(v)] = v
sage: len(D)
10
sage: del ValList
sage: len(D)
1
sage: del v
sage: len(D)
0
```

```
>>> from sage.all import *
>>> import weakref
>>> class Vals(): pass
>>> class Keys:
...     def __init__(self, val):
...         self.val = weakref.ref(val)
...     def __hash__(self):
...         return hash(self.val())
...     def __eq__(self, other):
...         return self.val() == other.val()
...     def __ne__(self, other):
...         return self.val() != other.val()
>>> ValList = [Vals() for _ in range(Integer(10))]
>>> import sage.misc.weak_dict
>>> D = sage.misc.weak_dict.WeakValueDictionary()
>>> for v in ValList:
...     D[Keys(v)] = v
>>> len(D)
10
>>> del ValList
>>> len(D)
1
>>> del v
>>> len(D)
0
```

get(*k*, *d=None*)

Return the stored value for a key, or a default value for unknown keys.

The default value defaults to `None`.

EXAMPLES:

```
sage: import sage.misc.weak_dict

sage: # needs sage.libs.pari
sage: L = [GF(p) for p in prime_range(10^3)]
sage: D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
sage: 100 in D
True
sage: 200 in D
False
sage: D.get(100, "not found")
Finite Field of size 547
sage: D.get(200, "not found")
'not found'
sage: D.get(200) is None
True
```

```
>>> from sage.all import *
>>> import sage.misc.weak_dict

>>> # needs sage.libs.pari
>>> L = [GF(p) for p in prime_range(Integer(10)**Integer(3))]
>>> D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
>>> Integer(100) in D
True
>>> Integer(200) in D
False
>>> D.get(Integer(100), "not found")
Finite Field of size 547
>>> D.get(Integer(200), "not found")
'not found'
>>> D.get(Integer(200)) is None
True
```

items()

Iterate over the items of this dictionary.

Warning

Iteration is unsafe, if the length of the dictionary changes during the iteration! This can also happen by garbage collection.

EXAMPLES:

```
sage: import sage.misc.weak_dict
sage: class Vals:
....:     def __init__(self, n):
....:         self.n = n
```

(continues on next page)

(continued from previous page)

```
....:     def __repr__(self):
....:         return "<%s>" % self.n
....:     def __lt__(self, other):
....:         return self.n < other.n
....:     def __eq__(self, other):
....:         return self.n == other.n
....:     def __ne__(self, other):
....:         return self.val() != other.val()
sage: class Keys():
....:     def __init__(self, n):
....:         self.n = n
....:     def __hash__(self):
....:         if self.n % 2:
....:             return int(5)
....:         return int(3)
....:     def __repr__(self):
....:         return "[%s]" % self.n
....:     def __lt__(self, other):
....:         return self.n < other.n
....:     def __eq__(self, other):
....:         return self.n == other.n
....:     def __ne__(self, other):
....:         return self.val() != other.val()
sage: L = [(Keys(n), Vals(n)) for n in range(10)]
sage: D = sage.misc.weak_dict.WeakValueDictionary(L)
```

```
>>> from sage.all import *
>>> import sage.misc.weak_dict
>>> class Vals:
...     def __init__(self, n):
...         self.n = n
...     def __repr__(self):
...         return "<%s>" % self.n
...     def __lt__(self, other):
...         return self.n < other.n
...     def __eq__(self, other):
...         return self.n == other.n
...     def __ne__(self, other):
...         return self.val() != other.val()
>>> class Keys():
...     def __init__(self, n):
...         self.n = n
...     def __hash__(self):
...         if self.n % Integer(2):
...             return int(Integer(5))
...         return int(Integer(3))
...     def __repr__(self):
...         return "[%s]" % self.n
...     def __lt__(self, other):
...         return self.n < other.n
...     def __eq__(self, other):
...         return self.n == other.n
```

(continues on next page)

(continued from previous page)

```
...       def __ne__(self, other):
...           return self.val() != other.val()
>>> L = [(Keys(n), Vals(n)) for n in range(Integer(10))]
>>> D = sage.misc.weak_dict.WeakValueDictionary(L)
```

We remove one dictionary item directly. Another item is removed by means of garbage collection. By consequence, there remain eight items in the dictionary:

```
sage: del D[Keys(2)]
sage: del L[5]
sage: for k,v in sorted(D.items()):
....:     print("{} {}".format(k, v))
[0] <0>
[1] <1>
[3] <3>
[4] <4>
[6] <6>
[7] <7>
[8] <8>
[9] <9>
```

```
>>> from sage.all import *
>>> del D[Keys(Integer(2))]
>>> del L[Integer(5)]
>>> for k,v in sorted(D.items()):
...     print("{} {}".format(k, v))
[0] <0>
[1] <1>
[3] <3>
[4] <4>
[6] <6>
[7] <7>
[8] <8>
[9] <9>
```

items_list()

The key-value pairs of this dictionary.

EXAMPLES:

```
sage: import sage.misc.weak_dict
sage: class Vals:
....:     def __init__(self, n):
....:         self.n = n
....:     def __repr__(self):
....:         return "<%s>" % self.n
....:     def __lt__(self, other):
....:         return self.n < other.n
....:     def __eq__(self, other):
....:         return self.n == other.n
....:     def __ne__(self, other):
....:         return self.val() != other.val()
```

(continues on next page)

(continued from previous page)

```
sage: class Keys():
....:     def __init__(self, n):
....:         self.n = n
....:     def __hash__(self):
....:         if self.n % 2:
....:             return int(5)
....:         return int(3)
....:     def __repr__(self):
....:         return "[%s]" % self.n
....:     def __lt__(self, other):
....:         return self.n < other.n
....:     def __eq__(self, other):
....:         return self.n == other.n
....:     def __ne__(self, other):
....:         return self.val() != other.val()
sage: L = [(Keys(n), Vals(n)) for n in range(10)]
sage: D = sage.misc.weak_dict.WeakValueDictionary(L)
```

```
>>> from sage.all import *
>>> import sage.misc.weak_dict
>>> class Vals:
...     def __init__(self, n):
...         self.n = n
...     def __repr__(self):
...         return "<%s>" % self.n
...     def __lt__(self, other):
...         return self.n < other.n
...     def __eq__(self, other):
...         return self.n == other.n
...     def __ne__(self, other):
...         return self.val() != other.val()
>>> class Keys():
...     def __init__(self, n):
...         self.n = n
...     def __hash__(self):
...         if self.n % Integer(2):
...             return int(Integer(5))
...         return int(Integer(3))
...     def __repr__(self):
...         return "[%s]" % self.n
...     def __lt__(self, other):
...         return self.n < other.n
...     def __eq__(self, other):
...         return self.n == other.n
...     def __ne__(self, other):
...         return self.val() != other.val()
>>> L = [(Keys(n), Vals(n)) for n in range(Integer(10))]
>>> D = sage.misc.weak_dict.WeakValueDictionary(L)
```

We remove one dictionary item directly. Another item is removed by means of garbage collection. By consequence, there remain eight items in the dictionary:

```
sage: del D[Keys(2)]
sage: del L[5]
sage: sorted(D.items())
[([0], <0>),
 ([1], <1>),
 ([3], <3>),
 ([4], <4>),
 ([6], <6>),
 ([7], <7>),
 ([8], <8>),
 ([9], <9>)]
```

```
>>> from sage.all import *
>>> del D[Keys(Integer(2))]
>>> del L[Integer(5)]
>>> sorted(D.items())
[([0], <0>),
 ([1], <1>),
 ([3], <3>),
 ([4], <4>),
 ([6], <6>),
 ([7], <7>),
 ([8], <8>),
 ([9], <9>)]
```

iteritems()

EXAMPLES:

```
sage: import sage.misc.weak_dict
sage: class Vals(): pass
sage: L = [Vals() for _ in range(10)]
sage: D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
sage: T = list(D.iteritems())
doctest:warning...:
DeprecationWarning: use items instead
See https://github.com/sagemath/sage/issues/34488 for details.
```

```
>>> from sage.all import *
>>> import sage.misc.weak_dict
>>> class Vals(): pass
>>> L = [Vals() for _ in range(Integer(10))]
>>> D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
>>> T = list(D.iteritems())
doctest:warning...:
DeprecationWarning: use items instead
See https://github.com/sagemath/sage/issues/34488 for details.
```

itervalues()

Deprecated.

EXAMPLES:

```
sage: import sage.misc.weak_dict
sage: class Vals(): pass
sage: L = [Vals() for _ in range(10)]
sage: D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
sage: T = list(D.itervalues())
doctest:warning...:
DeprecationWarning: use values instead
See https://github.com/sagemath/sage/issues/34488 for details.
```

```
>>> from sage.all import *
>>> import sage.misc.weak_dict
>>> class Vals(): pass
>>> L = [Vals() for _ in range(Integer(10))]
>>> D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
>>> T = list(D.itervalues())
doctest:warning...:
DeprecationWarning: use values instead
See https://github.com/sagemath/sage/issues/34488 for details.
```

keys()

The list of keys.

EXAMPLES:

```
sage: import sage.misc.weak_dict
sage: class Vals(): pass
sage: L = [Vals() for _ in range(10)]
sage: D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
sage: del L[4]
```

```
>>> from sage.all import *
>>> import sage.misc.weak_dict
>>> class Vals(): pass
>>> L = [Vals() for _ in range(Integer(10))]
>>> D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
>>> del L[Integer(4)]
```

One item got deleted from the list `L` and hence the corresponding item in the dictionary got deleted as well. Therefore, the corresponding key 4 is missing in the list of keys:

```
sage: sorted(D.keys())
[0, 1, 2, 3, 5, 6, 7, 8, 9]
```

```
>>> from sage.all import *
>>> sorted(D.keys())
[0, 1, 2, 3, 5, 6, 7, 8, 9]
```

pop(*k*)

Return the value for a given key, and delete it from the dictionary.

EXAMPLES:

```
sage: import sage.misc.weak_dict

sage: # needs sage.libs.pari
sage: L = [GF(p) for p in prime_range(10^3)]
sage: D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
sage: 20 in D
True
sage: D.pop(20)
Finite Field of size 73
sage: 20 in D
False
sage: D.pop(20)
Traceback (most recent call last):
...
KeyError: 20
```

```
>>> from sage.all import *
>>> import sage.misc.weak_dict

>>> # needs sage.libs.pari
>>> L = [GF(p) for p in prime_range(Integer(10)**Integer(3))]
>>> D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
>>> Integer(20) in D
True
>>> D.pop(Integer(20))
Finite Field of size 73
>>> Integer(20) in D
False
>>> D.pop(Integer(20))
Traceback (most recent call last):
...
KeyError: 20
```

popitem()

Return and delete some item from the dictionary.

EXAMPLES:

```
sage: import sage.misc.weak_dict
sage: D = sage.misc.weak_dict.WeakValueDictionary()
sage: D[1] = ZZ
```

```
>>> from sage.all import *
>>> import sage.misc.weak_dict
>>> D = sage.misc.weak_dict.WeakValueDictionary()
>>> D[Integer(1)] = ZZ
```

The dictionary only contains a single item, hence, it is clear which one will be returned:

```
sage: D.popitem()
(1, Integer Ring)
```

```
>>> from sage.all import *
>>> D.popitem()
(1, Integer Ring)
```

Now, the dictionary is empty, and hence the next attempt to pop an item will fail with a `KeyError`:

```
sage: D.popitem()
Traceback (most recent call last):
...
KeyError: 'popitem(): weak value dictionary is empty'
```

```
>>> from sage.all import *
>>> D.popitem()
Traceback (most recent call last):
...
KeyError: 'popitem(): weak value dictionary is empty'
```

setdefault(*k*, *default=None*)

Return the stored value for a given key; return and store a default value if no previous value is stored.

EXAMPLES:

```
sage: import sage.misc.weak_dict

sage: # needs sage.libs.pari
sage: L = [(p, GF(p)) for p in prime_range(10)]
sage: D = sage.misc.weak_dict.WeakValueDictionary(L)
sage: len(D)
4
```

```
>>> from sage.all import *
>>> import sage.misc.weak_dict

>>> # needs sage.libs.pari
>>> L = [(p, GF(p)) for p in prime_range(Integer(10))]
>>> D = sage.misc.weak_dict.WeakValueDictionary(L)
>>> len(D)
4
```

The value for an existing key is returned and not overridden:

```
sage: # needs sage.libs.pari
sage: D.setdefault(5, ZZ)
Finite Field of size 5
sage: D[5]
Finite Field of size 5
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari
>>> D.setdefault(Integer(5), ZZ)
Finite Field of size 5
>>> D[Integer(5)]
Finite Field of size 5
```

For a non-existing key, the default value is stored and returned:

```
sage: # needs sage.libs.pari
sage: 4 in D
False
sage: D.setdefault(4, ZZ)
Integer Ring
sage: 4 in D
True
sage: D[4]
Integer Ring
sage: len(D)
5
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari
>>> Integer(4) in D
False
>>> D.setdefault(Integer(4), ZZ)
Integer Ring
>>> Integer(4) in D
True
>>> D[Integer(4)]
Integer Ring
>>> len(D)
5
```

values()

Iterate over the values of this dictionary.

Warning

Iteration is unsafe, if the length of the dictionary changes during the iteration! This can also happen by garbage collection.

EXAMPLES:

```
sage: import sage.misc.weak_dict
sage: class Vals:
....:     def __init__(self, n):
....:         self.n = n
....:     def __repr__(self):
....:         return "<%s>" % self.n
....:     def __lt__(self, other):
....:         return self.n < other.n
....:     def __eq__(self, other):
....:         return self.n == other.n
....:     def __ne__(self, other):
....:         return self.val() != other.val()
sage: L = [Vals(n) for n in range(10)]
sage: D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
```

```
>>> from sage.all import *
>>> import sage.misc.weak_dict
>>> class Vals:
...     def __init__(self, n):
...         self.n = n
...     def __repr__(self):
...         return "<%s>" % self.n
...     def __lt__(self, other):
...         return self.n < other.n
...     def __eq__(self, other):
...         return self.n == other.n
...     def __ne__(self, other):
...         return self.val() != other.val()
>>> L = [Vals(n) for n in range(Integer(10))]
>>> D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
```

We delete one item from `D` and we delete one item from the list `L`. The latter implies that the corresponding item from `D` gets deleted as well. Hence, there remain eight values:

```
sage: del D[2]
sage: del L[5]
sage: for v in sorted(D.values()):
....:     print(v)
<0>
<1>
<3>
<4>
<6>
<7>
<8>
<9>
```

```
>>> from sage.all import *
>>> del D[Integer(2)]
>>> del L[Integer(5)]
>>> for v in sorted(D.values()):
...     print(v)
<0>
<1>
<3>
<4>
<6>
<7>
<8>
<9>
```

values_list()

Return the list of values.

EXAMPLES:

```
sage: import sage.misc.weak_dict
sage: class Vals:
```

(continues on next page)

(continued from previous page)

```
....:     def __init__(self, n):
....:         self.n = n
....:     def __repr__(self):
....:         return "<%s>" % self.n
....:     def __lt__(self, other):
....:         return self.n < other.n
....:     def __eq__(self, other):
....:         return self.n == other.n
....:     def __ne__(self, other):
....:         return self.val() != other.val()
sage: L = [Vals(n) for n in range(10)]
sage: D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
```

```
>>> from sage.all import *
>>> import sage.misc.weak_dict
>>> class Vals:
...     def __init__(self, n):
...         self.n = n
...     def __repr__(self):
...         return "<%s>" % self.n
...     def __lt__(self, other):
...         return self.n < other.n
...     def __eq__(self, other):
...         return self.n == other.n
...     def __ne__(self, other):
...         return self.val() != other.val()
>>> L = [Vals(n) for n in range(Integer(10))]
>>> D = sage.misc.weak_dict.WeakValueDictionary(enumerate(L))
```

We delete one item from `D` and we delete one item from the list `L`. The latter implies that the corresponding item from `D` gets deleted as well. Hence, there remain eight values:

```
sage: del D[2]
sage: del L[5]
sage: sorted(D.values_list())
[<0>, <1>, <3>, <4>, <6>, <7>, <8>, <9>]
```

```
>>> from sage.all import *
>>> del D[Integer(2)]
>>> del L[Integer(5)]
>>> sorted(D.values_list())
[<0>, <1>, <3>, <4>, <6>, <7>, <8>, <9>]
```

2.9 Fast Expression Evaluation

2.9.1 Fast Expression Evaluation

For many applications such as numerical integration, differential equation approximation, plotting a 3d surface, optimization problems, Monte-Carlo simulations, etc., one wishes to pass around and evaluate a single algebraic expression many, many times at various floating point values. Other applications may need to evaluate an expression many times in interval arithmetic, or in a finite field. Doing this via recursive calls over a python representation of the object (even if Maxima

or other outside packages are not involved) is extremely inefficient.

This module provides a function, *fast_callable()*, to transform such expressions into a form where they can be evaluated quickly:

```
sage: # needs sage.symbolic
sage: f = sin(x) + 3*x^2
sage: ff = fast_callable(f, vars=[x])
sage: ff(3.5)
36.3992167723104
sage: ff(RIF(3.5))
36.399216772310382
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> f = sin(x) + Integer(3)*x**Integer(2)
>>> ff = fast_callable(f, vars=[x])
>>> ff(RealNumber('3.5'))
36.3992167723104
>>> ff(RIF(RealNumber('3.5')))
36.399216772310382
```

By default, *fast_callable()* only removes some interpretive overhead from the evaluation, but all of the individual arithmetic operations are done using standard Sage arithmetic. This is still a huge win over `sage.calculus`, which evidently has a lot of overhead. Compare the cost of evaluating Wilkinson's polynomial (in unexpanded form) at $x = 30$:

```
sage: # needs sage.symbolic
sage: wilk = prod((x-i) for i in [1 .. 20]); wilk
(x - 1)*(x - 2)*(x - 3)*(x - 4)*(x - 5)*(x - 6)*(x - 7)*(x - 8)*(x - 9)*(x - 10)*(x -␣
↪11)*(x - 12)*(x - 13)*(x - 14)*(x - 15)*(x - 16)*(x - 17)*(x - 18)*(x - 19)*(x - 20)
sage: timeit('wilk.subs(x=30)')          # random    # long time
625 loops, best of 3: 1.43 ms per loop
sage: fc_wilk = fast_callable(wilk, vars=[x])
sage: timeit('fc_wilk(30)')              # random    # long time
625 loops, best of 3: 9.72 us per loop
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> wilk = prod((x-i) for i in (ellipsis_range(Integer(1) ,Ellipsis, Integer(20))));␣
↪wilk
(x - 1)*(x - 2)*(x - 3)*(x - 4)*(x - 5)*(x - 6)*(x - 7)*(x - 8)*(x - 9)*(x - 10)*(x -␣
↪11)*(x - 12)*(x - 13)*(x - 14)*(x - 15)*(x - 16)*(x - 17)*(x - 18)*(x - 19)*(x - 20)
>>> timeit('wilk.subs(x=30)')          # random    # long time
625 loops, best of 3: 1.43 ms per loop
>>> fc_wilk = fast_callable(wilk, vars=[x])
>>> timeit('fc_wilk(30)')              # random    # long time
625 loops, best of 3: 9.72 us per loop
```

You can specify a particular domain for the evaluation using `domain=`:

```
sage: fc_wilk_zz = fast_callable(wilk, vars=[x], domain=ZZ)                    #␣
↪needs sage.symbolic
```

```
>>> from sage.all import *
>>> fc_wilk_zz = fast_callable(wilk, vars=[x], domain=ZZ)                    #␣
↪needs sage.symbolic
```

The meaning of `domain=D` is that each intermediate and final result is converted to type `D`. For instance, the previous example of `sin(x) + 3*x^2` with `domain=D` would be equivalent to `D(D(sin(D(x))) + D(D(3)*D(D(x)^2)))`. (This example also demonstrates the one exception to the general rule: if an exponent is an integral constant, then it is not wrapped with `D()`.)

At first glance, this seems like a very bad idea if you want to compute quickly. And it is a bad idea, for types where we don't have a special interpreter. It's not too bad of a slowdown, though. To mitigate the costs, we check whether the value already has the correct parent before we call `D`.

We don't yet have a special interpreter with domain `ZZ`, so we can see how that compares to the generic `fc_wilk` example above:

```
sage: timeit('fc_wilk_zz(30)')          # random    # long time              #␣
↪needs sage.symbolic
625 loops, best of 3: 15.4 us per loop
```

```
>>> from sage.all import *
>>> timeit('fc_wilk_zz(30)')          # random    # long time              #␣
↪needs sage.symbolic
625 loops, best of 3: 15.4 us per loop
```

However, for other types, using `domain=D` will get a large speedup, because we have special-purpose interpreters for those types. One example is `RDF`. Since with `domain=RDF` we know that every single operation will be floating-point, we can just execute the floating-point operations directly and skip all the Python object creations that you would get from actually using `RDF` objects:

```
sage: fc_wilk_rdf = fast_callable(wilk, vars=[x], domain=RDF)              #␣
↪needs sage.symbolic
sage: timeit('fc_wilk_rdf(30.0)')       # random    # long time              #␣
↪needs sage.symbolic
625 loops, best of 3: 7 us per loop
```

```
>>> from sage.all import *
>>> fc_wilk_rdf = fast_callable(wilk, vars=[x], domain=RDF)                #␣
↪needs sage.symbolic
>>> timeit('fc_wilk_rdf(30.0)')       # random    # long time              #␣
↪needs sage.symbolic
625 loops, best of 3: 7 us per loop
```

The domain does not need to be a Sage type; for instance, `domain=float` also works. (We actually use the same fast interpreter for `domain=float` and `domain=RDF`; the only difference is that when `domain=RDF` is used, the return value is an `RDF` element, and when `domain=float` is used, the return value is a Python `float`.)

```
sage: fc_wilk_float = fast_callable(wilk, vars=[x], domain=float)          #␣
↪needs sage.symbolic
sage: timeit('fc_wilk_float(30.0)')     # random    # long time              #␣
↪needs sage.symbolic
625 loops, best of 3: 5.04 us per loop
```

```
>>> from sage.all import *
>>> fc_wilk_float = fast_callable(wilk, vars=[x], domain=float)                    #␣
↪needs sage.symbolic
>>> timeit('fc_wilk_float(30.0)')      # random    # long time                    #␣
↪needs sage.symbolic
625 loops, best of 3: 5.04 us per loop
```

We also have support for `RR`:

```
sage: fc_wilk_rr = fast_callable(wilk, vars=[x], domain=RR)                       #␣
↪needs sage.symbolic
sage: timeit('fc_wilk_rr(30.0)')        # random    # long time                   #␣
↪needs sage.symbolic
625 loops, best of 3: 13 us per loop
```

```
>>> from sage.all import *
>>> fc_wilk_rr = fast_callable(wilk, vars=[x], domain=RR)                         #␣
↪needs sage.symbolic
>>> timeit('fc_wilk_rr(30.0)')        # random    # long time                    #␣
↪needs sage.symbolic
625 loops, best of 3: 13 us per loop
```

For `CC`:

```
sage: fc_wilk_cc = fast_callable(wilk, vars=[x], domain=CC)                       #␣
↪needs sage.symbolic
sage: timeit('fc_wilk_cc(30.0)')        # random    # long time                   #␣
↪needs sage.symbolic
625 loops, best of 3: 23 us per loop
```

```
>>> from sage.all import *
>>> fc_wilk_cc = fast_callable(wilk, vars=[x], domain=CC)                         #␣
↪needs sage.symbolic
>>> timeit('fc_wilk_cc(30.0)')        # random    # long time                    #␣
↪needs sage.symbolic
625 loops, best of 3: 23 us per loop
```

And support for `CDF`:

```
sage: fc_wilk_cdf = fast_callable(wilk, vars=[x], domain=CDF)                     #␣
↪needs sage.symbolic
sage: timeit('fc_wilk_cdf(30.0)')       # random    # long time                   #␣
↪needs sage.symbolic
625 loops, best of 3: 10.2 us per loop
```

```
>>> from sage.all import *
>>> fc_wilk_cdf = fast_callable(wilk, vars=[x], domain=CDF)                       #␣
↪needs sage.symbolic
>>> timeit('fc_wilk_cdf(30.0)')       # random    # long time                    #␣
↪needs sage.symbolic
625 loops, best of 3: 10.2 us per loop
```

Currently, *fast_callable()* can accept two kinds of objects: polynomials (univariate and multivariate) and symbolic

expressions (elements of the Symbolic Ring). For polynomials, you can omit the `vars` argument; the variables will default to the ring generators (in the order used when creating the ring).

```
sage: K.<x,y,z> = QQ[]
sage: p = 10*y + 100*z + x
sage: fp = fast_callable(p)
sage: fp(1,2,3)
321
```

```
>>> from sage.all import *
>>> K = QQ['x, y, z']; (x, y, z,) = K._first_ngens(3)
>>> p = Integer(10)*y + Integer(100)*z + x
>>> fp = fast_callable(p)
>>> fp(Integer(1),Integer(2),Integer(3))
321
```

But you can also specify the variable names to override the default ordering (you can include extra variable names here, too).

```
sage: fp = fast_callable(p, vars=('x','w','z','y'))
```

```
>>> from sage.all import *
>>> fp = fast_callable(p, vars=('x','w','z','y'))
```

For symbolic expressions, you need to specify the variable names, so that *fast_callable()* knows what order to use.

```
sage: # needs sage.symbolic
sage: var('y,z,x')
(y, z, x)
sage: f = 10*y + 100*z + x
sage: ff = fast_callable(f, vars=(x,y,z))
sage: ff(1,2,3)
321
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> var('y,z,x')
(y, z, x)
>>> f = Integer(10)*y + Integer(100)*z + x
>>> ff = fast_callable(f, vars=(x,y,z))
>>> ff(Integer(1),Integer(2),Integer(3))
321
```

You can also specify extra variable names:

```
sage: ff = fast_callable(f, vars=('x','w','z','y'))                    #␣
↪needs sage.symbolic
sage: ff(1,2,3,4)                                                      #␣
↪needs sage.symbolic
341
```

```
>>> from sage.all import *
>>> ff = fast_callable(f, vars=('x','w','z','y'))                        #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.symbolic
>>> ff(Integer(1),Integer(2),Integer(3),Integer(4))                    ␣
↪                                    # needs sage.symbolic
341
```

This should be enough for normal use of *fast_callable()*; let's discuss some more advanced topics.

Sometimes it may be useful to create a fast version of an expression without going through symbolic expressions or polynomials; perhaps because you want to describe to *fast_callable()* an expression with common subexpressions.

Internally, *fast_callable()* works in two stages: it constructs an expression tree from its argument, and then it builds a fast evaluator from that expression tree. You can bypass the first phase by building your own expression tree and passing that directly to *fast_callable()*, using an *ExpressionTreeBuilder*.

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=('x','y','z'))
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=('x','y','z'))
```

An *ExpressionTreeBuilder* has three interesting methods: `constant()`, `var()`, and `call()`. All of these methods return `ExpressionTree` objects.

The `var()` method takes a string, and returns an expression tree for the corresponding variable.

```
sage: x = etb.var('x')
sage: y = etb.var('y')
sage: z = etb.var('y')
```

```
>>> from sage.all import *
>>> x = etb.var('x')
>>> y = etb.var('y')
>>> z = etb.var('y')
```

Expression trees support Python's numeric operators, so you can easily build expression trees representing arithmetic expressions.

```
sage: v1 = (x+y)*(y+z) + (y//z)
```

```
>>> from sage.all import *
>>> v1 = (x+y)*(y+z) + (y//z)
```

The `constant()` method takes a Sage value, and returns an expression tree representing that value.

```
sage: v2 = etb.constant(3.14159) * x + etb.constant(1729) * y
```

```
>>> from sage.all import *
>>> v2 = etb.constant(RealNumber('3.14159')) * x + etb.constant(Integer(1729)) * y
```

The `call()` method takes a sage/Python function and zero or more expression trees, and returns an expression tree representing the function call.

```
sage: v3 = etb.call(sin, v1+v2)
sage: v3                                                                    #␣
↪needs sage.symbolic
sin(add(add(mul(add(v_0, v_1), add(v_1, v_1)), floordiv(v_1, v_1)),
        add(mul(3.14159000000000, v_0), mul(1729, v_1))))
```

```
>>> from sage.all import *
>>> v3 = etb.call(sin, v1+v2)
>>> v3                                                                      #␣
↪needs sage.symbolic
sin(add(add(mul(add(v_0, v_1), add(v_1, v_1)), floordiv(v_1, v_1)),
        add(mul(3.14159000000000, v_0), mul(1729, v_1))))
```

Many sage/Python built-in functions are specially handled; for instance, when evaluating an expression involving `sin()` over `RDF`, the C math library function `sin()` is called. Arbitrary functions are allowed, but will be much slower since they will call back to Python code on every call; for example, the following will work.

```
sage: def my_sqrt(x): return pow(x, 0.5)
sage: e = etb.call(my_sqrt, v1); e
{my_sqrt}(add(mul(add(v_0, v_1), add(v_1, v_1)), floordiv(v_1, v_1)))
sage: fast_callable(e)(1, 2, 3)
3.60555127546399
```

```
>>> from sage.all import *
>>> def my_sqrt(x): return pow(x, RealNumber('0.5'))
>>> e = etb.call(my_sqrt, v1); e
{my_sqrt}(add(mul(add(v_0, v_1), add(v_1, v_1)), floordiv(v_1, v_1)))
>>> fast_callable(e)(Integer(1), Integer(2), Integer(3))
3.60555127546399
```

To provide *fast_callable()* for your own class (so that `fast_callable(x)` works when `x` is an instance of your class), implement a method `_fast_callable_(self, etb)` for your class. This method takes an *ExpressionTreeBuilder*, and returns an expression tree built up using the methods described above.

EXAMPLES:

```
sage: var('x')                                                              #␣
↪needs sage.symbolic
x
sage: f = fast_callable(sqrt(x^7+1), vars=[x], domain=float)                #␣
↪needs sage.symbolic
```

```
>>> from sage.all import *
>>> var('x')                                                                #␣
↪needs sage.symbolic
x
>>> f = fast_callable(sqrt(x**Integer(7)+Integer(1)), vars=[x], domain=float)  ␣
↪              # needs sage.symbolic
```

```
sage: f(1)                                                                  #␣
↪needs sage.symbolic
1.4142135623730951
```

(continues on next page)

(continued from previous page)

```
sage: f.op_list()                                                                #␣
↪needs sage.symbolic
[('load_arg', 0), ('ipow', 7), ('load_const', 1.0), 'add', 'sqrt', 'return']
```

```
>>> from sage.all import *
>>> f(Integer(1))                                                                ␣
↪     # needs sage.symbolic
1.4142135623730951
>>> f.op_list()                                                                 #␣
↪needs sage.symbolic
[('load_arg', 0), ('ipow', 7), ('load_const', 1.0), 'add', 'sqrt', 'return']
```

To interpret that last line, we load argument 0 (`x` in this case) onto the stack, push the constant 7.0 onto the stack, call the `pow()` functionn(which takes 2 arguments from the stack), push the constant 1.0, add the top two arguments of the stack, and then call *`sqrt()`*.

Here we take `sin()` of the first argument and add it to `f`:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder('x')
sage: x = etb.var('x')
sage: f = etb.call(sqrt, x^7 + 1)
sage: g = etb.call(sin, x)
sage: fast_callable(f+g).op_list()
[('load_arg', 0), ('ipow', 7), ('load_const', 1), 'add',
 ('py_call', <function sqrt at ...>, 1), ('load_arg', 0), ('py_call', sin, 1),
 'add', 'return']
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder('x')
>>> x = etb.var('x')
>>> f = etb.call(sqrt, x**Integer(7) + Integer(1))
>>> g = etb.call(sin, x)
>>> fast_callable(f+g).op_list()
[('load_arg', 0), ('ipow', 7), ('load_const', 1), 'add',
 ('py_call', <function sqrt at ...>, 1), ('load_arg', 0), ('py_call', sin, 1),
 'add', 'return']
```

AUTHOR:

- Carl Witty (2009-02): initial version (heavily inspired by Robert Bradshaw's fast_eval.pyx)

Todo

The following bits of text were written for the module docstring. They are not true yet, but I hope they will be true someday, at which point I will move them into the main text.

The final interesting method of *`ExpressionTreeBuilder`* is *`choice()`*. This produces conditional expressions, like the C `COND ? T : F` expression or the Python `T if COND else F`. This lets you define piecewise functions using *`fast_callable()`*.

```
sage: v4 = etb.choice(v3 >= etb.constant(0), v1, v2)  # not tested
```

```
>>> from sage.all import *
>>> v4 = etb.choice(v3 >= etb.constant(Integer(0)), v1, v2)  # not tested
```

The arguments are `(COND, T, F)` (the same order as in C), so the above means that if `v3` evaluates to a nonnegative number, then `v4` will evaluate to the result of `v1`; otherwise, `v4` will evaluate to the result of `v2`.

Let's see an example where we see that *fast_callable()* does not evaluate common subexpressions more than once. We'll make a *fast_callable()* expression that gives the result of 16 iterations of the Mandelbrot function.

```
sage: etb = ExpressionTreeBuilder('c')
sage: z = etb.constant(0)
sage: c = etb.var('c')
sage: for i in range(16):
....:     z = z*z + c
sage: mand = fast_callable(z, domain=CDF)                                    #␣
↪needs sage.rings.complex_double
```

```
>>> from sage.all import *
>>> etb = ExpressionTreeBuilder('c')
>>> z = etb.constant(Integer(0))
>>> c = etb.var('c')
>>> for i in range(Integer(16)):
...     z = z*z + c
>>> mand = fast_callable(z, domain=CDF)                                      #␣
↪needs sage.rings.complex_double
```

Now `ff` does 32 complex arithmetic operations on each call (16 additions and 16 multiplications). However, if `z*z` produced code that evaluated `z` twice, then this would do many thousands of arithmetic operations instead.

Note that the handling for common subexpressions only checks whether expression trees are the same Python object; for instance, the following code will evaluate `x+1` twice:

```
sage: etb = ExpressionTreeBuilder('x')
sage: x = etb.var('x')
sage: (x+1)*(x+1)
mul(add(v_0, 1), add(v_0, 1))
```

```
>>> from sage.all import *
>>> etb = ExpressionTreeBuilder('x')
>>> x = etb.var('x')
>>> (x+Integer(1))*(x+Integer(1))
mul(add(v_0, 1), add(v_0, 1))
```

but this code will only evaluate `x+1` once:

```
sage: v = x+1; v*v
mul(add(v_0, 1), add(v_0, 1))
```

```
>>> from sage.all import *
>>> v = x+Integer(1); v*v
mul(add(v_0, 1), add(v_0, 1))
```

class sage.ext.fast_callable.**CompilerInstrSpec**(*n_inputs*, *n_outputs*, *parameters*)

Bases: `object`

Describe a single instruction to the *fast_callable()* code generator.

An instruction has a number of stack inputs, a number of stack outputs, and a parameter list describing extra arguments that must be passed to the *InstructionStream.instr()* method (that end up as extra words in the code).

The parameter list is a list of strings. Each string is one of the following:

- `'args'` – the instruction argument refers to an input argument of the wrapper class; it is just appended to the code
- `'constants'`, `'py_constants'` – the instruction argument is a value; the value is added to the corresponding list (if it's not already there) and the index is appended to the code.
- `'n_inputs'`, `'n_outputs'` – the instruction actually takes a variable number of inputs or outputs (the `n_inputs` and `n_outputs` attributes of this instruction are ignored). The instruction argument specifies the number of inputs or outputs (respectively); it is just appended to the code.

class sage.ext.fast_callable.**Expression**

Bases: `object`

Represent an expression for *fast_callable()*.

Supports the standard Python arithmetic operators; if arithmetic is attempted between an Expression and a non-Expression, the non-Expression is converted to an expression (using the `__call__()` method of the Expression's *ExpressionTreeBuilder*).

EXAMPLES:

```
sage: # needs sage.symbolic
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))
sage: x = etb.var(x)
sage: etb(x)
v_0
sage: etb(3)
3
sage: etb.call(sin, x)
sin(v_0)
sage: (x+1)/(x-1)
div(add(v_0, 1), sub(v_0, 1))
sage: x//5
floordiv(v_0, 5)
sage: -abs(~x)
neg(abs(inv(v_0)))
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))
>>> x = etb.var(x)
>>> etb(x)
v_0
>>> etb(Integer(3))
3
>>> etb.call(sin, x)
sin(v_0)
>>> (x+Integer(1))/(x-Integer(1))
div(add(v_0, 1), sub(v_0, 1))
```

(continues on next page)

(continued from previous page)

```
>>> x//Integer(5)
floordiv(v_0, 5)
>>> -abs(~x)
neg(abs(inv(v_0)))
```

abs()

Compute the absolute value of an Expression.

EXAMPLES:

```
sage: # needs sage.symbolic
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))
sage: x = etb(x)
sage: abs(x)
abs(v_0)
sage: x.abs()
abs(v_0)
sage: x.__abs__()
abs(v_0)
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))
>>> x = etb(x)
>>> abs(x)
abs(v_0)
>>> x.abs()
abs(v_0)
>>> x.__abs__()
abs(v_0)
```

class sage.ext.fast_callable.**ExpressionCall**

Bases: *Expression*

An Expression that represents a function call.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                #␣
↪needs sage.symbolic
sage: type(etb.call(sin, x))                                                #␣
↪needs sage.symbolic
<class 'sage.ext.fast_callable.ExpressionCall'>
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                  #␣
↪needs sage.symbolic
>>> type(etb.call(sin, x))                                                  #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.symbolic
<class 'sage.ext.fast_callable.ExpressionCall'>
```

arguments()

Return the arguments from this *ExpressionCall*.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                #␣
↪needs sage.symbolic
sage: etb.call(sin, x).arguments()                                          #␣
↪needs sage.symbolic
[v_0]
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                  #␣
↪needs sage.symbolic
>>> etb.call(sin, x).arguments()                                            #␣
↪needs sage.symbolic
[v_0]
```

function()

Return the function from this *ExpressionCall*.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                #␣
↪needs sage.symbolic
sage: etb.call(sin, x).function()                                           #␣
↪needs sage.symbolic
sin
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                  #␣
↪needs sage.symbolic
>>> etb.call(sin, x).function()                                             #␣
↪needs sage.symbolic
sin
```

class sage.ext.fast_callable.**ExpressionChoice**

Bases: *Expression*

A conditional expression.

(It's possible to create choice nodes, but they don't work yet.)

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.symbolic
sage: etb.choice(etb.call(operator.eq, x, 0), 0, 1/x)                          #␣
↪needs sage.symbolic
(0 if {eq}(v_0, 0) else div(1, v_0))
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                     #␣
↪needs sage.symbolic
>>> etb.choice(etb.call(operator.eq, x, Integer(0)), Integer(0), Integer(1)/x)  ␣
↪                       # needs sage.symbolic
(0 if {eq}(v_0, 0) else div(1, v_0))
```

condition()

Return the condition of an *ExpressionChoice*.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                   #␣
↪needs sage.symbolic
sage: x = etb(x)                                                               #␣
↪needs sage.symbolic
sage: etb.choice(x, ~x, 0).condition()                                         #␣
↪needs sage.symbolic
v_0
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                     #␣
↪needs sage.symbolic
>>> x = etb(x)                                                                 #␣
↪needs sage.symbolic
>>> etb.choice(x, ~x, Integer(0)).condition()                                   ␣
↪     # needs sage.symbolic
v_0
```

if_false()

Return the false branch of an *ExpressionChoice*.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                   #␣
↪needs sage.symbolic
sage: x = etb(x)                                                               #␣
↪needs sage.symbolic
sage: etb.choice(x, ~x, 0).if_false()                                          #␣
↪needs sage.symbolic
0
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                    #␣
↪needs sage.symbolic
>>> x = etb(x)                                                                #␣
↪needs sage.symbolic
>>> etb.choice(x, ~x, Integer(0)).if_false()                                    ␣
↪     # needs sage.symbolic
0
```

if_true()

Return the true branch of an *ExpressionChoice*.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                  #␣
↪needs sage.symbolic
sage: x = etb(x)                                                              #␣
↪needs sage.symbolic
sage: etb.choice(x, ~x, 0).if_true()                                          #␣
↪needs sage.symbolic
inv(v_0)
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                    #␣
↪needs sage.symbolic
>>> x = etb(x)                                                                #␣
↪needs sage.symbolic
>>> etb.choice(x, ~x, Integer(0)).if_true()                                     ␣
↪     # needs sage.symbolic
inv(v_0)
```

class sage.ext.fast_callable.**ExpressionConstant**

Bases: *Expression*

An Expression that represents an arbitrary constant.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                  #␣
↪needs sage.symbolic
sage: type(etb(3))                                                            #␣
↪needs sage.symbolic
<class 'sage.ext.fast_callable.ExpressionConstant'>
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                    #␣
↪needs sage.symbolic
>>> type(etb(Integer(3)))                                                       ␣
```

(continues on next page)

(continued from previous page)

```
↪      # needs sage.symbolic
<class 'sage.ext.fast_callable.ExpressionConstant'>
```

value()

Return the constant value of an *ExpressionConstant*.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                #␣
↪needs sage.symbolic
sage: etb(3).value()                                                        #␣
↪needs sage.symbolic
3
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                #␣
↪needs sage.symbolic
>>> etb(Integer(3)).value()                                                 ␣
↪      # needs sage.symbolic
3
```

class sage.ext.fast_callable.**ExpressionIPow**

Bases: *Expression*

A power Expression with an integer exponent.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                #␣
↪needs sage.symbolic
sage: type(etb.var('x')^17)                                                 #␣
↪needs sage.symbolic
<class 'sage.ext.fast_callable.ExpressionIPow'>
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                #␣
↪needs sage.symbolic
>>> type(etb.var('x')**Integer(17))                                         ␣
↪      # needs sage.symbolic
<class 'sage.ext.fast_callable.ExpressionIPow'>
```

base()

Return the base from this *ExpressionIPow*.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                #␣
↪needs sage.symbolic
```

(continues on next page)

(continued from previous page)

```
sage: (etb(33)^42).base()                                                   #␣
↪needs sage.symbolic
33
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                  #␣
↪needs sage.symbolic
>>> (etb(Integer(33))**Integer(42)).base()                                  ␣
↪               # needs sage.symbolic
33
```

exponent()

Return the exponent from this *ExpressionIPow*.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                #␣
↪needs sage.symbolic
sage: (etb(x)^(-1)).exponent()                                              #␣
↪needs sage.symbolic
-1
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                  #␣
↪needs sage.symbolic
>>> (etb(x)**(-Integer(1))).exponent()                                      ␣
↪      # needs sage.symbolic
-1
```

class sage.ext.fast_callable.**ExpressionTreeBuilder**

Bases: object

A class with helper methods for building Expressions.

An instance of this class is passed to _fast_callable_() methods; you can also instantiate it yourself to create your own expressions for *fast_callable()*, bypassing _fast_callable_().

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder('x')
sage: x = etb.var('x')
sage: (x+3)*5
mul(add(v_0, 3), 5)
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder('x')
>>> x = etb.var('x')
>>> (x+Integer(3))*Integer(5)
mul(add(v_0, 3), 5)
```

call(*fn*, **args*)

Construct a call node, given a function and a list of arguments.

The arguments will be converted to Expressions using `ExpressionTreeBuilder.__call__()`.

As a special case, notice if the function is `operator.pow()` and the second argument is integral, and construct an *ExpressionIPow* instead.

EXAMPLES:

```
sage: # needs sage.symbolic
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))
sage: etb.call(cos, x)
cos(v_0)
sage: etb.call(sin, 1)
sin(1)
sage: etb.call(sin, etb(1))
sin(1)
sage: etb.call(factorial, x+57)
{factorial}(add(v_0, 57))
sage: etb.call(operator.pow, x, 543)
ipow(v_0, 543)
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))
>>> etb.call(cos, x)
cos(v_0)
>>> etb.call(sin, Integer(1))
sin(1)
>>> etb.call(sin, etb(Integer(1)))
sin(1)
>>> etb.call(factorial, x+Integer(57))
{factorial}(add(v_0, 57))
>>> etb.call(operator.pow, x, Integer(543))
ipow(v_0, 543)
```

choice(*cond*, *iftrue*, *iffalse*)

Construct a choice node (a conditional expression), given the condition, and the values for the true and false cases.

(It's possible to create choice nodes, but they don't work yet.)

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                #␣
↪needs sage.symbolic
sage: etb.choice(etb.call(operator.eq, x, 0), 0, 1/x)                       #␣
↪needs sage.symbolic
(0 if {eq}(v_0, 0) else div(1, v_0))
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                    #␣
↪needs sage.symbolic
>>> etb.choice(etb.call(operator.eq, x, Integer(0)), Integer(0), Integer(1)/
↪x)                        # needs sage.symbolic
(0 if {eq}(v_0, 0) else div(1, v_0))
```

constant(*c*)

Turn the argument into an *ExpressionConstant*, converting it to our domain if we have one.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder('x')
sage: etb.constant(pi)                                                      #␣
↪needs sage.symbolic
pi
sage: etb = ExpressionTreeBuilder('x', domain=RealField(200))               #␣
↪needs sage.rings.real_mpfr
sage: etb.constant(pi)                                                      #␣
↪needs sage.rings.real_mpfr sage.symbolic
3.1415926535897932384626433832795028841971693993751058209749
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder('x')
>>> etb.constant(pi)                                                        #␣
↪needs sage.symbolic
pi
>>> etb = ExpressionTreeBuilder('x', domain=RealField(Integer(200)))          ␣
↪     # needs sage.rings.real_mpfr
>>> etb.constant(pi)                                                        #␣
↪needs sage.rings.real_mpfr sage.symbolic
3.1415926535897932384626433832795028841971693993751058209749
```

var(*v*)

Turn the argument into an *ExpressionVariable*. Look it up in the list of variables. (Variables are matched by name.)

EXAMPLES:

```
sage: # needs sage.symbolic
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: var('a,b,some_really_long_name')
(a, b, some_really_long_name)
sage: x = polygen(QQ)
sage: etb = ExpressionTreeBuilder(vars=('a','b',some_really_long_name, x))
sage: etb.var(some_really_long_name)
v_2
sage: etb.var('some_really_long_name')
v_2
sage: etb.var(x)
```

(continues on next page)

(continued from previous page)

```
v_3
sage: etb.var('y')
Traceback (most recent call last):
...
ValueError: Variable 'y' not found...
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> var('a,b,some_really_long_name')
(a, b, some_really_long_name)
>>> x = polygen(QQ)
>>> etb = ExpressionTreeBuilder(vars=('a','b',some_really_long_name, x))
>>> etb.var(some_really_long_name)
v_2
>>> etb.var('some_really_long_name')
v_2
>>> etb.var(x)
v_3
>>> etb.var('y')
Traceback (most recent call last):
...
ValueError: Variable 'y' not found...
```

class sage.ext.fast_callable.**ExpressionVariable**

Bases: *Expression*

An Expression that represents a variable.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                #␣
↪needs sage.symbolic
sage: type(etb.var(x))                                                      #␣
↪needs sage.symbolic
<class 'sage.ext.fast_callable.ExpressionVariable'>
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                  #␣
↪needs sage.symbolic
>>> type(etb.var(x))                                                        #␣
↪needs sage.symbolic
<class 'sage.ext.fast_callable.ExpressionVariable'>
```

variable_index()

Return the variable index of an *ExpressionVariable*.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=(x,))                                #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.symbolic
sage: etb(x).variable_index()                                                #␣
↪needs sage.symbolic
0
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=(x,))                                   #␣
↪needs sage.symbolic
>>> etb(x).variable_index()                                                  #␣
↪needs sage.symbolic
0
```

class sage.ext.fast_callable.**FastCallableFloatWrapper**(*ff*, *imag_tol*)

Bases: object

A class to alter the return types of the fast-callable functions.

When applying numerical routines (including plotting) to symbolic expressions and functions, we generally first convert them to a faster form with *fast_callable()*. That function takes a `domain` parameter that forces the end (and all intermediate) results of evaluation to a specific type. Though usually always want the end result to be of type `float`, correctly choosing the `domain` presents some problems:

- `float` is a bad choice because it's common for real functions to have complex terms in them. Moreover precision issues can produce terms like `1.0 + 1e-12*I` that are hard to avoid if calling `real()` on everything is infeasible.
- `complex` has essentially the same problem as `float`. There are several symbolic functions like `min_symbolic()`, `max_symbolic()`, and `floor()` that are unable to operate on complex numbers.
- `None` leaves the types of the inputs/outputs alone, but due to the lack of a specialized interpreter, slows down evaluation by an unacceptable amount.
- `CDF` has none of the other issues, because `CDF` has its own specialized interpreter, a lexicographic ordering (for min/max), and supports `floor()`. However, most numerical functions cannot handle complex numbers, so using `CDF` would require us to wrap every evaluation in a `CDF`-to-`float` conversion routine. That would slow things down less than a domain of `None` would, but is unattractive mainly because of how invasive it would be to "fix" the output everywhere.

Creating a new fast-callable interpreter that has different input and output types solves most of the problems with a `CDF` domain, but *fast_callable()* and the interpreter classes in `sage.ext.interpreters` are not really written with that in mind. The `domain` parameter to *fast_callable()*, for example, is expecting a single Sage ring that corresponds to one interpreter. You can make it accept, for example, a string like "CDF-to-float", but the hacks required to make that work feel wrong.

Thus we arrive at this solution: a class to wrap the result of *fast_callable()*. Whenever we need to support intermediate complex terms in a numerical routine, we can set `domain=CDF` while creating its fast-callable incarnation, and then wrap the result in this class. The `__call__()` method of this class then ensures that the `CDF` output is converted to a `float` if its imaginary part is within an acceptable tolerance.

EXAMPLES:

An error is thrown if the answer is complex:

```
sage: # needs sage.symbolic
sage: from sage.ext.fast_callable import FastCallableFloatWrapper
sage: f = sqrt(x)
```

(continues on next page)

(continued from previous page)

```
sage: ff = fast_callable(f, vars=[x], domain=CDF)
sage: fff = FastCallableFloatWrapper(ff, imag_tol=1e-8)
sage: fff(1)
1.0
sage: fff(-1)
Traceback (most recent call last):
...
ValueError: complex fast-callable function result
1.0*I for arguments (-1,)
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.ext.fast_callable import FastCallableFloatWrapper
>>> f = sqrt(x)
>>> ff = fast_callable(f, vars=[x], domain=CDF)
>>> fff = FastCallableFloatWrapper(ff, imag_tol=RealNumber('1e-8'))
>>> fff(Integer(1))
1.0
>>> fff(-Integer(1))
Traceback (most recent call last):
...
ValueError: complex fast-callable function result
1.0*I for arguments (-1,)
```

class sage.ext.fast_callable.**InstructionStream**

Bases: `object`

An *InstructionStream* takes a sequence of instructions (passed in by a series of method calls) and computes the data structures needed by the interpreter. This is the stage where we switch from operating on *Expression* trees to a linear representation. If we had a peephole optimizer (we don't) it would go here.

Currently, this class is not very general; it only works for interpreters with a fixed set of memory chunks (with fixed names). Basically, it only works for stack-based expression interpreters. It should be generalized, so that the interpreter metadata includes a description of the memory chunks involved and the instruction stream can handle any interpreter.

Once you're done adding instructions, you call *get_current()* to retrieve the information needed by the interpreter (as a Python dictionary).

current_op_list()

Return the list of instructions that have been added to this *InstructionStream* so far.

It's OK to call this, then add more instructions.

EXAMPLES:

```
sage: from sage.ext.interpreters.wrapper_el import metadata
sage: from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
sage: from sage.ext.fast_callable import InstructionStream
sage: instr_stream = InstructionStream(metadata, 1)
sage: instr_stream.instr('load_arg', 0)
sage: instr_stream.instr('py_call', math.sin, 1)
sage: instr_stream.instr('abs')
```

(continues on next page)

(continued from previous page)

```
sage: instr_stream.instr('return')
sage: instr_stream.current_op_list()
[('load_arg', 0), ('py_call', <built-in function sin>, 1), 'abs', 'return']
```

```
>>> from sage.all import *
>>> from sage.ext.interpreters.wrapper_el import metadata
>>> from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
>>> from sage.ext.fast_callable import InstructionStream
>>> instr_stream = InstructionStream(metadata, Integer(1))
>>> instr_stream.instr('load_arg', Integer(0))
>>> instr_stream.instr('py_call', math.sin, Integer(1))
>>> instr_stream.instr('abs')
>>> instr_stream.instr('return')
>>> instr_stream.current_op_list()
[('load_arg', 0), ('py_call', <built-in function sin>, 1), 'abs', 'return']
```

get_current()

Return the current state of the *InstructionStream*, as a dictionary suitable for passing to a wrapper class.

NOTE: The dictionary includes internal data structures of the *InstructionStream*; you must not modify it.

EXAMPLES:

```
sage: from sage.ext.interpreters.wrapper_el import metadata
sage: from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
sage: from sage.ext.fast_callable import InstructionStream
sage: instr_stream = InstructionStream(metadata, 1)
sage: instr_stream.get_current()
{'args': 1,
 'code': [],
 'constants': [],
 'domain': None,
 'py_constants': [],
 'stack': 0}
sage: instr_stream.instr('load_arg', 0)
sage: instr_stream.instr('py_call', math.sin, 1)
sage: instr_stream.instr('abs')
sage: instr_stream.instr('return')
sage: instr_stream.current_op_list()
[('load_arg', 0), ('py_call', <built-in function sin>, 1), 'abs', 'return']
sage: instr_stream.get_current()
{'args': 1,
 'code': [0, 0, 3, 0, 1, 12, 2],
 'constants': [],
 'domain': None,
 'py_constants': [<built-in function sin>],
 'stack': 1}
```

```
>>> from sage.all import *
```

(continues on next page)

(continued from previous page)

```
>>> from sage.ext.interpreters.wrapper_el import metadata
>>> from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
>>> from sage.ext.fast_callable import InstructionStream
>>> instr_stream = InstructionStream(metadata, Integer(1))
>>> instr_stream.get_current()
{'args': 1,
 'code': [],
 'constants': [],
 'domain': None,
 'py_constants': [],
 'stack': 0}
>>> instr_stream.instr('load_arg', Integer(0))
>>> instr_stream.instr('py_call', math.sin, Integer(1))
>>> instr_stream.instr('abs')
>>> instr_stream.instr('return')
>>> instr_stream.current_op_list()
[('load_arg', 0), ('py_call', <built-in function sin>, 1), 'abs', 'return']
>>> instr_stream.get_current()
{'args': 1,
 'code': [0, 0, 3, 0, 1, 12, 2],
 'constants': [],
 'domain': None,
 'py_constants': [<built-in function sin>],
 'stack': 1}
```

get_metadata()

Return the interpreter metadata being used by the current *InstructionStream*.

The code generator sometimes uses this to decide which code to generate.

EXAMPLES:

```
sage: from sage.ext.interpreters.wrapper_el import metadata
sage: from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
sage: from sage.ext.fast_callable import InstructionStream
sage: instr_stream = InstructionStream(metadata, 1)
sage: md = instr_stream.get_metadata()
sage: type(md)
<class 'sage.ext.fast_callable.InterpreterMetadata'>
```

```
>>> from sage.all import *
>>> from sage.ext.interpreters.wrapper_el import metadata
>>> from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
>>> from sage.ext.fast_callable import InstructionStream
>>> instr_stream = InstructionStream(metadata, Integer(1))
>>> md = instr_stream.get_metadata()
>>> type(md)
<class 'sage.ext.fast_callable.InterpreterMetadata'>
```

has_instr(*opname*)

Check whether this *InstructionStream* knows how to generate code for a given instruction.

EXAMPLES:

```
sage: from sage.ext.interpreters.wrapper_el import metadata
sage: from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
sage: from sage.ext.fast_callable import InstructionStream
sage: instr_stream = InstructionStream(metadata, 1)
sage: instr_stream.has_instr('return')
True
sage: instr_stream.has_instr('factorial')
False
sage: instr_stream.has_instr('abs')
True
```

```
>>> from sage.all import *
>>> from sage.ext.interpreters.wrapper_el import metadata
>>> from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
>>> from sage.ext.fast_callable import InstructionStream
>>> instr_stream = InstructionStream(metadata, Integer(1))
>>> instr_stream.has_instr('return')
True
>>> instr_stream.has_instr('factorial')
False
>>> instr_stream.has_instr('abs')
True
```

instr(*opname*, **args*)

Generate code in this *InstructionStream* for the given instruction and arguments.

The opname is used to look up a *CompilerInstrSpec*; the *CompilerInstrSpec* describes how to interpret the arguments. (This is documented in the class docstring for *CompilerInstrSpec*.)

EXAMPLES:

```
sage: from sage.ext.interpreters.wrapper_el import metadata
sage: from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
sage: from sage.ext.fast_callable import InstructionStream
sage: instr_stream = InstructionStream(metadata, 1)
sage: instr_stream.instr('load_arg', 0)
sage: instr_stream.instr('sin')                                             #␣
↪needs sage.symbolic
sage: instr_stream.instr('py_call', math.sin, 1)
sage: instr_stream.instr('abs')
sage: instr_stream.instr('factorial')
Traceback (most recent call last):
...
KeyError: 'factorial'
sage: instr_stream.instr('return')
sage: instr_stream.current_op_list()                                        #␣
↪needs sage.symbolic
```

(continues on next page)

(continued from previous page)

```
[('load_arg', 0), 'sin', ('py_call', <built-in function sin>, 1), 'abs',
↪'return']
```

```
>>> from sage.all import *
>>> from sage.ext.interpreters.wrapper_el import metadata
>>> from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
>>> from sage.ext.fast_callable import InstructionStream
>>> instr_stream = InstructionStream(metadata, Integer(1))
>>> instr_stream.instr('load_arg', Integer(0))
>>> instr_stream.instr('sin')                                             #␣
↪needs sage.symbolic
>>> instr_stream.instr('py_call', math.sin, Integer(1))
>>> instr_stream.instr('abs')
>>> instr_stream.instr('factorial')
Traceback (most recent call last):
...
KeyError: 'factorial'
>>> instr_stream.instr('return')
>>> instr_stream.current_op_list()                                        #␣
↪needs sage.symbolic
[('load_arg', 0), 'sin', ('py_call', <built-in function sin>, 1), 'abs',
↪'return']
```

load_arg(*n*)

Add a `'load_arg'` instruction to this *InstructionStream*.

EXAMPLES:

```
sage: from sage.ext.interpreters.wrapper_el import metadata
sage: from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
sage: from sage.ext.fast_callable import InstructionStream
sage: instr_stream = InstructionStream(metadata, 12)
sage: instr_stream.load_arg(5)
sage: instr_stream.current_op_list()
[('load_arg', 5)]
sage: instr_stream.load_arg(3)
sage: instr_stream.current_op_list()
[('load_arg', 5), ('load_arg', 3)]
```

```
>>> from sage.all import *
>>> from sage.ext.interpreters.wrapper_el import metadata
>>> from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
>>> from sage.ext.fast_callable import InstructionStream
>>> instr_stream = InstructionStream(metadata, Integer(12))
>>> instr_stream.load_arg(Integer(5))
>>> instr_stream.current_op_list()
[('load_arg', 5)]
>>> instr_stream.load_arg(Integer(3))
>>> instr_stream.current_op_list()
```

(continues on next page)

(continued from previous page)

```
[('load_arg', 5), ('load_arg', 3)]
```

load_const(*c*)

Add a `'load_const'` instruction to this *InstructionStream*.

EXAMPLES:

```
sage: from sage.ext.interpreters.wrapper_el import metadata
sage: from sage.ext.interpreters.wrapper_rdf import metadata                #␣
↪needs sage.modules
sage: from sage.ext.fast_callable import InstructionStream, op_list
sage: instr_stream = InstructionStream(metadata, 1)
sage: instr_stream.load_const(5)
sage: instr_stream.current_op_list()
[('load_const', 5)]
sage: instr_stream.load_const(7)
sage: instr_stream.load_const(5)
sage: instr_stream.current_op_list()
[('load_const', 5), ('load_const', 7), ('load_const', 5)]
```

```
>>> from sage.all import *
>>> from sage.ext.interpreters.wrapper_el import metadata
>>> from sage.ext.interpreters.wrapper_rdf import metadata                  #␣
↪needs sage.modules
>>> from sage.ext.fast_callable import InstructionStream, op_list
>>> instr_stream = InstructionStream(metadata, Integer(1))
>>> instr_stream.load_const(Integer(5))
>>> instr_stream.current_op_list()
[('load_const', 5)]
>>> instr_stream.load_const(Integer(7))
>>> instr_stream.load_const(Integer(5))
>>> instr_stream.current_op_list()
[('load_const', 5), ('load_const', 7), ('load_const', 5)]
```

Note that constants are shared: even though we load 5 twice, it only appears once in the constant table.

```
sage: instr_stream.get_current()['constants']
[5, 7]
```

```
>>> from sage.all import *
>>> instr_stream.get_current()['constants']
[5, 7]
```

class sage.ext.fast_callable.**IntegerPowerFunction**(*n*)

Bases: `object`

This class represents the function x^n for an arbitrary integral power n.

That is, `IntegerPowerFunction(2)` is the squaring function; `IntegerPowerFunction(-1)` is the reciprocal function.

EXAMPLES:

```
sage: from sage.ext.fast_callable import IntegerPowerFunction
sage: square = IntegerPowerFunction(2)
sage: square
(^2)
sage: square(pi)                                                                #␣
↪needs sage.symbolic
pi^2
sage: square(I)                                                                 #␣
↪needs sage.symbolic
-1
sage: square(RIF(-1, 1)).str(style='brackets')                                  #␣
↪needs sage.rings.real_interval_field
'[0.0000000000000000 .. 1.0000000000000000]'
sage: IntegerPowerFunction(-1)
(^(-1))
sage: IntegerPowerFunction(-1)(22/7)
7/22
sage: v = Integers(123456789)(54321)
sage: v^9876543210
79745229
sage: IntegerPowerFunction(9876543210)(v)
79745229
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import IntegerPowerFunction
>>> square = IntegerPowerFunction(Integer(2))
>>> square
(^2)
>>> square(pi)                                                                  #␣
↪needs sage.symbolic
pi^2
>>> square(I)                                                                   #␣
↪needs sage.symbolic
-1
>>> square(RIF(-Integer(1), Integer(1))).str(style='brackets')                      ␣
↪              # needs sage.rings.real_interval_field
'[0.0000000000000000 .. 1.0000000000000000]'
>>> IntegerPowerFunction(-Integer(1))
(^(-1))
>>> IntegerPowerFunction(-Integer(1))(Integer(22)/Integer(7))
7/22
>>> v = Integers(Integer(123456789))(Integer(54321))
>>> v**Integer(9876543210)
79745229
>>> IntegerPowerFunction(Integer(9876543210))(v)
79745229
```

class sage.ext.fast_callable.**InterpreterMetadata**

Bases: `object`

The interpreter metadata for a *fast_callable()* interpreter.

Currently consists of a dictionary mapping instruction names to (*CompilerInstrSpec*, opcode) pairs, a list mapping opcodes to (instruction name, *CompilerInstrSpec*) pairs, and a range of exponents for which the

'ipow' instruction can be used. This range can be False (if the 'ipow' instruction should never be used), a pair of two integers (a, b), if 'ipow' should be used for $a \leq n \leq b$, or True, if 'ipow' should always be used. When 'ipow' cannot be used, then we fall back on calling *IntegerPowerFunction*.

See the class docstring for *CompilerInstrSpec* for more information.

NOTE: You must not modify the metadata.

by_opcode

by_opname

ipow_range

class sage.ext.fast_callable.**Wrapper**

Bases: object

The parent class for all *fast_callable()* wrappers.

Implements shared behavior (currently only debugging).

get_orig_args()

Get the original arguments used when initializing this wrapper.

(Probably only useful when writing doctests.)

EXAMPLES:

```
sage: fast_callable(sin(x)/x, vars=[x], domain=RDF).get_orig_args()          #␣
↪needs sage.symbolic
{'args': 1,
 'code': [0, 0, 16, 0, 0, 8, 2],
 'constants': [],
 'domain': Real Double Field,
 'py_constants': [],
 'stack': 2}
```

```
>>> from sage.all import *
>>> fast_callable(sin(x)/x, vars=[x], domain=RDF).get_orig_args()          #␣
↪needs sage.symbolic
{'args': 1,
 'code': [0, 0, 16, 0, 0, 8, 2],
 'constants': [],
 'domain': Real Double Field,
 'py_constants': [],
 'stack': 2}
```

op_list()

Return the list of instructions in this wrapper.

EXAMPLES:

```
sage: fast_callable(cos(x) * x, vars=[x], domain=RDF).op_list()              #␣
↪needs sage.symbolic
[('load_arg', 0), ('load_arg', 0), 'cos', 'mul', 'return']
```

```
>>> from sage.all import *
>>> fast_callable(cos(x) * x, vars=[x], domain=RDF).op_list()              #␣
↪needs sage.symbolic
[('load_arg', 0), ('load_arg', 0), 'cos', 'mul', 'return']
```

python_calls()

List the Python functions that are called in this wrapper.

(Python function calls are slow, so ideally this list would be empty. If it is not empty, then perhaps there is an optimization opportunity where a Sage developer could speed this up by adding a new instruction to the interpreter.)

EXAMPLES:

```
sage: fast_callable(abs(sin(x)), vars=[x], domain=RDF).python_calls()       #␣
↪needs sage.symbolic
[]
sage: fast_callable(abs(sin(factorial(x))), vars=[x]).python_calls()        #␣
↪needs sage.symbolic
[factorial, sin]
```

```
>>> from sage.all import *
>>> fast_callable(abs(sin(x)), vars=[x], domain=RDF).python_calls()       #␣
↪needs sage.symbolic
[]
>>> fast_callable(abs(sin(factorial(x))), vars=[x]).python_calls()        #␣
↪needs sage.symbolic
[factorial, sin]
```

sage.ext.fast_callable.**fast_callable**(*x*, *domain=None*, *vars=None*, *expect_one_var=False*)

Given an expression `x`, compile it into a form that can be quickly evaluated, given values for the variables in `x`.

Currently, `x` can be an expression object, an element of `SR`, or a (univariate or multivariate) polynomial; this list will probably be extended soon.

By default, `x` is evaluated the same way that a Python function would evaluate it – addition maps to `PyNumber_Add`, etc. However, you can specify `domain=D` where `D` is some Sage parent or Python type; in this case, all arithmetic is done in that domain. If we have a special-purpose interpreter for that parent (like `RDF` or `float`), `domain=...` will trigger the use of that interpreter.

If `vars` is `None` and `x` is a polynomial, then we will use the generators of `parent(x)` as the variables; otherwise, `vars` must be specified (unless `x` is a symbolic expression with only one variable, and `expect_one_var` is `True`, in which case we will use that variable).

EXAMPLES:

```
sage: # needs sage.symbolic
sage: var('x')
x
sage: expr = sin(x) + 3*x^2
sage: f = fast_callable(expr, vars=[x])
sage: f(2)
sin(2) + 12
sage: f(2.0)
12.9092974268257
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> var('x')
x
>>> expr = sin(x) + Integer(3)*x**Integer(2)
>>> f = fast_callable(expr, vars=[x])
>>> f(Integer(2))
sin(2) + 12
>>> f(RealNumber('2.0'))
12.9092974268257
```

We have special fast interpreters for `domain=float` and `domain=RDF`. (Actually it's the same interpreter; only the return type varies.) Note that the float interpreter is not actually more accurate than the `RDF` interpreter; elements of `RDF` just don't display all their digits. We have special fast interpreter for `domain=CDF`:

```
sage: # needs sage.symbolic
sage: f_float = fast_callable(expr, vars=[x], domain=float)
sage: f_float(2)
12.909297426825681
sage: f_rdf = fast_callable(expr, vars=[x], domain=RDF)
sage: f_rdf(2)
12.909297426825681
sage: f_cdf = fast_callable(expr, vars=[x], domain=CDF)
sage: f_cdf(2)
12.909297426825681
sage: f_cdf(2+I)
10.40311925062204 + 11.510943740958707*I
sage: f = fast_callable(expr, vars=('z','x','y'))
sage: f(1, 2, 3)
sin(2) + 12

sage: K.<x> = QQ[]
sage: p = -1/4*x^6 + 1/2*x^5 - x^4 - 12*x^3 + 1/2*x^2 - 1/95*x - 1/2
sage: fp = fast_callable(p, domain=RDF)
sage: fp.op_list()
[('load_arg', 0), ('load_const', -0.25), 'mul', ('load_const', 0.5), 'add',
 ('load_arg', 0), 'mul', ('load_const', -1.0), 'add', ('load_arg', 0), 'mul',
 ('load_const', -12.0), 'add', ('load_arg', 0), 'mul', ('load_const', 0.5),
 'add', ('load_arg', 0), 'mul', ('load_const', -0.010526315789473684),
 'add', ('load_arg', 0), 'mul', ('load_const', -0.5), 'add', 'return']
sage: fp(3.14159)
-552.4182988917153

sage: K.<x,y,z> = QQ[]
sage: p = x*y^2 + 1/3*y^2 - x*z - y*z
sage: fp = fast_callable(p, domain=RDF)
sage: fp.op_list()
[('load_const', 0.0), ('load_const', 1.0), ('load_arg', 0), ('ipow', 1),
 ('load_arg', 1), ('ipow', 2), 'mul', 'mul', 'add',
 ('load_const', 0.3333333333333333), ('load_arg', 1), ('ipow', 2), 'mul', 'add',
 ('load_const', -1.0), ('load_arg', 0), ('ipow', 1), ('load_arg', 2),
 ('ipow', 1), 'mul', 'mul', 'add', ('load_const', -1.0), ('load_arg', 1),
 ('ipow', 1), ('load_arg', 2), ('ipow', 1), 'mul', 'mul', 'add', 'return']
```

(continues on next page)

(continued from previous page)

```
sage: fp(e, pi, sqrt(2))   # abs tol 3e-14                                    #␣
↪needs sage.symbolic
21.831120464939584
sage: symbolic_result = p(e, pi, sqrt(2)); symbolic_result                   #␣
↪needs sage.symbolic
pi^2*e + 1/3*pi^2 - sqrt(2)*pi - sqrt(2)*e
sage: n(symbolic_result)                                                     #␣
↪needs sage.symbolic
21.8311204649396
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> f_float = fast_callable(expr, vars=[x], domain=float)
>>> f_float(Integer(2))
12.909297426825681
>>> f_rdf = fast_callable(expr, vars=[x], domain=RDF)
>>> f_rdf(Integer(2))
12.909297426825681
>>> f_cdf = fast_callable(expr, vars=[x], domain=CDF)
>>> f_cdf(Integer(2))
12.909297426825681
>>> f_cdf(Integer(2)+I)
10.40311925062204 + 11.510943740958707*I
>>> f = fast_callable(expr, vars=('z','x','y'))
>>> f(Integer(1), Integer(2), Integer(3))
sin(2) + 12

>>> K = QQ['x']; (x,) = K._first_ngens(1)
>>> p = -Integer(1)/Integer(4)*x**Integer(6) + Integer(1)/
↪Integer(2)*x**Integer(5) - x**Integer(4) - Integer(12)*x**Integer(3) +␣
↪Integer(1)/Integer(2)*x**Integer(2) - Integer(1)/Integer(95)*x - Integer(1)/
↪Integer(2)
>>> fp = fast_callable(p, domain=RDF)
>>> fp.op_list()
[('load_arg', 0), ('load_const', -0.25), 'mul', ('load_const', 0.5), 'add',
 ('load_arg', 0), 'mul', ('load_const', -1.0), 'add', ('load_arg', 0), 'mul',
 ('load_const', -12.0), 'add', ('load_arg', 0), 'mul', ('load_const', 0.5),
 'add', ('load_arg', 0), 'mul', ('load_const', -0.010526315789473684),
 'add', ('load_arg', 0), 'mul', ('load_const', -0.5), 'add', 'return']
>>> fp(RealNumber('3.14159'))
-552.4182988917153

>>> K = QQ['x, y, z']; (x, y, z,) = K._first_ngens(3)
>>> p = x*y**Integer(2) + Integer(1)/Integer(3)*y**Integer(2) - x*z - y*z
>>> fp = fast_callable(p, domain=RDF)
>>> fp.op_list()
[('load_const', 0.0), ('load_const', 1.0), ('load_arg', 0), ('ipow', 1),
 ('load_arg', 1), ('ipow', 2), 'mul', 'mul', 'add',
 ('load_const', 0.3333333333333333), ('load_arg', 1), ('ipow', 2), 'mul', 'add',
 ('load_const', -1.0), ('load_arg', 0), ('ipow', 1), ('load_arg', 2),
 ('ipow', 1), 'mul', 'mul', 'add', ('load_const', -1.0), ('load_arg', 1),
 ('ipow', 1), ('load_arg', 2), ('ipow', 1), 'mul', 'mul', 'add', 'return']
```

(continues on next page)

(continued from previous page)

```
>>> fp(e, pi, sqrt(Integer(2)))   # abs tol 3e-14                                ␣
↪     # needs sage.symbolic
21.831120464939584
>>> symbolic_result = p(e, pi, sqrt(Integer(2))); symbolic_result               ␣
↪     # needs sage.symbolic
pi^2*e + 1/3*pi^2 - sqrt(2)*pi - sqrt(2)*e
>>> n(symbolic_result)                                                          #␣
↪needs sage.symbolic
21.8311204649396
```

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder
sage: etb = ExpressionTreeBuilder(vars=('x','y'), domain=float)
sage: x = etb.var('x')
sage: y = etb.var('y')
sage: expr = etb.call(sin, x^2 + y); expr
sin(add(ipow(v_0, 2), v_1))
sage: fc = fast_callable(expr, domain=float)
sage: fc(5, 7)
0.5514266812416906
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder
>>> etb = ExpressionTreeBuilder(vars=('x','y'), domain=float)
>>> x = etb.var('x')
>>> y = etb.var('y')
>>> expr = etb.call(sin, x**Integer(2) + y); expr
sin(add(ipow(v_0, 2), v_1))
>>> fc = fast_callable(expr, domain=float)
>>> fc(Integer(5), Integer(7))
0.5514266812416906
```

Check that *fast_callable()* also works for symbolic functions with evaluation functions:

```
sage: # needs sage.symbolic
sage: def evalf_func(self, x, y, parent):
....:     return parent(x*y) if parent is not None else x*y
sage: x,y = var('x,y')
sage: f = function('f', evalf_func=evalf_func)
sage: fc = fast_callable(f(x, y), vars=[x, y])
sage: fc(3, 4)
f(3, 4)
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> def evalf_func(self, x, y, parent):
...     return parent(x*y) if parent is not None else x*y
>>> x,y = var('x,y')
>>> f = function('f', evalf_func=evalf_func)
>>> fc = fast_callable(f(x, y), vars=[x, y])
>>> fc(Integer(3), Integer(4))
f(3, 4)
```

And also when there are complex values involved:

```
sage: # needs sage.symbolic
sage: def evalf_func(self, x, y, parent):
....:     return parent(I*x*y) if parent is not None else I*x*y
sage: g = function('g', evalf_func=evalf_func)
sage: fc = fast_callable(g(x, y), vars=[x, y])
sage: fc(3, 4)
g(3, 4)
sage: fc2 = fast_callable(g(x, y), domain=complex, vars=[x, y])
sage: fc2(3, 4)
12j
sage: fc3 = fast_callable(g(x, y), domain=float, vars=[x, y])
sage: fc3(3, 4)
Traceback (most recent call last):
    ...
TypeError: unable to simplify to float approximation
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> def evalf_func(self, x, y, parent):
...     return parent(I*x*y) if parent is not None else I*x*y
>>> g = function('g', evalf_func=evalf_func)
>>> fc = fast_callable(g(x, y), vars=[x, y])
>>> fc(Integer(3), Integer(4))
g(3, 4)
>>> fc2 = fast_callable(g(x, y), domain=complex, vars=[x, y])
>>> fc2(Integer(3), Integer(4))
12j
>>> fc3 = fast_callable(g(x, y), domain=float, vars=[x, y])
>>> fc3(Integer(3), Integer(4))
Traceback (most recent call last):
    ...
TypeError: unable to simplify to float approximation
```

sage.ext.fast_callable.**function_name**(*fn*)

Given a function, return a string giving a name for the function.

For functions we recognize, we use our standard opcode name for the function (so `operator.add()` becomes `'add'`, and `sage.functions.trig.sin()` becomes `'sin'`).

For functions we don't recognize, we try to come up with a name, but the name will be wrapped in braces; this is a signal that we'll definitely use a slow Python call to call this function. (We may use a slow Python call even for functions we do recognize, if we're targeting an interpreter without an opcode for the function.)

Only used when printing Expressions.

EXAMPLES:

```
sage: from sage.ext.fast_callable import function_name
sage: function_name(operator.pow)
'pow'
sage: function_name(cos)                                                    #␣
↪needs sage.symbolic
'cos'
```

(continues on next page)

(continued from previous page)

```
sage: function_name(factorial)
'{factorial}'
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import function_name
>>> function_name(operator.pow)
'pow'
>>> function_name(cos)                                                    #␣
↪needs sage.symbolic
'cos'
>>> function_name(factorial)
'{factorial}'
```

sage.ext.fast_callable.**generate_code**(*expr*, *stream*)

Generate code from an *Expression* tree; write the result into an *InstructionStream*.

In *fast_callable()*, first we create an *Expression*, either directly with an *ExpressionTreeBuilder* or with `_fast_callable_()` methods. Then we optimize the *Expression* in tree form. (Unfortunately, this step is currently missing – we do no optimizations.)

Then we linearize the *Expression* into a sequence of instructions, by walking the *Expression* and sending the corresponding stack instructions to an *InstructionStream*.

EXAMPLES:

```
sage: from sage.ext.fast_callable import ExpressionTreeBuilder, generate_code,␣
↪InstructionStream

sage: # needs sage.symbolic
sage: etb = ExpressionTreeBuilder('x')
sage: x = etb.var('x')
sage: expr = (x+pi) * (x+1)
sage: from sage.ext.interpreters.wrapper_py import metadata, Wrapper_py
sage: instr_stream = InstructionStream(metadata, 1)
sage: generate_code(expr, instr_stream)
sage: instr_stream.instr('return')
sage: v = Wrapper_py(instr_stream.get_current())
sage: type(v)
<class '...interpreters.wrapper_py.Wrapper_py'>
sage: v(7)
8*pi + 56
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import ExpressionTreeBuilder, generate_code,␣
↪InstructionStream

>>> # needs sage.symbolic
>>> etb = ExpressionTreeBuilder('x')
>>> x = etb.var('x')
>>> expr = (x+pi) * (x+Integer(1))
>>> from sage.ext.interpreters.wrapper_py import metadata, Wrapper_py
>>> instr_stream = InstructionStream(metadata, Integer(1))
>>> generate_code(expr, instr_stream)
```

(continues on next page)

(continued from previous page)

```
>>> instr_stream.instr('return')
>>> v = Wrapper_py(instr_stream.get_current())
>>> type(v)
<class '...interpreters.wrapper_py.Wrapper_py'>
>>> v(Integer(7))
8*pi + 56
```

sage.ext.fast_callable.**get_builtin_functions**()

Return a dictionary from Sage and Python functions to opcode names.

The result is cached.

The dictionary is used in *ExpressionCall*.

EXAMPLES:

```
sage: from sage.ext.fast_callable import get_builtin_functions
sage: builtins = get_builtin_functions()
sage: sorted(set(builtins.values()))                                        #␣
↪needs sage.symbolic
['abs', 'acos', 'acosh', 'add', 'asin', 'asinh', 'atan', 'atanh', 'ceil',
 'cos', 'cosh', 'cot', 'csc', 'div', 'exp', 'floor', 'floordiv', 'inv', 'log',
 'mul', 'neg', 'pow', 'sec', 'sin', 'sinh', 'sqrt', 'sub', 'tan', 'tanh']
sage: builtins[sin]                                                         #␣
↪needs sage.symbolic
'sin'
sage: builtins[ln]
'log'
```

```
>>> from sage.all import *
>>> from sage.ext.fast_callable import get_builtin_functions
>>> builtins = get_builtin_functions()
>>> sorted(set(builtins.values()))                                          #␣
↪needs sage.symbolic
['abs', 'acos', 'acosh', 'add', 'asin', 'asinh', 'atan', 'atanh', 'ceil',
 'cos', 'cosh', 'cot', 'csc', 'div', 'exp', 'floor', 'floordiv', 'inv', 'log',
 'mul', 'neg', 'pow', 'sec', 'sin', 'sinh', 'sqrt', 'sub', 'tan', 'tanh']
>>> builtins[sin]                                                           #␣
↪needs sage.symbolic
'sin'
>>> builtins[ln]
'log'
```

sage.ext.fast_callable.**op_list**(*args*, *metadata*)

Given a dictionary with the result of calling `get_current()` on an *InstructionStream*, and the corresponding interpreter metadata, return a list of the instructions, in a simple somewhat human-readable format.

For debugging only. (That is, it's probably not a good idea to try to programmatically manipulate the result of this function; the expected use is just to print the returned list to the screen.)

There's probably no reason to call this directly; if you have a wrapper object, call *op_list()* on it; if you have an *InstructionStream* object, call `current_op_list()` on it.

EXAMPLES:

```
sage: from sage.ext.interpreters.wrapper_el import metadata
sage: from sage.ext.interpreters.wrapper_rdf import metadata                    #␣
↪needs sage.modules
sage: from sage.ext.fast_callable import InstructionStream, op_list
sage: instr_stream = InstructionStream(metadata, 1)
sage: instr_stream.instr('load_arg', 0)
sage: instr_stream.instr('abs')
sage: instr_stream.instr('return')
sage: instr_stream.current_op_list()
[('load_arg', 0), 'abs', 'return']
sage: op_list(instr_stream.get_current(), metadata)
[('load_arg', 0), 'abs', 'return']
```

```
>>> from sage.all import *
>>> from sage.ext.interpreters.wrapper_el import metadata
>>> from sage.ext.interpreters.wrapper_rdf import metadata                    #␣
↪needs sage.modules
>>> from sage.ext.fast_callable import InstructionStream, op_list
>>> instr_stream = InstructionStream(metadata, Integer(1))
>>> instr_stream.instr('load_arg', Integer(0))
>>> instr_stream.instr('abs')
>>> instr_stream.instr('return')
>>> instr_stream.current_op_list()
[('load_arg', 0), 'abs', 'return']
>>> op_list(instr_stream.get_current(), metadata)
[('load_arg', 0), 'abs', 'return']
```

2.9.2 Fast Numerical Evaluation

For many applications such as numerical integration, differential equation approximation, plotting a 3d surface, optimization problems, monte-carlo simulations, etc., one wishes to pass around and evaluate a single algebraic expression many, many times at various floating point values. Doing this via recursive calls over a python representation of the object (even if Maxima or other outside packages are not involved) is extremely inefficient.

The solution implemented in this module, by Robert Bradshaw (2008-10), has been superseded by *fast_callable()*. All that remains here is a compatible interface function *fast_float()*.

AUTHORS:

- Robert Bradshaw (2008-10): Initial version

sage.ext.fast_eval.**fast_float**(*f*, *expect_one_var=False*, **vars*)

Try to create a function that evaluates f quickly using floating-point numbers, if possible.

On failure, returns the input unchanged.

This is an alternative interface to *sage.ext.fast_callable.fast_callable()*. Issue #32268 proposes to deprecate this function.

INPUT:

- `f` – an expression
- `vars` – the names of the arguments
- `expect_one_var` – don't give deprecation warning if `vars` is omitted, as long as expression has only one var

EXAMPLES:

```
sage: from sage.ext.fast_eval import fast_float
sage: x,y = var('x,y')                                                          #␣
↪needs sage.symbolic
sage: f = fast_float(sqrt(x^2+y^2), 'x', 'y')                                   #␣
↪needs sage.symbolic
sage: f(3,4)                                                                    #␣
↪needs sage.symbolic
5.0
```

```
>>> from sage.all import *
>>> from sage.ext.fast_eval import fast_float
>>> x,y = var('x,y')                                                          #␣
↪needs sage.symbolic
>>> f = fast_float(sqrt(x**Integer(2)+y**Integer(2)), 'x', 'y')                 ␣
↪                # needs sage.symbolic
>>> f(Integer(3),Integer(4))                                                   ␣
↪              # needs sage.symbolic
5.0
```

Specifying the argument names is essential, as fast_float objects only distinguish between arguments by order.

```
sage: # needs sage.symbolic
sage: f = fast_float(x-y, 'x','y')
sage: f(1,2)
-1.0
sage: f = fast_float(x-y, 'y','x')
sage: f(1,2)
1.0
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> f = fast_float(x-y, 'x','y')
>>> f(Integer(1),Integer(2))
-1.0
>>> f = fast_float(x-y, 'y','x')
>>> f(Integer(1),Integer(2))
1.0
```

sage.ext.fast_eval.**is_fast_float**(*x*)

CHAPTER

THREE

CODE EVALUATION

3.1 Cython support functions

AUTHORS:

- William Stein (2006-01-18): initial version
- William Stein (2007-07-28): update from sagex to cython
- Martin Albrecht & William Stein (2011-08): cfile & cargs

sage.misc.cython.**compile_and_load**(*code*, ***kwds*)

INPUT:

- code – string containing code that could be in a .pyx file that is attached or put in a %cython block in the notebook

See the function *sage.misc.cython.cython()* for documentation for the other inputs.

OUTPUT: a module, which results from compiling the given code and importing it

EXAMPLES:

```
sage: from sage.misc.cython import compile_and_load
sage: module = compile_and_load("def f(int n):\n    return n*n")
sage: module.f(10)
100
```

```
>>> from sage.all import *
>>> from sage.misc.cython import compile_and_load
>>> module = compile_and_load("def f(int n):\n    return n*n")
>>> module.f(Integer(10))
100
```

sage.misc.cython.**cython**(*filename*, *verbose=0*, *compile_message=False*, *use_cache=False*, *create_local_c_file=False*, *annotate=True*, *view_annotate=False*, *view_annotate_callback=None*, *sage_namespace=True*, *create_local_so_file=False*)

Compile a Cython file. This converts a Cython file to a C (or C++ file), and then compiles that. The .c file and the .so file are created in a temporary directory.

INPUT:

- filename – the name of the file to be compiled; should end with 'pyx'
- verbose – integer (default: 0); level of verbosity. A negative value ensures complete silence.

- `compile_message` – boolean (default: `False`); if `True`, print `'Compiling <filename>...'` to the standard error
- `use_cache` – boolean (default: `False`); if `True`, check the temporary build directory to see if there is already a corresponding .so file. If so, and if the .so file is newer than the Cython file, don't recompile, just reuse the .so file.
- `create_local_c_file` – boolean (default: `False`); if `True`, save a copy of the `.c` or `.cpp` file in the current directory
- `annotate` – boolean (default: `True`); if `True`, create an html file which annotates the conversion from .pyx to .c. By default this is only created in the temporary directory, but if `create_local_c_file` is also True, then save a copy of the .html file in the current directory.
- `view_annotate` – boolean (default: `False`); if `True`, open the annotated html file in a web browser
- `view_annotate_callback` – function; a function that takes a string being the path to the html file. This can be overridden to change what to do with the annotated html file. Have no effect unless `view_annotate` is `True`. By default, the html file is opened in a web browser.
- `sage_namespace` – boolean (default: `True`); if `True`, import `sage.all`
- `create_local_so_file` – boolean (default: `False`); if `True`, save a copy of the compiled .so file in the current directory

OUTPUT: a tuple `(name, dir)` where `name` is the name of the compiled module and `dir` is the directory containing the generated files.

`sage.misc.cython.`**`cython_compile`**(*code*, ***kwds*)

Given a block of Cython code (as a text string), this function compiles it using a C compiler, and includes it into the global namespace.

AUTHOR: William Stein, 2006-10-31

Warning

Only use this from Python code, not from extension code, since from extension code you would change the global scope (i.e., of the Sage interpreter). And it would be stupid, since you're already writing Cython!

Also, never use this in the standard Sage library. Any code that uses this can only run on a system that has a C compiler installed, and we want to avoid making that assumption for casual Sage usage. Also, any code that uses this in the library would greatly slow down startup time, since currently there is no caching.

Todo

Need to create a clever caching system so code only gets compiled once.

`sage.misc.cython.`**`cython_import`**(*filename*, ***kwds*)

Compile a file containing Cython code, then import and return the module. Raises an `ImportError` if anything goes wrong.

INPUT:

- `filename` – string; name of a file that contains Cython code

See the function *`sage.misc.cython.cython()`* for documentation for the other inputs.

OUTPUT: the module that contains the compiled Cython code

sage.misc.cython.**cython_import_all**(*filename*, *globals*, ***kwds*)

Imports all non-private (i.e., not beginning with an underscore) attributes of the specified Cython module into the given context. This is similar to:

```
from module import *
```

Raises an `ImportError` exception if anything goes wrong.

INPUT:

- `filename` – string; name of a file that contains Cython code

See the function *sage.misc.cython.cython()* for documentation for the other inputs.

sage.misc.cython.**cython_lambda**(*vars*, *expr*, *verbose=0*, ***kwds*)

Create a compiled function which evaluates `expr` assuming machine values for `vars`.

INPUT:

- `vars` – list of pairs (variable name, c-data type), where the variable names and data types are strings, OR a string such as `'double x, int y, int z'`
- `expr` – an expression involving the vars and constants; you can access objects defined in the current module scope `globals()` using `sage.object_name`.

Warning

Accessing `globals()` doesn't actually work, see Issue #12446.

EXAMPLES:

We create a Lambda function in pure Python (using the r to make sure the 3.2 is viewed as a Python float):

```
sage: f = lambda x,y: x*x + y*y + x + y + 17r*x + 3.2r
```

```
>>> from sage.all import *
>>> f = lambda x,y: x*x + y*y + x + y + 17*x + 3.2
```

We make the same Lambda function, but in a compiled form.

```
sage: g = cython_lambda('double x, double y', 'x*x + y*y + x + y + 17*x + 3.2')
sage: g(2,3)
55.2
sage: g(0,0)
3.2
```

```
>>> from sage.all import *
>>> g = cython_lambda('double x, double y', 'x*x + y*y + x + y + 17*x + 3.2')
>>> g(Integer(2),Integer(3))
55.2
>>> g(Integer(0),Integer(0))
3.2
```

In order to access Sage globals, prefix them with `sage.`:

```
sage: f = cython_lambda('double x', 'sage.sin(x) + sage.a')
sage: f(0)
Traceback (most recent call last):
...
NameError: global 'a' is not defined
sage: a = 25
sage: f(10)
24.45597888911063
sage: a = 50
sage: f(10)
49.45597888911063
```

```
>>> from sage.all import *
>>> f = cython_lambda('double x', 'sage.sin(x) + sage.a')
>>> f(Integer(0))
Traceback (most recent call last):
...
NameError: global 'a' is not defined
>>> a = Integer(25)
>>> f(Integer(10))
24.45597888911063
>>> a = Integer(50)
>>> f(Integer(10))
49.45597888911063
```

sage.misc.cython.**sanitize**(*f*)

Given a filename `f`, replace it by a filename that is a valid Python module name.

This means that the characters are all alphanumeric or _'s and doesn't begin with a numeral.

EXAMPLES:

```
sage: from sage.misc.cython import sanitize
sage: sanitize('abc')
'abc'
sage: sanitize('abc/def')
'abc_def'
sage: sanitize('123/def-hij/file.py')
'_123_def_hij_file_py'
```

```
>>> from sage.all import *
>>> from sage.misc.cython import sanitize
>>> sanitize('abc')
'abc'
>>> sanitize('abc/def')
'abc_def'
>>> sanitize('123/def-hij/file.py')
'_123_def_hij_file_py'
```

3.2 Fortran compiler

class sage.misc.inline_fortran.**InlineFortran**(*globals=None*)

Bases: object

add_library(*s*)

add_library_path(*s*)

eval(*x*, *globals=None*, *locals=None*)

Compile fortran code x and adds the functions in it to globals.

INPUT:

- x – fortran code
- globals – dictionary to which to add the functions from the fortran module
- locals – ignored

EXAMPLES:

```
sage: # needs numpy
sage: code = '''
....: C FILE: FIB1.F
....:       SUBROUTINE FIB(A,N)
....: C
....: C     CALCULATE FIRST N FIBONACCI NUMBERS
....: C
....:       INTEGER N
....:       REAL*8 A(N)
....:       DO I=1,N
....:          IF (I.EQ.1) THEN
....:             A(I) = 0.0D0
....:          ELSEIF (I.EQ.2) THEN
....:             A(I) = 1.0D0
....:          ELSE
....:             A(I) = A(I-1) + A(I-2)
....:          ENDIF
....:       ENDDO
....:       END
....: C END FILE FIB1.F
....: '''
sage: fortran(code, globals())
sage: import numpy
sage: a = numpy.array(range(10), dtype=float)
sage: fib(a, 10)
sage: a
array([  0.,   1.,   1.,   2.,   3.,   5.,   8.,  13.,  21.,  34.])
```

```
>>> from sage.all import *
>>> # needs numpy
>>> code = '''
... C FILE: FIB1.F
...       SUBROUTINE FIB(A,N)
... C
```

(continues on next page)

(continued from previous page)

```
... C     CALCULATE FIRST N FIBONACCI NUMBERS
... C
...       INTEGER N
...       REAL*8 A(N)
...       DO I=1,N
...          IF (I.EQ.1) THEN
...             A(I) = 0.0D0
...          ELSEIF (I.EQ.2) THEN
...             A(I) = 1.0D0
...          ELSE
...             A(I) = A(I-1) + A(I-2)
...          ENDIF
...       ENDDO
...       END
... C END FILE FIB1.F
... '''
>>> fortran(code, globals())
>>> import numpy
>>> a = numpy.array(range(Integer(10)), dtype=float)
>>> fib(a, Integer(10))
>>> a
array([  0.,   1.,   1.,   2.,   3.,   5.,   8.,  13.,  21.,  34.])
```

3.3 A parser for symbolic equations and expressions

It is both safer and more powerful than using Python's eval, as one has complete control over what names are used (including dynamically creating variables) and how integer and floating point literals are created.

AUTHOR:

- Robert Bradshaw 2008-04 (initial version)

class sage.misc.parser.**LookupNameMaker**

Bases: object

This class wraps a dictionary as a callable for use in creating names. It takes a dictionary of names, and an (optional) callable to use when the given name is not found in the dictionary.

EXAMPLES:

```
sage: # needs sage.symbolic
sage: from sage.misc.parser import LookupNameMaker
sage: maker = LookupNameMaker({'pi': pi}, var)
sage: maker('pi')
pi
sage: maker('pi') is pi
True
sage: maker('a')
a
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.misc.parser import LookupNameMaker
```

(continues on next page)

(continued from previous page)

```
>>> maker = LookupNameMaker({'pi': pi}, var)
>>> maker('pi')
pi
>>> maker('pi') is pi
True
>>> maker('a')
a
```

set_names(*new_names*)

class sage.misc.parser.**Parser**

Bases: `object`

Create a symbolic expression parser.

INPUT:

- `make_int` – callable object to construct integers from strings (default: int)
- `make_float` – callable object to construct real numbers from strings (default: float)
- `make_var` – callable object to construct variables from strings (default: str) this may also be a dictionary of variable names
- `make_function` – callable object to construct callable functions from strings this may also be a dictionary
- `implicit_multiplication` – whether or not to accept implicit multiplication

OUTPUT:

The evaluated expression tree given by the string, where the above functions are used to create the leaves of this tree.

EXAMPLES:

```
sage: from sage.misc.parser import Parser
sage: p = Parser()
sage: p.parse("1+2")
3
sage: p.parse("1+2 == 3")
True

sage: p = Parser(make_var=var)                                          #␣
↪needs sage.symbolic
sage: p.parse("a*b^c - 3a")                                             #␣
↪needs sage.symbolic
a*b^c - 3*a

sage: R.<x> = QQ[]
sage: p = Parser(make_var={'x': x})
sage: p.parse("(x+1)^5-x")
x^5 + 5*x^4 + 10*x^3 + 10*x^2 + 4*x + 1
sage: p.parse("(x+1)^5-x").parent() is R
True

sage: p = Parser(make_float=RR, make_var=var,                           #␣
↪needs sage.symbolic
```

(continues on next page)

(continued from previous page)

```
....:             make_function={'foo': (lambda x: x*x+x)})
sage: p.parse("1.5 + foo(b)")                                                  #␣
↪needs sage.symbolic
b^2 + b + 1.50000000000000
sage: p.parse("1.9").parent()                                                  #␣
↪needs sage.symbolic
Real Field with 53 bits of precision
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Parser
>>> p = Parser()
>>> p.parse("1+2")
3
>>> p.parse("1+2 == 3")
True

>>> p = Parser(make_var=var)                                                   # needs␣
↪sage.symbolic
>>> p.parse("a*b^c - 3a")                                                      # needs␣
↪sage.symbolic
a*b^c - 3*a

>>> R = QQ['x']; (x,) = R._first_ngens(1)
>>> p = Parser(make_var={'x': x})
>>> p.parse("(x+1)^5-x")
x^5 + 5*x^4 + 10*x^3 + 10*x^2 + 4*x + 1
>>> p.parse("(x+1)^5-x").parent() is R
True

>>> p = Parser(make_float=RR, make_var=var,                                    # needs␣
↪sage.symbolic
...             make_function={'foo': (lambda x: x*x+x)})
>>> p.parse("1.5 + foo(b)")                                                    # needs␣
↪sage.symbolic
b^2 + b + 1.50000000000000
>>> p.parse("1.9").parent()                                                    # needs␣
↪sage.symbolic
Real Field with 53 bits of precision
```

p_arg(*tokens*)

Return an `expr`, or a `(name, expr)` tuple corresponding to a single function call argument.

EXAMPLES:

Parsing a normal expression:

```
sage: from sage.misc.parser import Parser, Tokenizer
sage: p = Parser(make_var=var)                                                 ␣
↪     # needs sage.symbolic
sage: p.p_arg(Tokenizer("a+b"))                                                ␣
↪     # needs sage.symbolic
a + b
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Parser, Tokenizer
>>> p = Parser(make_var=var)
↪   # needs sage.symbolic
>>> p.p_arg(Tokenizer("a+b"))
↪   # needs sage.symbolic
a + b
```

A keyword expression argument:

```
    sage: from sage.misc.parser import Parser, Tokenizer
    sage: p = Parser(make_var=var)
↪   # needs sage.symbolic
    sage: p.p_arg(Tokenizer("val=a+b"))
↪   # needs sage.symbolic
    ('val', a + b)

A lone list::

    sage: from sage.misc.parser import Parser, Tokenizer
    sage: p = Parser(make_var=var)
↪   # needs sage.symbolic
    sage: p.p_arg(Tokenizer("[x]"))
↪   # needs sage.symbolic
    [x]
```

p_args (*tokens*)

Return a `list, dict` pair.

EXAMPLES:

```
sage: from sage.misc.parser import Parser, Tokenizer
sage: p = Parser()
sage: p.p_args(Tokenizer("1,2,a=3"))
([1, 2], {'a': 3})
sage: p.p_args(Tokenizer("1, 2, a = 1+5^2"))
([1, 2], {'a': 26})
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Parser, Tokenizer
>>> p = Parser()
>>> p.p_args(Tokenizer("1,2,a=3"))
([1, 2], {'a': 3})
>>> p.p_args(Tokenizer("1, 2, a = 1+5^2"))
([1, 2], {'a': 26})
```

p_atom (*tokens*)

Parse an atom. This is either a parenthesized expression, a function call, or a literal name/int/float.

EXAMPLES:

```
sage: # needs sage.symbolic
sage: from sage.misc.parser import Parser, Tokenizer
sage: p = Parser(make_var=var, make_function={'sin': sin})
```

(continues on next page)

(continued from previous page)

```
sage: p.p_atom(Tokenizer("1"))
1
sage: p.p_atom(Tokenizer("12"))
12
sage: p.p_atom(Tokenizer("12.5"))
12.5
sage: p.p_atom(Tokenizer("(1+a)"))
a + 1
sage: p.p_atom(Tokenizer("(1+a)^2"))
a + 1
sage: p.p_atom(Tokenizer("sin(1+a)"))
sin(a + 1)
sage: p = Parser(make_var=var,
....:            make_function={'foo': sage.misc.parser.foo})
sage: p.p_atom(Tokenizer("foo(a, b, key=value)"))
((a, b), {'key': value})
sage: p.p_atom(Tokenizer("foo()"))
((), {})
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.misc.parser import Parser, Tokenizer
>>> p = Parser(make_var=var, make_function={'sin': sin})
>>> p.p_atom(Tokenizer("1"))
1
>>> p.p_atom(Tokenizer("12"))
12
>>> p.p_atom(Tokenizer("12.5"))
12.5
>>> p.p_atom(Tokenizer("(1+a)"))
a + 1
>>> p.p_atom(Tokenizer("(1+a)^2"))
a + 1
>>> p.p_atom(Tokenizer("sin(1+a)"))
sin(a + 1)
>>> p = Parser(make_var=var,
...            make_function={'foo': sage.misc.parser.foo})
>>> p.p_atom(Tokenizer("foo(a, b, key=value)"))
((a, b), {'key': value})
>>> p.p_atom(Tokenizer("foo()"))
((), {})
```

p_eqn (*tokens*)

Parse an equation or expression.

This is the top-level node called by the code{parse} function.

EXAMPLES:

```
sage: from sage.misc.parser import Parser, Tokenizer
sage: p = Parser(make_var=var)                                              #␣
↪needs sage.symbolic
sage: p.p_eqn(Tokenizer("1+a"))                                             #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.symbolic
a + 1

sage: # needs sage.symbolic
sage: p.p_eqn(Tokenizer("a == b"))
a == b
sage: p.p_eqn(Tokenizer("a < b"))
a < b
sage: p.p_eqn(Tokenizer("a > b"))
a > b
sage: p.p_eqn(Tokenizer("a <= b"))
a <= b
sage: p.p_eqn(Tokenizer("a >= b"))
a >= b
sage: p.p_eqn(Tokenizer("a != b"))
a != b
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Parser, Tokenizer
>>> p = Parser(make_var=var)                                    #␣
↪needs sage.symbolic
>>> p.p_eqn(Tokenizer("1+a"))                                   #␣
↪needs sage.symbolic
a + 1

>>> # needs sage.symbolic
>>> p.p_eqn(Tokenizer("a == b"))
a == b
>>> p.p_eqn(Tokenizer("a < b"))
a < b
>>> p.p_eqn(Tokenizer("a > b"))
a > b
>>> p.p_eqn(Tokenizer("a <= b"))
a <= b
>>> p.p_eqn(Tokenizer("a >= b"))
a >= b
>>> p.p_eqn(Tokenizer("a != b"))
a != b
```

p_expr(*tokens*)

Parse a list of one or more terms.

EXAMPLES:

```
sage: # needs sage.symbolic
sage: from sage.misc.parser import Parser, Tokenizer
sage: p = Parser(make_var=var)
sage: p.p_expr(Tokenizer("a+b"))
a + b
sage: p.p_expr(Tokenizer("a"))
a
sage: p.p_expr(Tokenizer("a - b + 4*c - d^2"))
```

(continues on next page)

(continued from previous page)

```
-d^2 + a - b + 4*c
sage: p.p_expr(Tokenizer("a - -3"))
a + 3
sage: p.p_expr(Tokenizer("a + 1 == b"))
a + 1
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.misc.parser import Parser, Tokenizer
>>> p = Parser(make_var=var)
>>> p.p_expr(Tokenizer("a+b"))
a + b
>>> p.p_expr(Tokenizer("a"))
a
>>> p.p_expr(Tokenizer("a - b + 4*c - d^2"))
-d^2 + a - b + 4*c
>>> p.p_expr(Tokenizer("a - -3"))
a + 3
>>> p.p_expr(Tokenizer("a + 1 == b"))
a + 1
```

p_factor(*tokens*)

Parse a single factor, which consists of any number of unary +/- and a power.

EXAMPLES:

```
sage: from sage.misc.parser import Parser, Tokenizer
sage: R.<t> = ZZ[['t']]
sage: p = Parser(make_var={'t': t})
sage: p.p_factor(Tokenizer("- -t"))
t
sage: p.p_factor(Tokenizer("- + - -t^2"))
-t^2
sage: p.p_factor(Tokenizer("t^11 * x"))
t^11
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Parser, Tokenizer
>>> R = ZZ[['t']]; (t,) = R._first_ngens(1)
>>> p = Parser(make_var={'t': t})
>>> p.p_factor(Tokenizer("- -t"))
t
>>> p.p_factor(Tokenizer("- + - -t^2"))
-t^2
>>> p.p_factor(Tokenizer("t^11 * x"))
t^11
```

p_list(*tokens*)

Parse a list of items.

EXAMPLES:

```
sage: from sage.misc.parser import Parser, Tokenizer
sage: p = Parser(make_var=var)                                              #␣
↪needs sage.symbolic
sage: p.p_list(Tokenizer("[1+2, 1e3]"))                                     #␣
↪needs sage.symbolic
[3, 1000.0]
sage: p.p_list(Tokenizer("[]"))                                             #␣
↪needs sage.symbolic
[]
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Parser, Tokenizer
>>> p = Parser(make_var=var)                                                #␣
↪needs sage.symbolic
>>> p.p_list(Tokenizer("[1+2, 1e3]"))                                       #␣
↪needs sage.symbolic
[3, 1000.0]
>>> p.p_list(Tokenizer("[]"))                                               #␣
↪needs sage.symbolic
[]
```

p_matrix(*tokens*)

Parse a matrix.

EXAMPLES:

```
sage: from sage.misc.parser import Parser, Tokenizer
sage: p = Parser(make_var=var)                                              #␣
↪needs sage.symbolic
sage: p.p_matrix(Tokenizer("([a,0],[0,a])"))                                #␣
↪needs sage.symbolic
[a 0]
[0 a]
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Parser, Tokenizer
>>> p = Parser(make_var=var)                                                #␣
↪needs sage.symbolic
>>> p.p_matrix(Tokenizer("([a,0],[0,a])"))                                  #␣
↪needs sage.symbolic
[a 0]
[0 a]
```

p_power(*tokens*)

Parses a power. Note that exponentiation groups right to left.

EXAMPLES:

```
sage: from sage.misc.parser import Parser, Tokenizer
sage: R.<t> = ZZ[['t']]
sage: p = Parser(make_var={'t': t})
sage: p.p_factor(Tokenizer("-(1+t)^-1"))
-1 + t - t^2 + t^3 - t^4 + t^5 - t^6 + t^7 - t^8 + t^9 - t^10 + t^11 - t^12 +␣
```

(continues on next page)

(continued from previous page)

```
↪t^13 - t^14 + t^15 - t^16 + t^17 - t^18 + t^19 + O(t^20)
sage: p.p_factor(Tokenizer("t**2"))
t^2
sage: p.p_power(Tokenizer("2^3^2")) == 2^9
True

sage: # needs sage.symbolic
sage: p = Parser(make_var=var)
sage: p.p_factor(Tokenizer('x!'))
factorial(x)
sage: p.p_factor(Tokenizer('(x^2)!'))
factorial(x^2)
sage: p.p_factor(Tokenizer('x!^2'))
factorial(x)^2
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Parser, Tokenizer
>>> R = ZZ[['t']]; (t,) = R._first_ngens(1)
>>> p = Parser(make_var={'t': t})
>>> p.p_factor(Tokenizer("-(1+t)^-1"))
-1 + t - t^2 + t^3 - t^4 + t^5 - t^6 + t^7 - t^8 + t^9 - t^10 + t^11 - t^12 +␣
↪t^13 - t^14 + t^15 - t^16 + t^17 - t^18 + t^19 + O(t^20)
>>> p.p_factor(Tokenizer("t**2"))
t^2
>>> p.p_power(Tokenizer("2^3^2")) == Integer(2)**Integer(9)
True

>>> # needs sage.symbolic
>>> p = Parser(make_var=var)
>>> p.p_factor(Tokenizer('x!'))
factorial(x)
>>> p.p_factor(Tokenizer('(x^2)!'))
factorial(x^2)
>>> p.p_factor(Tokenizer('x!^2'))
factorial(x)^2
```

p_sequence(*tokens*)

Parse a (possibly nested) set of lists and tuples.

EXAMPLES:

```
sage: from sage.misc.parser import Parser, Tokenizer
sage: p = Parser(make_var=var)                                              #␣
↪needs sage.symbolic
sage: p.p_sequence(Tokenizer("[1+2,0]"))                                    #␣
↪needs sage.symbolic
[[3, 0]]
sage: p.p_sequence(Tokenizer("(1,2,3) , [1+a, 2+b, (3+c), (4+d,)]"))        #␣
↪needs sage.symbolic
[(1, 2, 3), [a + 1, b + 2, c + 3, (d + 4,)]]
```

```
>>> from sage.all import *
```

(continues on next page)

(continued from previous page)

```
>>> from sage.misc.parser import Parser, Tokenizer
>>> p = Parser(make_var=var)                                                #␣
↪needs sage.symbolic
>>> p.p_sequence(Tokenizer("[1+2,0]"))                                      #␣
↪needs sage.symbolic
[[3, 0]]
>>> p.p_sequence(Tokenizer("(1,2,3) , [1+a, 2+b, (3+c), (4+d,)]"))         #␣
↪needs sage.symbolic
[(1, 2, 3), [a + 1, b + 2, c + 3, (d + 4,)]]
```

p_term(*tokens*)

Parse a single term (consisting of one or more factors).

EXAMPLES:

```
sage: # needs sage.symbolic
sage: from sage.misc.parser import Parser, Tokenizer
sage: p = Parser(make_var=var)
sage: p.p_term(Tokenizer("a*b"))
a*b
sage: p.p_term(Tokenizer("a * b / c * d"))
a*b*d/c
sage: p.p_term(Tokenizer("-a * b + c"))
-a*b
sage: p.p_term(Tokenizer("a*(b-c)^2"))
a*(b - c)^2
sage: p.p_term(Tokenizer("-3a"))
-3*a
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.misc.parser import Parser, Tokenizer
>>> p = Parser(make_var=var)
>>> p.p_term(Tokenizer("a*b"))
a*b
>>> p.p_term(Tokenizer("a * b / c * d"))
a*b*d/c
>>> p.p_term(Tokenizer("-a * b + c"))
-a*b
>>> p.p_term(Tokenizer("a*(b-c)^2"))
a*(b - c)^2
>>> p.p_term(Tokenizer("-3a"))
-3*a
```

p_tuple(*tokens*)

Parse a tuple of items.

EXAMPLES:

```
sage: from sage.misc.parser import Parser, Tokenizer
sage: p = Parser(make_var=var)                                             #␣
↪needs sage.symbolic
sage: p.p_tuple(Tokenizer("( (), (1), (1,), (1,2), (1,2,3), (1+2)^2, )"))  #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.symbolic
((), 1, (1,), (1, 2), (1, 2, 3), 9)
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Parser, Tokenizer
>>> p = Parser(make_var=var)                                                #␣
↪needs sage.symbolic
>>> p.p_tuple(Tokenizer("( (), (1), (1,), (1,2), (1,2,3), (1+2)^2, )"))    #␣
↪needs sage.symbolic
((), 1, (1,), (1, 2), (1, 2, 3), 9)
```

parse(*s*, *accept_eqn=True*)

Parse the given string.

EXAMPLES:

```
sage: from sage.misc.parser import Parser
sage: p = Parser(make_var=var)                                             #␣
↪needs sage.symbolic
sage: p.parse("E = m c^2")                                                 #␣
↪needs sage.symbolic
E == c^2*m
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Parser
>>> p = Parser(make_var=var)                                               #␣
↪needs sage.symbolic
>>> p.parse("E = m c^2")                                                   #␣
↪needs sage.symbolic
E == c^2*m
```

parse_expression(*s*)

Parse an expression.

EXAMPLES:

```
sage: from sage.misc.parser import Parser
sage: p = Parser(make_var=var)                                             #␣
↪needs sage.symbolic
sage: p.parse_expression('a-3b^2')                                         #␣
↪needs sage.symbolic
-3*b^2 + a
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Parser
>>> p = Parser(make_var=var)                                               #␣
↪needs sage.symbolic
>>> p.parse_expression('a-3b^2')                                           #␣
↪needs sage.symbolic
-3*b^2 + a
```

parse_sequence(*s*)

Parse a (possibly nested) set of lists and tuples.

EXAMPLES:

```
sage: # needs sage.symbolic
sage: from sage.misc.parser import Parser
sage: p = Parser(make_var=var)
sage: p.parse_sequence("1,2,3")
[1, 2, 3]
sage: p.parse_sequence("[1,2,(a,b,c+d)]")
[1, 2, (a, b, c + d)]
sage: p.parse_sequence("13")
13
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.misc.parser import Parser
>>> p = Parser(make_var=var)
>>> p.parse_sequence("1,2,3")
[1, 2, 3]
>>> p.parse_sequence("[1,2,(a,b,c+d)]")
[1, 2, (a, b, c + d)]
>>> p.parse_sequence("13")
13
```

class sage.misc.parser.**Tokenizer**

Bases: object

This class takes a string and turns it into a list of tokens for use by the parser.

The tokenizer wraps a string object, to tokenize a different string create a new tokenizer.

EXAMPLES:

```
sage: from sage.misc.parser import Tokenizer
sage: Tokenizer("1.5+2*3^4-sin(x)").test()
['FLOAT(1.5)', '+', 'INT(2)', '*', 'INT(3)', '^', 'INT(4)', '-', 'NAME(sin)', '(',
↪ 'NAME(x)', ')']
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Tokenizer
>>> Tokenizer("1.5+2*3^4-sin(x)").test()
['FLOAT(1.5)', '+', 'INT(2)', '*', 'INT(3)', '^', 'INT(4)', '-', 'NAME(sin)', '(',
↪ 'NAME(x)', ')']
```

The single character tokens are given by:

```
sage: Tokenizer("+-*/^(),=<>[]{}").test()
['+', '-', '*', '/', '^', '(', ')', ',', '=', '<', '>', '[', ']', '{', '}']
```

```
>>> from sage.all import *
>>> Tokenizer("+-*/^(),=<>[]{}").test()
['+', '-', '*', '/', '^', '(', ')', ',', '=', '<', '>', '[', ']', '{', '}']
```

Two-character comparisons accepted are:

```
sage: Tokenizer("<= >= != == **").test()
['LESS_EQ', 'GREATER_EQ', 'NOT_EQ', '=', '^']
```

```
>>> from sage.all import *
>>> Tokenizer("<= >= != == **").test()
['LESS_EQ', 'GREATER_EQ', 'NOT_EQ', '=', '^']
```

Integers are strings of 0-9:

```
sage: Tokenizer("1 123 9879834759873452908375013").test()
['INT(1)', 'INT(123)', 'INT(9879834759873452908375013)']
```

```
>>> from sage.all import *
>>> Tokenizer("1 123 9879834759873452908375013").test()
['INT(1)', 'INT(123)', 'INT(9879834759873452908375013)']
```

Floating point numbers can contain a single decimal point and possibly exponential notation:

```
sage: Tokenizer("1. .01 1e3 1.e-3").test()
['FLOAT(1.)', 'FLOAT(.01)', 'FLOAT(1e3)', 'FLOAT(1.e-3)']
```

```
>>> from sage.all import *
>>> Tokenizer("1. .01 1e3 1.e-3").test()
['FLOAT(1.)', 'FLOAT(.01)', 'FLOAT(1e3)', 'FLOAT(1.e-3)']
```

Note that negative signs are not attached to the token:

```
sage: Tokenizer("-1 -1.2").test()
['-', 'INT(1)', '-', 'FLOAT(1.2)']
```

```
>>> from sage.all import *
>>> Tokenizer("-1 -1.2").test()
['-', 'INT(1)', '-', 'FLOAT(1.2)']
```

Names are alphanumeric sequences not starting with a digit:

```
sage: Tokenizer("a a1 _a_24").test()
['NAME(a)', 'NAME(a1)', 'NAME(_a_24)']
```

```
>>> from sage.all import *
>>> Tokenizer("a a1 _a_24").test()
['NAME(a)', 'NAME(a1)', 'NAME(_a_24)']
```

There is special handling for matrices:

```
sage: Tokenizer("matrix(a)").test()
['MATRIX', '(', 'NAME(a)', ')']
```

```
>>> from sage.all import *
>>> Tokenizer("matrix(a)").test()
['MATRIX', '(', 'NAME(a)', ')']
```

Anything else is an error:

```
sage: Tokenizer("&@~").test()
['ERROR', 'ERROR', 'ERROR']
```

```
>>> from sage.all import *
>>> Tokenizer("&@~").test()
['ERROR', 'ERROR', 'ERROR']
```

No attempt for correctness is made at this stage:

```
sage: Tokenizer(") )( 5e5e5").test()
[')', ')', '(', 'FLOAT(5e5)', 'NAME(e5)']
sage: Tokenizer("?$%").test()
['ERROR', 'ERROR', 'ERROR']
```

```
>>> from sage.all import *
>>> Tokenizer(") )( 5e5e5").test()
[')', ')', '(', 'FLOAT(5e5)', 'NAME(e5)']
>>> Tokenizer("?$%").test()
['ERROR', 'ERROR', 'ERROR']
```

backtrack()

Put `self` in such a state that the subsequent call to `next()` will return the same as if `next()` had not been called.

Currently, one can only backtrack once.

EXAMPLES:

```
sage: from sage.misc.parser import Tokenizer, token_to_str
sage: t = Tokenizer("a+b")
sage: token_to_str(t.next())
'NAME'
sage: token_to_str(t.next())
'+'
sage: t.backtrack()   # the return type is bint for performance reasons
False
sage: token_to_str(t.next())
'+'
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Tokenizer, token_to_str
>>> t = Tokenizer("a+b")
>>> token_to_str(t.next())
'NAME'
>>> token_to_str(t.next())
'+'
>>> t.backtrack()   # the return type is bint for performance reasons
False
>>> token_to_str(t.next())
'+'
```

last()

Return the last token seen.

EXAMPLES:

```
sage: from sage.misc.parser import Tokenizer, token_to_str
sage: t = Tokenizer("3a")
sage: token_to_str(t.next())
'INT'
sage: token_to_str(t.last())
'INT'
sage: token_to_str(t.next())
'NAME'
sage: token_to_str(t.last())
'NAME'
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Tokenizer, token_to_str
>>> t = Tokenizer("3a")
>>> token_to_str(t.next())
'INT'
>>> token_to_str(t.last())
'INT'
>>> token_to_str(t.next())
'NAME'
>>> token_to_str(t.last())
'NAME'
```

last_token_string()

Return the actual contents of the last token.

EXAMPLES:

```
sage: from sage.misc.parser import Tokenizer, token_to_str
sage: t = Tokenizer("a - 1e5")
sage: token_to_str(t.next())
'NAME'
sage: t.last_token_string()
'a'
sage: token_to_str(t.next())
'-'
sage: token_to_str(t.next())
'FLOAT'
sage: t.last_token_string()
'1e5'
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Tokenizer, token_to_str
>>> t = Tokenizer("a - 1e5")
>>> token_to_str(t.next())
'NAME'
>>> t.last_token_string()
'a'
>>> token_to_str(t.next())
'-'
>>> token_to_str(t.next())
```

(continues on next page)

(continued from previous page)

```
'FLOAT'
>>> t.last_token_string()
'1e5'
```

next()

Return the next token in the string.

EXAMPLES:

```
sage: from sage.misc.parser import Tokenizer, token_to_str
sage: t = Tokenizer("a+3")
sage: token_to_str(t.next())
'NAME'
sage: token_to_str(t.next())
'+'
sage: token_to_str(t.next())
'INT'
sage: token_to_str(t.next())
'EOS'
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Tokenizer, token_to_str
>>> t = Tokenizer("a+3")
>>> token_to_str(t.next())
'NAME'
>>> token_to_str(t.next())
'+'
>>> token_to_str(t.next())
'INT'
>>> token_to_str(t.next())
'EOS'
```

peek()

Return the next token that will be encountered, without changing the state of `self`.

EXAMPLES:

```
sage: from sage.misc.parser import Tokenizer, token_to_str
sage: t = Tokenizer("a+b")
sage: token_to_str(t.peek())
'NAME'
sage: token_to_str(t.next())
'NAME'
sage: token_to_str(t.peek())
'+'
sage: token_to_str(t.peek())
'+'
sage: token_to_str(t.next())
'+'
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Tokenizer, token_to_str
```

(continues on next page)

(continued from previous page)

```
>>> t = Tokenizer("a+b")
>>> token_to_str(t.peek())
'NAME'
>>> token_to_str(t.next())
'NAME'
>>> token_to_str(t.peek())
'+'
>>> token_to_str(t.peek())
'+'
>>> token_to_str(t.next())
'+'
```

reset (*pos=0*)

Reset the tokenizer to a given position.

EXAMPLES:

```
sage: from sage.misc.parser import Tokenizer
sage: t = Tokenizer("a+b*c")
sage: t.test()
['NAME(a)', '+', 'NAME(b)', '*', 'NAME(c)']
sage: t.test()
[]
sage: t.reset()
sage: t.test()
['NAME(a)', '+', 'NAME(b)', '*', 'NAME(c)']
sage: t.reset(3)
sage: t.test()
['*', 'NAME(c)']
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Tokenizer
>>> t = Tokenizer("a+b*c")
>>> t.test()
['NAME(a)', '+', 'NAME(b)', '*', 'NAME(c)']
>>> t.test()
[]
>>> t.reset()
>>> t.test()
['NAME(a)', '+', 'NAME(b)', '*', 'NAME(c)']
>>> t.reset(Integer(3))
>>> t.test()
['*', 'NAME(c)']
```

No care is taken to make sure we don't jump in the middle of a token:

```
sage: t = Tokenizer("12345+a")
sage: t.test()
['INT(12345)', '+', 'NAME(a)']
sage: t.reset(2)
sage: t.test()
['INT(345)', '+', 'NAME(a)']
```

```
>>> from sage.all import *
>>> t = Tokenizer("12345+a")
>>> t.test()
['INT(12345)', '+', 'NAME(a)']
>>> t.reset(Integer(2))
>>> t.test()
['INT(345)', '+', 'NAME(a)']
```

test()

This is a utility function for easy testing of the tokenizer.

Destructively read off the tokens in self, returning a list of string representations of the tokens.

EXAMPLES:

```
sage: from sage.misc.parser import Tokenizer
sage: t = Tokenizer("a b 3")
sage: t.test()
['NAME(a)', 'NAME(b)', 'INT(3)']
sage: t.test()
[]
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Tokenizer
>>> t = Tokenizer("a b 3")
>>> t.test()
['NAME(a)', 'NAME(b)', 'INT(3)']
>>> t.test()
[]
```

sage.misc.parser.**foo**(**args*, ***kwds*)

This is a function for testing that simply returns the arguments and keywords passed into it.

EXAMPLES:

```
sage: from sage.misc.parser import foo
sage: foo(1, 2, a=3)
((1, 2), {'a': 3})
```

```
>>> from sage.all import *
>>> from sage.misc.parser import foo
>>> foo(Integer(1), Integer(2), a=Integer(3))
((1, 2), {'a': 3})
```

sage.misc.parser.**token_to_str**(*token*)

For speed reasons, tokens are integers. This function returns a string representation of a given token.

EXAMPLES:

```
sage: from sage.misc.parser import Tokenizer, token_to_str
sage: t = Tokenizer("+ 2")
sage: token_to_str(t.next())
'+'
sage: token_to_str(t.next())
'INT'
```

```
>>> from sage.all import *
>>> from sage.misc.parser import Tokenizer, token_to_str
>>> t = Tokenizer("+ 2")
>>> token_to_str(t.next())
'+'
>>> token_to_str(t.next())
'INT'
```

3.4 Evaluating Python code without any preparsing

class sage.misc.python.**Python**

Bases: object

Allow for evaluating a chunk of code without any preparsing.

eval(*x*, *globals*, *locals=None*)

Evaluate x with given globals; locals is completely ignored.

This is specifically meant for evaluating code blocks with %python in the notebook.

INPUT:

- x – string
- globals – dictionary
- locals – completely IGNORED

EXAMPLES:

```
sage: from sage.misc.python import Python
sage: python = Python()
sage: python.eval('2+2', globals())
4
''
```

```
>>> from sage.all import *
>>> from sage.misc.python import Python
>>> python = Python()
>>> python.eval('2+2', globals())
4
''
```

Any variables that are set during evaluation of the block will propagate to the globals dictionary.

```
sage: python.eval('a=5\nb=7\na+b', globals())
12
''
sage: b
7
```

```
>>> from sage.all import *
>>> python.eval('a=5\nb=7\na+b', globals())
12
''
```

(continues on next page)

(continued from previous page)

```
>>> b
7
```

The `locals` variable is ignored – it is there only for completeness. It is ignored since otherwise the following will not work:

```
sage: python.eval("def foo():\n    return 'foo'\nprint(foo())\ndef mumble():\n␣
↪    print('mumble {}'.format(foo()))\nmumble()", globals())
foo
mumble foo
''
sage: mumble
<function mumble at ...>
```

```
>>> from sage.all import *
>>> python.eval("def foo():\n    return 'foo'\nprint(foo())\ndef mumble():\n  ␣
↪ print('mumble {}'.format(foo()))\nmumble()", globals())
foo
mumble foo
''
>>> mumble
<function mumble at ...>
```

3.5 Evaluating a String in Sage

`sage.misc.sage_eval.`**`sage_eval`**(*source*, *locals=None*, *cmds=''*, *preparse=True*)

Obtain a Sage object from the input string by evaluating it using Sage. This means calling eval after preparsing and with globals equal to everything included in the scope of `from sage.all import *`.).

INPUT:

- `source` – string or object with a `_sage_` method
- `locals` – evaluate in namespace of `sage.all` plus the locals dictionary
- `cmds` – string; sequence of commands to be run before source is evaluated
- `preparse` – boolean (default: `True`); if `True`, preparse the string expression

EXAMPLES: This example illustrates that preparsing is applied:

```
sage: eval('2^3')
1
sage: sage_eval('2^3')
8
```

```
>>> from sage.all import *
>>> eval('2^3')
1
>>> sage_eval('2^3')
8
```

However, preparsing can be turned off:

```
sage: sage_eval('2^3', preparse=False)
1
```

```
>>> from sage.all import *
>>> sage_eval('2^3', preparse=False)
1
```

Note that you can explicitly define variables and pass them as the second option:

```
sage: x = PolynomialRing(RationalField(),"x").gen()
sage: sage_eval('x^2+1', locals={'x':x})
x^2 + 1
```

```
>>> from sage.all import *
>>> x = PolynomialRing(RationalField(),"x").gen()
>>> sage_eval('x^2+1', locals={'x':x})
x^2 + 1
```

This example illustrates that evaluation occurs in the context of `from sage.all import *`. Even though `bernoulli` has been redefined in the local scope, when calling *`sage_eval()`* the default value meaning of `bernoulli()` is used. Likewise for `QQ` below:

```
sage: bernoulli = lambda x : x^2
sage: bernoulli(6)
36
sage: eval('bernoulli(6)')
36
sage: sage_eval('bernoulli(6)')                                                 #␣
↪needs sage.libs.flint
1/42
```

```
>>> from sage.all import *
>>> bernoulli = lambda x : x**Integer(2)
>>> bernoulli(Integer(6))
36
>>> eval('bernoulli(6)')
36
>>> sage_eval('bernoulli(6)')                                                   #␣
↪needs sage.libs.flint
1/42
```

```
sage: QQ = lambda x : x^2
sage: QQ(2)
4
sage: sage_eval('QQ(2)')
2
sage: parent(sage_eval('QQ(2)'))
Rational Field
```

```
>>> from sage.all import *
>>> QQ = lambda x : x**Integer(2)
>>> QQ(Integer(2))
```

(continues on next page)

(continued from previous page)

```
4
>>> sage_eval('QQ(2)')
2
>>> parent(sage_eval('QQ(2)'))
Rational Field
```

This example illustrates setting a variable for use in evaluation:

```
sage: x = 5
sage: eval('4//3 + x', {'x': 25})
26
sage: sage_eval('4/3 + x',  locals={'x': 25})
79/3
```

```
>>> from sage.all import *
>>> x = Integer(5)
>>> eval('4//3 + x', {'x': Integer(25)})
26
>>> sage_eval('4/3 + x',  locals={'x': Integer(25)})
79/3
```

You can also specify a sequence of commands to be run before the expression is evaluated:

```
sage: sage_eval('p', cmds='K.<x> = QQ[]\np = x^2 + 1')
x^2 + 1
```

```
>>> from sage.all import *
>>> sage_eval('p', cmds='K.<x> = QQ[]\np = x^2 + 1')
x^2 + 1
```

If you give commands to execute and a dictionary of variables, then the dictionary will be modified by assignments in the commands:

```
sage: vars = {}
sage: sage_eval('None', cmds='y = 3', locals=vars)
sage: vars['y'], parent(vars['y'])
(3, Integer Ring)
```

```
>>> from sage.all import *
>>> vars = {}
>>> sage_eval('None', cmds='y = 3', locals=vars)
>>> vars['y'], parent(vars['y'])
(3, Integer Ring)
```

You can also specify the object to evaluate as a tuple. A 2-tuple is assumed to be a pair of a command sequence and an expression; a 3-tuple is assumed to be a triple of a command sequence, an expression, and a dictionary holding local variables. (In this case, the given dictionary will not be modified by assignments in the commands.)

```
sage: sage_eval(('f(x) = x^2', 'f(3)'))                                    #␣
↪needs sage.symbolic
9
sage: vars = {'rt2': sqrt(2.0)}
```

(continues on next page)

(continued from previous page)

```
sage: sage_eval(('rt2 += 1', 'rt2', vars))
2.41421356237309
sage: vars['rt2']
1.41421356237310
```

```
>>> from sage.all import *
>>> sage_eval(('f(x) = x^2', 'f(3)'))                                    #␣
↪needs sage.symbolic
9
>>> vars = {'rt2': sqrt(RealNumber('2.0'))}
>>> sage_eval(('rt2 += 1', 'rt2', vars))
2.41421356237309
>>> vars['rt2']
1.41421356237310
```

This example illustrates how *sage_eval* can be useful when evaluating the output of other computer algebra systems:

```
sage: # needs sage.libs.gap
sage: R.<x> = PolynomialRing(RationalField())
sage: gap.eval('R:=PolynomialRing(Rationals,["x"]);')
'Rationals[x]'
sage: ff = gap.eval('x:=IndeterminatesOfPolynomialRing(R);; f:=x^2+1;'); ff
'x^2+1'
sage: sage_eval(ff, locals={'x':x})
x^2 + 1
sage: eval(ff)
Traceback (most recent call last):
...
RuntimeError: Use ** for exponentiation, not '^', which means xor
in Python, and has the wrong precedence.
```

```
>>> from sage.all import *
>>> # needs sage.libs.gap
>>> R = PolynomialRing(RationalField(), names=('x',)); (x,) = R._first_ngens(1)
>>> gap.eval('R:=PolynomialRing(Rationals,["x"]);')
'Rationals[x]'
>>> ff = gap.eval('x:=IndeterminatesOfPolynomialRing(R);; f:=x^2+1;'); ff
'x^2+1'
>>> sage_eval(ff, locals={'x':x})
x^2 + 1
>>> eval(ff)
Traceback (most recent call last):
...
RuntimeError: Use ** for exponentiation, not '^', which means xor
in Python, and has the wrong precedence.
```

Here you can see that `eval()` simply will not work but *sage_eval()* will.

sage.misc.sage_eval.**sageobj**(*x*, *vars=None*)

Return a native Sage object associated to `x`, if possible and implemented.

If the object has a `_sage_` method it is called and the value is returned. Otherwise, `str()` is called on the object,

and all preparsing is applied and the resulting expression is evaluated in the context of `from sage.all import *`. To evaluate the expression with certain variables set, use the `vars` argument, which should be a dictionary.

EXAMPLES:

```
sage: type(sageobj(gp('34/56')))                                                #␣
↪needs sage.libs.pari
<class 'sage.rings.rational.Rational'>

sage: n = 5/2
sage: sageobj(n) is n
True
sage: k = sageobj('Z(8^3/1)', {'Z':ZZ}); k
512
sage: type(k)
<class 'sage.rings.integer.Integer'>
```

```
>>> from sage.all import *
>>> type(sageobj(gp('34/56')))                                                  #␣
↪needs sage.libs.pari
<class 'sage.rings.rational.Rational'>

>>> n = Integer(5)/Integer(2)
>>> sageobj(n) is n
True
>>> k = sageobj('Z(8^3/1)', {'Z':ZZ}); k
512
>>> type(k)
<class 'sage.rings.integer.Integer'>
```

This illustrates interfaces:

```
sage: # needs sage.libs.pari
sage: f = gp('2/3')
sage: type(f)
<class 'sage.interfaces.gp.GpElement'>
sage: f._sage_()
2/3
sage: type(f._sage_())
<class 'sage.rings.rational.Rational'>

sage: # needs sage.libs.gap
sage: a = gap(939393/2433)
sage: a._sage_()
313131/811
sage: type(a._sage_())
<class 'sage.rings.rational.Rational'>
```

```
>>> from sage.all import *
>>> # needs sage.libs.pari
>>> f = gp('2/3')
>>> type(f)
<class 'sage.interfaces.gp.GpElement'>
>>> f._sage_()
```

(continues on next page)

(continued from previous page)

```
2/3
>>> type(f._sage_())
<class 'sage.rings.rational.Rational'>

>>> # needs sage.libs.gap
>>> a = gap(Integer(939393)/Integer(2433))
>>> a._sage_()
313131/811
>>> type(a._sage_())
<class 'sage.rings.rational.Rational'>
```

3.6 Evaluating shell scripts

class sage.misc.sh.**Sh**

Bases: object

Evaluates a shell script and returns the output.

To use this from the notebook type `sh` at the beginning of the input cell. The working directory is then the (usually temporary) directory where the Sage worksheet process is executing.

eval(*code*, *globals=None*, *locals=None*)

This is difficult to test because the output goes to the screen rather than being captured by the doctest program, so the following really only tests that the command doesn't bomb, not that it gives the right output:

```
sage: sh.eval('''echo "Hello there"\nif [ $? -eq 0 ]; then\necho "good"\nfi''
↪') # random output
```

```
>>> from sage.all import *
>>> sh.eval('''echo "Hello there"\nif [ $? -eq 0 ]; then\necho "good"\nfi''')
↪# random output
```

CHAPTER

FOUR

FORMATTED OUTPUT

4.1 Formatted Output

4.1.1 Symbols for Character Art

This module defines single- and multi-line symbols.

EXAMPLES:

```
sage: from sage.typeset.symbols import *

sage: symbols = ascii_art('')
sage: for i in range(1, 5):
....:     symbols += ascii_left_parenthesis.character_art(i)
....:     symbols += ascii_art(' ')
....:     symbols += ascii_right_parenthesis.character_art(i)
....:     symbols += ascii_art(' ')
sage: for i in range(1, 5):
....:     symbols += ascii_left_square_bracket.character_art(i)
....:     symbols += ascii_art(' ')
....:     symbols += ascii_right_square_bracket.character_art(i)
....:     symbols += ascii_art(' ')
sage: for i in range(1, 5):
....:     symbols += ascii_left_curly_brace.character_art(i)
....:     symbols += ascii_art(' ')
....:     symbols += ascii_right_curly_brace.character_art(i)
....:     symbols += ascii_art(' ')
sage: symbols
     ( )             [ ]             { }
   ( ) ( )         [ ] [ ]         { } { }
 ( ) ( ) ( )     [ ] [ ] [ ]     { } { } { }
( ) ( ) ( ) ( ) [ ] [ ] [ ] [ ] { } { } { } { }

sage: symbols = unicode_art('')
sage: for i in range(1, 5):
....:     symbols += unicode_left_parenthesis.character_art(i)
....:     symbols += unicode_art(' ')
....:     symbols += unicode_right_parenthesis.character_art(i)
....:     symbols += unicode_art(' ')
sage: for i in range(1, 5):
....:     symbols += unicode_left_square_bracket.character_art(i)
....:     symbols += unicode_art(' ')
```

(continues on next page)

(continued from previous page)

```
....:     symbols += unicode_right_square_bracket.character_art(i)
....:     symbols += unicode_art(' ')
sage: for i in range(1, 5):
....:     symbols += unicode_left_curly_brace.character_art(i)
....:     symbols += unicode_art(' ')
....:     symbols += unicode_right_curly_brace.character_art(i)
....:     symbols += unicode_art(' ')
sage: symbols
            ⎛ ⎞             ⎡ ⎤             ⎧ ⎫
        ⎛ ⎞ │ │         ⎡ ⎤ │ │         ⎧ ⎫ ⎭ ⎩
    ⎛ ⎞ │ │ │ │     ⎡ ⎤ │ │ │ │     ⎨ ⎬ ⎫ ⎧
( ) ⎝ ⎠ ⎝ ⎠ ⎝ ⎠ [ ] ⎣ ⎦ ⎣ ⎦ ⎣ ⎦ ⎩ ⎭ ⎭ ⎨ ⎩ ⎭ ⎩
```

```
>>> from sage.all import *
>>> from sage.typeset.symbols import *

>>> symbols = ascii_art('')
>>> for i in range(Integer(1), Integer(5)):
...     symbols += ascii_left_parenthesis.character_art(i)
...     symbols += ascii_art(' ')
...     symbols += ascii_right_parenthesis.character_art(i)
...     symbols += ascii_art(' ')
>>> for i in range(Integer(1), Integer(5)):
...     symbols += ascii_left_square_bracket.character_art(i)
...     symbols += ascii_art(' ')
...     symbols += ascii_right_square_bracket.character_art(i)
...     symbols += ascii_art(' ')
>>> for i in range(Integer(1), Integer(5)):
...     symbols += ascii_left_curly_brace.character_art(i)
...     symbols += ascii_art(' ')
...     symbols += ascii_right_curly_brace.character_art(i)
...     symbols += ascii_art(' ')
>>> symbols
            ( )             [ ]             { }
        ( ) ( )         [ ] [ ]         { } { }
    ( ) ( ) ( )     [ ] [ ] [ ]     { } { } { }
( ) ( ) ( ) ( ) [ ] [ ] [ ] [ ] { } { } { } { }

>>> symbols = unicode_art('')
>>> for i in range(Integer(1), Integer(5)):
...     symbols += unicode_left_parenthesis.character_art(i)
...     symbols += unicode_art(' ')
...     symbols += unicode_right_parenthesis.character_art(i)
...     symbols += unicode_art(' ')
>>> for i in range(Integer(1), Integer(5)):
...     symbols += unicode_left_square_bracket.character_art(i)
...     symbols += unicode_art(' ')
...     symbols += unicode_right_square_bracket.character_art(i)
...     symbols += unicode_art(' ')
>>> for i in range(Integer(1), Integer(5)):
...     symbols += unicode_left_curly_brace.character_art(i)
...     symbols += unicode_art(' ')
```

(continues on next page)

(continued from previous page)

```
...       symbols += unicode_right_curly_brace.character_art(i)
...       symbols += unicode_art(' ')
>>> symbols
              ⎛ ⎞                 ⎡ ⎤                 ⎛ ⎞
          ⎛ ⎞ ⎜ ⎟             ⎡ ⎤ ⎢ ⎥             ⎛ ⎞ ⌋ ⌊
      ⎛ ⎞ ⎜ ⎟ ⎜ ⎟         ⎡ ⎤ ⎢ ⎥ ⎢ ⎥         ⌠ ⌋ ⎨ ⎬ ⌋ ⌠
( ) ⌊ ⌋ ⌊ ⌋ ⌊ ⌋ [ ] ⌊ ⌋ ⌊ ⌋ ⌊ ⌋ { } ⌊ ⌡ ⌊ ⌋ ⌊ ⌋
```

class sage.typeset.symbols.**CompoundAsciiSymbol**(*character*, *top*, *extension*, *bottom*, *middle=None*, *middle_top=None*, *middle_bottom=None*, *top_2=None*, *bottom_2=None*)

Bases: *CompoundSymbol*

character_art(*num_lines*)

Return the ASCII art of the symbol.

EXAMPLES:

```
sage: from sage.typeset.symbols import *
sage: ascii_left_curly_brace.character_art(3)
{
{
{
```

```
>>> from sage.all import *
>>> from sage.typeset.symbols import *
>>> ascii_left_curly_brace.character_art(Integer(3))
{
{
{
```

class sage.typeset.symbols.**CompoundSymbol**(*character*, *top*, *extension*, *bottom*, *middle=None*, *middle_top=None*, *middle_bottom=None*, *top_2=None*, *bottom_2=None*)

Bases: SageObject

A multi-character (ascii/unicode art) symbol.

INPUT:

Instead of a string, each of these can be unicode in Python 2:

- character – string; the single-line version of the symbol
- top – string; the top line of a multi-line symbol
- extension – string; the extension line of a multi-line symbol (will be repeated)
- bottom – string; the bottom line of a multi-line symbol
- middle – (optional) string; the middle part, for example in curly braces. Will be used only once for the symbol, and only if its height is odd.
- middle_top – (optional) string; the upper half of the 2-line middle part if the height of the symbol is even. Will be used only once for the symbol.
- middle_bottom – (optional) string; the lower half of the 2-line middle part if the height of the symbol is even. Will be used only once for the symbol.

- top_2 – (optional) string; the upper half of a 2-line symbol
- bottom_2 – (optional) string; the lower half of a 2-line symbol

EXAMPLES:

```
sage: from sage.typeset.symbols import CompoundSymbol
sage: i = CompoundSymbol('I', '+', '|', '+', '|')
sage: i.print_to_stdout(1)
I
sage: i.print_to_stdout(3)
+
|
+
```

```
>>> from sage.all import *
>>> from sage.typeset.symbols import CompoundSymbol
>>> i = CompoundSymbol('I', '+', '|', '+', '|')
>>> i.print_to_stdout(Integer(1))
I
>>> i.print_to_stdout(Integer(3))
+
|
+
```

print_to_stdout(*num_lines*)

Print the multi-line symbol.

This method is for testing purposes.

INPUT:

- num_lines – integer; the total number of lines

EXAMPLES:

```
sage: from sage.typeset.symbols import *
sage: unicode_integral.print_to_stdout(1)
⌠
sage: unicode_integral.print_to_stdout(2)
⌠
⌡
sage: unicode_integral.print_to_stdout(3)
⌠
⎮
⌡
sage: unicode_integral.print_to_stdout(4)
⌠
⎮
⎮
⌡
```

```
>>> from sage.all import *
>>> from sage.typeset.symbols import *
>>> unicode_integral.print_to_stdout(Integer(1))
⌠
```

(continues on next page)

(continued from previous page)

```
>>> unicode_integral.print_to_stdout(Integer(2))
⌠
⌡
>>> unicode_integral.print_to_stdout(Integer(3))
⌠
⎮
⌡
>>> unicode_integral.print_to_stdout(Integer(4))
⌠
⎮
⎮
⌡
```

class sage.typeset.symbols.**CompoundUnicodeSymbol**(*character*, *top*, *extension*, *bottom*, *middle=None*, *middle_top=None*, *middle_bottom=None*, *top_2=None*, *bottom_2=None*)

Bases: *CompoundSymbol*

character_art(*num_lines*)

Return the unicode art of the symbol.

EXAMPLES:

```
sage: from sage.typeset.symbols import *
sage: unicode_left_curly_brace.character_art(3)
⎧
⎨
⎩
```

```
>>> from sage.all import *
>>> from sage.typeset.symbols import *
>>> unicode_left_curly_brace.character_art(Integer(3))
⎧
⎨
⎩
```

4.1.2 Base Class for Character-Based Art

This is the common base class for *sage.typeset.ascii_art.AsciiArt* and *sage.typeset.unicode_art.UnicodeArt*. They implement simple graphics by placing characters on a rectangular grid, in other words, using monospace fonts. The difference is that one is restricted to 7-bit ascii, the other uses all unicode code points.

class sage.typeset.character_art.**CharacterArt**(*lines=[]*, *breakpoints=[]*, *baseline=None*)

Bases: SageObject

Abstract base class for character art.

INPUT:

- `lines` – the list of lines of the representation of the character art object
- `breakpoints` – the list of points where the representation can be split
- `baseline` – the reference line (from the bottom)

Instead of just integers, `breakpoints` may also contain tuples consisting of an offset and the breakpoints of a nested substring at that offset. This is used to prioritize the breakpoints, as line breaks inside the substring will be avoided if possible.

EXAMPLES:

```
sage: i = var('i')                                                          #␣
↪needs sage.symbolic
sage: ascii_art(sum(pi^i/factorial(i)*x^i, i, 0, oo))                       #␣
↪needs sage.symbolic
 pi*x
e
```

```
>>> from sage.all import *
>>> i = var('i')                                                        # needs␣
↪sage.symbolic
>>> ascii_art(sum(pi**i/factorial(i)*x**i, i, Integer(0), oo))                  ␣
↪    # needs sage.symbolic
 pi*x
e
```

classmethod empty()

Return the empty character art object.

EXAMPLES:

```
sage: from sage.typeset.ascii_art import AsciiArt
sage: AsciiArt.empty()
```

```
>>> from sage.all import *
>>> from sage.typeset.ascii_art import AsciiArt
>>> AsciiArt.empty()
```

get_baseline()

Return the line where the baseline is, for example:

```
    5       4
14*x  + 5*x
```

the baseline has at line 0 and

```
{ o        }
{  \   : 4 }
{   o      }
```

has at line 1.

get_breakpoints()

Return an iterator of breakpoints where the object can be split.

This method is deprecated, as its output is an implementation detail. The mere breakpoints of a character art element do not reflect the best way to split it if nested structures are involved. For details, see Issue #29204.

For example the expression:

```
   5    4
14x + 5x
```

can be split on position 4 (on the +).

EXAMPLES:

```
sage: from sage.typeset.ascii_art import AsciiArt
sage: p3 = AsciiArt([" * ", "***"])
sage: p5 = AsciiArt(["  *  ", " * * * ", "*****"])
sage: aa = ascii_art([p3, p5])
sage: aa.get_breakpoints()
doctest:...: DeprecationWarning: get_breakpoints() is deprecated
See https://github.com/sagemath/sage/issues/29204 for details.
[6]
```

```
>>> from sage.all import *
>>> from sage.typeset.ascii_art import AsciiArt
>>> p3 = AsciiArt([" * ", "***"])
>>> p5 = AsciiArt(["  *  ", " * * * ", "*****"])
>>> aa = ascii_art([p3, p5])
>>> aa.get_breakpoints()
doctest:...: DeprecationWarning: get_breakpoints() is deprecated
See https://github.com/sagemath/sage/issues/29204 for details.
[6]
```

height()

Return the height of the ASCII art object.

OUTPUT: integer; the number of lines

split(*pos*)

Split the representation at the position `pos`.

EXAMPLES:

```
sage: from sage.typeset.ascii_art import AsciiArt
sage: p3 = AsciiArt([" * ", "***"])
sage: p5 = AsciiArt(["  *  ", " * * * ", "*****"])
sage: aa = ascii_art([p3, p5])
sage: a,b= aa.split(6)
sage: a
[
[  *
[ ***,
sage: b
   *   ]
  * *  ]
 ***** ]
```

```
>>> from sage.all import *
>>> from sage.typeset.ascii_art import AsciiArt
>>> p3 = AsciiArt([" * ", "***"])
>>> p5 = AsciiArt(["  *  ", " * * * ", "*****"])
```

(continues on next page)

(continued from previous page)

```
>>> aa = ascii_art([p3, p5])
>>> a,b= aa.split(Integer(6))
>>> a
[
[  *
[ ***,
>>> b
   *   ]
  * *  ]
 ***** ]
```

width()

Return the length (width) of the ASCII art object.

OUTPUT: integer; the number of characters in each line

4.1.3 Factory for Character-Based Art

class sage.typeset.character_art_factory.**CharacterArtFactory**(*art_type*, *string_type*, *magic_method_name*, *parenthesis*, *square_bracet*, *curly_brace*)

Bases: SageObject

Abstract base class for character art factory.

This class is the common implementation behind *ascii_art()* and *unicode_art()* .

INPUT:

- art_type – type of the character art (i.e. a subclass of *CharacterArt*)
- string_type – type of strings (the lines in the character art, e.g. str or unicode)
- magic_method_name – name of the Sage magic method (e.g. '_ascii_art_' or '_unicode_art_')
- parenthesis – left/right pair of two multi-line symbols. The parenthesis, a.k.a. round brackets (used for printing tuples).
- square_bracket – left/right pair of two multi-line symbols. The square_brackets (used for printing lists).
- curly_brace – left/right pair of two multi-line symbols. The curly braces (used for printing sets).

EXAMPLES:

```
sage: from sage.typeset.ascii_art import _ascii_art_factory as factory
sage: type(factory)
<class 'sage.typeset.character_art_factory.CharacterArtFactory'>
```

```
>>> from sage.all import *
>>> from sage.typeset.ascii_art import _ascii_art_factory as factory
>>> type(factory)
<class 'sage.typeset.character_art_factory.CharacterArtFactory'>
```

build(*obj*, *baseline=None*)

Construct a character art representation.

INPUT:

- `obj` – anything; the object whose ascii art representation we want
- `baseline` – (optional) the baseline of the object

OUTPUT: character art object

EXAMPLES:

```
sage: result = ascii_art(integral(exp(x+x^2)/(x+1), x))                    #␣
↪needs sage.symbolic
...
sage: result                                                               #␣
↪needs sage.symbolic
    /
   |
   |   2
   |  x  + x
   | e
   | ------- dx
   |  x + 1
   |
  /
```

```
>>> from sage.all import *
>>> result = ascii_art(integral(exp(x+x**Integer(2))/(x+Integer(1)), x))      ␣
↪               # needs sage.symbolic
...
>>> result                                                                  #␣
↪needs sage.symbolic
    /
   |
   |   2
   |  x  + x
   | e
   | ------- dx
   |  x + 1
   |
  /
```

build_container(*content*, *left_border*, *right_border*, *baseline=0*)

Return character art for a container.

INPUT:

- `content` – *CharacterArt*; the content of the container, usually comma-separated entries
- `left_border` – *CompoundSymbol*; the left border of the container
- `right_border` – *CompoundSymbol*; the right border of the container
- `baseline` – (default: 0) the baseline of the object

build_dict(*d*, *baseline=0*)

Return a character art output of a dictionary.

build_empty()

Return the empty character art object.

OUTPUT: character art instance

EXAMPLES:

```
sage: from sage.typeset.ascii_art import _ascii_art_factory as factory
sage: str(factory.build_empty())
''
```

```
>>> from sage.all import *
>>> from sage.typeset.ascii_art import _ascii_art_factory as factory
>>> str(factory.build_empty())
''
```

build_from_magic_method(*obj*, *baseline=None*)

Return the character art object created by the object's magic method.

OUTPUT: character art instance

EXAMPLES:

```
sage: from sage.typeset.ascii_art import _ascii_art_factory as factory
sage: out = factory.build_from_magic_method(identity_matrix(2));  out       #␣
↪needs sage.modules
[1 0]
[0 1]
sage: type(out)                                                             #␣
↪needs sage.modules
<class 'sage.typeset.ascii_art.AsciiArt'>
```

```
>>> from sage.all import *
>>> from sage.typeset.ascii_art import _ascii_art_factory as factory
>>> out = factory.build_from_magic_method(identity_matrix(Integer(2)));  out ␣
↪     # needs sage.modules
[1 0]
[0 1]
>>> type(out)                                                               #␣
↪needs sage.modules
<class 'sage.typeset.ascii_art.AsciiArt'>
```

build_from_string(*obj*, *baseline=0*)

Return the character art object created from splitting the object's string representation.

INPUT:

- `obj` – utf-8 encoded byte string or unicode
- `baseline` – (default: 0) the baseline of the object

OUTPUT: character art instance

EXAMPLES:

```
sage: from sage.typeset.ascii_art import _ascii_art_factory as factory
sage: out = factory.build_from_string('a\nbb\nccc')
sage: out + out + out
a  a  a
bb bb bb
ccccccccc
```

(continues on next page)

(continued from previous page)

```
sage: type(out)
<class 'sage.typeset.ascii_art.AsciiArt'>
```

```
>>> from sage.all import *
>>> from sage.typeset.ascii_art import _ascii_art_factory as factory
>>> out = factory.build_from_string('a\nbb\nccc')
>>> out + out + out
a  a  a
bb bb bb
ccccccccc
>>> type(out)
<class 'sage.typeset.ascii_art.AsciiArt'>
```

build_list(*l*, *baseline=0*)

Return a character art output of a list.

build_set(*s*, *baseline=0*)

Return a character art output of a set.

build_tuple(*t*, *baseline=0*)

Return a character art output of a tuple.

concatenate(*iterable*, *separator*, *empty=None*, *baseline=0*, *nested=False*)

Concatenate multiple character art instances.

The breakpoints are set as the breakpoints of the `separator` together with the breakpoints of the objects in `iterable`. If there is `None`, the end of the separator is used.

INPUT:

- `iterable` – iterable of character art
- `separable` – character art; the separator in-between the iterable
- `empty` – an optional character art which is returned if `iterable` is empty
- `baseline` – (default: 0) the baseline of the object
- `nested` – boolean (default: `False`); if `True`, each of the character art objects is treated as a nested element, so that line breaks at the separator are preferred over line breaks inside the character art objects

EXAMPLES:

```
sage: i2 = identity_matrix(2)                                                  #␣
↪needs sage.modules
sage: ascii_art(i2, i2, i2, sep=ascii_art(1/x))                                #␣
↪needs sage.modules sage.symbolic
     1     1
[1 0]-[1 0]-[1 0]
[0 1]x[0 1]x[0 1]
```

```
>>> from sage.all import *
>>> i2 = identity_matrix(Integer(2))                                           ␣
↪     # needs sage.modules
>>> ascii_art(i2, i2, i2, sep=ascii_art(Integer(1)/x))                         ␣
↪     # needs sage.modules sage.symbolic
```

(continues on next page)

(continued from previous page)

```
     1     1
[1 0]-[1 0]-[1 0]
[0 1]x[0 1]x[0 1]
```

parse_keywords(*kwds*)

Parse the keyword input given by the dict `kwds`.

INPUT:

- `kwds` – dictionary

OUTPUT:

A triple:

- the separator
- the baseline
- the baseline of the separator

Warning

The input is a dict, not a list of keyword arguments.

Note

This will remove `sep`/`separator` and `baseline` from `kwds` if they are specified.

4.1.4 ASCII Art

This file contains:

- *AsciiArt* a simple implementation of an ASCII art object,
- *ascii_art()* a function to get the ASCII art representation of any object in Sage,

AUTHOR:

- Jean-Baptiste Priez (2013-04): initial version

EXAMPLES:

```
sage: # needs sage.symbolic
sage: n = var('n')
sage: integrate(n^2/x, x)
n^2*log(x)
sage: ascii_art(integrate(n^2/x, x))
 2
n *log(x)
sage: ascii_art(integrate(n^2/(pi*x), x))
 2
n *log(x)
---------
    pi
```

(continues on next page)

(continued from previous page)

```
sage: ascii_art(list(Partitions(6)))                                            #␣
↪needs sage.combinat sage.libs.flint
[                                                               * ]
[                                                       **      * ]
[                                           ***         **      *   * ]
[                       ****        ***     *       **  **      *   * ]
[          *****    ****    *       ***     **      *       **  *   *   * ]
[ ******, *     , **    , *     , ***, *   , *   , **, * , * , * ]
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> n = var('n')
>>> integrate(n**Integer(2)/x, x)
n^2*log(x)
>>> ascii_art(integrate(n**Integer(2)/x, x))
 2
n *log(x)
>>> ascii_art(integrate(n**Integer(2)/(pi*x), x))
 2
n *log(x)
---------
    pi

>>> ascii_art(list(Partitions(Integer(6))))                                     ␣
↪      # needs sage.combinat sage.libs.flint
[                                                               * ]
[                                                       **      * ]
[                                           ***         **      *   * ]
[                       ****        ***     *       **  **      *   * ]
[          *****    ****    *       ***     **      *       **  *   *   * ]
[ ******, *     , **    , *     , ***, *   , *   , **, * , * , * ]
```

This method *ascii_art()* could be automatically use by the display hook manager activated by the magic function: `%display ascii_art`:

```
sage: from sage.repl.interpreter import get_test_shell
sage: shell = get_test_shell()
sage: shell.run_cell('%display ascii_art')
sage: shell.run_cell("i = var('i')")                                            #␣
↪needs sage.symbolic
sage: shell.run_cell('sum(factorial(i)*x^i, i, 0, 10)')                         #␣
↪needs sage.symbolic
         10           9          8         7        6        5       4      3...
3628800*x   + 362880*x  + 40320*x  + 5040*x  + 720*x  + 120*x  + 24*x  + 6*x...

...2
...+ 2*x  + x + 1

sage: shell.run_cell('3/(7*x)')                                                 #␣
↪needs sage.symbolic
 3
```

(continues on next page)

(continued from previous page)

```
---
7*x
sage: shell.run_cell('list(Compositions(5))')                                  #␣
↪needs sage.combinat
[ *
[ *  **   *        *                   *
[ *  *   **  ***   *   **    *         *   **    *          *
[ *  *   *   *    **  **   ***  ****   *   *    **   ***    *    **     *
[ *, * , * , *  , * , *  , *  , *   , **, ** , ** , **  , ***, *** , ****,

      ]
      ]
      ]
      ]
***** ]
sage: shell.run_cell('%display simple')
sage: shell.quit()
```

```
>>> from sage.all import *
>>> from sage.repl.interpreter import get_test_shell
>>> shell = get_test_shell()
>>> shell.run_cell('%display ascii_art')
>>> shell.run_cell("i = var('i')")                                             #␣
↪needs sage.symbolic
>>> shell.run_cell('sum(factorial(i)*x^i, i, 0, 10)')                          #␣
↪needs sage.symbolic
         10           9          8         7        6        5       4      3...
3628800*x   + 362880*x  + 40320*x  + 5040*x  + 720*x  + 120*x  + 24*x  + 6*x...
<BLANKLINE>
...2
...+ 2*x  + x + 1

>>> shell.run_cell('3/(7*x)')                                                  #␣
↪needs sage.symbolic
 3
---
7*x
>>> shell.run_cell('list(Compositions(5))')                                    #␣
↪needs sage.combinat
[ *
[ *  **   *        *                   *
[ *  *   **  ***   *   **    *         *   **    *          *
[ *  *   *   *    **  **   ***  ****   *   *    **   ***    *    **     *
[ *, * , * , *  , * , *  , *  , *   , **, ** , ** , **  , ***, *** , ****,
<BLANKLINE>
      ]
      ]
      ]
      ]
***** ]
>>> shell.run_cell('%display simple')
>>> shell.quit()
```

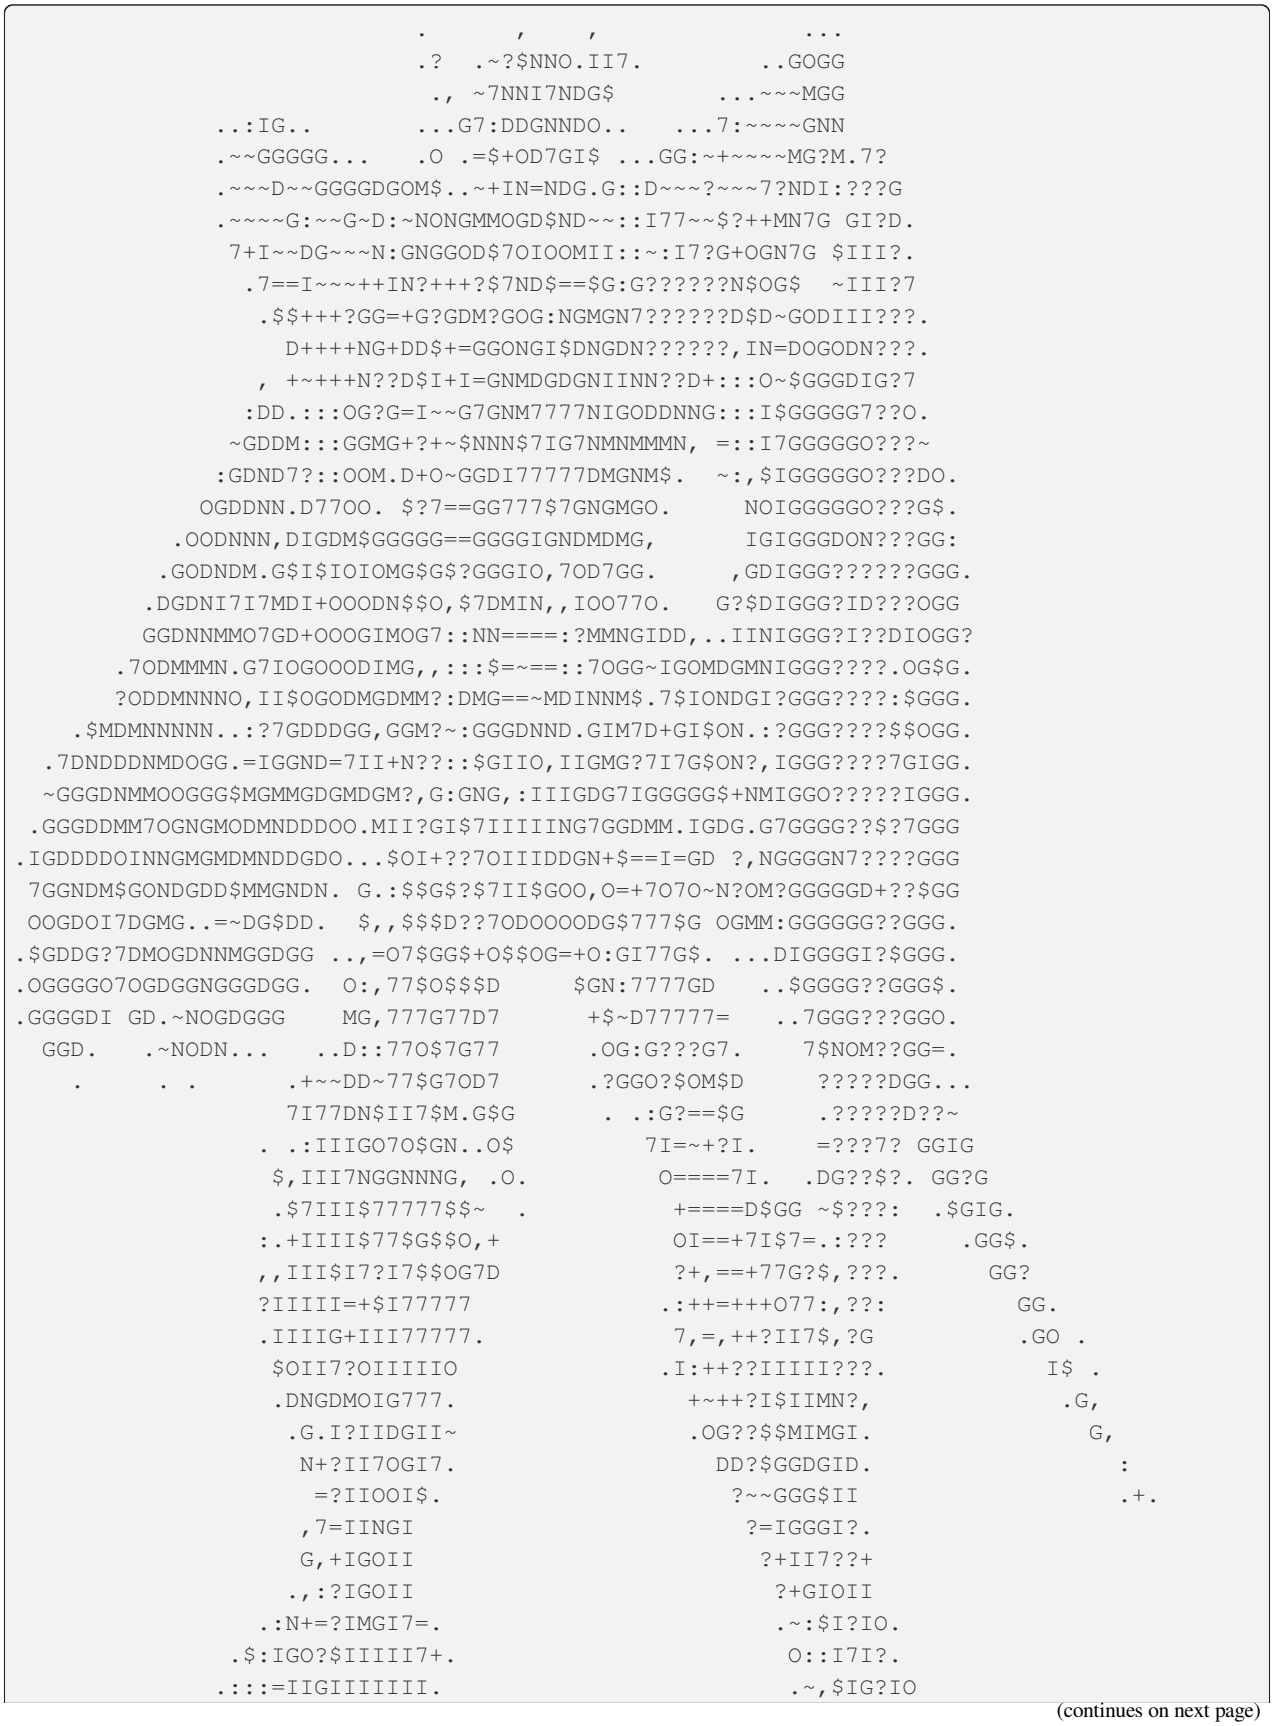

(continues on next page)

(continued from previous page)

```
             .+:$IIIIMIII7G$?.                          I::I7IIG7
             .$I$+7IIIMMMG7I7                           ?G,DGGNII.
             .$~:$IIGMNGND77I:                           +I$GOD=?=
            ?=?IIIIGIIIINI7777?                         .7~=~===?.
          ONGNDG??IG?III$N7I777                           D~====I
        .:$???7IIIIIII.....,....                          O::==~$D.
        .,........ ..                                    ..M:I.==$7G.
                                                          I?::IIIII7.
                                                         .~:G:IIIIIG.
                                                         .$:,O7III$$O
                                                           ::~DOGGNNO
                                                           .::,IOODI,
                                                             .7????$.
                                                                ... .
```

class sage.typeset.ascii_art.**AsciiArt**(*lines=[]*, *breakpoints=[]*, *baseline=None*)

Bases: *CharacterArt*

An Ascii art object is an object with some specific representation for *printing*.

INPUT:

- `lines` – the list of lines of the representation of the ascii art object
- `breakpoints` – the list of points where the representation can be split
- `baseline` – the reference line (from the bottom)

EXAMPLES:

```
sage: i = var('i')                                                              #␣
↪needs sage.symbolic
sage: ascii_art(sum(pi^i/factorial(i)*x^i, i, 0, oo))                           #␣
↪needs sage.symbolic
 pi*x
e
```

```
>>> from sage.all import *
>>> i = var('i')                                                              #␣
↪needs sage.symbolic
>>> ascii_art(sum(pi**i/factorial(i)*x**i, i, Integer(0), oo))                  ␣
↪       # needs sage.symbolic
 pi*x
e
```

sage.typeset.ascii_art.**ascii_art**(**obj*, ***kwds*)

Return an ASCII art representation.

INPUT:

- `*obj` – any number of positional arguments, of arbitrary type. The objects whose ascii art representation we want.
- `sep` – (optional) `'sep=...'` keyword argument (or `'separator'`). Anything that can be converted to ascii art (default: empty ascii art). The separator in-between a list of objects. Only used if more than one object given.

- `baseline` – (default: 0) the baseline for the object
- `sep_baseline` – (default: 0) the baseline for the separator

OUTPUT: *AsciiArt* instance

EXAMPLES:

```
sage: result = ascii_art(integral(exp(x+x^2)/(x+1), x))                    #␣
↪needs sage.symbolic
...
sage: result                                                               #␣
↪needs sage.symbolic
    /
   |
   |   2
   |  x  + x
   | e
   | ------- dx
   |  x + 1
   |
  /
```

```
>>> from sage.all import *
>>> result = ascii_art(integral(exp(x+x**Integer(2))/(x+Integer(1)), x))          ␣
↪               # needs sage.symbolic
...
>>> result                                                                  #␣
↪needs sage.symbolic
    /
   |
   |   2
   |  x  + x
   | e
   | ------- dx
   |  x + 1
   |
  /
```

We can specify a separator object:

```
sage: ident = lambda n: identity_matrix(ZZ, n)
sage: ascii_art(ident(1), ident(2), ident(3), sep=' : ')                    #␣
↪needs sage.modules
              [1 0 0]
      [1 0]   [0 1 0]
[1] : [0 1] : [0 0 1]
```

```
>>> from sage.all import *
>>> ident = lambda n: identity_matrix(ZZ, n)
>>> ascii_art(ident(Integer(1)), ident(Integer(2)), ident(Integer(3)), sep=' : ')␣
↪                       # needs sage.modules
              [1 0 0]
      [1 0]   [0 1 0]
[1] : [0 1] : [0 0 1]
```

We can specify the baseline:

```
sage: ascii_art(ident(2), baseline=-1) + ascii_art(ident(3))                    #␣
↪needs sage.modules
[1 0][1 0 0]
[0 1][0 1 0]
     [0 0 1]
```

```
>>> from sage.all import *
>>> ascii_art(ident(Integer(2)), baseline=-Integer(1)) + ascii_
↪art(ident(Integer(3)))                    # needs sage.modules
[1 0][1 0 0]
[0 1][0 1 0]
     [0 0 1]
```

We can determine the baseline of the separator:

```
sage: ascii_art(ident(1), ident(2), ident(3), sep=' -- ', sep_baseline=-1)      #␣
↪needs sage.modules
                [1 0 0]
    -- [1 0] -- [0 1 0]
[1]     [0 1]     [0 0 1]
```

```
>>> from sage.all import *
>>> ascii_art(ident(Integer(1)), ident(Integer(2)), ident(Integer(3)), sep=' -- ',
↪ sep_baseline=-Integer(1))      # needs sage.modules
                [1 0 0]
    -- [1 0] -- [0 1 0]
[1]     [0 1]     [0 0 1]
```

If specified, the `sep_baseline` overrides the baseline of an ascii art separator:

```
sage: sep_line = ascii_art('\n'.join(' | ' for _ in range(6)), baseline=6)
sage: ascii_art(*Partitions(6), separator=sep_line, sep_baseline=0)             #␣
↪needs sage.combinat sage.libs.flint
       |       |      |      |     |     |     |    |    |    | *
       |       |      |      |     |     |     |    |    | ** | *
       |       |      |      |     |     | *** |    | ** | *  | *
       |       |      | **** |     | *** | *   | ** | ** | *  | *
       | ***** | **** | *    | *** | **  | *   | ** | *  | *  | *
****** | *     | **   | *    | *** | *   | *   | ** | *  | *  | *
```

```
>>> from sage.all import *
>>> sep_line = ascii_art('\n'.join(' | ' for _ in range(Integer(6))),␣
↪baseline=Integer(6))
>>> ascii_art(*Partitions(Integer(6)), separator=sep_line, sep_
↪baseline=Integer(0))              # needs sage.combinat sage.libs.flint
       |       |      |      |     |     |     |    |    |    | *
       |       |      |      |     |     |     |    |    | ** | *
       |       |      |      |     |     | *** |    | ** | *  | *
       |       |      | **** |     | *** | *   | ** | ** | *  | *
       | ***** | **** | *    | *** | **  | *   | ** | *  | *  | *
****** | *     | **   | *    | *** | *   | *   | ** | *  | *  | *
```

4.1.5 Unicode Art

This module implements ascii art using unicode characters. It is a strict superset of *ascii_art*.

class sage.typeset.unicode_art.**UnicodeArt**(*lines=[]*, *breakpoints=[]*, *baseline=None*)

Bases: *CharacterArt*

An Ascii art object is an object with some specific representation for *printing*.

INPUT:

- `lines` – the list of lines of the representation of the ascii art object
- `breakpoints` – the list of points where the representation can be split
- `baseline` – the reference line (from the bottom)

EXAMPLES:

```
sage: i = var('i')                                                          #␣
↪needs sage.symbolic
sage: unicode_art(sum(pi^i/factorial(i)*x^i, i, 0, oo))                     #␣
↪needs sage.symbolic
 ∞
 ___
 ╲
  ╲   π·x
  ╱  ℯ
 ╱
 ‾‾‾
i = 0
```

```
>>> from sage.all import *
>>> i = var('i')                                                          #␣
↪needs sage.symbolic
>>> unicode_art(sum(pi**i/factorial(i)*x**i, i, Integer(0), oo))          ␣
↪       # needs sage.symbolic
 ∞
 ___
 ╲
  ╲   π·x
  ╱  ℯ
 ╱
 ‾‾‾
i = 0
```

sage.typeset.unicode_art.**unicode_art**(**obj*, ***kwds*)

Return an unicode art representation.

INPUT:

- `*obj` – any number of positional arguments, of arbitrary type. The objects whose ascii art representation we want.
- `sep` – (optional) `'sep=...'` keyword argument (or `'separator'`). Anything that can be converted to unicode art (default: empty unicode art). The separator in-between a list of objects. Only used if more than one object given.
- `baseline` – (default: 0) the baseline for the object
- `sep_baseline` – (default: 0) the baseline for the separator

OUTPUT: *UnicodeArt* instance

EXAMPLES:

```
sage: result = unicode_art(integral(exp(sqrt(x))/(x+pi), x))                #␣
↪needs sage.symbolic
...
sage: result                                                                #␣
↪needs sage.symbolic
    ⌠
```

(continues on next page)

(continued from previous page)

```
    ⎮   √x
    ⎮  e
    ⎮ ──── dx
    ⎮ x + π
    ⌡
sage: ident = lambda n: identity_matrix(ZZ, n)
sage: unicode_art(ident(1), ident(2), ident(3), sep=' : ')                    #␣
↪needs sage.modules
              ⎛1 0 0⎞
      ⎛1 0⎞   ⎜0 1 0⎟
(1) : ⎝0 1⎠ : ⎝0 0 1⎠
```

```
>>> from sage.all import *
>>> result = unicode_art(integral(exp(sqrt(x))/(x+pi), x))                   #␣
↪needs sage.symbolic
...
>>> result                                                                   #␣
↪needs sage.symbolic
    ⌠
    ⎮   √x
    ⎮  e
    ⎮ ──── dx
    ⎮ x + π
    ⌡
>>> ident = lambda n: identity_matrix(ZZ, n)
>>> unicode_art(ident(Integer(1)), ident(Integer(2)), ident(Integer(3)), sep=' :
↪')                        # needs sage.modules
              ⎛1 0 0⎞
      ⎛1 0⎞   ⎜0 1 0⎟
(1) : ⎝0 1⎠ : ⎝0 0 1⎠
```

If specified, the `sep_baseline` overrides the baseline of an unicode art separator:

```
sage: sep_line = unicode_art('\n'.join(' | ' for _ in range(5)), baseline=5)
sage: unicode_art(*AlternatingSignMatrices(3),                               #␣
↪needs sage.combinat sage.modules
....:             separator=sep_line, sep_baseline=1)
        |         |         |           |         |         |
⎛1 0 0⎞ | ⎛0 1 0⎞ | ⎛1 0 0⎞ | ⎛ 0  1  0⎞ | ⎛0 0 1⎞ | ⎛0 1 0⎞ | ⎛0 0 1⎞
⎜0 1 0⎟ | ⎜1 0 0⎟ | ⎜0 0 1⎟ | ⎜ 1 -1  1⎟ | ⎜1 0 0⎟ | ⎜0 0 1⎟ | ⎜0 1 0⎟
⎝0 0 1⎠ | ⎝0 0 1⎠ | ⎝0 1 0⎠ | ⎝ 0  1  0⎠ | ⎝0 1 0⎠ | ⎝1 0 0⎠ | ⎝1 0 0⎠
        |         |         |           |         |         |
```

```
>>> from sage.all import *
>>> sep_line = unicode_art('\n'.join(' | ' for _ in range(Integer(5))),␣
↪baseline=Integer(5))
>>> unicode_art(*AlternatingSignMatrices(Integer(3)),                        ␣
↪     # needs sage.combinat sage.modules
...             separator=sep_line, sep_baseline=Integer(1))
        |         |         |           |         |         |
⎛1 0 0⎞ | ⎛0 1 0⎞ | ⎛1 0 0⎞ | ⎛ 0  1  0⎞ | ⎛0 0 1⎞ | ⎛0 1 0⎞ | ⎛0 0 1⎞
⎜0 1 0⎟ | ⎜1 0 0⎟ | ⎜0 0 1⎟ | ⎜ 1 -1  1⎟ | ⎜1 0 0⎟ | ⎜0 0 1⎟ | ⎜0 1 0⎟
```

(continues on next page)

(continued from previous page)

```
⎛0  0  1⎞  ⎛0  0  1⎞  ⎛0  1  0⎞  ⎛ 0   1   0⎞  ⎛0  1  0⎞  ⎛1  0  0⎞  ⎛1  0  0⎞
⎜       ⎟  ⎜       ⎟  ⎜       ⎟  ⎜         ⎟  ⎜       ⎟  ⎜       ⎟  ⎜       ⎟
```

sage.typeset.unicode_art.**unicode_subscript**(*x*)

Return the integer `x` as a superscript.

EXAMPLES:

```
sage: from sage.typeset.unicode_art import unicode_subscript
sage: unicode_subscript(15123902)
'₁₅₁₂₃₉₀₂'
sage: unicode_subscript(-712)
'₋₇₁₂'
```

```
>>> from sage.all import *
>>> from sage.typeset.unicode_art import unicode_subscript
>>> unicode_subscript(Integer(15123902))
'₁₅₁₂₃₉₀₂'
>>> unicode_subscript(-Integer(712))
'₋₇₁₂'
```

sage.typeset.unicode_art.**unicode_superscript**(*x*)

Return the rational number `x` as a superscript.

EXAMPLES:

```
sage: from sage.typeset.unicode_art import unicode_superscript
sage: unicode_superscript(15123902)
'¹⁵¹²³⁹⁰²'
sage: unicode_superscript(-712/5)
'⁻⁷¹²/⁵'
```

```
>>> from sage.all import *
>>> from sage.typeset.unicode_art import unicode_superscript
>>> unicode_superscript(Integer(15123902))
'¹⁵¹²³⁹⁰²'
>>> unicode_superscript(-Integer(712)/Integer(5))
'⁻⁷¹²/⁵'
```

4.1.6 Unicode Characters

This module provides Python identifiers for Unicode characters corresponding to various mathematical symbols.

The syntax is `unicode_XXX`, where `XXX` is the LaTeX name of the symbol, stripped of any backslash or any curly brace (e.g. `unicode_mathbbR` for `ℝ`).

EXAMPLES:

Operators:

```
sage: from sage.typeset.unicode_characters import unicode_otimes
sage: unicode_otimes
'⊗'
sage: hex(ord(_))
```

(continues on next page)

(continued from previous page)

```
'0x2297'
sage: from sage.typeset.unicode_characters import unicode_bigotimes
sage: unicode_bigotimes
'⨂'
sage: hex(ord(_))
'0x2a02'
sage: from sage.typeset.unicode_characters import unicode_wedge
sage: unicode_wedge
'∧'
sage: hex(ord(_))
'0x2227'
sage: from sage.typeset.unicode_characters import unicode_bigwedge
sage: unicode_bigwedge
'⋀'
sage: hex(ord(_))
'0x22c0'
sage: from sage.typeset.unicode_characters import unicode_partial
sage: unicode_partial
'∂'
sage: hex(ord(_))
'0x2202'
```

```
>>> from sage.all import *
>>> from sage.typeset.unicode_characters import unicode_otimes
>>> unicode_otimes
'⊗'
>>> hex(ord(_))
'0x2297'
>>> from sage.typeset.unicode_characters import unicode_bigotimes
>>> unicode_bigotimes
'⨂'
>>> hex(ord(_))
'0x2a02'
>>> from sage.typeset.unicode_characters import unicode_wedge
>>> unicode_wedge
'∧'
>>> hex(ord(_))
'0x2227'
>>> from sage.typeset.unicode_characters import unicode_bigwedge
>>> unicode_bigwedge
'⋀'
>>> hex(ord(_))
'0x22c0'
>>> from sage.typeset.unicode_characters import unicode_partial
>>> unicode_partial
'∂'
>>> hex(ord(_))
'0x2202'
```

Arrows:

```
sage: from sage.typeset.unicode_characters import unicode_to
```

(continues on next page)

(continued from previous page)

```
sage: unicode_to
'→'
sage: hex(ord(_))
'0x2192'
sage: from sage.typeset.unicode_characters import unicode_mapsto
sage: unicode_mapsto
'↦'
sage: hex(ord(_))
'0x21a6'
```

```
>>> from sage.all import *
>>> from sage.typeset.unicode_characters import unicode_to
>>> unicode_to
'→'
>>> hex(ord(_))
'0x2192'
>>> from sage.typeset.unicode_characters import unicode_mapsto
>>> unicode_mapsto
'↦'
>>> hex(ord(_))
'0x21a6'
```

Letters:

```
sage: from sage.typeset.unicode_characters import unicode_mathbbR
sage: unicode_mathbbR
'ℝ'
sage: hex(ord(_))
'0x211d'
sage: from sage.typeset.unicode_characters import unicode_mathbbC
sage: unicode_mathbbC
'ℂ'
sage: hex(ord(_))
'0x2102'
```

```
>>> from sage.all import *
>>> from sage.typeset.unicode_characters import unicode_mathbbR
>>> unicode_mathbbR
'ℝ'
>>> hex(ord(_))
'0x211d'
>>> from sage.typeset.unicode_characters import unicode_mathbbC
>>> unicode_mathbbC
'ℂ'
>>> hex(ord(_))
'0x2102'
```

4.1.7 Repr formatting support

sage.misc.repr.**coeff_repr**(*c*, *is_latex=False*)

String representing coefficients in a linear combination.

INPUT:

- `c` – a coefficient (i.e., an element of a ring)

OUTPUT: string

EXAMPLES:

```
sage: from sage.misc.repr import coeff_repr
sage: coeff_repr(QQ(1/2))
'1/2'
sage: coeff_repr(-x^2)                                                          #␣
↪needs sage.symbolic
'(-x^2)'
sage: coeff_repr(QQ(1/2), is_latex=True)
'\\frac{1}{2}'
sage: coeff_repr(-x^2, is_latex=True)                                           #␣
↪needs sage.symbolic
'\\left(-x^{2}\\right)'
```

```
>>> from sage.all import *
>>> from sage.misc.repr import coeff_repr
>>> coeff_repr(QQ(Integer(1)/Integer(2)))
'1/2'
>>> coeff_repr(-x**Integer(2))                                                  ␣
↪      # needs sage.symbolic
'(-x^2)'
>>> coeff_repr(QQ(Integer(1)/Integer(2)), is_latex=True)
'\\frac{1}{2}'
>>> coeff_repr(-x**Integer(2), is_latex=True)                                   ␣
↪      # needs sage.symbolic
'\\left(-x^{2}\\right)'
```

sage.misc.repr.**repr_lincomb**(*terms*, *is_latex=False*, *scalar_mult='*'*, *strip_one=False*, *repr_monomial=None*, *latex_scalar_mult=None*)

Compute a string representation of a linear combination of some formal symbols.

INPUT:

- `terms` – list of terms, as pairs (support, coefficient)
- `is_latex` – whether to produce latex (default: `False`)
- `scalar_mult` – string representing the multiplication (default: `'*'`)
- `latex_scalar_mult` – latex string representing the multiplication (default: a space if `scalar_mult` is `'*'`; otherwise `scalar_mult`)
- `coeffs` – for backward compatibility

EXAMPLES:

```
sage: repr_lincomb([('a',1), ('b',-2), ('c',3)])
'a - 2*b + 3*c'
sage: repr_lincomb([('a',0), ('b',-2), ('c',3)])
'-2*b + 3*c'
sage: repr_lincomb([('a',0), ('b',2), ('c',3)])
'2*b + 3*c'
sage: repr_lincomb([('a',1), ('b',0), ('c',3)])
'a + 3*c'
sage: repr_lincomb([('a',-1), ('b','2+3*x'), ('c',3)])
'-a + (2+3*x)*b + 3*c'
sage: repr_lincomb([('a', '1+x^2'), ('b', '2+3*x'), ('c', 3)])
'(1+x^2)*a + (2+3*x)*b + 3*c'
sage: repr_lincomb([('a', '1+x^2'), ('b', '-2+3*x'), ('c', 3)])
'(1+x^2)*a + (-2+3*x)*b + 3*c'
sage: repr_lincomb([('a', 1), ('b', -2), ('c', -3)])
'a - 2*b - 3*c'
sage: t = PolynomialRing(RationalField(),'t').gen()
sage: repr_lincomb([('a', -t), ('s', t - 2), ('', t^2 + 2)])
'-t*a + (t-2)*s + (t^2+2)'
```

```
>>> from sage.all import *
>>> repr_lincomb([('a',Integer(1)), ('b',-Integer(2)), ('c',Integer(3))])
'a - 2*b + 3*c'
>>> repr_lincomb([('a',Integer(0)), ('b',-Integer(2)), ('c',Integer(3))])
'-2*b + 3*c'
>>> repr_lincomb([('a',Integer(0)), ('b',Integer(2)), ('c',Integer(3))])
'2*b + 3*c'
>>> repr_lincomb([('a',Integer(1)), ('b',Integer(0)), ('c',Integer(3))])
'a + 3*c'
>>> repr_lincomb([('a',-Integer(1)), ('b','2+3*x'), ('c',Integer(3))])
'-a + (2+3*x)*b + 3*c'
>>> repr_lincomb([('a', '1+x^2'), ('b', '2+3*x'), ('c', Integer(3))])
'(1+x^2)*a + (2+3*x)*b + 3*c'
>>> repr_lincomb([('a', '1+x^2'), ('b', '-2+3*x'), ('c', Integer(3))])
'(1+x^2)*a + (-2+3*x)*b + 3*c'
>>> repr_lincomb([('a', Integer(1)), ('b', -Integer(2)), ('c', -Integer(3))])
'a - 2*b - 3*c'
>>> t = PolynomialRing(RationalField(),'t').gen()
>>> repr_lincomb([('a', -t), ('s', t - Integer(2)), ('', t**Integer(2) +␣
↪Integer(2))])
'-t*a + (t-2)*s + (t^2+2)'
```

Examples for `scalar_mult`:

```
sage: repr_lincomb([('a',1), ('b',2), ('c',3)], scalar_mult='*')
'a + 2*b + 3*c'
sage: repr_lincomb([('a',2), ('b',0), ('c',-3)], scalar_mult='**')
'2**a - 3**c'
sage: repr_lincomb([('a',-1), ('b',2), ('c',3)], scalar_mult='**')
'-a + 2**b + 3**c'
```

```
>>> from sage.all import *
```

(continues on next page)

(continued from previous page)

```
>>> repr_lincomb([('a',Integer(1)), ('b',Integer(2)), ('c',Integer(3))], scalar_
↪mult='*')
'a + 2*b + 3*c'
>>> repr_lincomb([('a',Integer(2)), ('b',Integer(0)), ('c',-Integer(3))], scalar_
↪mult='**')
'2**a - 3**c'
>>> repr_lincomb([('a',-Integer(1)), ('b',Integer(2)), ('c',Integer(3))], scalar_
↪mult='**')
'-a + 2**b + 3**c'
```

Examples for `scalar_mult` and `is_latex`:

```
sage: repr_lincomb([('a',-1), ('b',2), ('c',3)], is_latex=True)
'-a + 2 b + 3 c'
sage: repr_lincomb([('a',-1), ('b',-1), ('c',3)], is_latex=True, scalar_mult='*')
'-a - b + 3 c'
sage: repr_lincomb([('a',-1), ('b',2), ('c',-3)], is_latex=True, scalar_mult='**')
'-a + 2**b - 3**c'
sage: repr_lincomb([('a',-2), ('b',-1), ('c',-3)], is_latex=True, latex_scalar_
↪mult='*')
'-2*a - b - 3*c'
sage: repr_lincomb([('a',-2), ('b',-1), ('c',-3)], is_latex=True, latex_scalar_
↪mult='')
'-2a - b - 3c'
```

```
>>> from sage.all import *
>>> repr_lincomb([('a',-Integer(1)), ('b',Integer(2)), ('c',Integer(3))], is_
↪latex=True)
'-a + 2 b + 3 c'
>>> repr_lincomb([('a',-Integer(1)), ('b',-Integer(1)), ('c',Integer(3))], is_
↪latex=True, scalar_mult='*')
'-a - b + 3 c'
>>> repr_lincomb([('a',-Integer(1)), ('b',Integer(2)), ('c',-Integer(3))], is_
↪latex=True, scalar_mult='**')
'-a + 2**b - 3**c'
>>> repr_lincomb([('a',-Integer(2)), ('b',-Integer(1)), ('c',-Integer(3))], is_
↪latex=True, latex_scalar_mult='*')
'-2*a - b - 3*c'
>>> repr_lincomb([('a',-Integer(2)), ('b',-Integer(1)), ('c',-Integer(3))], is_
↪latex=True, latex_scalar_mult='')
'-2a - b - 3c'
```

Examples for `strip_one`:

```
sage: repr_lincomb([ ('a',1), (1,-2), ('3',3) ])
'a - 2*1 + 3*3'
sage: repr_lincomb([ ('a',-1), (1,1), ('3',3) ])
'-a + 1 + 3*3'
sage: repr_lincomb([ ('a',1), (1,-2), ('3',3) ], strip_one = True)
'a - 2 + 3*3'
sage: repr_lincomb([ ('a',-1), (1,1), ('3',3) ], strip_one = True)
'-a + 1 + 3*3'
```

(continues on next page)

(continued from previous page)

```
sage: repr_lincomb([ ('a',1), (1,-1), ('3',3) ], strip_one = True)
'a - 1 + 3*3'
```

```
>>> from sage.all import *
>>> repr_lincomb([ ('a',Integer(1)), (Integer(1),-Integer(2)), ('3',Integer(3)) ])
'a - 2*1 + 3*3'
>>> repr_lincomb([ ('a',-Integer(1)), (Integer(1),Integer(1)), ('3',Integer(3)) ])
'-a + 1 + 3*3'
>>> repr_lincomb([ ('a',Integer(1)), (Integer(1),-Integer(2)), ('3',Integer(3)) ],
↪ strip_one = True)
'a - 2 + 3*3'
>>> repr_lincomb([ ('a',-Integer(1)), (Integer(1),Integer(1)), ('3',Integer(3)) ],
↪ strip_one = True)
'-a + 1 + 3*3'
>>> repr_lincomb([ ('a',Integer(1)), (Integer(1),-Integer(1)), ('3',Integer(3)) ],
↪ strip_one = True)
'a - 1 + 3*3'
```

Examples for `repr_monomial`:

```
sage: repr_lincomb([('a',1), ('b',2), ('c',3)], repr_monomial = lambda s: s+"1")
'a1 + 2*b1 + 3*c1'
```

```
>>> from sage.all import *
>>> repr_lincomb([('a',Integer(1)), ('b',Integer(2)), ('c',Integer(3))], repr_
↪monomial = lambda s: s+"1")
'a1 + 2*b1 + 3*c1'
```

4.1.8 Sage Input Formatting

This module provides the function *sage_input()* that takes an arbitrary sage value and produces a sequence of commands that, if typed at the `sage:` prompt, will recreate the value. If this is not implemented for a particular value, then an exception is raised instead. This might be useful in understanding a part of Sage, or for debugging. For instance, if you have a value produced in a complicated way in the middle of a debugging session, you could use *sage_input()* to find a simple way to produce the same value. We attempt to produce commands that are readable and idiomatic.:

```
sage: sage_input(3)
3
sage: sage_input((polygen(RR) + RR(pi))^2, verify=True)                    #␣
↪needs sage.symbolic
# Verified
R.<x> = RR[]
x^2 + 6.2831853071795862*x + 9.869604401089358
```

```
>>> from sage.all import *
>>> sage_input(Integer(3))
3
>>> sage_input((polygen(RR) + RR(pi))**Integer(2), verify=True)              ␣
↪       # needs sage.symbolic
# Verified
R.<x> = RR[]
x^2 + 6.2831853071795862*x + 9.869604401089358
```

With `verify=True`, *`sage_input()`* also verifies the results, by calling *`sage_eval()`* on the result and verifying that it is equal to the input.:

```
sage: sage_input(GF(2)(1), verify=True)
# Verified
GF(2)(1)
```

```
>>> from sage.all import *
>>> sage_input(GF(Integer(2))(Integer(1)), verify=True)
# Verified
GF(2)(1)
```

We can generate code that works without the preparser, with `preparse=False`; or we can generate code that will work whether or not the preparser is enabled, with `preparse=None`. Generating code with `preparse=False` may be useful to see how to create a certain value in a Python or Cython source file.:

```
sage: sage_input(5, verify=True)
# Verified
5
sage: sage_input(5, preparse=False)
ZZ(5)
sage: sage_input(5, preparse=None)
ZZ(5)
sage: sage_input(5r, verify=True)
# Verified
5r
sage: sage_input(5r, preparse=False)
5
sage: sage_input(5r, preparse=None)
int(5)
```

```
>>> from sage.all import *
>>> sage_input(Integer(5), verify=True)
# Verified
5
>>> sage_input(Integer(5), preparse=False)
ZZ(5)
>>> sage_input(Integer(5), preparse=None)
ZZ(5)
>>> sage_input(5, verify=True)
# Verified
5r
>>> sage_input(5, preparse=False)
5
>>> sage_input(5, preparse=None)
int(5)
```

Adding *`sage_input()`* support to your own classes is straightforward. You need to add a `_sage_input_()` method which returns a *`SageInputExpression`* (henceforth abbreviated as SIE) which will reconstruct this instance of your class.

A `_sage_input_` method takes two parameters, conventionally named `sib` and `coerced`. The first argument is a *`SageInputBuilder`*; it has methods to build SIEs. The second argument, `coerced`, is a boolean. This is only useful if your class is a subclass of `Element` (although it is always present). If `coerced` is `False`, then your method must

generate an expression which will evaluate to a value of the correct type with the correct parent. If `coerced` is `True`, then your method may generate an expression of a type that has a canonical coercion to your type; and if `coerced` is 2, then your method may generate an expression of a type that has a conversion to your type.

Let's work through some examples. We'll build a sequence of functions that would be acceptable as `_sage_input_` methods for the `Rational` class.

Here's the first and simplest version.:

```
sage: def qq_sage_input_v1(self, sib, coerced):
....:     return sib(self.numerator())/sib(self.denominator())
```

```
>>> from sage.all import *
>>> def qq_sage_input_v1(self, sib, coerced):
...     return sib(self.numerator())/sib(self.denominator())
```

We see that given a *SageInputBuilder* `sib`, you can construct a SIE for a value `v` simply with `sib(v)`, and you can construct a SIE for a quotient with the division operator. Of course, the other operators also work, and so do function calls, method calls, subscripts, etc.

We'll test with the following code, which you don't need to understand. (It produces a list of 8 results, showing the formatted versions of -5/7 and 3, with the preparser either enabled or disabled and either with or without an automatic coercion to QQ.):

```
sage: from sage.misc.sage_input import SageInputBuilder
sage: def test_qq_formatter(fmt):
....:     results = []
....:     for v in [-5/7, QQ(3)]:
....:         for pp in [False, True]:
....:             for coerced in [False, True]:
....:                 sib = SageInputBuilder(preparse=pp)
....:                 results.append(sib.result(fmt(v, sib, coerced)))
....:     return results

sage: test_qq_formatter(qq_sage_input_v1)
[-ZZ(5)/ZZ(7), -ZZ(5)/ZZ(7), -5/7, -5/7, ZZ(3)/ZZ(1), ZZ(3)/ZZ(1), 3/1, 3/1]
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder
>>> def test_qq_formatter(fmt):
...     results = []
...     for v in [-Integer(5)/Integer(7), QQ(Integer(3))]:
...         for pp in [False, True]:
...             for coerced in [False, True]:
...                 sib = SageInputBuilder(preparse=pp)
...                 results.append(sib.result(fmt(v, sib, coerced)))
...     return results

>>> test_qq_formatter(qq_sage_input_v1)
[-ZZ(5)/ZZ(7), -ZZ(5)/ZZ(7), -5/7, -5/7, ZZ(3)/ZZ(1), ZZ(3)/ZZ(1), 3/1, 3/1]
```

Let's try for some shorter, perhaps nicer-looking output. We'll start by getting rid of the `ZZ` in the denominators; even without the preparser, `-ZZ(5)/7 == -ZZ(5)/ZZ(7)`.:

```
sage: def qq_sage_input_v2(self, sib, coerced):
....:     return sib(self.numerator())/sib.int(self.denominator())
```

```
>>> from sage.all import *
>>> def qq_sage_input_v2(self, sib, coerced):
...     return sib(self.numerator())/sib.int(self.denominator())
```

The `int` method on *SageInputBuilder* returns a SIE for an integer that is always represented in the simple way, without coercions. (So, depending on the preparser mode, it might read in as an `Integer` or an `int`.):

```
sage: test_qq_formatter(qq_sage_input_v2)
[-ZZ(5)/7, -ZZ(5)/7, -5/7, -5/7, ZZ(3)/1, ZZ(3)/1, 3/1, 3/1]
```

```
>>> from sage.all import *
>>> test_qq_formatter(qq_sage_input_v2)
[-ZZ(5)/7, -ZZ(5)/7, -5/7, -5/7, ZZ(3)/1, ZZ(3)/1, 3/1, 3/1]
```

Next let us get rid of the divisions by 1. These are more complicated, since if we are not careful we will get results in **Z** instead of **Q**:

```
sage: def qq_sage_input_v3(self, sib, coerced):
....:     if self.denominator() == 1:
....:         if coerced:
....:             return sib.int(self.numerator())
....:         else:
....:             return sib.name('QQ')(sib.int(self.numerator()))
....:     return sib(self.numerator())/sib.int(self.denominator())
```

```
>>> from sage.all import *
>>> def qq_sage_input_v3(self, sib, coerced):
...     if self.denominator() == Integer(1):
...         if coerced:
...             return sib.int(self.numerator())
...         else:
...             return sib.name('QQ')(sib.int(self.numerator()))
...     return sib(self.numerator())/sib.int(self.denominator())
```

We see that the method{name} method gives an SIE representing a sage constant or function.:

```
sage: test_qq_formatter(qq_sage_input_v3)
[-ZZ(5)/7, -ZZ(5)/7, -5/7, -5/7, QQ(3), 3, QQ(3), 3]
```

```
>>> from sage.all import *
>>> test_qq_formatter(qq_sage_input_v3)
[-ZZ(5)/7, -ZZ(5)/7, -5/7, -5/7, QQ(3), 3, QQ(3), 3]
```

This is the prettiest output we're going to get, but let's make one further refinement. Other `_sage_input_` methods, like the one for polynomials, analyze the structure of SIEs; they work better (give prettier output) if negations are at the outside. If the above code were used for rationals, then `sage_input(polygen(QQ) - 2/3)` would produce `x + (-2/3)`; if we change to the following code, then we would get `x - 2/3` instead.:

```
sage: def qq_sage_input_v4(self, sib, coerced):
....:     num = self.numerator()
....:     neg = (num < 0)
....:     if neg: num = -num
....:     if self.denominator() == 1:
....:         if coerced:
....:             v = sib.int(num)
....:         else:
....:             v = sib.name('QQ')(sib.int(num))
....:     else:
....:         v = sib(num)/sib.int(self.denominator())
....:     if neg: v = -v
....:     return v

sage: test_qq_formatter(qq_sage_input_v4)
[-ZZ(5)/7, -ZZ(5)/7, -5/7, -5/7, QQ(3), 3, QQ(3), 3]
```

```
>>> from sage.all import *
>>> def qq_sage_input_v4(self, sib, coerced):
...     num = self.numerator()
...     neg = (num < Integer(0))
...     if neg: num = -num
...     if self.denominator() == Integer(1):
...         if coerced:
...             v = sib.int(num)
...         else:
...             v = sib.name('QQ')(sib.int(num))
...     else:
...         v = sib(num)/sib.int(self.denominator())
...     if neg: v = -v
...     return v

>>> test_qq_formatter(qq_sage_input_v4)
[-ZZ(5)/7, -ZZ(5)/7, -5/7, -5/7, QQ(3), 3, QQ(3), 3]
```

AUTHORS:

- Carl Witty (2008-04): new file
- Vincent Delecroix (2015-02): documentation formatting

class sage.misc.sage_input.**SIE_assign**(*sib*, *lhs*, *rhs*)

Bases: *SageInputExpression*

This class represents an assignment command.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.assign(sib.name('foo').x, sib.name('pi'))
{assign: {getattr: {atomic:foo}.x} {atomic:pi}}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.assign(sib.name('foo').x, sib.name('pi'))
{assign: {getattr: {atomic:foo}.x} {atomic:pi}}
```

class sage.misc.sage_input.**SIE_binary**(*sib*, *op*, *lhs*, *rhs*)

Bases: *SageInputExpression*

This class represents an arithmetic expression with a binary operator and its two arguments, in a *sage_input()* expression tree.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib(3)+5
{binop:+ {atomic:3} {atomic:5}}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib(Integer(3))+Integer(5)
{binop:+ {atomic:3} {atomic:5}}
```

class sage.misc.sage_input.**SIE_call**(*sib*, *func*, *args*, *kwargs*)

Bases: *SageInputExpression*

This class represents a function-call node in a *sage_input()* expression tree.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sie = sib.name('GF')
sage: sie(49)
{call: {atomic:GF}({atomic:49})}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sie = sib.name('GF')
>>> sie(Integer(49))
{call: {atomic:GF}({atomic:49})}
```

class sage.misc.sage_input.**SIE_dict**(*sib*, *entries*)

Bases: *SageInputExpression*

This class represents a dict node in a *sage_input()* expression tree.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.dict([('TeX', RR(pi)), ('Metafont', RR(e))])                          #␣
↪needs sage.symbolic
{dict: {{atomic:'TeX'}:{call: {atomic:RR}({atomic:3.1415926535897931})},
        {atomic:'Metafont'}:{call: {atomic:RR}({atomic:2.7182818284590451})}}}
sage: sib.dict({-40:-40, 0:32, 100:212})
{dict: {{unop:- {atomic:40}}:{unop:- {atomic:40}},
        {atomic:0}:{atomic:32}, {atomic:100}:{atomic:212}}}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.dict([('TeX', RR(pi)), ('Metafont', RR(e))])                            #␣
↪needs sage.symbolic
{dict: {{atomic:'TeX'}:{call: {atomic:RR}({atomic:3.1415926535897931})},
        {atomic:'Metafont'}:{call: {atomic:RR}({atomic:2.7182818284590451})}}}
>>> sib.dict({-Integer(40):-Integer(40), Integer(0):Integer(32),␣
↪Integer(100):Integer(212)})
{dict: {{unop:- {atomic:40}}:{unop:- {atomic:40}},
        {atomic:0}:{atomic:32}, {atomic:100}:{atomic:212}}}
```

class sage.misc.sage_input.**SIE_gen**(*sib*, *parent*, *name*)

Bases: *SageInputExpression*

This class represents a named generator of a parent with named generators.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.gen(ZZ['x'])
{gen:x {constr_parent: {subscr: {atomic:ZZ}[{atomic:'x'}]} with gens: ('x',)}}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.gen(ZZ['x'])
{gen:x {constr_parent: {subscr: {atomic:ZZ}[{atomic:'x'}]} with gens: ('x',)}}
```

class sage.misc.sage_input.**SIE_gens_constructor**(*sib*, *constr*, *gen_names*, *gens_syntax=None*)

Bases: *SageInputExpression*

This class represents an expression that can create a sage parent with named generators, optionally using the sage preparser generators syntax (like `K.<x> = QQ[]`).

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder
```

(continues on next page)

(continued from previous page)

```
sage: sib = SageInputBuilder()
sage: qq = sib.name('QQ')
sage: sib.parent_with_gens("some parent", qq['x'],
....:                      ('x',), 'QQx',
....:                      gens_syntax=sib.empty_subscript(qq))
{constr_parent: {subscr: {atomic:QQ}[{atomic:'x'}]} with gens: ('x',)}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> qq = sib.name('QQ')
>>> sib.parent_with_gens("some parent", qq['x'],
...                      ('x',), 'QQx',
...                      gens_syntax=sib.empty_subscript(qq))
{constr_parent: {subscr: {atomic:QQ}[{atomic:'x'}]} with gens: ('x',)}
```

class sage.misc.sage_input.**SIE_getattr**(*sib*, *obj*, *attr*)

Bases: *SageInputExpression*

This class represents a getattr node in a *sage_input()* expression tree.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sie = sib.name('CC').gen()
sage: sie
{call: {getattr: {atomic:CC}.gen}()}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sie = sib.name('CC').gen()
>>> sie
{call: {getattr: {atomic:CC}.gen}()}
```

class sage.misc.sage_input.**SIE_import_name**(*sib*, *module*, *name*, *alt_name=None*)

Bases: *SageInputExpression*

This class represents a name which has been imported from a module.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.import_name('sage.rings.integer', 'make_integer')
{import:sage.rings.integer/make_integer}
sage: sib.import_name('sage.foo', 'happy', 'sad')
{import:sage.foo/happy as sad}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.import_name('sage.rings.integer', 'make_integer')
{import:sage.rings.integer/make_integer}
>>> sib.import_name('sage.foo', 'happy', 'sad')
{import:sage.foo/happy as sad}
```

class sage.misc.sage_input.**SIE_literal**(*sib*)

Bases: *SageInputExpression*

An abstract base class for `literals` (basically, values which consist of a single token).

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder, SIE_literal

sage: sib = SageInputBuilder()
sage: sie = sib(3)
sage: sie
{atomic:3}
sage: isinstance(sie, SIE_literal)
True
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder, SIE_literal

>>> sib = SageInputBuilder()
>>> sie = sib(Integer(3))
>>> sie
{atomic:3}
>>> isinstance(sie, SIE_literal)
True
```

class sage.misc.sage_input.**SIE_literal_stringrep**(*sib*, *n*)

Bases: *SIE_literal*

Values in this class are leaves in a *sage_input()* expression tree. Typically they represent a single token, and consist of the string representation of that token. They are used for integer, floating-point, and string literals, and for name expressions.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder, SIE_literal_stringrep

sage: sib = SageInputBuilder()
sage: isinstance(sib(3), SIE_literal_stringrep)
True
sage: isinstance(sib(3.14159, True), SIE_literal_stringrep)                    #␣
↪needs sage.rings.real_mpfr
True
sage: isinstance(sib.name('pi'), SIE_literal_stringrep)
True
```

(continues on next page)

(continued from previous page)

```
sage: isinstance(sib(False), SIE_literal_stringrep)
True
sage: sib(False)
{atomic:False}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder, SIE_literal_stringrep

>>> sib = SageInputBuilder()
>>> isinstance(sib(Integer(3)), SIE_literal_stringrep)
True
>>> isinstance(sib(RealNumber('3.14159'), True), SIE_literal_stringrep)
↪          # needs sage.rings.real_mpfr
True
>>> isinstance(sib.name('pi'), SIE_literal_stringrep)
True
>>> isinstance(sib(False), SIE_literal_stringrep)
True
>>> sib(False)
{atomic:False}
```

class sage.misc.sage_input.**SIE_subscript**(*sib*, *coll*, *key*)

Bases: *SageInputExpression*

This class represents a subscript node in a *sage_input()* expression tree.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sie = sib.name('QQ')['x,y']
sage: sie
{subscr: {atomic:QQ}[{atomic:'x,y'}]}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sie = sib.name('QQ')['x,y']
>>> sie
{subscr: {atomic:QQ}[{atomic:'x,y'}]}
```

class sage.misc.sage_input.**SIE_tuple**(*sib*, *values*, *is_list*)

Bases: *SageInputExpression*

This class represents a tuple or list node in a *sage_input()* expression tree.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
```

(continues on next page)

(continued from previous page)

```
sage: sib((1, 'howdy'))
{tuple: ({atomic:1}, {atomic:'howdy'})}
sage: sib(["lists"])
{list: ({atomic:'lists'})}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib((Integer(1), 'howdy'))
{tuple: ({atomic:1}, {atomic:'howdy'})}
>>> sib(["lists"])
{list: ({atomic:'lists'})}
```

class sage.misc.sage_input.**SIE_unary**(*sib*, *op*, *operand*)

Bases: *SageInputExpression*

This class represents an arithmetic expression with a unary operator and its argument, in a *sage_input()* expression tree.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: -sib(256)
{unop:- {atomic:256}}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> -sib(Integer(256))
{unop:- {atomic:256}}
```

class sage.misc.sage_input.**SageInputAnswer**(*cmds*, *expr*, *locals=None*)

Bases: tuple

This class inherits from tuple, so it acts like a tuple when passed to *sage_eval()*; but it prints as a sequence of commands.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputAnswer
sage: v = SageInputAnswer('x = 22\n', 'x/7'); v
x = 22
x/7
sage: isinstance(v, tuple)
True
sage: v[0]
'x = 22\n'
sage: v[1]
'x/7'
```

(continues on next page)

(continued from previous page)

```
sage: len(v)
2
sage: v = SageInputAnswer('', 'sin(3.14)', {'sin': math.sin}); v
LOCALS:
  sin: <built-in function sin>
sin(3.14)
sage: v[0]
''
sage: v[1]
'sin(3.14)'
sage: v[2]
{'sin': <built-in function sin>}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputAnswer
>>> v = SageInputAnswer('x = 22\n', 'x/7'); v
x = 22
x/7
>>> isinstance(v, tuple)
True
>>> v[Integer(0)]
'x = 22\n'
>>> v[Integer(1)]
'x/7'
>>> len(v)
2
>>> v = SageInputAnswer('', 'sin(3.14)', {'sin': math.sin}); v
LOCALS:
  sin: <built-in function sin>
sin(3.14)
>>> v[Integer(0)]
''
>>> v[Integer(1)]
'sin(3.14)'
>>> v[Integer(2)]
{'sin': <built-in function sin>}
```

class sage.misc.sage_input.**SageInputBuilder**(*allow_locals=False*, *preparse=True*)

Bases: object

An instance of this class is passed to _sage_input_ methods. It keeps track of the current state of the _sage_input_ process, and contains many utility methods for building *SageInputExpression* objects.

In normal use, instances of *SageInputBuilder* are created internally by *sage_input()*, but it may be useful to create an instance directly for testing or doctesting.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder
```

We can create a *SageInputBuilder*, use it to create some *SageInputExpression* s, and get a result. (As mentioned above, this is only useful for testing or doctesting; normally you would just use *sage_input()*.):

```
sage: sib = SageInputBuilder()
sage: sib.result((sib(3) + sib(4)) * (sib(5) + sib(6)))
(3 + 4)*(5 + 6)
```

```
>>> from sage.all import *
>>> sib = SageInputBuilder()
>>> sib.result((sib(Integer(3)) + sib(Integer(4))) * (sib(Integer(5)) +␣
↪sib(Integer(6))))
(3 + 4)*(5 + 6)
```

assign(*e*, *val*)

Construct a command that performs the assignment `e=val`.

Can only be used as an argument to the `command` method.

INPUT:

- `e`, `val` – SageInputExpression

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: circular = sib([None])
sage: sib.command(circular, sib.assign(circular[0], circular))
sage: sib.result(circular)
si = [None]
si[0] = si
si
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> circular = sib([None])
>>> sib.command(circular, sib.assign(circular[Integer(0)], circular))
>>> sib.result(circular)
si = [None]
si[0] = si
si
```

cache(*x*, *sie*, *name*)

INPUT:

- `x` – an arbitrary value
- `sie` – a *SageInputExpression*
- `name` – a requested variable name

Enters `x` and `sie` in a cache, so that subsequent calls `self(x)` will directly return `sie`. Also, marks the requested name of this `sie` to be `name`.

This should almost always be called as part of the method{_sage_input_} method of a parent. It may also be called on values of an arbitrary type, which may be useful if the values are both large and likely to be used multiple times in a single expression.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sie42 = sib(GF(101)(42))
sage: sib.cache(GF(101)(42), sie42, 'the_ultimate_answer')
sage: sib.result(sib(GF(101)(42)) + sib(GF(101)(42)))
the_ultimate_answer = GF(101)(42)
the_ultimate_answer + the_ultimate_answer
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sie42 = sib(GF(Integer(101))(Integer(42)))
>>> sib.cache(GF(Integer(101))(Integer(42)), sie42, 'the_ultimate_answer')
>>> sib.result(sib(GF(Integer(101))(Integer(42))) +␣
↪sib(GF(Integer(101))(Integer(42))))
the_ultimate_answer = GF(101)(42)
the_ultimate_answer + the_ultimate_answer
```

Note that we don't assign the result to a variable if the value is only used once.:

```
sage: sib = SageInputBuilder()
sage: sie42 = sib(GF(101)(42))
sage: sib.cache(GF(101)(42), sie42, 'the_ultimate_answer')
sage: sib.result(sib(GF(101)(42)) + sib(GF(101)(43)))
GF_101 = GF(101)
GF_101(42) + GF_101(43)
```

```
>>> from sage.all import *
>>> sib = SageInputBuilder()
>>> sie42 = sib(GF(Integer(101))(Integer(42)))
>>> sib.cache(GF(Integer(101))(Integer(42)), sie42, 'the_ultimate_answer')
>>> sib.result(sib(GF(Integer(101))(Integer(42))) +␣
↪sib(GF(Integer(101))(Integer(43))))
GF_101 = GF(101)
GF_101(42) + GF_101(43)
```

command(*v*, *cmd*)

INPUT:

- v, cmd – SageInputExpression

Attaches a command to v, which will be executed before v is used. Multiple commands will be executed in the order added.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: incr_list = sib([])
sage: sib.command(incr_list, incr_list.append(1))
sage: sib.command(incr_list, incr_list.extend([2, 3]))
sage: sib.result(incr_list)
si = []
si.append(1)
si.extend([2, 3])
si
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> incr_list = sib([])
>>> sib.command(incr_list, incr_list.append(Integer(1)))
>>> sib.command(incr_list, incr_list.extend([Integer(2), Integer(3)]))
>>> sib.result(incr_list)
si = []
si.append(1)
si.extend([2, 3])
si
```

dict (*entries*)

Given a dictionary, or a list of (key, value) pairs, produces a *SageInputExpression* representing the dictionary.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.result(sib.dict({1:1, 2:5/2, 3:100/3}))
{1:1, 2:5/2, 3:100/3}
sage: sib.result(sib.dict([('hello', 'sunshine'), ('goodbye', 'rain')]))
{'hello':'sunshine', 'goodbye':'rain'}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.result(sib.dict({Integer(1):Integer(1), Integer(2):Integer(5)/
↪Integer(2), Integer(3):Integer(100)/Integer(3)}))
{1:1, 2:5/2, 3:100/3}
>>> sib.result(sib.dict([('hello', 'sunshine'), ('goodbye', 'rain')]))
{'hello':'sunshine', 'goodbye':'rain'}
```

empty_subscript (*parent*)

Given a *SageInputExpression* representing `foo`, produces a *SageInputExpression* representing `foo[]`. Since this is not legal Python syntax, it is useful only for producing the sage generator syntax for a polynomial ring.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.result(sib.empty_subscript(sib(2) + sib(3)))
(2 + 3)[]
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.result(sib.empty_subscript(sib(Integer(2)) + sib(Integer(3))))
(2 + 3)[]
```

The following calls this method indirectly.:

```
sage: sage_input(polygen(ZZ['y']))
R.<x> = ZZ['y'][]
x
```

```
>>> from sage.all import *
>>> sage_input(polygen(ZZ['y']))
R.<x> = ZZ['y'][]
x
```

float_str(*n*)

Given a string representing a floating-point number, produces a *SageInputExpression* that formats as that string.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.result(sib.float_str(repr(RR(e))))                                #␣
↪needs sage.symbolic
2.71828182845905
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.result(sib.float_str(repr(RR(e))))                                  #␣
↪needs sage.symbolic
2.71828182845905
```

gen(*parent*, *n=0*)

Given a parent, returns a *SageInputExpression* for the n-th (default: 0) generator of the parent.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder
```

(continues on next page)

(continued from previous page)

```
sage: sib = SageInputBuilder()
sage: sib.result(sib.gen(ZZ['y']))
R.<y> = ZZ[]
y
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.result(sib.gen(ZZ['y']))
R.<y> = ZZ[]
y
```

getattr(*sie*, *attr*)

Given a *SageInputExpression* representing `foo` and an attribute name bar, produce a *SageInputExpression* representing `foo.bar`. Normally, you could just use attribute-access syntax, but that doesn't work if bar is some attribute that bypasses __getattr__ (such as if bar is '__getattr__' itself).

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.getattr(ZZ, '__getattr__')
{getattr: {atomic:ZZ}.__getattr__}
sage: sib.getattr(sib.name('foo'), '__new__')
{getattr: {atomic:foo}.__new__}
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.getattr(ZZ, '__getattr__')
{getattr: {atomic:ZZ}.__getattr__}
>>> sib.getattr(sib.name('foo'), '__new__')
{getattr: {atomic:foo}.__new__}
```

id_cache(*x*, *sie*, *name*)

INPUT:

- `x` – an arbitrary value
- `sie` – a *SageInputExpression*
- `name` – a requested variable name

Enters `x` and `sie` in a cache, so that subsequent calls `self(x)` will directly return `sie`. Also, marks the requested name of this `sie` to be `name`. Differs from the method{cache} method in that the cache is keyed by `id(x)` instead of by `x`.

This may be called on values of an arbitrary type, which may be useful if the values are both large and likely to be used multiple times in a single expression; it should be preferred to method{cache} if equality on the values is difficult or impossible to compute.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: x = polygen(ZZ)
sage: sib = SageInputBuilder()
sage: my_42 = 42*x
sage: sie42 = sib(my_42)
sage: sib.id_cache(my_42, sie42, 'the_ultimate_answer')
sage: sib.result(sib(my_42) + sib(my_42))
R.<x> = ZZ[]
the_ultimate_answer = 42*x
the_ultimate_answer + the_ultimate_answer
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> x = polygen(ZZ)
>>> sib = SageInputBuilder()
>>> my_42 = Integer(42)*x
>>> sie42 = sib(my_42)
>>> sib.id_cache(my_42, sie42, 'the_ultimate_answer')
>>> sib.result(sib(my_42) + sib(my_42))
R.<x> = ZZ[]
the_ultimate_answer = 42*x
the_ultimate_answer + the_ultimate_answer
```

Since id_cache keys off of object identity (“is”), the following does not trigger the cache.:

```
sage: sib.result(sib(42*x) + sib(42*x))
42*x + 42*x
```

```
>>> from sage.all import *
>>> sib.result(sib(Integer(42)*x) + sib(Integer(42)*x))
42*x + 42*x
```

Note that we don’t assign the result to a variable if the value is only used once.:

```
sage: sib = SageInputBuilder()
sage: my_42 = 42*x
sage: sie42 = sib(my_42)
sage: sib.id_cache(my_42, sie42, 'the_ultimate_answer')
sage: sib.result(sib(my_42) + sib(43*x))
R.<x> = ZZ[]
42*x + 43*x
```

```
>>> from sage.all import *
>>> sib = SageInputBuilder()
>>> my_42 = Integer(42)*x
>>> sie42 = sib(my_42)
>>> sib.id_cache(my_42, sie42, 'the_ultimate_answer')
>>> sib.result(sib(my_42) + sib(Integer(43)*x))
R.<x> = ZZ[]
42*x + 43*x
```

import_name(*module*, *name*, *alt_name=None*)

INPUT:

- `module`, `name`, `alt_name` – strings

Creates an expression that will import a name from a module and then use that name.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: v1 = sib.import_name('sage.foo.bar', 'baz')
sage: v2 = sib.import_name('sage.foo.bar', 'ZZ', 'not_the_real_ZZ')
sage: sib.result(v1+v2)
from sage.foo.bar import baz
from sage.foo.bar import ZZ as not_the_real_ZZ
baz + not_the_real_ZZ
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> v1 = sib.import_name('sage.foo.bar', 'baz')
>>> v2 = sib.import_name('sage.foo.bar', 'ZZ', 'not_the_real_ZZ')
>>> sib.result(v1+v2)
from sage.foo.bar import baz
from sage.foo.bar import ZZ as not_the_real_ZZ
baz + not_the_real_ZZ
```

We adjust the names if there is a conflict.:

```
sage: sib = SageInputBuilder()
sage: v1 = sib.import_name('sage.foo', 'poly')
sage: v2 = sib.import_name('sage.bar', 'poly')
sage: sib.result(v1+v2)
from sage.foo import poly as poly1
from sage.bar import poly as poly2
poly1 + poly2
```

```
>>> from sage.all import *
>>> sib = SageInputBuilder()
>>> v1 = sib.import_name('sage.foo', 'poly')
>>> v2 = sib.import_name('sage.bar', 'poly')
>>> sib.result(v1+v2)
from sage.foo import poly as poly1
from sage.bar import poly as poly2
poly1 + poly2
```

int(*n*)

Return a raw SIE from the integer `n`.

As it is raw, it may read back as a Sage Integer or a Python int, depending on its size and whether the preparser is enabled.

INPUT:

- n – a Sage Integer or a Python int

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.result(sib.int(-3^50))
-717897987691852588770249

sage: sib = SageInputBuilder()
sage: sib.result(sib.int(-42r))
-42
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.result(sib.int(-Integer(3)**Integer(50)))
-717897987691852588770249

>>> sib = SageInputBuilder()
>>> sib.result(sib.int(-42))
-42
```

name(*n*)

Given a string representing a Python name, produces a *SageInputExpression* for that name.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.result(sib.name('pi') + sib.name('e'))
pi + e
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.result(sib.name('pi') + sib.name('e'))
pi + e
```

parent_with_gens(*parent*, *sie*, *gen_names*, *name*, *gens_syntax=None*)

This method is used for parents with generators, to manage the sage preparser generator syntax (like `K.<x> = QQ[]`).

The method{_sage_input_} method of a parent class with generators should construct a *SageInputExpression* for the parent, and then call this method with the parent itself, the constructed SIE, a sequence containing the names of the generators, and (optionally) another SIE to use if the sage generator syntax is used; typically this will be the same as the first SIE except omitting a `names` parameter.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder


sage: def test_setup(use_gens=True, preparse=True):
....:     sib = SageInputBuilder(preparse=preparse)
....:     gen_names=('foo', 'bar')
....:     parent = "some parent"
....:     normal_sie = sib.name('make_a_parent')(names=gen_names)
....:     if use_gens:
....:         gens_sie = sib.name('make_a_parent')()
....:     else:
....:         gens_sie = None
....:     name = 'the_thing'
....:     result = sib.parent_with_gens(parent, normal_sie,
....:                                   gen_names, name,
....:                                   gens_syntax=gens_sie)
....:     return sib, result

sage: sib, par_sie = test_setup()
sage: sib.result(par_sie)
make_a_parent(names=('foo', 'bar'))

sage: sib, par_sie = test_setup()
sage: sib.result(sib(3) * sib.gen("some parent", 0))
the_thing.<foo,bar> = make_a_parent()
3*foo

sage: sib, par_sie = test_setup(preparse=False)
sage: sib.result(par_sie)
make_a_parent(names=('foo', 'bar'))

sage: sib, par_sie = test_setup(preparse=False)
sage: sib.result(sib(3) * sib.gen("some parent", 0))
the_thing = make_a_parent(names=('foo', 'bar'))
foo,bar = the_thing.gens()
ZZ(3)*foo

sage: sib, par_sie = test_setup(use_gens=False)
sage: sib.result(par_sie)
make_a_parent(names=('foo', 'bar'))

sage: sib, par_sie = test_setup(use_gens=False)
sage: sib.result(sib(3) * sib.gen("some parent", 0))
the_thing = make_a_parent(names=('foo', 'bar'))
foo,bar = the_thing.gens()
3*foo

sage: sib, par_sie = test_setup()
sage: sib.result(par_sie - sib.gen("some parent", 1))
the_thing.<foo,bar> = make_a_parent()
the_thing - bar
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder


>>> def test_setup(use_gens=True, preparse=True):
...     sib = SageInputBuilder(preparse=preparse)
...     gen_names=('foo', 'bar')
...     parent = "some parent"
...     normal_sie = sib.name('make_a_parent')(names=gen_names)
...     if use_gens:
...         gens_sie = sib.name('make_a_parent')()
...     else:
...         gens_sie = None
...     name = 'the_thing'
...     result = sib.parent_with_gens(parent, normal_sie,
...                                   gen_names, name,
...                                   gens_syntax=gens_sie)
...     return sib, result

>>> sib, par_sie = test_setup()
>>> sib.result(par_sie)
make_a_parent(names=('foo', 'bar'))

>>> sib, par_sie = test_setup()
>>> sib.result(sib(Integer(3)) * sib.gen("some parent", Integer(0)))
the_thing.<foo,bar> = make_a_parent()
3*foo

>>> sib, par_sie = test_setup(preparse=False)
>>> sib.result(par_sie)
make_a_parent(names=('foo', 'bar'))

>>> sib, par_sie = test_setup(preparse=False)
>>> sib.result(sib(Integer(3)) * sib.gen("some parent", Integer(0)))
the_thing = make_a_parent(names=('foo', 'bar'))
foo,bar = the_thing.gens()
ZZ(3)*foo

>>> sib, par_sie = test_setup(use_gens=False)
>>> sib.result(par_sie)
make_a_parent(names=('foo', 'bar'))

>>> sib, par_sie = test_setup(use_gens=False)
>>> sib.result(sib(Integer(3)) * sib.gen("some parent", Integer(0)))
the_thing = make_a_parent(names=('foo', 'bar'))
foo,bar = the_thing.gens()
3*foo

>>> sib, par_sie = test_setup()
>>> sib.result(par_sie - sib.gen("some parent", Integer(1)))
the_thing.<foo,bar> = make_a_parent()
the_thing - bar
```

preparse()

Check the preparse status.

It returns `True` if the preparser will be enabled, `False` if it will be disabled, and `None` if the result must work whether or not the preparser is enabled.

For example, this is useful in the method{_sage_input_} methods of `Integer` and `RealNumber`; but most method{_sage_input_} methods will not need to examine this.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder
sage: SageInputBuilder().preparse()
True
sage: SageInputBuilder(preparse=False).preparse()
False
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder
>>> SageInputBuilder().preparse()
True
>>> SageInputBuilder(preparse=False).preparse()
False
```

prod(*factors*, *simplify=False*)

Given a sequence, returns a *SageInputExpression* for the product of the elements.

With `simplify=True`, performs some simplifications first. If any element is formatted as a string `'0'`, then that element is returned directly. If any element is formatted as a string `'1'`, then it is removed from the sequence (unless it is the only element in the sequence). And any negations are removed from the elements and moved to the outside of the product.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.result(sib.prod([-1, 0, 1, -2]))
-1*0*1*-2

sage: sib = SageInputBuilder()
sage: sib.result(sib.prod([-1, 0, 1, 2], simplify=True))
0

sage: sib = SageInputBuilder()
sage: sib.result(sib.prod([-1, 2, -3, -4], simplify=True))
-2*3*4

sage: sib = SageInputBuilder()
sage: sib.result(sib.prod([-1, 1, -1, -1], simplify=True))
-1

sage: sib = SageInputBuilder()
sage: sib.result(sib.prod([1, 1, 1], simplify=True))
1
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.result(sib.prod([-Integer(1), Integer(0), Integer(1), -Integer(2)]))
-1*0*1*-2

>>> sib = SageInputBuilder()
>>> sib.result(sib.prod([-Integer(1), Integer(0), Integer(1), Integer(2)],␣
↪simplify=True))
0

>>> sib = SageInputBuilder()
>>> sib.result(sib.prod([-Integer(1), Integer(2), -Integer(3), -Integer(4)],␣
↪simplify=True))
-2*3*4

>>> sib = SageInputBuilder()
>>> sib.result(sib.prod([-Integer(1), Integer(1), -Integer(1), -Integer(1)],␣
↪simplify=True))
-1

>>> sib = SageInputBuilder()
>>> sib.result(sib.prod([Integer(1), Integer(1), Integer(1)], simplify=True))
1
```

result(*e*)

Given a *SageInputExpression* constructed using `self`, returns a tuple of a list of commands and an expression (and possibly a dictionary of local variables) suitable for *sage_eval()*.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: r = sib.result(sib(6) * sib(7)); r
6*7
sage: tuple(r)
('', '6*7')
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> r = sib.result(sib(Integer(6)) * sib(Integer(7))); r
6*7
>>> tuple(r)
('', '6*7')
```

share(*sie*)

Mark the given expression as sharable, so that it will be replaced by a variable if it occurs multiple times in the expression. (Most non-single-token expressions are already sharable.)

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder
```

Without explicitly using .share(), string literals are not shared:

```
sage: sib = SageInputBuilder()
sage: e = sib('hello')
sage: sib.result(sib((e, e)))
('hello', 'hello')
```

```
>>> from sage.all import *
>>> sib = SageInputBuilder()
>>> e = sib('hello')
>>> sib.result(sib((e, e)))
('hello', 'hello')
```

See the difference if we use .share():

```
sage: sib = SageInputBuilder()
sage: e = sib('hello')
sage: sib.share(e)
sage: sib.result(sib((e, e)))
si = 'hello'
(si, si)
```

```
>>> from sage.all import *
>>> sib = SageInputBuilder()
>>> e = sib('hello')
>>> sib.share(e)
>>> sib.result(sib((e, e)))
si = 'hello'
(si, si)
```

sum(*terms*, *simplify=False*)

Given a sequence, returns a *SageInputExpression* for the product of the elements.

With `simplify=True`, performs some simplifications first. If any element is formatted as a string `'0'`, then it is removed from the sequence (unless it is the only element in the sequence); and any instances of `a + -b` are changed to `a - b`.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: sib.result(sib.sum([-1, 0, 1, 0, -1]))
-1 + 0 + 1 + 0 + -1

sage: sib = SageInputBuilder()
sage: sib.result(sib.sum([-1, 0, 1, 0, -1], simplify=True))
-1 + 1 - 1
```

(continues on next page)

(continued from previous page)

```
sage: sib = SageInputBuilder()
sage: sib.result(sib.sum([0, 0, 0], simplify=True))
0
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> sib.result(sib.sum([-Integer(1), Integer(0), Integer(1), Integer(0), -
↪Integer(1)]))
-1 + 0 + 1 + 0 + -1

>>> sib = SageInputBuilder()
>>> sib.result(sib.sum([-Integer(1), Integer(0), Integer(1), Integer(0), -
↪Integer(1)], simplify=True))
-1 + 1 - 1

>>> sib = SageInputBuilder()
>>> sib.result(sib.sum([Integer(0), Integer(0), Integer(0)], simplify=True))
0
```

use_variable(*sie*, *name*)

Marks the *SageInputExpression* `sie` to use a variable even if it is only referenced once. (If `sie` is the final top-level expression, though, it will not use a variable.)

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder

sage: sib = SageInputBuilder()
sage: e = sib.name('MatrixSpace')(ZZ, 10, 10)
sage: sib.use_variable(e, 'MS')
sage: sib.result(e.zero_matrix())
MS = MatrixSpace(ZZ, 10, 10)
MS.zero_matrix()
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder

>>> sib = SageInputBuilder()
>>> e = sib.name('MatrixSpace')(ZZ, Integer(10), Integer(10))
>>> sib.use_variable(e, 'MS')
>>> sib.result(e.zero_matrix())
MS = MatrixSpace(ZZ, 10, 10)
MS.zero_matrix()
```

Without the call to use_variable, we get this instead:

```
sage: sib = SageInputBuilder()
sage: e = sib.name('MatrixSpace')(ZZ, 10, 10)
sage: sib.result(e.zero_matrix())
```

(continues on next page)

(continued from previous page)

```
MatrixSpace(ZZ, 10, 10).zero_matrix()
```

```
>>> from sage.all import *
>>> sib = SageInputBuilder()
>>> e = sib.name('MatrixSpace')(ZZ, Integer(10), Integer(10))
>>> sib.result(e.zero_matrix())
MatrixSpace(ZZ, 10, 10).zero_matrix()
```

And even with the call to use_variable, we don't use a variable here:

```
sage: sib = SageInputBuilder()
sage: e = sib.name('MatrixSpace')(ZZ, 10, 10)
sage: sib.use_variable(e, 'MS')
sage: sib.result(e)
MatrixSpace(ZZ, 10, 10)
```

```
>>> from sage.all import *
>>> sib = SageInputBuilder()
>>> e = sib.name('MatrixSpace')(ZZ, Integer(10), Integer(10))
>>> sib.use_variable(e, 'MS')
>>> sib.result(e)
MatrixSpace(ZZ, 10, 10)
```

class sage.misc.sage_input.**SageInputExpression**(*sib*)

Bases: object

Subclasses of this class represent expressions for *sage_input()*. sage classes should define a method{_sage_input_} method, which will return an instance of *SageInputExpression*, created using methods of *SageInputBuilder*.

To the extent possible, operations on *SageInputExpression* objects construct a new *SageInputExpression* representing that operation. That is, if `a` is a *SageInputExpression*, then `a + b` constructs a *SageInputExpression* representing this sum. This also works for attribute access, function calls, subscripts, etc. Since arbitrary attribute accesses might be used to construct a new attribute-access expression, all internal attributes and methods have names that begin with `_sie_` to reduce the chance of collisions.

It is expected that instances of this class will not be directly created outside this module; instead, instances will be created using methods of *SageInputBuilder* and *SageInputExpression*.

Values of type *SageInputExpression* print in a fairly ugly way, that reveals the internal structure of the expression tree.

class sage.misc.sage_input.**SageInputFormatter**

Bases: object

An instance of this class is used to keep track of variable names and a sequence of generated commands during the *sage_input()* formatting process.

format(*e*, *prec*)

Format a Sage input expression into a string.

INPUT:

- `e` – a *SageInputExpression*
- `prec` – integer representing a precedence level

First, we check to see if `e` should be replaced by a variable. If so, we generate the command to assign the variable, and return the name of the variable.

Otherwise, we format the expression by calling its method{_sie_format} method, and add parentheses if necessary.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputBuilder, SageInputFormatter

sage: sib = SageInputBuilder()
sage: sif = SageInputFormatter()
sage: sie = sib(GF(5))
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputBuilder, SageInputFormatter

>>> sib = SageInputBuilder()
>>> sif = SageInputFormatter()
>>> sie = sib(GF(Integer(5)))
```

Here we `cheat` by calling method{_sie_prepare} twice, to make it use a variable.:

```
sage: sie._sie_prepare(sif)
sage: sie._sie_prepare(sif)
sage: sif._commands
''
sage: sif.format(sie, 0)
'GF_5'
sage: sif._commands
'GF_5 = GF(5)\n'
```

```
>>> from sage.all import *
>>> sie._sie_prepare(sif)
>>> sie._sie_prepare(sif)
>>> sif._commands
''
>>> sif.format(sie, Integer(0))
'GF_5'
>>> sif._commands
'GF_5 = GF(5)\n'
```

We demonstrate the use of commands, by showing how to construct code that will produce a random matrix:

```
sage: sib = SageInputBuilder()
sage: sif = SageInputFormatter()
sage: sie = sib.name('matrix')(sib.name('ZZ'), 10, 10)
sage: sib.command(sie, sie.randomize())
sage: sie._sie_prepare(sif)
sage: sif._commands
''
sage: sif.format(sie, 0)
'si'
sage: sif._commands
'si = matrix(ZZ, 10, 10)\nsi.randomize()\n'
```

```
>>> from sage.all import *
>>> sib = SageInputBuilder()
>>> sif = SageInputFormatter()
>>> sie = sib.name('matrix')(sib.name('ZZ'), Integer(10), Integer(10))
>>> sib.command(sie, sie.randomize())
>>> sie._sie_prepare(sif)
>>> sif._commands
''
>>> sif.format(sie, Integer(0))
'si'
>>> sif._commands
'si = matrix(ZZ, 10, 10)\nsi.randomize()\n'
```

get_name(*name*)

Return a name corresponding to a given requested name. If only one request for a name is received, then we will use the requested name; otherwise, we will add numbers to the end of the name to make it unique.

If the input name is `None`, then it is treated as a name of `'si'`.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputFormatter

sage: sif = SageInputFormatter()
sage: names = ('x', 'x', 'y', 'z')
sage: for n in names: sif.register_name(n)
sage: for n in names: sif.get_name(n)
'x1'
'x2'
'y'
'z'
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputFormatter

>>> sif = SageInputFormatter()
>>> names = ('x', 'x', 'y', 'z')
>>> for n in names: sif.register_name(n)
>>> for n in names: sif.get_name(n)
'x1'
'x2'
'y'
'z'
```

register_name(*name*)

Register that some value would like to use a given name. If only one request for a name is received, then we will use the requested name; otherwise, we will add numbers to the end of the name to make it unique.

If the input name is `None`, then it is treated as a name of `'si'`.

EXAMPLES:

```
sage: from sage.misc.sage_input import SageInputFormatter
```

(continues on next page)

(continued from previous page)

```
sage: sif = SageInputFormatter()
sage: sif._names, sif._dup_names
(set(), {})
sage: sif.register_name('x')
sage: sif.register_name('y')
sage: sif._names, sif._dup_names
({'x', 'y'}, {})
sage: sif.register_name('x')
sage: sif._names, sif._dup_names
({'x', 'y'}, {'x': 0})
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import SageInputFormatter

>>> sif = SageInputFormatter()
>>> sif._names, sif._dup_names
(set(), {})
>>> sif.register_name('x')
>>> sif.register_name('y')
>>> sif._names, sif._dup_names
({'x', 'y'}, {})
>>> sif.register_name('x')
>>> sif._names, sif._dup_names
({'x', 'y'}, {'x': 0})
```

sage.misc.sage_input.**sage_input**(*x*, *preparse=True*, *verify=False*, *allow_locals=False*)

Return a sequence of commands that can be used to rebuild the object `x`.

INPUT:

- `x` – the value we want to find an input form for
- `preparse` – (default: `True`) whether to generate code that requires the preparser. With `True`, generated code requires the preparser. With `False`, generated code requires that the preparser not be used. With `None`, generated code will work whether or not the preparser is used.
- `verify` – (default: `False`) if `True`, then the answer will be evaluated with *sage_eval()*, and an exception will be raised if the result is not equal to the original value. (In fact, for `verify=True`, *sage_input()* is effectively run three times, with `preparse` set to `True`, `False`, and `None`, and all three results are checked.) This is particularly useful for doctests.
- `allow_locals` – (default: `False`) if `True`, then values that *sage_input()* cannot handle are returned in a dictionary, and the returned code assumes that this dictionary is passed as the `locals` parameter of *sage_eval()*. (Otherwise, if *sage_input()* cannot handle a value, an exception is raised.)

EXAMPLES:

```
sage: sage_input(GF(2)(1))
GF(2)(1)
sage: sage_input((GF(2)(0), GF(2)(1)), verify=True)
# Verified
GF_2 = GF(2)
(GF_2(0), GF_2(1))
```

```
>>> from sage.all import *
>>> sage_input(GF(Integer(2))(Integer(1)))
GF(2)(1)
>>> sage_input((GF(Integer(2))(Integer(0)), GF(Integer(2))(Integer(1))),␣
↪verify=True)
# Verified
GF_2 = GF(2)
(GF_2(0), GF_2(1))
```

When the preparser is enabled, we use the sage generator syntax.:

```
sage: K.<x> = GF(5)[]
sage: sage_input(x^3 + 2*x, verify=True)
# Verified
R.<x> = GF(5)[]
x^3 + 2*x
sage: sage_input(x^3 + 2*x, preparse=False)
R = GF(5)['x']
x = R.gen()
x**3 + 2*x
```

```
>>> from sage.all import *
>>> K = GF(Integer(5))['x']; (x,) = K._first_ngens(1)
>>> sage_input(x**Integer(3) + Integer(2)*x, verify=True)
# Verified
R.<x> = GF(5)[]
x^3 + 2*x
>>> sage_input(x**Integer(3) + Integer(2)*x, preparse=False)
R = GF(5)['x']
x = R.gen()
x**3 + 2*x
```

The result of *sage_input()* is actually a pair of strings with a special __repr__ method to print nicely.:

```
sage: # needs sage.rings.real_mpfr sage.symbolic
sage: r = sage_input(RealField(20)(pi), verify=True)
sage: r
# Verified
RealField(20)(3.1415939)
sage: isinstance(r, tuple)
True
sage: len(r)
2
sage: tuple(r)
('# Verified\n', 'RealField(20)(3.1415939)')
```

```
>>> from sage.all import *
>>> # needs sage.rings.real_mpfr sage.symbolic
>>> r = sage_input(RealField(Integer(20))(pi), verify=True)
>>> r
# Verified
RealField(20)(3.1415939)
>>> isinstance(r, tuple)
```

(continues on next page)

(continued from previous page)

```
True
>>> len(r)
2
>>> tuple(r)
('# Verified\n', 'RealField(20)(3.1415939)')
```

We cannot find an input form for a function.:

```
sage: sage_input((3, lambda x: x))
Traceback (most recent call last):
...
ValueError: cannot convert <function <lambda> at 0x...> to sage_input form
```

```
>>> from sage.all import *
>>> sage_input((Integer(3), lambda x: x))
Traceback (most recent call last):
...
ValueError: cannot convert <function <lambda> at 0x...> to sage_input form
```

But we can have *sage_input()* continue anyway, and return an input form for the rest of the expression, with `allow_locals=True`.:

```
sage: r = sage_input((3, lambda x: x), verify=True, allow_locals=True)
sage: r
LOCALS:
    _sil1: <function <lambda> at 0x...>
# Verified
(3, _sil1)
sage: tuple(r)
('# Verified\n', '(3, _sil1)', {'_sil1': <function <lambda> at 0x...>})
```

```
>>> from sage.all import *
>>> r = sage_input((Integer(3), lambda x: x), verify=True, allow_locals=True)
>>> r
LOCALS:
    _sil1: <function <lambda> at 0x...>
# Verified
(3, _sil1)
>>> tuple(r)
('# Verified\n', '(3, _sil1)', {'_sil1': <function <lambda> at 0x...>})
```

sage.misc.sage_input.**verify_same**(*a*, *b*)

Verify that two Sage values are the same. This is an extended equality test; it checks that the values are equal and that their parents are equal. (For values which are not Elements, the types are checked instead.)

If the values are the same, we return `None`; otherwise, we raise an exception.

EXAMPLES:

```
sage: from sage.misc.sage_input import verify_same
sage: verify_same(1, 1)
sage: verify_same(1, 2)
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
AssertionError: Expected 1 == 2
sage: verify_same(1, 1r)
Traceback (most recent call last):
...
AttributeError: 'int' object has no attribute 'parent'...
sage: verify_same(1r, 1)
Traceback (most recent call last):
...
    assert(type(a) == type(b))
AssertionError
sage: verify_same(5, GF(7)(5))
Traceback (most recent call last):
...
    assert(a.parent() == b.parent())
AssertionError
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import verify_same
>>> verify_same(Integer(1), Integer(1))
>>> verify_same(Integer(1), Integer(2))
Traceback (most recent call last):
...
AssertionError: Expected 1 == 2
>>> verify_same(Integer(1), 1)
Traceback (most recent call last):
...
AttributeError: 'int' object has no attribute 'parent'...
>>> verify_same(1, Integer(1))
Traceback (most recent call last):
...
    assert(type(a) == type(b))
AssertionError
>>> verify_same(Integer(5), GF(Integer(7))(Integer(5)))
Traceback (most recent call last):
...
    assert(a.parent() == b.parent())
AssertionError
```

sage.misc.sage_input.**verify_si_answer**(*x*, *answer*, *preparse*)

Verify that evaluating `answer` gives a value equal to `x` (with the same parent/type). If `preparse` is `True` or `False`, then we evaluate `answer` with the preparser enabled or disabled, respectively; if `preparse` is `None`, then we evaluate `answer` both with the preparser enabled and disabled and check both results.

On success, we return `None`; on failure, we raise an exception.

INPUT:

- `x` – an arbitrary Sage value
- `answer` – string, or a *SageInputAnswer*
- `preparse` – `True`, `False`, or `None`

EXAMPLES:

```
sage: from sage.misc.sage_input import verify_si_answer
sage: verify_si_answer(1, '1', True)
sage: verify_si_answer(1, '1', False)
Traceback (most recent call last):
...
AttributeError: 'int' object has no attribute 'parent'...
sage: verify_si_answer(1, 'ZZ(1)', None)
```

```
>>> from sage.all import *
>>> from sage.misc.sage_input import verify_si_answer
>>> verify_si_answer(Integer(1), '1', True)
>>> verify_si_answer(Integer(1), '1', False)
Traceback (most recent call last):
...
AttributeError: 'int' object has no attribute 'parent'...
>>> verify_si_answer(Integer(1), 'ZZ(1)', None)
```

4.1.9 Tables

Display a rectangular array as a table, either in plain text, LaTeX, or html. See the documentation for *table* for details and examples.

AUTHORS:

- John H. Palmieri (2012-11)

class sage.misc.table.**table**(*rows=None*, *columns=None*, *header_row=False*, *header_column=False*, *frame=False*, *align='left'*)

Bases: SageObject

Display a rectangular array as a table, either in plain text, LaTeX, or html.

INPUT:

- `rows` – (default: `None`) list of lists (or list of tuples, etc.), containing the data to be displayed
- `columns` – (default: `None`) list of lists (etc.), containing the data to be displayed, but stored as columns. Set either `rows` or `columns`, but not both.
- `header_row` – (default: `False`) if `True`, first row is highlighted
- `header_column` – (default: `False`) if `True`, first column is highlighted
- `frame` – (default: `False`) if `True`, put a box around each cell
- `align` – (default: `'left'`) the alignment of each entry: either `'left'`, `'center'`, or `'right'`

EXAMPLES:

```
sage: rows = [['a', 'b', 'c'], [100,2,3], [4,5,60]]
sage: table(rows)
  a     b   c
  100   2   3
  4     5   60
sage: latex(table(rows))
\begin{tabular}{lll}
a & b & c \\
$100$ & $2$ & $3$ \\
```

(continues on next page)

(continued from previous page)

```
$4$ & $5$ & $60$ \\
\end{tabular}
```

```
>>> from sage.all import *
>>> rows = [['a', 'b', 'c'], [Integer(100),Integer(2),Integer(3)], [Integer(4),
↪Integer(5),Integer(60)]]
>>> table(rows)
  a     b   c
  100   2   3
  4     5   60
>>> latex(table(rows))
\begin{tabular}{lll}
a & b & c \\
$100$ & $2$ & $3$ \\
$4$ & $5$ & $60$ \\
\end{tabular}
```

If `header_row` is `True`, then the first row is highlighted. If `header_column` is `True`, then the first column is highlighted. If `frame` is `True`, then print a box around every "cell".

```
sage: table(rows, header_row=True)
    a     b   c
  ├─────┼───┼────┤
    100   2   3
    4     5   60
sage: latex(table(rows, header_row=True))
\begin{tabular}{lll}
a & b & c \\ \hline
$100$ & $2$ & $3$ \\
$4$ & $5$ & $60$ \\
\end{tabular}
sage: table(rows=rows, frame=True)
┌─────┬───┬────┐
│ a   │ b │ c  │
├─────┼───┼────┤
│ 100 │ 2 │ 3  │
├─────┼───┼────┤
│ 4   │ 5 │ 60 │
└─────┴───┴────┘
sage: latex(table(rows=rows, frame=True))
\begin{tabular}{|l|l|l|} \hline
a & b & c \\ \hline
$100$ & $2$ & $3$ \\ \hline
$4$ & $5$ & $60$ \\ \hline
\end{tabular}
sage: table(rows, header_column=True, frame=True)
┌─────╥───┬────┐
│ a   ‖ b │ c  │
├─────╫───┼────┤
│ 100 ‖ 2 │ 3  │
├─────╫───┼────┤
│ 4   ‖ 5 │ 60 │
```

(continues on next page)

(continued from previous page)

```
└─────╨─────┴─────┘
sage: latex(table(rows, header_row=True, frame=True))
\begin{tabular}{|l|l|l|} \hline
a & b & c \\ \hline \hline
$100$ & $2$ & $3$ \\ \hline
$4$ & $5$ & $60$ \\ \hline
\end{tabular}
sage: table(rows, header_column=True)
  a   | b   c
  100 | 2   3
  4   | 5   60
```

```
>>> from sage.all import *
>>> table(rows, header_row=True)
    a     b   c
  ╞═════╪═══╪═══╡
    100   2   3
    4     5   60
>>> latex(table(rows, header_row=True))
\begin{tabular}{lll}
a & b & c \\ \hline
$100$ & $2$ & $3$ \\
$4$ & $5$ & $60$ \\
\end{tabular}
>>> table(rows=rows, frame=True)
┌─────┬───┬────┐
│ a   │ b │ c  │
├─────┼───┼────┤
│ 100 │ 2 │ 3  │
├─────┼───┼────┤
│ 4   │ 5 │ 60 │
└─────┴───┴────┘
>>> latex(table(rows=rows, frame=True))
\begin{tabular}{|l|l|l|} \hline
a & b & c \\ \hline
$100$ & $2$ & $3$ \\ \hline
$4$ & $5$ & $60$ \\ \hline
\end{tabular}
>>> table(rows, header_column=True, frame=True)
┌─────╥───┬────┐
│ a   ║ b │ c  │
├─────╫───┼────┤
│ 100 ║ 2 │ 3  │
├─────╫───┼────┤
│ 4   ║ 5 │ 60 │
└─────╨───┴────┘
>>> latex(table(rows, header_row=True, frame=True))
\begin{tabular}{|l|l|l|} \hline
a & b & c \\ \hline \hline
$100$ & $2$ & $3$ \\ \hline
$4$ & $5$ & $60$ \\ \hline
\end{tabular}
```

(continues on next page)

(continued from previous page)

```
>>> table(rows, header_column=True)
  a   | b   c
  100 | 2   3
  4   | 5   60
```

The argument `header_row` can, instead of being `True` or `False`, be the contents of the header row, so that `rows` consists of the data, while `header_row` is the header information. The same goes for `header_column`. Passing lists for both arguments simultaneously is not supported.

```
sage: table([(x,n(sin(x), digits=2)) for x in [0..3]],                    #␣
↪needs sage.symbolic
....:       header_row=["$x$", r"$\sin(x)$"], frame=True)
┌─────┬──────────┐
│ $x$ │ $\sin(x)$ │
├─────┼──────────┤
│ 0   │ 0.00     │
├─────┼──────────┤
│ 1   │ 0.84     │
├─────┼──────────┤
│ 2   │ 0.91     │
├─────┼──────────┤
│ 3   │ 0.14     │
└─────┴──────────┘
```

```
>>> from sage.all import *
>>> table([(x,n(sin(x), digits=Integer(2))) for x in (ellipsis_range(Integer(0),
↪Ellipsis,Integer(3)))],                          # needs sage.symbolic
...       header_row=["$x$", r"$\sin(x)$"], frame=True)
┌─────┬──────────┐
│ $x$ │ $\sin(x)$ │
├─────┼──────────┤
│ 0   │ 0.00     │
├─────┼──────────┤
│ 1   │ 0.84     │
├─────┼──────────┤
│ 2   │ 0.91     │
├─────┼──────────┤
│ 3   │ 0.14     │
└─────┴──────────┘
```

You can create the transpose of this table in several ways, for example, "by hand," that is, changing the data defining the table:

```
sage: table(rows=[[x for x in [0..3]],                                    #␣
↪needs sage.symbolic
....:             [n(sin(x), digits=2) for x in [0..3]]],
....:       header_column=['$x$', r'$\sin(x)$'], frame=True)
┌──────────┬──────┬──────┬──────┬──────┐
│ $x$      ‖ 0    │ 1    │ 2    │ 3    │
├──────────┼──────┼──────┼──────┼──────┤
│ $\sin(x)$ ‖ 0.00 │ 0.84 │ 0.91 │ 0.14 │
└──────────┴──────┴──────┴──────┴──────┘
```

```
>>> from sage.all import *
>>> table(rows=[[x for x in (ellipsis_range(Integer(0),Ellipsis,Integer(3)))],
↪                                        # needs sage.symbolic
...              [n(sin(x), digits=Integer(2)) for x in (ellipsis_range(Integer(0),
↪Ellipsis,Integer(3)))]],
...        header_column=['$x$', r'$\sin(x)$'], frame=True)
```

x	0	1	2	3
$\sin(x)$	0.00	0.84	0.91	0.14

or by passing the original data as the `columns` of the table and using `header_column` instead of `header_row`:

```
sage: table(columns=[(x, n(sin(x), digits=2)) for x in [0..3]],                #␣
↪needs sage.symbolic
....:       header_column=['$x$', r'$\sin(x)$'], frame=True)
```

x	0	1	2	3
$\sin(x)$	0.00	0.84	0.91	0.14

```
>>> from sage.all import *
>>> table(columns=[(x, n(sin(x), digits=Integer(2))) for x in (ellipsis_
↪range(Integer(0),Ellipsis,Integer(3)))],                  # needs sage.symbolic
...        header_column=['$x$', r'$\sin(x)$'], frame=True)
```

x	0	1	2	3
$\sin(x)$	0.00	0.84	0.91	0.14

or by taking the *transpose()* of the original table:

```
sage: table(rows=[(x, n(sin(x), digits=2)) for x in [0..3]],                   #␣
↪needs sage.symbolic
....:       header_row=['$x$', r'$\sin(x)$'], frame=True).transpose()
```

x	0	1	2	3
$\sin(x)$	0.00	0.84	0.91	0.14

```
>>> from sage.all import *
>>> table(rows=[(x, n(sin(x), digits=Integer(2))) for x in (ellipsis_
↪range(Integer(0),Ellipsis,Integer(3)))],                    # needs sage.
↪symbolic
...        header_row=['$x$', r'$\sin(x)$'], frame=True).transpose()
```

x	0	1	2	3

(continues on next page)

(continued from previous page)

```
| $\sin(x)$ ‖ 0.00 | 0.84 | 0.91 | 0.14 |
└─────────────╨──────┴──────┴──────┴──────┘
```

In either plain text or LaTeX, entries in tables can be aligned to the left (default), center, or right:

```
sage: table(rows, align='left')
  a     b   c
  100   2   3
  4     5   60
sage: table(rows, align='center')
  a    b   c
 100   2   3
  4    5   60
sage: table(rows, align='right', frame=True)
┌─────┬───┬────┐
│   a │ b │  c │
├─────┼───┼────┤
│ 100 │ 2 │  3 │
├─────┼───┼────┤
│   4 │ 5 │ 60 │
└─────┴───┴────┘
```

```
>>> from sage.all import *
>>> table(rows, align='left')
  a     b   c
  100   2   3
  4     5   60
>>> table(rows, align='center')
  a    b   c
 100   2   3
  4    5   60
>>> table(rows, align='right', frame=True)
┌─────┬───┬────┐
│   a │ b │  c │
├─────┼───┼────┤
│ 100 │ 2 │  3 │
├─────┼───┼────┤
│   4 │ 5 │ 60 │
└─────┴───┴────┘
```

To generate HTML you should use `html(table(...))`:

```
sage: # needs sage.symbolic
sage: data = [["$x$", r"$\sin(x)$"]] + [(x, n(sin(x), digits=2))
....:                                   for x in [0..3]]
sage: output = html(table(data, header_row=True, frame=True))
sage: type(output)
<class 'sage.misc.html.HtmlFragment'>
sage: print(output)
<div class="notruncate">
<table border="1" class="table_form">
<tbody>
```

(continues on next page)

(continued from previous page)

```
<tr>
<th style="text-align:left">\(x\)</th>
<th style="text-align:left">\(\sin(x)\)</th>
</tr>
<tr class ="row-a">
<td style="text-align:left">\(0\)</td>
<td style="text-align:left">\(0.00\)</td>
</tr>
<tr class ="row-b">
<td style="text-align:left">\(1\)</td>
<td style="text-align:left">\(0.84\)</td>
</tr>
<tr class ="row-a">
<td style="text-align:left">\(2\)</td>
<td style="text-align:left">\(0.91\)</td>
</tr>
<tr class ="row-b">
<td style="text-align:left">\(3\)</td>
<td style="text-align:left">\(0.14\)</td>
</tr>
</tbody>
</table>
</div>
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> data = [["$x$", r"$\sin(x)$"]] + [(x, n(sin(x), digits=Integer(2)))
...                                    for x in (ellipsis_range(Integer(0),
↪Ellipsis,Integer(3)))]
>>> output = html(table(data, header_row=True, frame=True))
>>> type(output)
<class 'sage.misc.html.HtmlFragment'>
>>> print(output)
<div class="notruncate">
<table border="1" class="table_form">
<tbody>
<tr>
<th style="text-align:left">\(x\)</th>
<th style="text-align:left">\(\sin(x)\)</th>
</tr>
<tr class ="row-a">
<td style="text-align:left">\(0\)</td>
<td style="text-align:left">\(0.00\)</td>
</tr>
<tr class ="row-b">
<td style="text-align:left">\(1\)</td>
<td style="text-align:left">\(0.84\)</td>
</tr>
<tr class ="row-a">
<td style="text-align:left">\(2\)</td>
<td style="text-align:left">\(0.91\)</td>
</tr>
```

(continues on next page)

(continued from previous page)

```
<tr class ="row-b">
<td style="text-align:left">\(3\)</td>
<td style="text-align:left">\(0.14\)</td>
</tr>
</tbody>
</table>
</div>
```

It is an error to specify both `rows` and `columns`:

```
sage: table(rows=[[1,2,3], [4,5,6]], columns=[[0,0,0], [0,0,1024]])
Traceback (most recent call last):
...
ValueError: do not set both 'rows' and 'columns' when defining a table

sage: table(columns=[[0,0,0], [0,0,1024]])
0 0
0 0
0 1024
```

```
>>> from sage.all import *
>>> table(rows=[[Integer(1),Integer(2),Integer(3)], [Integer(4),Integer(5),
↪Integer(6)]], columns=[[Integer(0),Integer(0),Integer(0)], [Integer(0),
↪Integer(0),Integer(1024)]])
Traceback (most recent call last):
...
ValueError: do not set both 'rows' and 'columns' when defining a table

>>> table(columns=[[Integer(0),Integer(0),Integer(0)], [Integer(0),Integer(0),
↪Integer(1024)]])
0 0
0 0
0 1024
```

Note that if `rows` is just a list or tuple, not nested, then it is treated as a single row:

```
sage: table([1,2,3])
1   2   3
```

```
>>> from sage.all import *
>>> table([Integer(1),Integer(2),Integer(3)])
1   2   3
```

Also, if you pass a non-rectangular array, the longer rows or columns get truncated:

```
sage: table([[1,2,3,7,12], [4,5]])
1   2
4   5
sage: table(columns=[[1,2,3], [4,5,6,7]])
1   4
2   5
3   6
```

```
>>> from sage.all import *
>>> table([[Integer(1),Integer(2),Integer(3),Integer(7),Integer(12)], [Integer(4),
↪Integer(5)]])
1   2
4   5
>>> table(columns=[[Integer(1),Integer(2),Integer(3)], [Integer(4),Integer(5),
↪Integer(6),Integer(7)]])
1   4
2   5
3   6
```

_rich_repr_(*display_manager*, ***kwds*)

Rich Output Magic Method.

See `sage.repl.rich_output` for details.

EXAMPLES:

```
sage: from sage.repl.rich_output import get_display_manager
sage: dm = get_display_manager()
sage: t = table([1, 2, 3])
sage: t._rich_repr_(dm)    # the doctest backend does not support html
```

```
>>> from sage.all import *
>>> from sage.repl.rich_output import get_display_manager
>>> dm = get_display_manager()
>>> t = table([Integer(1), Integer(2), Integer(3)])
>>> t._rich_repr_(dm)    # the doctest backend does not support html
```

options(***kwds*)

With no arguments, return the dictionary of options for this table. With arguments, modify options.

INPUT:

- `header_row` – if `True`, first row is highlighted
- `header_column` – if `True`, first column is highlighted
- `frame` – if `True`, put a box around each cell
- `align` – the alignment of each entry: either `'left'`, `'center'`, or `'right'`

EXAMPLES:

```
sage: T = table([['a', 'b', 'c'], [1,2,3]])
sage: T.options()['align'], T.options()['frame']
('left', False)
sage: T.options(align='right', frame=True)
sage: T.options()['align'], T.options()['frame']
('right', True)
```

```
>>> from sage.all import *
>>> T = table([['a', 'b', 'c'], [Integer(1),Integer(2),Integer(3)]])
>>> T.options()['align'], T.options()['frame']
('left', False)
>>> T.options(align='right', frame=True)
```

(continues on next page)

(continued from previous page)

```
>>> T.options()['align'], T.options()['frame']
('right', True)
```

Note that when first initializing a table, `header_row` or `header_column` can be a list. In this case, during the initialization process, the header is merged with the rest of the data, so changing the header option later using `table.options(...)` doesn't affect the contents of the table, just whether the row or column is highlighted. When using this *options()* method, no merging of data occurs, so here `header_row` and `header_column` should just be `True` or `False`, not a list.

```
sage: T = table([[1,2,3], [4,5,6]], header_row=['a', 'b', 'c'], frame=True)
sage: T
┌───┬───┬───┐
│ a │ b │ c │
├───┼───┼───┤
│ 1 │ 2 │ 3 │
├───┼───┼───┤
│ 4 │ 5 │ 6 │
└───┴───┴───┘
sage: T.options(header_row=False)
sage: T
┌───┬───┬───┐
│ a │ b │ c │
├───┼───┼───┤
│ 1 │ 2 │ 3 │
├───┼───┼───┤
│ 4 │ 5 │ 6 │
└───┴───┴───┘
```

```
>>> from sage.all import *
>>> T = table([[Integer(1),Integer(2),Integer(3)], [Integer(4),Integer(5),
↪Integer(6)]], header_row=['a', 'b', 'c'], frame=True)
>>> T
┌───┬───┬───┐
│ a │ b │ c │
├───┼───┼───┤
│ 1 │ 2 │ 3 │
├───┼───┼───┤
│ 4 │ 5 │ 6 │
└───┴───┴───┘
>>> T.options(header_row=False)
>>> T
┌───┬───┬───┐
│ a │ b │ c │
├───┼───┼───┤
│ 1 │ 2 │ 3 │
├───┼───┼───┤
│ 4 │ 5 │ 6 │
└───┴───┴───┘
```

If you do specify a list for `header_row`, an error is raised:

```
sage: T.options(header_row=['x', 'y', 'z'])
```

(continues on next page)

(continued from previous page)

```
Traceback (most recent call last):
...
TypeError: header_row should be either True or False.
```

```
>>> from sage.all import *
>>> T.options(header_row=['x', 'y', 'z'])
Traceback (most recent call last):
...
TypeError: header_row should be either True or False.
```

transpose()

Return a table which is the transpose of this one: rows and columns have been interchanged. Several of the properties of the original table are preserved: whether a frame is present and any alignment setting. On the other hand, header rows are converted to header columns, and vice versa.

EXAMPLES:

```
sage: T = table([[1,2,3], [4,5,6]])
sage: T.transpose()
  1   4
  2   5
  3   6
sage: T = table([[1,2,3], [4,5,6]], header_row=['x', 'y', 'z'], frame=True)
sage: T.transpose()
┌───╥───┬───┐
│ x ║ 1 │ 4 │
├───╫───┼───┤
│ y ║ 2 │ 5 │
├───╫───┼───┤
│ z ║ 3 │ 6 │
└───╨───┴───┘
```

```
>>> from sage.all import *
>>> T = table([[Integer(1),Integer(2),Integer(3)], [Integer(4),Integer(5),
↪Integer(6)]])
>>> T.transpose()
  1   4
  2   5
  3   6
>>> T = table([[Integer(1),Integer(2),Integer(3)], [Integer(4),Integer(5),
↪Integer(6)]], header_row=['x', 'y', 'z'], frame=True)
>>> T.transpose()
┌───╥───┬───┐
│ x ║ 1 │ 4 │
├───╫───┼───┤
│ y ║ 2 │ 5 │
├───╫───┼───┤
│ z ║ 3 │ 6 │
└───╨───┴───┘
```

4.2 HTML and MathML

4.2.1 HTML Fragments

This module defines a HTML fragment class, which holds a piece of HTML. This is primarily used in browser-based notebooks, though it might be useful for creating static pages as well.

This module defines *MathJax*, an object of which performs the task of producing an HTML representation of any object. The produced HTML is renderable in a browser-based notebook with the help of MathJax.

class sage.misc.html.**HTMLFragmentFactory**

Bases: SageObject

eval(*s*, *locals=None*)

Evaluate embedded <sage> tags.

INPUT:

- `s` – string
- `globals` – dictionary; the global variables when evaluating `s`. Default: the current global variables.

OUTPUT: *HtmlFragment*

EXAMPLES:

```
sage: a = 123
sage: html.eval('<sage>a</sage>')
\(123\)
sage: html.eval('<sage>a</sage>', locals={'a': 456})
\(456\)
```

```
>>> from sage.all import *
>>> a = Integer(123)
>>> html.eval('<sage>a</sage>')
\(123\)
>>> html.eval('<sage>a</sage>', locals={'a': Integer(456)})
\(456\)
```

iframe(*url*, *height=400*, *width=800*)

Generate an iframe HTML fragment.

INPUT:

- `url` – string; a url, either with or without URI scheme (defaults to "http"), or an absolute file path
- `height` – the number of pixels for the page height Defaults to 400
- `width` – the number of pixels for the page width Defaults to 800

OUTPUT: *HtmlFragment*

EXAMPLES:

```
sage: pretty_print(html.iframe("sagemath.org"))
<iframe height="400" width="800"
src="http://sagemath.org"></iframe>
sage: pretty_print(html.iframe("http://sagemath.org",30,40))
<iframe height="30" width="40"
src="http://sagemath.org"></iframe>
```

(continues on next page)

(continued from previous page)

```
sage: pretty_print(html.iframe("https://sagemath.org",30))
<iframe height="30" width="800"
src="https://sagemath.org"></iframe>
sage: pretty_print(html.iframe("/home/admin/0/data/filename"))
<iframe height="400" width="800"
src="file:///home/admin/0/data/filename"></iframe>
sage: pretty_print(html.iframe('
↪iVBORw0KGgoAAAANSUhEUgAAA'
....: 'AUAAAAFCAYAAACNbyblAAAAHElEQVQI12P4//8/w38GIAXDIBKE0DHxgljNBA'
....: 'AO9TXL0Y4OHwAAAABJRU5ErkJggg==''))
<iframe height="400" width="800"
src="http://
↪iVBORw0KGgoAAAANSUhEUgAAAAUAAAAFCAYAAACNbyblAAAAHElEQVQI12P4//8/
↪w38GIAXDIBKE0DHxgljNBAAO9TXL0Y4OHwAAAABJRU5ErkJggg==""></iframe>
```

```
>>> from sage.all import *
>>> pretty_print(html.iframe("sagemath.org"))
<iframe height="400" width="800"
src="http://sagemath.org"></iframe>
>>> pretty_print(html.iframe("http://sagemath.org",Integer(30),Integer(40)))
<iframe height="30" width="40"
src="http://sagemath.org"></iframe>
>>> pretty_print(html.iframe("https://sagemath.org",Integer(30)))
<iframe height="30" width="800"
src="https://sagemath.org"></iframe>
>>> pretty_print(html.iframe("/home/admin/0/data/filename"))
<iframe height="400" width="800"
src="file:///home/admin/0/data/filename"></iframe>
>>> pretty_print(html.iframe(''
... 'AUAAAAFCAYAAACNbyblAAAAHElEQVQI12P4//8/w38GIAXDIBKE0DHxgljNBA'
... 'AO9TXL0Y4OHwAAAABJRU5ErkJggg==''))
<iframe height="400" width="800"
src="http://
↪iVBORw0KGgoAAAANSUhEUgAAAAUAAAAFCAYAAACNbyblAAAAHElEQVQI12P4//8/
↪w38GIAXDIBKE0DHxgljNBAAO9TXL0Y4OHwAAAABJRU5ErkJggg==""></iframe>
```

class sage.misc.html.**HtmlFragment**

Bases: `str`, `SageObject`

A HTML fragment.

This is a piece of HTML, usually not a complete document. For example, just a `<div>...</div>` piece and not the entire `<html>...</html>`.

EXAMPLES:

```
sage: from sage.misc.html import HtmlFragment
sage: HtmlFragment('<b>test</b>')
<b>test</b>
```

```
>>> from sage.all import *
>>> from sage.misc.html import HtmlFragment
>>> HtmlFragment('<b>test</b>')
```

(continues on next page)

(continued from previous page)

```
<b>test</b>
```

_rich_repr_(*display_manager*, ***kwds*)

Rich Output Magic Method.

See `sage.repl.rich_output` for details.

EXAMPLES:

```
sage: from sage.repl.rich_output import get_display_manager
sage: dm = get_display_manager()
sage: h = sage.misc.html.HtmlFragment('<b>old</b>')
sage: h._rich_repr_(dm)  # the doctest backend does not support html
OutputPlainText container
```

```
>>> from sage.all import *
>>> from sage.repl.rich_output import get_display_manager
>>> dm = get_display_manager()
>>> h = sage.misc.html.HtmlFragment('<b>old</b>')
>>> h._rich_repr_(dm)  # the doctest backend does not support html
OutputPlainText container
```

class sage.misc.html.**MathJax**

Bases: `object`

Render LaTeX input using MathJax. This returns a *MathJaxExpr*.

EXAMPLES:

```
sage: from sage.misc.html import MathJax
sage: MathJax()(3)
<html>\[3\]</html>
sage: MathJax()(ZZ)
<html>\[\newcommand{\Bold}[1]{\mathbf{#1}}\Bold{Z}\]</html>
```

```
>>> from sage.all import *
>>> from sage.misc.html import MathJax
>>> MathJax()(Integer(3))
<html>\[3\]</html>
>>> MathJax()(ZZ)
<html>\[\newcommand{\Bold}[1]{\mathbf{#1}}\Bold{Z}\]</html>
```

eval(*x*, *globals=None*, *locals=None*, *mode='display'*, *combine_all=False*)

Render LaTeX input using MathJax. This returns a *MathJaxExpr*.

INPUT:

- `x` – a Sage object
- `globals` – a globals dictionary
- `locals` – extra local variables used when evaluating Sage code in `x`
- `mode` – string (default: `'display'`); `'display'` for displaymath, `'inline'` for inline math, or `'plain'` for just the LaTeX code without the surrounding html and script tags

- `combine_all` – boolean (default: `False`); if `combine_all` is `True` and the input is a tuple, then it does not return a tuple and instead returns a string with all the elements separated by a single space

OUTPUT: *MathJaxExpr*

EXAMPLES:

```
sage: from sage.misc.html import MathJax
sage: MathJax().eval(3, mode='display')
<html>\[3\]</html>
sage: MathJax().eval(3, mode='inline')
<html>\(3\)</html>
sage: MathJax().eval(type(3), mode='inline')
<html>\(\verb|&lt;class|\verb| |\verb|'sage.rings.integer.Integer'>|\)</html>
```

```
>>> from sage.all import *
>>> from sage.misc.html import MathJax
>>> MathJax().eval(Integer(3), mode='display')
<html>\[3\]</html>
>>> MathJax().eval(Integer(3), mode='inline')
<html>\(3\)</html>
>>> MathJax().eval(type(Integer(3)), mode='inline')
<html>\(\verb|&lt;class|\verb| |\verb|'sage.rings.integer.Integer'>|\)</html>
```

class sage.misc.html.**MathJaxExpr**(*y*)

Bases: `object`

An arbitrary MathJax expression that can be nicely concatenated.

EXAMPLES:

```
sage: from sage.misc.html import MathJaxExpr
sage: MathJaxExpr("a^{2}") + MathJaxExpr("x^{-1}")
a^{2}x^{-1}
```

```
>>> from sage.all import *
>>> from sage.misc.html import MathJaxExpr
>>> MathJaxExpr("a^{2}") + MathJaxExpr("x^{-1}")
a^{2}x^{-1}
```

sage.misc.html.**html**(*obj*, *concatenate=True*, *strict=False*)

Construct a HTML fragment.

INPUT:

- `obj` – anything. An object for which you want an HTML representation
- `concatenate` – if `True`, combine HTML representations of elements of the container `obj`
- `strict` – if `True`, construct an HTML representation of `obj` even if `obj` is a string

OUTPUT: *HtmlFragment*

EXAMPLES:

```
sage: h = html('<hr>');  pretty_print(h)
<hr>
sage: type(h)
```

(continues on next page)

(continued from previous page)

```
<class 'sage.misc.html.HtmlFragment'>

sage: html(1/2)
<html>\(\displaystyle \frac{1}{2}\)</html>

sage: html('<a href="http://sagemath.org">sagemath</a>')
<a href="http://sagemath.org">sagemath</a>

sage: html('<a href="http://sagemath.org">sagemath</a>', strict=True)
<html>\(\displaystyle \verb|&lt;a|\verb| |\verb|href="http://sagemath.org">
↪sagemath&lt;/a>|\)</html>
```

```
>>> from sage.all import *
>>> h = html('<hr>');  pretty_print(h)
<hr>
>>> type(h)
<class 'sage.misc.html.HtmlFragment'>

>>> html(Integer(1)/Integer(2))
<html>\(\displaystyle \frac{1}{2}\)</html>

>>> html('<a href="http://sagemath.org">sagemath</a>')
<a href="http://sagemath.org">sagemath</a>

>>> html('<a href="http://sagemath.org">sagemath</a>', strict=True)
<html>\(\displaystyle \verb|&lt;a|\verb| |\verb|href="http://sagemath.org">
↪sagemath&lt;/a>|\)</html>
```

Display preference `align_latex` affects rendering of LaTeX expressions:

```
sage: from sage.repl.rich_output.display_manager import get_display_manager
sage: dm = get_display_manager()
sage: dm.preferences.align_latex = 'left'
sage: html(1/2)
<html>\(\displaystyle \frac{1}{2}\)</html>
sage: dm.preferences.align_latex = 'center'
sage: html(1/2)
<html>\[\frac{1}{2}\]</html>
sage: dm.preferences.align_latex = None  # same with left
sage: html(1/2)
<html>\(\displaystyle \frac{1}{2}\)</html>
```

```
>>> from sage.all import *
>>> from sage.repl.rich_output.display_manager import get_display_manager
>>> dm = get_display_manager()
>>> dm.preferences.align_latex = 'left'
>>> html(Integer(1)/Integer(2))
<html>\(\displaystyle \frac{1}{2}\)</html>
>>> dm.preferences.align_latex = 'center'
>>> html(Integer(1)/Integer(2))
<html>\[\frac{1}{2}\]</html>
>>> dm.preferences.align_latex = None  # same with left
```

(continues on next page)

(continued from previous page)

```
>>> html(Integer(1)/Integer(2))
<html>\(\displaystyle \frac{1}{2}\)</html>
```

sage.misc.html.**math_parse**(*s*)

Transform the string `s` with TeX maths to an HTML string renderable by MathJax.

INPUT:

- `s` – string

OUTPUT: *HtmlFragment*

Specifically this method does the following:

- Replace all `$text$`'s by `\(text\)`
- Replace all `$$text$$`'s by `\[text\]`
- Replace all `$`'s by `$`'s. Note that this has precedence over the above two cases.

EXAMPLES:

```
sage: print(sage.misc.html.math_parse('This is $2+2$.'))
This is \(2+2\).
sage: print(sage.misc.html.math_parse('This is $$2+2$$.'))
This is \[2+2\].
sage: print(sage.misc.html.math_parse('This is \\[2+2\\].'))
This is \[2+2\].
sage: print(sage.misc.html.math_parse(r'$2+2$ is rendered to $2+2$.'))
<span>$</span>2+2<span>$</span> is rendered to \(2+2\).
```

```
>>> from sage.all import *
>>> print(sage.misc.html.math_parse('This is $2+2$.'))
This is \(2+2\).
>>> print(sage.misc.html.math_parse('This is $$2+2$$.'))
This is \[2+2\].
>>> print(sage.misc.html.math_parse('This is \\[2+2\\].'))
This is \[2+2\].
>>> print(sage.misc.html.math_parse(r'$2+2$ is rendered to $2+2$.'))
<span>$</span>2+2<span>$</span> is rendered to \(2+2\).
```

sage.misc.html.**pretty_print_default**(*enable=True*)

Enable or disable default pretty printing.

Pretty printing means rendering things in HTML and by MathJax so that a browser-based frontend can render real math.

This function is pretty useless without the notebook, it should not be in the global namespace.

INPUT:

- `enable` – boolean (default: `True`); if `True`, turn on pretty printing. If `False`, turn it off.

EXAMPLES:

```
sage: pretty_print_default(True)
sage: 'foo'  # the doctest backend does not support html
'foo'
```

(continues on next page)

(continued from previous page)

```
sage: pretty_print_default(False)
sage: 'foo'
'foo'
```

```
>>> from sage.all import *
>>> pretty_print_default(True)
>>> 'foo'  # the doctest backend does not support html
'foo'
>>> pretty_print_default(False)
>>> 'foo'
'foo'
```

4.2.2 MathML output support

In order to support MathML formatting, an object should define a special method _mathml_(self) that returns its MathML representation.

class sage.misc.mathml.**MathML**

Bases: str

sage.misc.mathml.**bool_function**(*x*)

sage.misc.mathml.**list_function**(*x*)

sage.misc.mathml.**mathml**(*x*)

Output x formatted for inclusion in a MathML document.

sage.misc.mathml.**str_function**(*x*)

sage.misc.mathml.**tuple_function**(*x*)

4.3 LaTeX

4.3.1 Installing and using SageTeX

SageTeX is a system for embedding computations and plots from Sage into LaTeX documents. It is included by default with Sage, so if you have installed Sage, you already have SageTeX. However, to get it to work, you need to make TeX aware of SageTeX. Instructions for that are in the Make SageTeX known to TeX section of the Sage tutorial (this link should take you to a local copy of the tutorial).

4.3.2 LaTeX printing support

In order to support latex formatting, an object should define a special method `_latex_(self)` that returns a string, which will be typeset in a mathematical mode (the exact mode depends on circumstances).

This module focuses on using LaTeX for printing. For the use of LaTeX for rendering math in HTML by MathJax, see *MathJax* defined in *sage.misc.html*.

AUTHORS:

- William Stein: original implementation
- Joel B. Mohler: latex_variable_name() drastic rewrite and many doc-tests

class sage.misc.latex.**Latex**(*debug=False*, *slide=False*, *density=150*, *engine=None*)

Bases: *LatexCall*

Enter, e.g.,

```
%latex
The equation $y^2 = x^3 + x$ defines an elliptic curve.
We have $2006 = \sage{factor(2006)}$.
```

in an input cell in the notebook to get a typeset version. Use `%latex_debug` to get debugging output.

Use `latex(...)` to typeset a Sage object. Use *LatexExpr* to typeset LaTeX code that you create by hand.

Use `%slide` instead to typeset slides.

Warning

You must have dvipng (or dvips and magick/convert) installed on your operating system, or this command will not work.

EXAMPLES:

```
sage: latex(x^20 + 1)                                                          #␣
↪needs sage.symbolic
x^{20} + 1
sage: latex(FiniteField(25,'a'))                                               #␣
↪needs sage.rings.finite_rings
\Bold{F}_{5^{2}}
sage: latex("hello")
\text{\texttt{hello}}
sage: LatexExpr(r"\frac{x^2 - 1}{x + 1} = x - 1")
\frac{x^2 - 1}{x + 1} = x - 1
```

```
>>> from sage.all import *
>>> latex(x**Integer(20) + Integer(1))                                         ␣
↪               # needs sage.symbolic
x^{20} + 1
>>> latex(FiniteField(Integer(25),'a'))                                        ␣
↪     # needs sage.rings.finite_rings
\Bold{F}_{5^{2}}
>>> latex("hello")
\text{\texttt{hello}}
>>> LatexExpr(r"\frac{x^2 - 1}{x + 1} = x - 1")
\frac{x^2 - 1}{x + 1} = x - 1
```

LaTeX expressions can be added; note that a space is automatically inserted:

```
sage: LatexExpr(r"y \neq") + latex(x^20 + 1)                                   #␣
↪needs sage.symbolic
y \neq x^{20} + 1
```

```
>>> from sage.all import *
>>> LatexExpr(r"y \neq") + latex(x**Integer(20) + Integer(1))                  ␣
```

(continues on next page)

(continued from previous page)

```
↪                # needs sage.symbolic
y \neq x^{20} + 1
```

add_macro(*macro*)

Append to the string of extra LaTeX macros, for use with %latex and %html.

INPUT:

- `macro` – string

EXAMPLES:

```
sage: latex.extra_macros()
''
sage: latex.add_macro("\\newcommand{\\foo}{bar}")
sage: latex.extra_macros()
'\\newcommand{\\foo}{bar}'
sage: latex.extra_macros("")  # restore to default
```

```
>>> from sage.all import *
>>> latex.extra_macros()
''
>>> latex.add_macro("\\newcommand{\\foo}{bar}")
>>> latex.extra_macros()
'\\newcommand{\\foo}{bar}'
>>> latex.extra_macros("")  # restore to default
```

add_package_to_preamble_if_available(*package_name*)

Add a `\usepackage{package_name}` instruction to the latex preamble if not yet present there, and if `package_name.sty` is available in the LaTeX installation.

INPUT:

- `package_name` – string

See also

- *add_to_preamble()*
- *has_file()*.

add_to_preamble(*s*)

Append to the string `s` of extra LaTeX macros, for use with `%latex`.

EXAMPLES:

```
sage: latex.extra_preamble()
''
sage: latex.add_to_preamble("\\DeclareMathOperator{\\Ext}{Ext}")
```

```
>>> from sage.all import *
>>> latex.extra_preamble()
''
>>> latex.add_to_preamble("\\DeclareMathOperator{\\Ext}{Ext}")
```

At this point, a notebook cell containing

```
%latex
$\Ext_A^*(\GF{2}, \GF{2}) \Rightarrow \pi_*^s*(S^0)$
```

will be typeset correctly.

```
sage: latex.add_to_preamble("\\usepackage{xypic}")
sage: latex.extra_preamble()
'\\DeclareMathOperator{\\Ext}{Ext}\\usepackage{xypic}'
```

```
>>> from sage.all import *
>>> latex.add_to_preamble("\\usepackage{xypic}")
>>> latex.extra_preamble()
'\\DeclareMathOperator{\\Ext}{Ext}\\usepackage{xypic}'
```

Now one can put various xypic diagrams into a `%latex` cell, such as

```
%latex
\[ \xymatrix{ \circ \ar `r[d]^{a} `[rr]^{b} `/4pt[rr]^{c} `[rrr]^{d}
`_dl[drrr]^{e} [drrr]^{f} & \circ & \circ & \circ \\ \circ & \circ &
\circ & \circ } \]
```

Reset the preamble to its default, the empty string:

```
sage: latex.extra_preamble('')
sage: latex.extra_preamble()
''
```

```
>>> from sage.all import *
>>> latex.extra_preamble('')
>>> latex.extra_preamble()
''
```

blackboard_bold(*t=None*)

Controls whether Sage uses blackboard bold or ordinary bold face for typesetting `ZZ`, `RR`, etc.

INPUT:

- `t` – boolean or `None`

OUTPUT:

If `t` is `None`, return the current setting (`True` or `False`).

If `t` is `True`, use blackboard bold (`\mathbb`); otherwise use boldface (`\mathbf`).

EXAMPLES:

```
sage: latex.blackboard_bold()
False
sage: latex.blackboard_bold(True)
sage: latex.blackboard_bold()
True
sage: latex.blackboard_bold(False)
```

```
>>> from sage.all import *
>>> latex.blackboard_bold()
False
>>> latex.blackboard_bold(True)
>>> latex.blackboard_bold()
True
>>> latex.blackboard_bold(False)
```

check_file(*file_name*, *more_info=''*)

INPUT:

- `file_name` – string
- `more_info` – string (default: `''`)

Emit a warning if the local LaTeX installation does not include `file_name`. The string `more_info` is appended to the warning message. The warning is only emitted the first time this method is called.

EXAMPLES:

```
sage: latex.check_file("article.cls")       # optional - latex
sage: latex.check_file("some_inexistent_file.sty")
Warning: `some_inexistent_file.sty` is not part of this computer's TeX␣
↪installation.
sage: latex.check_file("some_inexistent_file.sty")
sage: latex.check_file("some_inexistent_file.sty", "This file is required for␣
↪blah. It can be downloaded from: http://blah.org/")
Warning: `some_inexistent_file.sty` is not part of this computer's TeX␣
↪installation.
This file is required for blah. It can be downloaded from: http://blah.org/
```

```
>>> from sage.all import *
>>> latex.check_file("article.cls")       # optional - latex
>>> latex.check_file("some_inexistent_file.sty")
Warning: `some_inexistent_file.sty` is not part of this computer's TeX␣
↪installation.
>>> latex.check_file("some_inexistent_file.sty")
>>> latex.check_file("some_inexistent_file.sty", "This file is required for␣
↪blah. It can be downloaded from: http://blah.org/")
Warning: `some_inexistent_file.sty` is not part of this computer's TeX␣
↪installation.
This file is required for blah. It can be downloaded from: http://blah.org/
```

This test checks that the bug in Issue #9091 is fixed:

```
sage: latex.check_file("article.cls", "The article class is really critical.
↪")    # optional - latex
```

```
>>> from sage.all import *
>>> latex.check_file("article.cls", "The article class is really critical.") ␣
↪  # optional - latex
```

engine(*e=None*)

Set Sage to use `e` as latex engine when typesetting with *view()*, in `%latex` cells, etc.

INPUT:

- `e` – `'latex'`, `'pdflatex'`, `'xelatex'`, `'lualatex'` or `None`

If `e` is `None`, return the current engine.

If using the XeLaTeX engine, it will almost always be necessary to set the proper preamble with *extra_preamble()* or *add_to_preamble()*. For example:

```
latex.extra_preamble(r'''\usepackage{fontspec,xunicode,xltxtra}
\setmainfont[Mapping=tex-text]{some font here}
\setmonofont[Mapping=tex-text]{another font here}''')
```

EXAMPLES:

```
sage: latex.engine()  # random
'lualatex'
sage: latex.engine("latex")
sage: latex.engine()
'latex'
sage: latex.engine("pdflatex")
sage: latex.engine()
'pdflatex'
```

```
>>> from sage.all import *
>>> latex.engine()  # random
'lualatex'
>>> latex.engine("latex")
>>> latex.engine()
'latex'
>>> latex.engine("pdflatex")
>>> latex.engine()
'pdflatex'
```

eval(*x*, *globals*, *strip=False*, *filename=None*, *debug=None*, *density=None*, *engine=None*, *locals={}*)

Compile the formatted tex given by `x` as a png and writes the output file to the directory given by `filename`.

INPUT:

- `globals` – a globals dictionary
- `x` – string to evaluate
- `strip` – ignored
- `filename` – output filename
- `debug` – whether to print verbose debugging output
- `density` – how big output image is
- `engine` – latex engine to use. Currently `'latex'`, `'pdflatex'`, `'xelatex'` and `'lualatex'` are supported
- `locals` – extra local variables used when evaluating Sage code in `x`

Warning

When using `'latex'` (the default), you must have `dvipng` (or `dvips` and `magick/convert`) installed on your operating system, or this command will not work. When using `'pdflatex'`, `'xelatex'` or `'lualatex'`, you must have `magick/convert` installed.

OUTPUT:

If it compiled successfully, this returns an empty string `''`, otherwise it returns `None`.

EXAMPLES:

```
sage: fn = tmp_filename()
sage: latex.eval("$\\ZZ[x]$", locals(), filename=fn) # not tested
''
sage: latex.eval(r"\ThisIsAnInvalidCommand", {}) # optional -- latex␣
↪ImageMagick
An error occurred...
```

```
>>> from sage.all import *
>>> fn = tmp_filename()
>>> latex.eval("$\\ZZ[x]$", locals(), filename=fn) # not tested
''
>>> latex.eval(r"\ThisIsAnInvalidCommand", {}) # optional -- latex ImageMagick
An error occurred...
```

extra_macros(*macros=None*)

String containing extra LaTeX macros to use with `%latex` and `%html`.

INPUT:

- `macros` – string (default: `None`)

If `macros` is `None`, return the current string. Otherwise, set it to `macros`. If you want to *append* to the string of macros instead of replacing it, use *latex.add_macro*.

EXAMPLES:

```
sage: latex.extra_macros("\\newcommand{\\foo}{bar}")
sage: latex.extra_macros()
'\\newcommand{\\foo}{bar}'
sage: latex.extra_macros("")
sage: latex.extra_macros()
''
```

```
>>> from sage.all import *
>>> latex.extra_macros("\\newcommand{\\foo}{bar}")
>>> latex.extra_macros()
'\\newcommand{\\foo}{bar}'
>>> latex.extra_macros("")
>>> latex.extra_macros()
''
```

extra_preamble(*s=None*)

String containing extra preamble to be used with %latex.

INPUT:

- `s` – string or `None`

If `s` is `None`, return the current preamble. Otherwise, set it to `s`. If you want to *append* to the current extra preamble instead of replacing it, use *`latex.add_to_preamble`*.

You will almost certainly need to use this when using the XeLaTeX engine; see below or the documentation for *`engine()`* for a suggested preamble.

EXAMPLES:

```
sage: latex.extra_preamble("\\DeclareMathOperator{\\Ext}{Ext}")
sage: latex.extra_preamble()
'\\DeclareMathOperator{\\Ext}{Ext}'
sage: latex.extra_preamble("\\"+r"usepackage{fontspec,xunicode,xltxtra}\
↪setmainfont[Mapping=tex-text]{UnBatang}\setmonofont[Mapping=tex-text]
↪{UnDotum}")
sage: latex.extra_preamble()
'\\usepackage{fontspec,xunicode,xltxtra}\\setmainfont[Mapping=tex-text]
↪{UnBatang}\\setmonofont[Mapping=tex-text]{UnDotum}'
sage: latex.extra_preamble("")
sage: latex.extra_preamble()
''
```

```
>>> from sage.all import *
>>> latex.extra_preamble("\\DeclareMathOperator{\\Ext}{Ext}")
>>> latex.extra_preamble()
'\\DeclareMathOperator{\\Ext}{Ext}'
>>> latex.extra_preamble("\\"+r"usepackage{fontspec,xunicode,xltxtra}\
↪setmainfont[Mapping=tex-text]{UnBatang}\setmonofont[Mapping=tex-text]
↪{UnDotum}")
>>> latex.extra_preamble()
'\\usepackage{fontspec,xunicode,xltxtra}\\setmainfont[Mapping=tex-text]
↪{UnBatang}\\setmonofont[Mapping=tex-text]{UnDotum}'
>>> latex.extra_preamble("")
>>> latex.extra_preamble()
''
```

has_file(*file_name*)

INPUT:

- `file_name` – string

Tests whether the local LaTeX installation includes `file_name`.

EXAMPLES:

```
sage: latex.has_file("article.cls")       # optional - latex
True
sage: latex.has_file("some_inexistent_file.sty")
False
```

```
>>> from sage.all import *
>>> latex.has_file("article.cls")       # optional - latex
True
>>> latex.has_file("some_inexistent_file.sty")
False
```

matrix_column_alignment(*align=None*)

Changes the column-alignment of the LaTeX representation of matrices.

INPUT:

- `align` – string (`'r'` for right, `'c'` for center, `'l'` for left) or `None`

OUTPUT:

If `align` is `None`, then returns the current alignment-string. Otherwise, set this alignment.

The input `align` can be any string which the LaTeX `array`-environment understands as a parameter for aligning a column.

EXAMPLES:

```
sage: # needs sage.modules
sage: a = matrix(1, 1, [42])
sage: latex(a)
\left(\begin{array}{r}
42
\end{array}\right)
sage: latex.matrix_column_alignment('c')
sage: latex(a)
\left(\begin{array}{c}
42
\end{array}\right)
sage: latex.matrix_column_alignment('l')
sage: latex(a)
\left(\begin{array}{l}
42
\end{array}\right)
```

```
>>> from sage.all import *
>>> # needs sage.modules
>>> a = matrix(Integer(1), Integer(1), [Integer(42)])
>>> latex(a)
\left(\begin{array}{r}
42
\end{array}\right)
>>> latex.matrix_column_alignment('c')
>>> latex(a)
\left(\begin{array}{c}
42
\end{array}\right)
>>> latex.matrix_column_alignment('l')
>>> latex(a)
\left(\begin{array}{l}
42
\end{array}\right)
```

Restore defaults:

```
sage: latex.matrix_column_alignment('r')
```

```
>>> from sage.all import *
>>> latex.matrix_column_alignment('r')
```

matrix_delimiters(*left=None*, *right=None*)

Change the left and right delimiters for the LaTeX representation of matrices

INPUT:

- `left`, `right` – strings or `None`

If both `left` and `right` are `None`, then return the current delimiters. Otherwise, set the left and/or right delimiters, whichever are specified.

Good choices for `left` and `right` are any delimiters which LaTeX understands and knows how to resize; some examples are:

- parentheses: `'('`, `')'`
- brackets: `'['`, `']'`
- braces: `'\\{'`, `'\\}'`
- vertical lines: `'|'`
- angle brackets: `'\\langle'`, `'\\rangle'`

Note

Putting aside aesthetics, you may combine these in any way imaginable; for example, you could set `left` to be a right-hand bracket `']'` and `right` to be a right-hand brace `'\\}'`, and it will be typeset correctly.

EXAMPLES:

```
sage: # needs sage.modules
sage: a = matrix(1, 1, [17])
sage: latex(a)
\left(\begin{array}{r}
17
\end{array}\right)
sage: latex.matrix_delimiters('[', ']')
sage: latex(a)
\left[\begin{array}{r}
17
\end{array}\right]
sage: latex.matrix_delimiters(left='\\{')
sage: latex(a)
\left\{\begin{array}{r}
17
\end{array}\right]
sage: latex.matrix_delimiters()
['\\{', ']']
```

```
>>> from sage.all import *
>>> # needs sage.modules
>>> a = matrix(Integer(1), Integer(1), [Integer(17)])
>>> latex(a)
```

(continues on next page)

(continued from previous page)

```
\left(\begin{array}{r}
17
\end{array}\right)
>>> latex.matrix_delimiters('[', ']')
>>> latex(a)
\left[\begin{array}{r}
17
\end{array}\right]
>>> latex.matrix_delimiters(left='\\{')
>>> latex(a)
\left\{\begin{array}{r}
17
\end{array}\right]
>>> latex.matrix_delimiters()
['\\{', ']']
```

Restore defaults:

```
sage: latex.matrix_delimiters('(', ')')
```

```
>>> from sage.all import *
>>> latex.matrix_delimiters('(', ')')
```

vector_delimiters(*left=None*, *right=None*)

Change the left and right delimiters for the LaTeX representation of vectors

INPUT:

- `left`, `right` – strings or `None`

If both `left` and `right` are `None`, then return the current delimiters. Otherwise, set the left and/or right delimiters, whichever are specified.

Good choices for `left` and `right` are any delimiters which LaTeX understands and knows how to resize; some examples are:

- parentheses: `'('`, `')'`
- brackets: `'['`, `']'`
- braces: `'\\{'`, `'\\}'`
- vertical lines: `'|'`
- angle brackets: `'\\langle'`, `'\\rangle'`

Note

Putting aside aesthetics, you may combine these in any way imaginable; for example, you could set `left` to be a right-hand bracket `']'` and `right` to be a right-hand brace `'\\}'`, and it will be typeset correctly.

EXAMPLES:

```
sage: # needs sage.modules
sage: a = vector(QQ, [1,2,3])
```

(continues on next page)

(continued from previous page)

```
sage: latex(a)
\left(1,\,2,\,3\right)
sage: latex.vector_delimiters('[', ']')
sage: latex(a)
\left[1,\,2,\,3\right]
sage: latex.vector_delimiters(right='\\}')
sage: latex(a)
\left[1,\,2,\,3\right\}
sage: latex.vector_delimiters()
['[', '\\}']
```

```
>>> from sage.all import *
>>> # needs sage.modules
>>> a = vector(QQ, [Integer(1),Integer(2),Integer(3)])
>>> latex(a)
\left(1,\,2,\,3\right)
>>> latex.vector_delimiters('[', ']')
>>> latex(a)
\left[1,\,2,\,3\right]
>>> latex.vector_delimiters(right='\\}')
>>> latex(a)
\left[1,\,2,\,3\right\}
>>> latex.vector_delimiters()
['[', '\\}']
```

Restore defaults:

```
sage: latex.vector_delimiters('(', ')')
```

```
>>> from sage.all import *
>>> latex.vector_delimiters('(', ')')
```

class sage.misc.latex.**LatexCall**

Bases: object

Typeset Sage objects via a __call__ method to this class, typically by calling those objects' _latex_ methods. The class *Latex* inherits from this. This class is used in *latex_macros*, while functions from *latex_macros* are used in *Latex*, so this is here primarily to avoid circular imports.

EXAMPLES:

```
sage: from sage.misc.latex import LatexCall
sage: LatexCall()(ZZ)
\Bold{Z}
sage: LatexCall().__call__(ZZ)
\Bold{Z}
```

```
>>> from sage.all import *
>>> from sage.misc.latex import LatexCall
>>> LatexCall()(ZZ)
\Bold{Z}
>>> LatexCall().__call__(ZZ)
\Bold{Z}
```

This returns an instance of the class *LatexExpr*:

```
sage: type(LatexCall()(ZZ))
<class 'sage.misc.latex.LatexExpr'>
```

```
>>> from sage.all import *
>>> type(LatexCall()(ZZ))
<class 'sage.misc.latex.LatexExpr'>
```

class sage.misc.latex.**LatexExamples**

Bases: object

A catalogue of Sage objects with complicated _latex_ methods. Use these for testing *latex()*, *view()*, the Typeset button in the notebook, etc.

The classes here only have __init__, _repr_, and _latex_ methods.

EXAMPLES:

```
sage: from sage.misc.latex import latex_examples
sage: K = latex_examples.knot()
sage: K
LaTeX example for testing display of a knot produced by xypic...
sage: latex(K)
\vtop{\vbox{\xygraph{!{0;/r1.5pc/:}
[u] !{\vloop<(-.005)\khole||\vcrossneg \vunder- }
[] !{\ar @{-}@'{p-(1,0)@+}+(-1,1)}
[ul] !{\vcap[3]>\khole}
[rrr] !{\ar @{-}@'{p-(0,1)@+}-(1,1)}
}}}
```

```
>>> from sage.all import *
>>> from sage.misc.latex import latex_examples
>>> K = latex_examples.knot()
>>> K
LaTeX example for testing display of a knot produced by xypic...
>>> latex(K)
\vtop{\vbox{\xygraph{!{0;/r1.5pc/:}
[u] !{\vloop<(-.005)\khole||\vcrossneg \vunder- }
[] !{\ar @{-}@'{p-(1,0)@+}+(-1,1)}
[ul] !{\vcap[3]>\khole}
[rrr] !{\ar @{-}@'{p-(0,1)@+}-(1,1)}
}}}
```

class diagram

Bases: SageObject

LaTeX example for testing display of commutative diagrams. See its string representation for details.

EXAMPLES:

```
sage: from sage.misc.latex import latex_examples
sage: CD = latex_examples.diagram()
sage: CD
LaTeX example for testing display of a commutative diagram...
```

```
>>> from sage.all import *
>>> from sage.misc.latex import latex_examples
>>> CD = latex_examples.diagram()
>>> CD
LaTeX example for testing display of a commutative diagram...
```

class graph

Bases: SageObject

LaTeX example for testing display of graphs. See its string representation for details.

EXAMPLES:

```
sage: from sage.misc.latex import latex_examples
sage: G = latex_examples.graph()
sage: G
LaTeX example for testing display of graphs...
```

```
>>> from sage.all import *
>>> from sage.misc.latex import latex_examples
>>> G = latex_examples.graph()
>>> G
LaTeX example for testing display of graphs...
```

class knot

Bases: SageObject

LaTeX example for testing display of knots. See its string representation for details.

EXAMPLES:

```
sage: from sage.misc.latex import latex_examples
sage: K = latex_examples.knot()
sage: K
LaTeX example for testing display of a knot...
```

```
>>> from sage.all import *
>>> from sage.misc.latex import latex_examples
>>> K = latex_examples.knot()
>>> K
LaTeX example for testing display of a knot...
```

class pstricks

Bases: SageObject

LaTeX example for testing display of pstricks output. See its string representation for details.

EXAMPLES:

```
sage: from sage.misc.latex import latex_examples
sage: PS = latex_examples.pstricks()
sage: PS
LaTeX example for testing display of pstricks...
```

```
>>> from sage.all import *
>>> from sage.misc.latex import latex_examples
>>> PS = latex_examples.pstricks()
>>> PS
LaTeX example for testing display of pstricks...
```

class sage.misc.latex.**LatexExpr**

Bases: `str`

A class for LaTeX expressions.

Normally, objects of this class are created by a *latex()* call. It is also possible to generate *LatexExpr* directly from a string, which must contain valid LaTeX code for typesetting in math mode (without dollar signs). In the Jupyter notebook, use `pretty_print()` to actually see the typeset LaTeX code; alternatively, from either the command-line or the notebook, use the *view()* function.

INPUT:

- `str` – string with valid math mode LaTeX code (or something which can be converted to such a string)

OUTPUT: *LatexExpr* wrapping the string representation of the input

EXAMPLES:

```
sage: latex(x^20 + 1)                                                          #␣
↪needs sage.symbolic
x^{20} + 1
sage: LatexExpr(r"\frac{x^2 + 1}{x - 2}")                                      #␣
↪needs sage.symbolic
\frac{x^2 + 1}{x - 2}
```

```
>>> from sage.all import *
>>> latex(x**Integer(20) + Integer(1))                                          ␣
↪               # needs sage.symbolic
x^{20} + 1
>>> LatexExpr(r"\frac{x^2 + 1}{x - 2}")                                      #␣
↪needs sage.symbolic
\frac{x^2 + 1}{x - 2}
```

`LatexExpr` simply converts to string without doing anything extra, it does *not* call *latex()*:

```
sage: latex(ZZ)
\Bold{Z}
sage: LatexExpr(ZZ)
Integer Ring
```

```
>>> from sage.all import *
>>> latex(ZZ)
\Bold{Z}
>>> LatexExpr(ZZ)
Integer Ring
```

The result of *latex()* is of type `LatexExpr`:

```
sage: L = latex(x^20 + 1)                                                    #␣
↪needs sage.symbolic
sage: L                                                                      #␣
↪needs sage.symbolic
x^{20} + 1
sage: type(L)                                                                #␣
↪needs sage.symbolic
<class 'sage.misc.latex.LatexExpr'>
```

```
>>> from sage.all import *
>>> L = latex(x**Integer(20) + Integer(1))                                    ␣
↪               # needs sage.symbolic
>>> L                                                                        #␣
↪needs sage.symbolic
x^{20} + 1
>>> type(L)                                                                  #␣
↪needs sage.symbolic
<class 'sage.misc.latex.LatexExpr'>
```

A `LatexExpr` can be converted to a plain string:

```
sage: str(latex(x^20 + 1))                                                   #␣
↪needs sage.symbolic
'x^{20} + 1'
```

```
>>> from sage.all import *
>>> str(latex(x**Integer(20) + Integer(1)))                                   ␣
↪               # needs sage.symbolic
'x^{20} + 1'
```

`sage.misc.latex.`**`None_function`**`(x)`

Return the LaTeX code for `None`.

INPUT:

- `x` – None

EXAMPLES:

```
sage: from sage.misc.latex import None_function
sage: print(None_function(None))
\mathrm{None}
```

```
>>> from sage.all import *
>>> from sage.misc.latex import None_function
>>> print(None_function(None))
\mathrm{None}
```

`sage.misc.latex.`**`bool_function`**`(x)`

Return the LaTeX code for a boolean `x`.

INPUT:

- `x` – boolean

EXAMPLES:

```
sage: from sage.misc.latex import bool_function
sage: print(bool_function(2==3))
\mathrm{False}
sage: print(bool_function(3==(2+1)))
\mathrm{True}
```

```
>>> from sage.all import *
>>> from sage.misc.latex import bool_function
>>> print(bool_function(Integer(2)==Integer(3)))
\mathrm{False}
>>> print(bool_function(Integer(3)==(Integer(2)+Integer(1))))
\mathrm{True}
```

sage.misc.latex.**builtin_constant_function**(*x*)

Return the LaTeX code for a builtin constant `x`.

INPUT:

- `x` – builtin constant

See also

Python built-in Constants http://docs.python.org/library/constants.html

EXAMPLES:

```
sage: from sage.misc.latex import builtin_constant_function
sage: builtin_constant_function(True)
'\\mbox{\\rm True}'
sage: builtin_constant_function(None)
'\\mbox{\\rm None}'
sage: builtin_constant_function(NotImplemented)
'\\mbox{\\rm NotImplemented}'
sage: builtin_constant_function(Ellipsis)
'\\mbox{\\rm Ellipsis}'
```

```
>>> from sage.all import *
>>> from sage.misc.latex import builtin_constant_function
>>> builtin_constant_function(True)
'\\mbox{\\rm True}'
>>> builtin_constant_function(None)
'\\mbox{\\rm None}'
>>> builtin_constant_function(NotImplemented)
'\\mbox{\\rm NotImplemented}'
>>> builtin_constant_function(Ellipsis)
'\\mbox{\\rm Ellipsis}'
```

sage.misc.latex.**coeff_repr**(*c*)

LaTeX string representing coefficients in a linear combination.

INPUT:

- `c` – a coefficient (i.e., an element of a ring)

OUTPUT: string

EXAMPLES:

```
sage: from sage.misc.latex import coeff_repr
sage: coeff_repr(QQ(1/2))
'\\frac{1}{2}'
sage: coeff_repr(-x^2)                                                      #␣
↪needs sage.symbolic
'\\left(-x^{2}\\right)'
```

```
>>> from sage.all import *
>>> from sage.misc.latex import coeff_repr
>>> coeff_repr(QQ(Integer(1)/Integer(2)))
'\\frac{1}{2}'
>>> coeff_repr(-x**Integer(2))                                              ␣
↪      # needs sage.symbolic
'\\left(-x^{2}\\right)'
```

sage.misc.latex.**default_engine**()

Return the default latex engine and the official name of the engine. This is determined by availability of the popular engines on the user's system. It is assumed that at least latex is available.

This function is deprecated as part of the public API. There is instead an internal counterpart `_default_engine()`, but no stability promises are made with regards to its interface.

EXAMPLES:

```
sage: from sage.misc.latex import default_engine
sage: default_engine()  # random
('lualatex', 'LuaLaTeX')
```

```
>>> from sage.all import *
>>> from sage.misc.latex import default_engine
>>> default_engine()  # random
('lualatex', 'LuaLaTeX')
```

sage.misc.latex.**dict_function**(*x*)

Return the LaTeX code for a dictionary `x`.

INPUT:

- `x` – dictionary

EXAMPLES:

```
sage: # needs sage.symbolic
sage: from sage.misc.latex import dict_function
sage: x,y,z = var('x,y,z')
sage: print(dict_function({x/2: y^2}))
\left\{\frac{1}{2} \, x : y^{2}\right\}
sage: d = {(1,2,x^2): [sin(z^2), y/2]}
sage: latex(d)
\left\{\left(1, 2, x^{2}\right) :
       \left[\sin\left(z^{2}\right), \frac{1}{2} \, y\right]\right\}
```

```
>>> from sage.all import *
>>> # needs sage.symbolic
>>> from sage.misc.latex import dict_function
>>> x,y,z = var('x,y,z')
>>> print(dict_function({x/Integer(2): y**Integer(2)}))
\left\{\frac{1}{2} \, x : y^{2}\right\}
>>> d = {(Integer(1),Integer(2),x**Integer(2)): [sin(z**Integer(2)), y/
↪Integer(2)]}
>>> latex(d)
\left\{\left(1, 2, x^{2}\right) :
       \left[\sin\left(z^{2}\right), \frac{1}{2} \, y\right]\right\}
```

sage.misc.latex.**float_function**(*x*)

Return the LaTeX code for a python float `x`.

INPUT:

- `x` – a python float

EXAMPLES:

```
sage: from sage.misc.latex import float_function
sage: float_function(float(3.14))
3.14
sage: float_function(float(1e-10))
1 \times 10^{-10}
sage: float_function(float(2e10))
20000000000.0
```

```
>>> from sage.all import *
>>> from sage.misc.latex import float_function
>>> float_function(float(RealNumber('3.14')))
3.14
>>> float_function(float(RealNumber('1e-10')))
1 \times 10^{-10}
>>> float_function(float(RealNumber('2e10')))
20000000000.0
```

sage.misc.latex.**has_latex_attr**(*x*)

Return `True` if `x` has a `_latex_` attribute, except if `x` is a `type`, in which case return `False`.

EXAMPLES:

```
sage: from sage.misc.latex import has_latex_attr
sage: has_latex_attr(identity_matrix(3))                                    #␣
↪needs sage.modules
True
sage: has_latex_attr("abc")  # strings have no _latex_ method
False
```

```
>>> from sage.all import *
>>> from sage.misc.latex import has_latex_attr
>>> has_latex_attr(identity_matrix(Integer(3)))                             ␣
↪     # needs sage.modules
```

(continues on next page)

(continued from previous page)

```
True
>>> has_latex_attr("abc")  # strings have no _latex_ method
False
```

Types inherit the `_latex_` method of the class to which they refer, but calling it is broken:

```
sage: # needs sage.modules
sage: T = type(identity_matrix(3)); T
<class 'sage.matrix.matrix_integer_dense.Matrix_integer_dense'>
sage: hasattr(T, '_latex_')
True
sage: T._latex_()
Traceback (most recent call last):
...
TypeError: ..._latex_... needs an argument
sage: has_latex_attr(T)
False
```

```
>>> from sage.all import *
>>> # needs sage.modules
>>> T = type(identity_matrix(Integer(3))); T
<class 'sage.matrix.matrix_integer_dense.Matrix_integer_dense'>
>>> hasattr(T, '_latex_')
True
>>> T._latex_()
Traceback (most recent call last):
...
TypeError: ..._latex_... needs an argument
>>> has_latex_attr(T)
False
```

`sage.misc.latex.`**`latex`**(*x*, *combine_all=False*)

Return a *LatexExpr* built out of the argument `x`.

INPUT:

- `x` – a Sage object
- `combine_all` – boolean (default: `False`); if `combine_all` is `True` and the input is a tuple, then it does not return a tuple and instead returns a string with all the elements separated by a single space

OUTPUT: a *LatexExpr* built from `x`

EXAMPLES:

```
sage: latex(Integer(3))  # indirect doctest
3
sage: latex(1==0)
\mathrm{False}
sage: print(latex([x, 2]))                                                  #␣
↪needs sage.symbolic
\left[x, 2\right]
```

```
>>> from sage.all import *
>>> latex(Integer(Integer(3)))  # indirect doctest
3
>>> latex(Integer(1)==Integer(0))
\mathrm{False}
>>> print(latex([x, Integer(2)]))
↪ # needs sage.symbolic
\left[x, 2\right]
```

Check that Issue #11775 is fixed:

```
sage: latex((x,2), combine_all=True)
↪needs sage.symbolic
x 2
```

```
>>> from sage.all import *
>>> latex((x,Integer(2)), combine_all=True)
↪ # needs sage.symbolic
x 2
```

sage.misc.latex.**latex_extra_preamble**()

Return the string containing the user-configured preamble, sage_latex_macros, and any user-configured macros. This is used in the *eval()* method for the *Latex* class, and in _latex_file_(); it follows either LATEX_HEADER or SLIDE_HEADER (defined at the top of this file) which is a string containing the documentclass and standard usepackage commands.

EXAMPLES:

```
sage: from sage.misc.latex import latex_extra_preamble
sage: print(latex_extra_preamble())

\newcommand{\ZZ}{\Bold{Z}}
\newcommand{\NN}{\Bold{N}}
\newcommand{\RR}{\Bold{R}}
\newcommand{\CC}{\Bold{C}}
\newcommand{\QQ}{\Bold{Q}}
\newcommand{\QQbar}{\overline{\QQ}}
\newcommand{\GF}[1]{\Bold{F}_{#1}}
\newcommand{\Zp}[1]{\Bold{Z}_{#1}}
\newcommand{\Qp}[1]{\Bold{Q}_{#1}}
\newcommand{\Zmod}[1]{\ZZ/#1\ZZ}
\newcommand{\CDF}{\Bold{C}}
\newcommand{\CIF}{\Bold{C}}
\newcommand{\CLF}{\Bold{C}}
\newcommand{\RDF}{\Bold{R}}
\newcommand{\RIF}{\Bold{I} \Bold{R}}
\newcommand{\RLF}{\Bold{R}}
\newcommand{\SL}{\mathrm{SL}}
\newcommand{\PSL}{\mathrm{PSL}}
\newcommand{\lcm}{\mathop{\operatorname{lcm}}}
\newcommand{\dist}{\mathrm{dist}}
\newcommand{\Bold}[1]{\mathbf{#1}}
```

```
>>> from sage.all import *
>>> from sage.misc.latex import latex_extra_preamble
>>> print(latex_extra_preamble())
<BLANKLINE>
\newcommand{\ZZ}{\Bold{Z}}
\newcommand{\NN}{\Bold{N}}
\newcommand{\RR}{\Bold{R}}
\newcommand{\CC}{\Bold{C}}
\newcommand{\QQ}{\Bold{Q}}
\newcommand{\QQbar}{\overline{\QQ}}
\newcommand{\GF}[1]{\Bold{F}_{#1}}
\newcommand{\Zp}[1]{\Bold{Z}_{#1}}
\newcommand{\Qp}[1]{\Bold{Q}_{#1}}
\newcommand{\Zmod}[1]{\ZZ/#1\ZZ}
\newcommand{\CDF}{\Bold{C}}
\newcommand{\CIF}{\Bold{C}}
\newcommand{\CLF}{\Bold{C}}
\newcommand{\RDF}{\Bold{R}}
\newcommand{\RIF}{\Bold{I} \Bold{R}}
\newcommand{\RLF}{\Bold{R}}
\newcommand{\SL}{\mathrm{SL}}
\newcommand{\PSL}{\mathrm{PSL}}
\newcommand{\lcm}{\mathop{\operatorname{lcm}}}
\newcommand{\dist}{\mathrm{dist}}
\newcommand{\Bold}[1]{\mathbf{#1}}
<BLANKLINE>
```

sage.misc.latex.**latex_variable_name**(*x*, *is_fname=False*)

Return latex version of a variable name.

Here are some guiding principles for usage of this function:

1. If the variable is a single letter, that is the latex version.
2. If the variable name is suffixed by a number, we put the number in the subscript.
3. If the variable name contains an `'_'` we start the subscript at the underscore. Note that #3 trumps rule #2.
4. If a component of the variable is a Greek letter, escape it properly.
5. Recurse nicely with subscripts.

Refer to the examples section for how these rules might play out in practice.

EXAMPLES:

```
sage: from sage.misc.latex import latex_variable_name
sage: latex_variable_name('a')
'a'
sage: latex_variable_name('abc')
'\\mathit{abc}'
sage: latex_variable_name('sigma')
'\\sigma'
sage: latex_variable_name('sigma_k')
'\\sigma_{k}'
sage: latex_variable_name('sigma389')
'\\sigma_{389}'
```

(continues on next page)

(continued from previous page)

```
sage: latex_variable_name('beta_00')
'\\beta_{00}'
sage: latex_variable_name('Omega84')
'\\Omega_{84}'
sage: latex_variable_name('sigma_alpha')
'\\sigma_{\\alpha}'
sage: latex_variable_name('nothing1')
'\\mathit{nothing}_{1}'
sage: latex_variable_name('nothing1', is_fname=True)
'{\\rm nothing}_{1}'
sage: latex_variable_name('nothing_abc')
'\\mathit{nothing}_{\\mathit{abc}}'
sage: latex_variable_name('nothing_abc', is_fname=True)
'{\\rm nothing}_{{\\rm abc}}'
sage: latex_variable_name('alpha_beta_gamma12')
'\\alpha_{\\beta_{\\gamma_{12}}}'
sage: latex_variable_name('x_ast')
'x_{\\ast}'
```

```
>>> from sage.all import *
>>> from sage.misc.latex import latex_variable_name
>>> latex_variable_name('a')
'a'
>>> latex_variable_name('abc')
'\\mathit{abc}'
>>> latex_variable_name('sigma')
'\\sigma'
>>> latex_variable_name('sigma_k')
'\\sigma_{k}'
>>> latex_variable_name('sigma389')
'\\sigma_{389}'
>>> latex_variable_name('beta_00')
'\\beta_{00}'
>>> latex_variable_name('Omega84')
'\\Omega_{84}'
>>> latex_variable_name('sigma_alpha')
'\\sigma_{\\alpha}'
>>> latex_variable_name('nothing1')
'\\mathit{nothing}_{1}'
>>> latex_variable_name('nothing1', is_fname=True)
'{\\rm nothing}_{1}'
>>> latex_variable_name('nothing_abc')
'\\mathit{nothing}_{\\mathit{abc}}'
>>> latex_variable_name('nothing_abc', is_fname=True)
'{\\rm nothing}_{{\\rm abc}}'
>>> latex_variable_name('alpha_beta_gamma12')
'\\alpha_{\\beta_{\\gamma_{12}}}'
>>> latex_variable_name('x_ast')
'x_{\\ast}'
```

sage.misc.latex.**latex_varify**(*a*, *is_fname=False*)

Convert a string `a` to a LaTeX string: if it's an element of `common_varnames`, then prepend a backslash. If `a`

consists of a single letter, then return it. Otherwise, return either "{\rm a}" or "\mbox{a}" if "is_fname" flag is `True` or `False`.

INPUT:

- `a` – string

OUTPUT: string

EXAMPLES:

```
sage: from sage.misc.latex import latex_varify
sage: latex_varify('w')
'w'
sage: latex_varify('aleph')
'\\mathit{aleph}'
sage: latex_varify('aleph', is_fname=True)
'{\\rm aleph}'
sage: latex_varify('alpha')
'\\alpha'
sage: latex_varify('ast')
'\\ast'
```

```
>>> from sage.all import *
>>> from sage.misc.latex import latex_varify
>>> latex_varify('w')
'w'
>>> latex_varify('aleph')
'\\mathit{aleph}'
>>> latex_varify('aleph', is_fname=True)
'{\\rm aleph}'
>>> latex_varify('alpha')
'\\alpha'
>>> latex_varify('ast')
'\\ast'
```

`sage.misc.latex.`**`list_function`**`(x)`

Return the LaTeX code for a list `x`.

INPUT:

- `x` – list

EXAMPLES:

```
sage: from sage.misc.latex import list_function
sage: list_function([1,2,3])
'\\left[1, 2, 3\\right]'
sage: latex([1,2,3])  # indirect doctest
\left[1, 2, 3\right]
sage: latex([Matrix(ZZ, 3, range(9)),   # indirect doctest                    #␣
↪needs sage.modules
....:        Matrix(ZZ, 3, range(9))])
\left[\left(\begin{array}{rrr}
0 & 1 & 2 \\
3 & 4 & 5 \\
6 & 7 & 8
```

(continues on next page)

(continued from previous page)

```
\end{array}\right), \left(\begin{array}{rrr}
0 & 1 & 2 \\
3 & 4 & 5 \\
6 & 7 & 8
\end{array}\right)\right]
```

```
>>> from sage.all import *
>>> from sage.misc.latex import list_function
>>> list_function([Integer(1),Integer(2),Integer(3)])
'\\left[1, 2, 3\\right]'
>>> latex([Integer(1),Integer(2),Integer(3)])  # indirect doctest
\left[1, 2, 3\right]
>>> latex([Matrix(ZZ, Integer(3), range(Integer(9))),   # indirect doctest
↪              # needs sage.modules
...        Matrix(ZZ, Integer(3), range(Integer(9)))])
\left[\left(\begin{array}{rrr}
0 & 1 & 2 \\
3 & 4 & 5 \\
6 & 7 & 8
\end{array}\right), \left(\begin{array}{rrr}
0 & 1 & 2 \\
3 & 4 & 5 \\
6 & 7 & 8
\end{array}\right)\right]
```

`sage.misc.latex.`**`pdf`**(*x*, *filename*, *tiny=False*, *tightpage=True*, *margin=None*, *engine=None*, *debug=False*)

Create an image from the latex representation of `x` and save it as a pdf file with the given filename.

INPUT:

- `x` – a Sage object
- `filename` – the filename with which to save the image
- `tiny` – boolean (default: `False`); if `True`, use a tiny font
- `tightpage` – boolean (default: `True`); use the LaTeX package `preview` with the 'tightpage' option
- `margin` – float (default: no margin); width of border, only effective with 'tight page'
- `engine` – (default: `None`) `'latex'`, `'pdflatex'`, `'xelatex'` or `'lualatex'`; if `None`, the value defined in the LaTeX global preferences `latex.engine()` is used
- `debug` – boolean (default: `False`); if `True`, print verbose output

EXAMPLES:

```
sage: # optional - latex
sage: from sage.misc.latex import pdf
sage: import tempfile
sage: with tempfile.NamedTemporaryFile(suffix=".pdf") as f:  # random
....:     pdf(ZZ[x], f.name)
```

```
>>> from sage.all import *
>>> # optional - latex
>>> from sage.misc.latex import pdf
```

(continues on next page)

(continued from previous page)

```
>>> import tempfile
>>> with tempfile.NamedTemporaryFile(suffix=".pdf") as f:  # random
...     pdf(ZZ[x], f.name)
```

sage.misc.latex.**png**(*x*, *filename*, *density=150*, *debug=False*, *do_in_background=False*, *tiny=False*, *engine=None*)

Create a png image representation of `x` and save to the given filename.

INPUT:

- `x` – object to be displayed
- `filename` – file in which to save the image
- `density` – integer (default: 150)
- `debug` – boolean (default: `False`); print verbose output
- `do_in_background` – boolean (default: `False`); unused, kept for backwards compatibility
- `tiny` – boolean (default: `False`); use tiny font
- `engine` – (default: `None`) `'latex'`, `'pdflatex'`, `'xelatex'` or `'lualatex'`

EXAMPLES:

```
sage: # optional - imagemagick latex, needs sage.plot
sage: from sage.misc.latex import png
sage: import tempfile
sage: with tempfile.NamedTemporaryFile(suffix='.png') as f:  # random
....:     png(ZZ[x], f.name)
```

```
>>> from sage.all import *
>>> # optional - imagemagick latex, needs sage.plot
>>> from sage.misc.latex import png
>>> import tempfile
>>> with tempfile.NamedTemporaryFile(suffix='.png') as f:  # random
...     png(ZZ[x], f.name)
```

sage.misc.latex.**repr_lincomb**(*symbols*, *coeffs*)

Compute a latex representation of a linear combination of some formal symbols.

INPUT:

- `symbols` – list of symbols
- `coeffs` – list of coefficients of the symbols

OUTPUT: string

EXAMPLES:

```
sage: t = PolynomialRing(QQ, 't').0
sage: from sage.misc.latex import repr_lincomb
sage: repr_lincomb(['a', 's', ''], [-t, t - 2, t^12 + 2])
'-t\\text{\\texttt{a}} + \\left(t - 2\\right)\\text{\\texttt{s}} + \\left(t^{12}␣
↪+ 2\\right)'
sage: repr_lincomb(['a', 'b'], [1,1])
'\\text{\\texttt{a}} + \\text{\\texttt{b}}'
```

```
>>> from sage.all import *
>>> t = PolynomialRing(QQ, 't').gen(0)
>>> from sage.misc.latex import repr_lincomb
>>> repr_lincomb(['a', 's', ''], [-t, t - Integer(2), t**Integer(12) +␣
↪Integer(2)])
'-t\\text{\\texttt{a}} + \\left(t - 2\\right)\\text{\\texttt{s}} + \\left(t^{12}␣
↪+ 2\\right)'
>>> repr_lincomb(['a', 'b'], [Integer(1),Integer(1)])
'\\text{\\texttt{a}} + \\text{\\texttt{b}}'
```

Verify that a certain corner case works (see Issue #5707 and Issue #5766):

```
sage: repr_lincomb([1,5,-3],[2,8/9,7])
'2\\cdot 1 + \\frac{8}{9}\\cdot 5 + 7\\cdot -3'
```

```
>>> from sage.all import *
>>> repr_lincomb([Integer(1),Integer(5),-Integer(3)],[Integer(2),Integer(8)/
↪Integer(9),Integer(7)])
'2\\cdot 1 + \\frac{8}{9}\\cdot 5 + 7\\cdot -3'
```

Verify that Issue #17299 (latex representation of modular symbols) is fixed:

```
sage: x = EllipticCurve('64a1').modular_symbol_space(sign=1).basis()[0]          #␣
↪needs sage.schemes
sage: from sage.misc.latex import repr_lincomb
sage: latex(x.modular_symbol_rep())                                              #␣
↪needs sage.schemes
\left\{\frac{-3}{11}, \frac{-1}{4}\right\} - \left\{\frac{3}{13}, \frac{1}{4}\
↪right\}
```

```
>>> from sage.all import *
>>> x = EllipticCurve('64a1').modular_symbol_space(sign=Integer(1)).
↪basis()[Integer(0)]          # needs sage.schemes
>>> from sage.misc.latex import repr_lincomb
>>> latex(x.modular_symbol_rep())                                                #␣
↪needs sage.schemes
\left\{\frac{-3}{11}, \frac{-1}{4}\right\} - \left\{\frac{3}{13}, \frac{1}{4}\
↪right\}
```

Verify that it works when the symbols are numbers:

```
sage: x = FormalSum([(1,2),(3,4)])
sage: latex(x)
2 + 3\cdot 4
```

```
>>> from sage.all import *
>>> x = FormalSum([(Integer(1),Integer(2)),(Integer(3),Integer(4))])
>>> latex(x)
2 + 3\cdot 4
```

Verify that it works when `bv in CC` raises an error:

```
sage: x = FormalSum([(1,'x'),(2,'y')])
sage: latex(x)
\text{\texttt{x}} + 2\text{\texttt{y}}
```

```
>>> from sage.all import *
>>> x = FormalSum([(Integer(1),'x'),(Integer(2),'y')])
>>> latex(x)
\text{\texttt{x}} + 2\text{\texttt{y}}
```

sage.misc.latex.**str_function**(*x*)

Return a LaTeX representation of the string `x`.

The main purpose of this function is to generate LaTeX representation for classes that do not provide a customized method.

If `x` contains only digits with, possibly, a single decimal point and/or a sign in front, it is considered to be its own representation. Otherwise each line of `x` is wrapped in a `\texttt` command and these lines are assembled in a left-justified array. This gives to complicated strings the closest look to their "terminal representation".

Warning

Such wrappers **cannot** be used as arguments of LaTeX commands or in command definitions. If this causes you any problems, they probably can be solved by implementing a suitable `_latex_` method for an appropriate class.

INPUT:

- `x` – string

OUTPUT: string

EXAMPLES:

```
sage: from sage.misc.latex import str_function
sage: str_function('34')
'34'
sage: str_function('34.5')
'34.5'
sage: str_function('-34.5')
'-34.5'
sage: str_function('+34.5')
'+34.5'
sage: str_function('hello_world')
'\\text{\\texttt{hello{\\char`\\_}world}}'
sage: str_function('-1.00000?') # trac 12178
'-1.00000?'
```

```
>>> from sage.all import *
>>> from sage.misc.latex import str_function
>>> str_function('34')
'34'
>>> str_function('34.5')
'34.5'
>>> str_function('-34.5')
```

(continues on next page)

(continued from previous page)

```
'-34.5'
>>> str_function('+34.5')
'+34.5'
>>> str_function('hello_world')
'\\text{\\texttt{hello{\\char`\\_}world}}'
>>> str_function('-1.00000?') # trac 12178
'-1.00000?'
```

sage.misc.latex.**tuple_function**(*x*, *combine_all=False*)

Return the LaTeX code for a tuple `x`.

INPUT:

- `x` – tuple
- `combine_all` – boolean (default: `False`); if `combine_all` is `True`, then it does not return a tuple and instead returns a string with all the elements separated by a single space. It does not collapse tuples which are inside tuples.

EXAMPLES:

```
sage: from sage.misc.latex import tuple_function
sage: tuple_function((1,2,3))
'\\left(1, 2, 3\\right)'
```

```
>>> from sage.all import *
>>> from sage.misc.latex import tuple_function
>>> tuple_function((Integer(1),Integer(2),Integer(3)))
'\\left(1, 2, 3\\right)'
```

Check that Issue #11775 is fixed:

```
sage: tuple_function((1,2,3), combine_all=True)
'1 2 3'
sage: tuple_function(((1,2),3), combine_all=True)
'\\left(1, 2\\right) 3'
```

```
>>> from sage.all import *
>>> tuple_function((Integer(1),Integer(2),Integer(3)), combine_all=True)
'1 2 3'
>>> tuple_function(((Integer(1),Integer(2)),Integer(3)), combine_all=True)
'\\left(1, 2\\right) 3'
```

sage.misc.latex.**view**(*objects*, *title='Sage'*, *debug=False*, *sep=''*, *tiny=False*, *engine=None*, *viewer=None*, *tightpage=True*, *margin=None*, *mode='inline'*, *combine_all=False*, ***kwds*)

Compute a latex representation of each object in objects, compile, and display typeset. If used from the command line, this requires that latex be installed.

INPUT:

- `objects` – list (or object)
- `title` – string (default: `'Sage'`); title for the document
- `debug` – boolean (default: `False`); print verbose output
- `sep` – string (default: `''`); separator between math objects

- tiny – boolean (default: False); use tiny font
- engine – string or None (default: None); can take the following values:
  - None – the value defined in the LaTeX global preferences latex.engine() is used
  - 'pdflatex' – compilation does tex -> pdf
  - 'xelatex' – compilation does tex -> pdf
  - 'lualatex' – compilation does tex -> pdf
  - 'latex' – compilation first tries tex -> dvi -> png and if an error occurs then tries dvi -> ps -> pdf. This is slower than 'pdflatex' and known to be broken when overfull hboxes are detected.
- viewer – string or None (default: None); specify a viewer to use; currently the only options are None and 'pdf'
- **tightpage – boolean (default: True); use the LaTeX package** preview with the 'tightpage' option
- margin – float or None (default: None); adds a margin of margin mm. Has no affect if the option tightpage is False.
- mode – string (default: 'inline'); 'display' for displaymath or 'inline' for inline math
- combine_all – boolean (default: False); if combine_all is True and the input is a tuple, then it does not return a tuple and instead returns a string with all the elements separated by a single space

OUTPUT: display typeset objects

The output is displayed in a separate viewer displaying a dvi (or pdf) file, with the following: the title string is printed, centered, at the top. Beneath that, each object in objects is typeset on its own line, with the string sep inserted between these lines.

The value of sep is inserted between each element of the list objects; you can, for example, add vertical space between objects with sep='\\vspace{15mm}', while sep='\\hrule' adds a horizontal line between objects, and sep='\\newpage' inserts a page break between objects.

If the engine is either 'pdflatex', 'xelatex', or 'lualatex', it produces a pdf file. Otherwise, it produces a dvi file, and if the program dvipng is installed, it checks the dvi file by trying to convert it to a png file. If this conversion fails, the dvi file probably contains some postscript special commands or it has other issues which might make displaying it a problem; in this case, the file is converted to a pdf file, which is then displayed.

Setting viewer to 'pdf' forces the use of a separate viewer, even in notebook mode. This also sets the latex engine to be pdflatex if the current engine is latex.

Setting the option tightpage to True (this is the default setting) tells LaTeX to use the package 'preview' with the 'tightpage' option. Then, each object is typeset in its own page, and that page is cropped to exactly the size of the object. This is typically useful for very large pictures (like graphs) generated with tikz. This only works when using a separate viewer. Note that the object are currently typeset in plain math mode rather than displaymath, because the latter imposes a limit on the width of the picture. Technically, tightpage adds

```
\\usepackage[tightpage,active]{preview}
\\PreviewEnvironment{page}
```

to the LaTeX preamble, and replaces the \\[and \\] around each object by \\begin{page}$ and $\\ end{page}. Setting tightpage to False turns off this behavior and provides the latex output as a full page. If tightpage is set to True, the Title is ignored.

4.3.3 LaTeX macros

AUTHORS:

- John H. Palmieri (2009-03)

The code here sets up LaTeX macro definitions for use in the documentation. To add a macro, modify the list `macros`, near the end of this file, and then run 'sage -b'. The entries in this list are used to produce `sage_latex_macros`, a list of strings of the form '\newcommand…', and `sage_mathjax_macros`, a list of strings suitable for parsing by MathJax. The LaTeX macros are produced using the `_latex_` method for each Sage object listed in `macros`, and the MathJax macros are produced from the LaTeX macros. The list of LaTeX macros is used in the file `sage_docbuild.conf` to add to the preambles of both the LaTeX file used to build the PDF version of the documentation and the LaTeX file used to build the HTML version.

Any macro defined here may be used in docstrings or in the tutorial (or other pieces of documentation). In a docstring, for example, "ZZ" in backquotes (demarking math mode) will appear as "ZZ" in interactive help, but will be typeset as "\Bold{Z}" in the reference manual.

More details on the list `macros`: the entries are lists or tuples of the form `[name]` or `[name, arguments]`, where `name` is a string and `arguments` consists of valid arguments for the Sage object named `name`. For example, `["ZZ"]` and `["GF", 2]` produce the LaTeX macros '\newcommand{\ZZ}{\Bold{Z}}' and '\newcommand{\GF}[1]{\Bold{F}_{#1}}', respectively. (For the second of these, `latex(GF(2))` is called and the string '2' gets replaced by '#1', so `["GF", 17]` would have worked just as well. `["GF", p]` would have raised an error, though, because `p` is not defined, and `["GF", 4]` would have raised an error, because to define the field with four elements in Sage, you also need to specify the name of a generator.)

To see evidence of the results of the code here, run `sage --docbuild tutorial latex` (for example), and look at the resulting LaTeX file in `SAGE_DOC/latex/en/tutorial/`. The preamble should contain 'newcommand' lines for each of the entries in `macros`.

`sage.misc.latex_macros.`**`convert_latex_macro_to_mathjax`**(*macro*)

This converts a LaTeX macro definition (newcommand…) to a MathJax macro definition (MathJax.Macro…).

INPUT:

- `macro` – LaTeX macro definition

See the web page https://docs.mathjax.org/en/latest/input/tex/macros.html for a description of the format for MathJax macros.

EXAMPLES:

```
sage: from sage.misc.latex_macros import convert_latex_macro_to_mathjax
sage: convert_latex_macro_to_mathjax('\\newcommand{\\ZZ}{\\Bold{Z}}')
('ZZ', '\\Bold{Z}')
sage: convert_latex_macro_to_mathjax('\\newcommand{\\GF}[1]{\\Bold{F}_{#1}}')
('GF', ['\\Bold{F}_{#1}', 1])
```

```
>>> from sage.all import *
>>> from sage.misc.latex_macros import convert_latex_macro_to_mathjax
>>> convert_latex_macro_to_mathjax('\\newcommand{\\ZZ}{\\Bold{Z}}')
('ZZ', '\\Bold{Z}')
>>> convert_latex_macro_to_mathjax('\\newcommand{\\GF}[1]{\\Bold{F}_{#1}}')
('GF', ['\\Bold{F}_{#1}', 1])
```

`sage.misc.latex_macros.`**`produce_latex_macro`**(*name*, **sample_args*)

Produce a string defining a LaTeX macro.

INPUT:

- name – name of macro to be defined, also name of corresponding Sage object
- sample_args – (optional) sample arguments for this Sage object

EXAMPLES:

```
sage: from sage.misc.latex_macros import produce_latex_macro
sage: produce_latex_macro('ZZ')
'\\newcommand{\\ZZ}{\\Bold{Z}}'
```

```
>>> from sage.all import *
>>> from sage.misc.latex_macros import produce_latex_macro
>>> produce_latex_macro('ZZ')
'\\newcommand{\\ZZ}{\\Bold{Z}}'
```

If the Sage object takes arguments, then the LaTeX macro will accept arguments as well. You must pass valid arguments, which will then be converted to #1, #2, etc. in the macro definition. The following allows the use of "GF{p^n}", for example:

```
sage: produce_latex_macro('GF', 37)
'\\newcommand{\\GF}[1]{\\Bold{F}_{#1}}'
```

```
>>> from sage.all import *
>>> produce_latex_macro('GF', Integer(37))
'\\newcommand{\\GF}[1]{\\Bold{F}_{#1}}'
```

If the Sage object is not in the global namespace, describe it like so:

```
sage: produce_latex_macro('sage.rings.finite_rings.finite_field_constructor.
↪FiniteField', 3)
'\\newcommand{\\FiniteField}[1]{\\Bold{F}_{#1}}'
```

```
>>> from sage.all import *
>>> produce_latex_macro('sage.rings.finite_rings.finite_field_constructor.
↪FiniteField', Integer(3))
'\\newcommand{\\FiniteField}[1]{\\Bold{F}_{#1}}'
```

sage.misc.latex_macros.**sage_latex_macros**()

Return list of LaTeX macros for Sage. This just runs the function *produce_latex_macro()* on the list macros defined in this file, and appends sage_configurable_latex_macros. To add a new macro for permanent use in Sage, modify macros.

EXAMPLES:

```
sage: from sage.misc.latex_macros import sage_latex_macros
sage: sage_latex_macros()
['\\newcommand{\\ZZ}{\\Bold{Z}}', '\\newcommand{\\NN}{\\Bold{N}}', ...
```

```
>>> from sage.all import *
>>> from sage.misc.latex_macros import sage_latex_macros
>>> sage_latex_macros()
['\\newcommand{\\ZZ}{\\Bold{Z}}', '\\newcommand{\\NN}{\\Bold{N}}', ...
```

sage.misc.latex_macros.**sage_mathjax_macros**()

Return Sage's macro definitions for usage with MathJax.

This feeds each item output by *sage_latex_macros()* to *convert_latex_macro_to_mathjax()*.

EXAMPLES:

```
sage: from sage.misc.latex_macros import sage_mathjax_macros
sage: sage_mathjax_macros()
{'Bold': ['\\mathbf{#1}', 1], 'CC': '\\Bold{C}', ...
```

```
>>> from sage.all import *
>>> from sage.misc.latex_macros import sage_mathjax_macros
>>> sage_mathjax_macros()
{'Bold': ['\\mathbf{#1}', 1], 'CC': '\\Bold{C}', ...
```

4.3.4 Standalone LaTeX Document class and TikzPicture

This module contains two Python classes. Firstly, it contains a class *Standalone* to represent a LaTeX file using the standalone document class.

From its documentation:

> *The standalone bundle allows users to easily place picture environments or other material in own source files and compile these on their own or as part of a main document. A special standalone class is provided for use with such files, which by default crops the resulting output file to the content. The standalone package enables the user to simply load the standalone files using ``input`` inside a main document.*

Secondly, it contains a class *TikzPicture* which inherits from *Standalone* that represents a LaTeX file using the standalone document class and containing a tikzpicture.

A Python Module for PGF/Tikz pictures. A TikzPicture object is created from a string starting with `r'\begin{tikzpicture}'` and ending with `r'\end{tikzpicture}'`.

The module allows to convert a standalone LaTeX document class file, including tikzpictures, to an image. It allows conversion to pdf, png and svg formats. It also show them automatically in Jupyter using rich representation.

According to wikipedia, PGF/TikZ is a pair of languages for producing vector graphics (e.g., technical illustrations and drawings) from a geometric/algebraic description, with standard features including the drawing of points, lines, arrows, paths, circles, ellipses and polygons.

EXAMPLES:

Standalone LaTeX document class

First *Hello World* example:

```
sage: from sage.misc.latex_standalone import Standalone
sage: Standalone('Hello World')
\documentclass{standalone}
\begin{document}
Hello World
\end{document}
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> Standalone('Hello World')
\documentclass{standalone}
\begin{document}
```

(continues on next page)

(continued from previous page)

```
Hello World
\end{document}
```

Loading a few latex packages:

```
sage: Standalone('Hello World', usepackage=['amsmath', 'amsfont'])
\documentclass{standalone}
\usepackage{amsmath}
\usepackage{amsfont}
\begin{document}
Hello World
\end{document}
```

```
>>> from sage.all import *
>>> Standalone('Hello World', usepackage=['amsmath', 'amsfont'])
\documentclass{standalone}
\usepackage{amsmath}
\usepackage{amsfont}
\begin{document}
Hello World
\end{document}
```

Setting few standalone options (see documentation of standalone for a complete list):

```
sage: Standalone('Hello World', standalone_config=["border=4mm", "beamer=true"])
\documentclass{standalone}
\standaloneconfig{border=4mm}
\standaloneconfig{beamer=true}
\begin{document}
Hello World
\end{document}
```

```
>>> from sage.all import *
>>> Standalone('Hello World', standalone_config=["border=4mm", "beamer=true"])
\documentclass{standalone}
\standaloneconfig{border=4mm}
\standaloneconfig{beamer=true}
\begin{document}
Hello World
\end{document}
```

Adding your own list of macros:

```
sage: Standalone('Hello World', macros=[r'\newcommand{\ZZ}{\mathbb{Z}}'])
\documentclass{standalone}
\newcommand{\ZZ}{\mathbb{Z}}
\begin{document}
Hello World
\end{document}
```

```
>>> from sage.all import *
>>> Standalone('Hello World', macros=[r'\newcommand{\ZZ}{\mathbb{Z}}'])
```

(continues on next page)

(continued from previous page)

```
\documentclass{standalone}
\newcommand{\ZZ}{\mathbb{Z}}
\begin{document}
Hello World
\end{document}
```

It provides conversion to images of different format:

```
sage: from sage.misc.latex_standalone import Standalone
sage: s = Standalone('Hello World')
sage: _ = s.pdf()     # not tested
sage: _ = s.png()     # not tested
sage: _ = s.svg()     # not tested
sage: s               # not tested, in Jupyter, this shows the image directly below␣
↪the cell
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> s = Standalone('Hello World')
>>> _ = s.pdf()     # not tested
>>> _ = s.png()     # not tested
>>> _ = s.svg()     # not tested
>>> s               # not tested, in Jupyter, this shows the image directly below the␣
↪cell
```

TikzPicture

This module also contains a class *TikzPicture* which inherits from *Standalone* to represent more specifically a tikzpicture which is within a standalone document class.

First construct a string describing a tikzpicture:

```
sage: lines = []
sage: lines.append(r'\begin{tikzpicture}')
sage: lines.append(r'\draw[very thick,orange,->] (0,0) -- (1,1);')
sage: lines.append(r'\end{tikzpicture}')
sage: s = '\n'.join(lines)
sage: print(s)
\begin{tikzpicture}
\draw[very thick,orange,->] (0,0) -- (1,1);
\end{tikzpicture}
```

```
>>> from sage.all import *
>>> lines = []
>>> lines.append(r'\begin{tikzpicture}')
>>> lines.append(r'\draw[very thick,orange,->] (0,0) -- (1,1);')
>>> lines.append(r'\end{tikzpicture}')
>>> s = '\n'.join(lines)
>>> print(s)
\begin{tikzpicture}
\draw[very thick,orange,->] (0,0) -- (1,1);
\end{tikzpicture}
```

One may provide it as input to `TikzPicture`:

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: t = TikzPicture(s)
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> t = TikzPicture(s)
```

In the terminal, the following shows the content of the standalone document class tex file which contains the tikzpicture. In Jupyter, it shows the picture itself:

```
sage: t
\documentclass[tikz]{standalone}
\begin{document}
\begin{tikzpicture}
\draw[very thick,orange,->] (0,0) -- (1,1);
\end{tikzpicture}
\end{document}
```

```
>>> from sage.all import *
>>> t
\documentclass[tikz]{standalone}
\begin{document}
\begin{tikzpicture}
\draw[very thick,orange,->] (0,0) -- (1,1);
\end{tikzpicture}
\end{document}
```

As it is the case for *Standalone*, the constructor of `TikzPicture` has many arguments allowing for example to add some more `\usepackage` lines:

```
sage: t = TikzPicture(s, usepackage=['amsmath'])
sage: t
\documentclass[tikz]{standalone}
\usepackage{amsmath}
\begin{document}
\begin{tikzpicture}
\draw[very thick,orange,->] (0,0) -- (1,1);
\end{tikzpicture}
\end{document}
```

```
>>> from sage.all import *
>>> t = TikzPicture(s, usepackage=['amsmath'])
>>> t
\documentclass[tikz]{standalone}
\usepackage{amsmath}
\begin{document}
\begin{tikzpicture}
\draw[very thick,orange,->] (0,0) -- (1,1);
\end{tikzpicture}
\end{document}
```

Moreover, it allows to load some tikz libraries:

```
sage: t = TikzPicture(s, usetikzlibrary=['arrows'])
sage: t
\documentclass[tikz]{standalone}
\usetikzlibrary{arrows}
\begin{document}
\begin{tikzpicture}
\draw[very thick,orange,->] (0,0) -- (1,1);
\end{tikzpicture}
\end{document}
```

```
>>> from sage.all import *
>>> t = TikzPicture(s, usetikzlibrary=['arrows'])
>>> t
\documentclass[tikz]{standalone}
\usetikzlibrary{arrows}
\begin{document}
\begin{tikzpicture}
\draw[very thick,orange,->] (0,0) -- (1,1);
\end{tikzpicture}
\end{document}
```

The following example illustrates that it works when providing the tikzpicture code generated by Sage from some polyhedron:

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: V = [[1,0,1], [1,0,0], [1,1,0], [0,0,-1],
....:      [0,1,0], [-1,0,0], [0,1,1], [0,0,1], [0,-1,0]]
sage: P = Polyhedron(vertices=V).polar()                                    #␣
↪needs sage.geometry.polyhedron
sage: s1 = P.projection().tikz([674,108,-731],112, output_type='LatexExpr')  #␣
↪needs sage.geometry.polyhedron sage.plot
sage: t1 = TikzPicture(s1)                                                  #␣
↪needs sage.geometry.polyhedron sage.plot
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> V = [[Integer(1),Integer(0),Integer(1)], [Integer(1),Integer(0),Integer(0)],␣
↪[Integer(1),Integer(1),Integer(0)], [Integer(0),Integer(0),-Integer(1)],
...      [Integer(0),Integer(1),Integer(0)], [-Integer(1),Integer(0),Integer(0)],␣
↪[Integer(0),Integer(1),Integer(1)], [Integer(0),Integer(0),Integer(1)], [Integer(0),
↪-Integer(1),Integer(0)]]
>>> P = Polyhedron(vertices=V).polar()                                      #␣
↪needs sage.geometry.polyhedron
>>> s1 = P.projection().tikz([Integer(674),Integer(108),-Integer(731)],Integer(112),␣
↪output_type='LatexExpr')          # needs sage.geometry.polyhedron sage.plot
>>> t1 = TikzPicture(s1)                                                    #␣
↪needs sage.geometry.polyhedron sage.plot
```

Open the image in a viewer (the returned value is a string giving the absolute path to the file in some temporary directory):

```
sage: path_to_file = t1.pdf()               # not tested                    #␣
↪needs sage.geometry.polyhedron sage.plot
```

```
>>> from sage.all import *
>>> path_to_file = t1.pdf()                # not tested                                #␣
↪needs sage.geometry.polyhedron sage.plot
```

Instead, you may save a pdf of the tikzpicture into a file of your choice (but this does not open the viewer):

```
sage: _ = t1.pdf('tikz_polytope.pdf')       # not tested                                 #␣
↪needs sage.geometry.polyhedron sage.plot
```

```
>>> from sage.all import *
>>> _ = t1.pdf('tikz_polytope.pdf')       # not tested                                 #␣
↪needs sage.geometry.polyhedron sage.plot
```

Opening the image in a viewer can be turned off:

```
sage: _ = t1.pdf(view=False)                # long time (2s), optional - latex, needs␣
↪sage.geometry.polyhedron sage.plot
```

```
>>> from sage.all import *
>>> _ = t1.pdf(view=False)                # long time (2s), optional - latex, needs␣
↪sage.geometry.polyhedron sage.plot
```

The same can be done with png format (translated from pdf with convert command which needs the installation of imagemagick):

```
sage: _ = t1.png(view=False)                # long time (2s), optional - imagemagick␣
↪latex, needs sage.geometry.polyhedron sage.plot
```

```
>>> from sage.all import *
>>> _ = t1.png(view=False)                # long time (2s), optional - imagemagick␣
↪latex, needs sage.geometry.polyhedron sage.plot
```

The string representation gives the header (5 lines) and tail (5 lines) of the tikzpicture. In Jupyter, it will instead use rich representation and show the image directly below the cell in png or svg format:

```
sage: t1                                                                              #␣
↪needs sage.geometry.polyhedron sage.plot
\documentclass[tikz]{standalone}
\begin{document}
\begin{tikzpicture}%
        [x={(0.249656cm, -0.577639cm)},
        y={(0.777700cm, -0.358578cm)},
        z={(-0.576936cm, -0.733318cm)},
...
\node[vertex] at (0.00000, -1.00000, 0.00000)     {};
\node[vertex] at (-0.50000, -0.50000, -0.50000)     {};
%%
%%
\end{tikzpicture}
\end{document}
```

```
>>> from sage.all import *
>>> t1                                                                          #␣
↪needs sage.geometry.polyhedron sage.plot
\documentclass[tikz]{standalone}
\begin{document}
\begin{tikzpicture}%
        [x={(0.249656cm, -0.577639cm)},
        y={(0.777700cm, -0.358578cm)},
        z={(-0.576936cm, -0.733318cm)},
...
\node[vertex] at (0.00000, -1.00000, 0.00000)     {};
\node[vertex] at (-0.50000, -0.50000, -0.50000)     {};
%%
%%
\end{tikzpicture}
\end{document}
```

Use `print(t)` to see the complete content of the file:

```
sage: print(t1)                                 # not tested                    #␣
↪needs sage.geometry.polyhedron sage.plot
```

```
>>> from sage.all import *
>>> print(t1)                                 # not tested                    #␣
↪needs sage.geometry.polyhedron sage.plot
```

Adding a border in the options avoids cropping the vertices of a graph:

```
sage: # needs sage.graphs
sage: g = graphs.PetersenGraph()
sage: s2 = latex(g)    # takes 3s but the result is cached           # optional - latex
sage: t2 = TikzPicture(s2, standalone_config=["border=4mm"],        # optional - latex
....:                  usepackage=['tkz-graph'])
sage: _ = t2.pdf()                              # not tested
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> g = graphs.PetersenGraph()
>>> s2 = latex(g)    # takes 3s but the result is cached           # optional - latex
>>> t2 = TikzPicture(s2, standalone_config=["border=4mm"],        # optional - latex
...                  usepackage=['tkz-graph'])
>>> _ = t2.pdf()                              # not tested
```

The current latex representation of a transducer is a tikzpicture using the tikz library automata. The string can be used as input:

```
sage: # needs sage.graphs sage.modules
sage: s3 = latex(transducers.GrayCode())
sage: t3 = TikzPicture(s3, usetikzlibrary=['automata'])
sage: _ = t3.pdf(view=False)                    # long time (2s)        # optional - latex
```

```
>>> from sage.all import *
>>> # needs sage.graphs sage.modules
```

(continues on next page)

(continued from previous page)

```
>>> s3 = latex(transducers.GrayCode())
>>> t3 = TikzPicture(s3, usetikzlibrary=['automata'])
>>> _ = t3.pdf(view=False)                 # long time (2s)        # optional - latex
```

AUTHORS:

- Sébastien Labbé, initial version in slabbe-0.2.spkg, nov 2015.
- Sébastien Labbé, inclusion into SageMath from slabbe-0.6.2, July 2021.

class sage.misc.latex_standalone.**Standalone**(*content*, *document_class_options=None*, *standalone_config=None*, *usepackage=None*, *macros=None*, *use_sage_preamble=False*)

Bases: SageObject

LaTeX standalone document class.

INPUT:

- `content` – string; the content to be added in the document between lines `r'\begin{document}'` and `r'\end{document}'`
- `document_class_options` – list of strings (default: `[]`); latex document class standalone options. Such options appear on the line `\documentclass[...]{standalone}` between the brackets.
- `standalone_config` – list of strings (default: `[]`); standalone configuration options. Such options are defined with `\standaloneconfig{...}`.
- `usepackage` – list of strings (default: `[]`); latex packages
- `macros` – list of strings (default: `[]`); stuff you need for the picture
- `use_sage_preamble` – boolean (default: `False`); whether to include sage latex preamble and sage latex macros, that is, the content of `sage.misc.latex.extra_preamble()`, `sage.misc.latex.extra_macros()` and *sage.misc.latex_macros.sage_latex_macros()*

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: content = "\\section{Intro}\nTest\n"
sage: t = Standalone(content)
sage: t
\documentclass{standalone}
\begin{document}
\section{Intro}
Test
\end{document}
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> content = "\\section{Intro}\nTest\n"
>>> t = Standalone(content)
>>> t
\documentclass{standalone}
\begin{document}
\section{Intro}
Test
\end{document}
```

```
sage: t = Standalone(content, standalone_config=["border=4mm"],
....:                usepackage=['amsmath'])
sage: t
\documentclass{standalone}
\standaloneconfig{border=4mm}
\usepackage{amsmath}
\begin{document}
\section{Intro}
Test
\end{document}
```

```
>>> from sage.all import *
>>> t = Standalone(content, standalone_config=["border=4mm"],
...                usepackage=['amsmath'])
>>> t
\documentclass{standalone}
\standaloneconfig{border=4mm}
\usepackage{amsmath}
\begin{document}
\section{Intro}
Test
\end{document}
```

add_document_class_option(*option*)

Add a document class option.

INPUT:

- `option` – string

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: t.add_document_class_option('beamer')
sage: t
\documentclass[beamer]{standalone}
\begin{document}
Hello World
\end{document}
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
>>> t.add_document_class_option('beamer')
>>> t
\documentclass[beamer]{standalone}
\begin{document}
Hello World
\end{document}
```

add_macro(*macro*)

Add a macro.

INPUT:

- `macro` – string, newcommand line

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: t.add_macro(r'\newcommand{\ZZ}{\mathbb{Z}}')
sage: t
\documentclass{standalone}
\newcommand{\ZZ}{\mathbb{Z}}
\begin{document}
Hello World
\end{document}
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
>>> t.add_macro(r'\newcommand{\ZZ}{\mathbb{Z}}')
>>> t
\documentclass{standalone}
\newcommand{\ZZ}{\mathbb{Z}}
\begin{document}
Hello World
\end{document}
```

add_standalone_config(*config*)

Add a standalone config.

INPUT:

- `config` – string

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: t.add_standalone_config("border=4mm")
sage: t
\documentclass{standalone}
\standaloneconfig{border=4mm}
\begin{document}
Hello World
\end{document}
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
>>> t.add_standalone_config("border=4mm")
>>> t
\documentclass{standalone}
\standaloneconfig{border=4mm}
\begin{document}
Hello World
\end{document}
```

add_usepackage(*package*)

Add a `usepackage` line.

INPUT:

- `package` – string, name of package

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: t.add_usepackage('amsmath')
sage: t
\documentclass{standalone}
\usepackage{amsmath}
\begin{document}
Hello World
\end{document}
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
>>> t.add_usepackage('amsmath')
>>> t
\documentclass{standalone}
\usepackage{amsmath}
\begin{document}
Hello World
\end{document}
```

content()

Return the content of the standalone document class file.

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: t.content()
'Hello World'
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
>>> t.content()
'Hello World'
```

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
sage: t = TikzPicture(s)
sage: print(t.content())
\begin{tikzpicture}
\draw (0,0) -- (1,1);
\end{tikzpicture}
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
>>> t = TikzPicture(s)
>>> print(t.content())
\begin{tikzpicture}
\draw (0,0) -- (1,1);
\end{tikzpicture}
```

dvi (*filename=None*, *view=True*, *program='latex'*)

Compile the latex code with latex and create a dvi file.

INPUT:

- `filename` – string (default: `None`); the output filename. If `None`, it saves the file in a temporary directory
- `view` – boolean (default: `True`); whether to open the file in a dvi viewer. This option is ignored and automatically set to `False` if `filename` is not `None`.
- `program` – string (default: `'latex'`); `'latex'`

OUTPUT: string, path to dvi file

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: _ = t.dvi(view=False)                 # long time (1s)     # optional -␣
↪latex
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
>>> _ = t.dvi(view=False)                 # long time (1s)     # optional -␣
↪latex
```

Same for instances of *TikzPicture*:

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
sage: t = TikzPicture(s)
sage: _ = t.dvi(view=False)                 # not tested
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
>>> t = TikzPicture(s)
>>> _ = t.dvi(view=False)                 # not tested
```

A filename may be provided where to save the file, in which case the viewer does not open the file:

```
sage: from sage.misc.temporary_file import tmp_filename
sage: filename = tmp_filename('temp','.dvi')
sage: path_to_file = t.dvi(filename)        # long time (1s)     # optional -␣
```

(continues on next page)

(continued from previous page)

```
↪latex
sage: path_to_file[-4:]                    # long time (fast)  # optional -␣
↪latex
'.dvi'
```

```
>>> from sage.all import *
>>> from sage.misc.temporary_file import tmp_filename
>>> filename = tmp_filename('temp','.dvi')
>>> path_to_file = t.dvi(filename)         # long time (1s)    # optional -␣
↪latex
>>> path_to_file[-Integer(4):]                      # long time (fast)  #␣
↪optional - latex
'.dvi'
```

The filename may contain spaces:

```
sage: filename = tmp_filename('filename with spaces','.dvi')
sage: path_to_file = t.dvi(filename)         # long time (1s)    # optional -␣
↪latex
```

```
>>> from sage.all import *
>>> filename = tmp_filename('filename with spaces','.dvi')
>>> path_to_file = t.dvi(filename)         # long time (1s)    # optional -␣
↪latex
```

eps (*filename=None*, *view=True*, *program='dvips'*)

Compile the latex code with pdflatex and converts to a eps file.

INPUT:

- `filename` – string (default: `None`); the output filename. If `None`, it saves the file in a temporary directory
- `view` – boolean (default: `True`); whether to open the file in a browser. This option is ignored and automatically set to `False` if `filename` is not `None`.
- `program` – string (default: `'dvips'`); `'pdftocairo'` or `'dvips'`

OUTPUT: string, path to eps file

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: _ = t.eps(view=False)      # not tested
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
>>> _ = t.eps(view=False)      # not tested
```

Same for instances of *TikzPicture*:

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
sage: t = TikzPicture(s)
sage: _ = t.eps(view=False)      # not tested
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
>>> t = TikzPicture(s)
>>> _ = t.eps(view=False)      # not tested
```

We test the creation of the files:

```
sage: from sage.misc.temporary_file import tmp_filename
sage: filename = tmp_filename('temp', '.eps')
sage: path_to_file = t.eps(filename,             # long time (1s)     #␣
↪optional - latex dvips
....:                       program='dvips')
sage: path_to_file[-4:]                          # long time (fast)   #␣
↪optional - latex dvips
'.eps'
sage: path_to_file = t.eps(filename,             # long time (1s)     #␣
↪optional - latex pdftocairo
....:                       program='pdftocairo')
sage: path_to_file[-4:]                          # long time (fast)   #␣
↪optional - latex pdftocairo
'.eps'
```

```
>>> from sage.all import *
>>> from sage.misc.temporary_file import tmp_filename
>>> filename = tmp_filename('temp', '.eps')
>>> path_to_file = t.eps(filename,             # long time (1s)     # optional -
↪ latex dvips
...                       program='dvips')
>>> path_to_file[-Integer(4):]                          # long time (fast)   #␣
↪optional - latex dvips
'.eps'
>>> path_to_file = t.eps(filename,             # long time (1s)     # optional -
↪ latex pdftocairo
...                       program='pdftocairo')
>>> path_to_file[-Integer(4):]                          # long time (fast)   #␣
↪optional - latex pdftocairo
'.eps'
```

pdf (*filename=None*, *view=True*, *program=None*)

Compile the latex code with pdflatex and create a pdf file.

INPUT:

- `filename` – string (default: `None`); the output filename. If `None`, it saves the file in a temporary directory.
- `view` – boolean (default: `True`); whether to open the file in a pdf viewer. This option is ignored and automatically set to `False` if `filename` is not `None`.

- `program` – string (default: `None`); `'pdflatex'` or `'lualatex'`. If `None`, it uses `'lualatex'` if it is available, otherwise `'pdflatex'`.

OUTPUT: string, path to pdf file

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: _ = t.pdf(view=False)                  # long time (1s)     # optional -␣
↪latex
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
>>> _ = t.pdf(view=False)                  # long time (1s)     # optional -␣
↪latex
```

Same for instances of *TikzPicture*:

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
sage: t = TikzPicture(s)
sage: _ = t.pdf(view=False)                  # not tested
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
>>> t = TikzPicture(s)
>>> _ = t.pdf(view=False)                  # not tested
```

A filename may be provided where to save the file, in which case the viewer does not open the file:

```
sage: from sage.misc.temporary_file import tmp_filename
sage: filename = tmp_filename('temp','.pdf')
sage: path_to_file = t.pdf(filename)         # long time (1s)     # optional -␣
↪latex
sage: path_to_file[-4:]                      # long time (fast)   # optional -␣
↪latex
'.pdf'
```

```
>>> from sage.all import *
>>> from sage.misc.temporary_file import tmp_filename
>>> filename = tmp_filename('temp','.pdf')
>>> path_to_file = t.pdf(filename)         # long time (1s)     # optional -␣
↪latex
>>> path_to_file[-Integer(4):]                      # long time (fast)   #␣
↪optional - latex
'.pdf'
```

The filename may contain spaces:

```
sage: filename = tmp_filename('filename with spaces','.pdf')
sage: path_to_file = t.pdf(filename)         # long time (1s)     # optional -␣
↪latex
```

```
>>> from sage.all import *
>>> filename = tmp_filename('filename with spaces','.pdf')
>>> path_to_file = t.pdf(filename)        # long time (1s)    # optional -␣
↪latex
```

png(*filename=None*, *density=150*, *view=True*)

Compile the latex code with pdflatex and converts to a png file.

INPUT:

- `filename` – string (default: `None`); the output filename. If `None`, it saves the file in a temporary directory.
- `density` – integer (default: `150`); horizontal and vertical density of the image
- `view` – boolean (default: `True`); whether to open the file in a png viewer. This option is ignored and automatically set to `False` if `filename` is not `None`.

OUTPUT: string, path to png file

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: _ = t.png(view=False)             # long time (1s)    # optional -␣
↪latex imagemagick
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
>>> _ = t.png(view=False)             # long time (1s)    # optional - latex␣
↪imagemagick
```

Same for instances of *TikzPicture*:

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
sage: t = TikzPicture(s)
sage: _ = t.png(view=False)             # not tested
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
>>> t = TikzPicture(s)
>>> _ = t.png(view=False)             # not tested
```

```
sage: from sage.misc.temporary_file import tmp_filename
sage: filename = tmp_filename('temp','.png')
sage: path_to_file = t.png(filename)    # long time (1s)    # optional -␣
↪latex imagemagick
sage: path_to_file[-4:]                 # long time (fast)  # optional -␣
↪latex imagemagick
'.png'
```

```
>>> from sage.all import *
>>> from sage.misc.temporary_file import tmp_filename
>>> filename = tmp_filename('temp','.png')
>>> path_to_file = t.png(filename)     # long time (1s)     # optional - latex␣
↪imagemagick
>>> path_to_file[-Integer(4):]                  # long time (fast)  # optional␣
↪- latex imagemagick
'.png'
```

save(*filename*, ***kwds*)

Save the graphics to an image file.

INPUT:

- `filename` – string. The filename and the image format given by the extension, which can be one of the following:
  - `.pdf`,
  - `.png`,
  - `.svg`,
  - `.eps`,
  - `.dvi`,
  - `.sobj` (for a Sage object you can load later),
  - empty extension will be treated as `.sobj`.

All other keyword arguments will be passed to the plotter.

OUTPUT: none

Note

This method follows the signature of the method `sage.plot.Graphics.save()` in order to be compatible with with sagetex. In particular so that `\sageplot{t}` written in a `tex` file works when `t` is an instance of *Standalone* or *TikzPicture*.

EXAMPLES:

```
sage: from sage.misc.temporary_file import tmp_filename
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: filename = tmp_filename('temp','.pdf')
sage: t.save(filename)                          # long time (1s)     #␣
↪optional - latex
sage: filename = tmp_filename('temp','.eps')
sage: t.save(filename)                          # long time (1s)     #␣
↪optional - latex dvips
```

```
>>> from sage.all import *
>>> from sage.misc.temporary_file import tmp_filename
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
```

(continues on next page)

(continued from previous page)

```
>>> filename = tmp_filename('temp','.pdf')
>>> t.save(filename)                              # long time (1s)     # optional -
↪ latex
>>> filename = tmp_filename('temp','.eps')
>>> t.save(filename)                              # long time (1s)     # optional -
↪ latex dvips
```

svg(*filename=None*, *view=True*, *program='pdftocairo'*)

Compile the latex code with pdflatex and converts to a svg file.

INPUT:

- `filename` – string (default: `None`); the output filename. If `None`, it saves the file in a temporary directory.
- `view` – boolean (default: `True`); whether to open the file in a browser. This option is ignored and automatically set to `False` if `filename` is not `None`.
- `program` – string (default: `'pdftocairo'`); `'pdftocairo'` or `'pdf2svg'`

OUTPUT: string, path to svg file

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: _ = t.svg(view=False)      # not tested
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
>>> _ = t.svg(view=False)      # not tested
```

Same for instances of *TikzPicture*:

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
sage: t = TikzPicture(s)
sage: _ = t.svg(view=False)      # not tested
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
>>> t = TikzPicture(s)
>>> _ = t.svg(view=False)      # not tested
```

```
sage: from sage.misc.temporary_file import tmp_filename
sage: filename = tmp_filename('temp', '.svg')
sage: path_to_file = t.svg(filename,            # long time (1s)     #␣
↪optional - latex pdf2svg
....:                      program='pdf2svg')
sage: path_to_file[-4:]                         # long time (fast)   #␣
↪optional - latex pdf2svg
'.svg'
```

(continues on next page)

(continued from previous page)

```
sage: path_to_file = t.svg(filename,            # long time (1s)    #␣
↪optional - latex pdftocairo
....:                       program='pdftocairo')
sage: path_to_file[-4:]                         # long time (fast)  #␣
↪optional - latex pdftocairo
'.svg'
```

```
>>> from sage.all import *
>>> from sage.misc.temporary_file import tmp_filename
>>> filename = tmp_filename('temp', '.svg')
>>> path_to_file = t.svg(filename,            # long time (1s)    # optional -
↪ latex pdf2svg
...                       program='pdf2svg')
>>> path_to_file[-Integer(4):]                          # long time (fast)  #␣
↪optional - latex pdf2svg
'.svg'
>>> path_to_file = t.svg(filename,            # long time (1s)    # optional -
↪ latex pdftocairo
...                       program='pdftocairo')
>>> path_to_file[-Integer(4):]                          # long time (fast)  #␣
↪optional - latex pdftocairo
'.svg'
```

tex(*filename=None*, *content_only=False*, *include_header=None*)

Writes the latex code to a file.

INPUT:

- `filename` – string (default: `None`); the output filename. If `None`, it saves the file in a temporary directory.
- `content_only` – boolean (default: `False`); whether to include the header latex part. If `True`, it prints only the content to the file.

OUTPUT: string, path to tex file

EXAMPLES:

```
sage: from sage.misc.latex_standalone import Standalone
sage: t = Standalone('Hello World')
sage: _ = t.tex()
sage: _ = t.tex(content_only=True)
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import Standalone
>>> t = Standalone('Hello World')
>>> _ = t.tex()
>>> _ = t.tex(content_only=True)
```

Same for instances of *TikzPicture*:

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
sage: t = TikzPicture(s)
```

(continues on next page)

(continued from previous page)

```
sage: _ = t.tex()
sage: _ = t.tex(content_only=True)
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
>>> t = TikzPicture(s)
>>> _ = t.tex()
>>> _ = t.tex(content_only=True)
```

Write to a given filename:

```
sage: from sage.misc.temporary_file import tmp_filename
sage: filename = tmp_filename('temp','.tex')
sage: path_to_file = t.tex(filename)
sage: path_to_file[-4:]
'.tex'
```

```
>>> from sage.all import *
>>> from sage.misc.temporary_file import tmp_filename
>>> filename = tmp_filename('temp','.tex')
>>> path_to_file = t.tex(filename)
>>> path_to_file[-Integer(4):]
'.tex'
```

class sage.misc.latex_standalone.**TikzPicture**(*content*, *standalone_config=None*, *usepackage=None*, *usetikzlibrary=None*, *macros=None*, *use_sage_preamble=False*)

Bases: *Standalone*

A TikzPicture embedded in a LaTeX standalone document class.

INPUT:

- `content` – string, tikzpicture code starting with `r'\begin{tikzpicture}'` and ending with `r'\end{tikzpicture}'`
- `standalone_config` – list of strings (default: `[]`); latex document class standalone configuration options
- `usepackage` – list of strings (default: `[]`); latex packages
- `usetikzlibrary` – list of strings (default: `[]`); tikz libraries to use
- `macros` – list of strings (default: `[]`); stuff you need for the picture
- `use_sage_preamble` – boolean (default: `False`); whether to include sage latex preamble and sage latex macros, that is, the content of `sage.misc.latex.extra_preamble()`, `sage.misc.latex.extra_macros()` and *sage.misc.latex_macros.sage_latex_macros()*

EXAMPLES:

Create your own tikz string from scratch and provide it:

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: lines = []
sage: lines.append(r'\begin{tikzpicture}')
```

(continues on next page)

(continued from previous page)

```
sage: lines.append(r'\draw[very thick,orange,->] (0,0) -- (1,1);')
sage: lines.append(r'\end{tikzpicture}')
sage: s = '\n'.join(lines)
sage: t = TikzPicture(s)
sage: t
\documentclass[tikz]{standalone}
\begin{document}
\begin{tikzpicture}
\draw[very thick,orange,->] (0,0) -- (1,1);
\end{tikzpicture}
\end{document}
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> lines = []
>>> lines.append(r'\begin{tikzpicture}')
>>> lines.append(r'\draw[very thick,orange,->] (0,0) -- (1,1);')
>>> lines.append(r'\end{tikzpicture}')
>>> s = '\n'.join(lines)
>>> t = TikzPicture(s)
>>> t
\documentclass[tikz]{standalone}
\begin{document}
\begin{tikzpicture}
\draw[very thick,orange,->] (0,0) -- (1,1);
\end{tikzpicture}
\end{document}
```

Then use it by exporting the tikzpicture to other formats, all of the below methods return a string providing the path to the filename, which is by default in a temporary folder:

```
sage: # not tested
sage: _ = t.pdf()
sage: _ = t.png()
sage: _ = t.svg()
sage: _ = t.tex()
sage: _ = t.pdf(filename='abc.pdf')
```

```
>>> from sage.all import *
>>> # not tested
>>> _ = t.pdf()
>>> _ = t.png()
>>> _ = t.svg()
>>> _ = t.tex()
>>> _ = t.pdf(filename='abc.pdf')
```

Here we create a tikzpicture for the latex representation of a graph. This is using tkz-graph tex library:

```
sage: # needs sage.graphs
sage: g = graphs.PetersenGraph()
sage: s = latex(g)                                                  # optional - latex
sage: t = TikzPicture(s, standalone_config=["border=4mm"],          # optional - latex
```

(continues on next page)

(continued from previous page)

```
....:                 usepackage=['tkz-graph'])
sage: _ = t.pdf(view=False)                    # long time (2s), optional -␣
↪latex latex_package_tkz_graph
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> g = graphs.PetersenGraph()
>>> s = latex(g)                                              # optional - latex
>>> t = TikzPicture(s, standalone_config=["border=4mm"],      # optional - latex
...                 usepackage=['tkz-graph'])
>>> _ = t.pdf(view=False)                    # long time (2s), optional - latex␣
↪latex_package_tkz_graph
```

Here are standalone configurations, packages, tikz libraries and macros that can be set:

```
sage: options = ['preview', 'border=4mm', 'beamer', 'float']
sage: usepackage = ['nicefrac', 'amsmath', 'pifont', 'tikz-3dplot',
....:    'pgfplots']
sage: tikzlib = ['arrows', 'snakes', 'backgrounds', 'patterns',
....:      'matrix', 'shapes', 'fit', 'calc', 'shadows', 'plotmarks',
....:      'positioning', 'pgfplots.groupplots', 'mindmap']
sage: macros = [r'\newcommand{\ZZ}{\mathbb{Z}}']
sage: s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
sage: t = TikzPicture(s, standalone_config=options, usepackage=usepackage,
....:        usetikzlibrary=tikzlib, macros=macros)
sage: _ = t.pdf(view=False)                    # long time (2s), optional - latex
```

```
>>> from sage.all import *
>>> options = ['preview', 'border=4mm', 'beamer', 'float']
>>> usepackage = ['nicefrac', 'amsmath', 'pifont', 'tikz-3dplot',
...    'pgfplots']
>>> tikzlib = ['arrows', 'snakes', 'backgrounds', 'patterns',
...      'matrix', 'shapes', 'fit', 'calc', 'shadows', 'plotmarks',
...      'positioning', 'pgfplots.groupplots', 'mindmap']
>>> macros = [r'\newcommand{\ZZ}{\mathbb{Z}}']
>>> s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
>>> t = TikzPicture(s, standalone_config=options, usepackage=usepackage,
...        usetikzlibrary=tikzlib, macros=macros)
>>> _ = t.pdf(view=False)                    # long time (2s), optional - latex
```

add_usetikzlibrary(*library*)

Add a `usetikzlibrary` line.

INPUT:

- `library` – string, name of library

EXAMPLES:

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
sage: t = TikzPicture(s)
sage: t.add_usetikzlibrary('arrows')
```

(continues on next page)

(continued from previous page)

```
sage: t
\documentclass[tikz]{standalone}
\usetikzlibrary{arrows}
\begin{document}
\begin{tikzpicture}
\draw (0,0) -- (1,1);
\end{tikzpicture}
\end{document}
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
>>> t = TikzPicture(s)
>>> t.add_usetikzlibrary('arrows')
>>> t
\documentclass[tikz]{standalone}
\usetikzlibrary{arrows}
\begin{document}
\begin{tikzpicture}
\draw (0,0) -- (1,1);
\end{tikzpicture}
\end{document}
```

classmethod from_dot_string(*dotdata*, *prog='dot'*)

Convert a graph to a tikzpicture using graphviz and dot2tex.

Note

Prerequisite: dot2tex optional Sage package and graphviz must be installed.

INPUT:

- `dotdata` – dot format string
- `prog` – string (default: `'dot'`); the program used for the layout corresponding to one of the software of the graphviz suite: `'dot'`, `'neato'`, `'twopi'`, `'circo'` or `'fdp'`

EXAMPLES:

```
sage: # needs sage.graphs
sage: from sage.misc.latex_standalone import TikzPicture
sage: G = graphs.PetersenGraph()
sage: dotdata = G.graphviz_string()
sage: tikz = TikzPicture.from_dot_string(dotdata)    # long time (3s),␣
↪optional - dot2tex graphviz
sage: _ = tikz.pdf()      # not tested
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> from sage.misc.latex_standalone import TikzPicture
>>> G = graphs.PetersenGraph()
>>> dotdata = G.graphviz_string()
```

(continues on next page)

(continued from previous page)

```
>>> tikz = TikzPicture.from_dot_string(dotdata)    # long time (3s), optional -
↪ dot2tex graphviz
>>> _ = tikz.pdf()      # not tested
```

```
sage: # needs sage.graphs
sage: dotdata = G.graphviz_string(labels='latex')
sage: tikz = TikzPicture.from_dot_string(dotdata)    # long time (3s),␣
↪optional - dot2tex graphviz
sage: _ = tikz.pdf()      # not tested
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> dotdata = G.graphviz_string(labels='latex')
>>> tikz = TikzPicture.from_dot_string(dotdata)    # long time (3s), optional -
↪ dot2tex graphviz
>>> _ = tikz.pdf()      # not tested
```

```
sage: # needs sage.combinat sage.graphs sage.groups
sage: W = CoxeterGroup(["A",2])
sage: G = W.cayley_graph()
sage: dotdata = G.graphviz_string()
sage: tikz = TikzPicture.from_dot_string(dotdata)    # long time (3s),␣
↪optional - dot2tex graphviz
sage: _ = tikz.pdf()      # not tested
```

```
>>> from sage.all import *
>>> # needs sage.combinat sage.graphs sage.groups
>>> W = CoxeterGroup(["A",Integer(2)])
>>> G = W.cayley_graph()
>>> dotdata = G.graphviz_string()
>>> tikz = TikzPicture.from_dot_string(dotdata)    # long time (3s), optional -
↪ dot2tex graphviz
>>> _ = tikz.pdf()      # not tested
```

```
sage: # needs sage.combinat sage.graphs sage.groups
sage: dotdata = G.graphviz_string(labels='latex')
sage: tikz = TikzPicture.from_dot_string(dotdata)    # long time (3s),␣
↪optional - dot2tex graphviz
sage: _ = tikz.pdf()      # not tested
```

```
>>> from sage.all import *
>>> # needs sage.combinat sage.graphs sage.groups
>>> dotdata = G.graphviz_string(labels='latex')
>>> tikz = TikzPicture.from_dot_string(dotdata)    # long time (3s), optional -
↪ dot2tex graphviz
>>> _ = tikz.pdf()      # not tested
```

classmethod from_graph(*graph*, *merge_multiedges=True*, *merge_label_function=<class 'tuple'>*, ***kwds*)

Convert a graph to a tikzpicture using graphviz and dot2tex.

Note

Prerequisite: dot2tex optional Sage package and graphviz must be installed.

Warning

This method might be deleted in the future in favor of a method in the graph class returning a tikz picture.

INPUT:

- `graph` – graph
- `merge_multiedges` – boolean (default: `True`); if the graph has multiple edges, whether to merge the multiedges into one single edge
- `merge_label_function` – function (default: `tuple`); a function to apply to each list of labels to be merged. It is ignored if `merge_multiedges` is not `True` or if the graph has no multiple edges.

Other inputs are used for latex drawing with dot2tex and graphviz:

- `prog` – string (default: `'dot'`); the program used for the layout corresponding to one of the software of the graphviz suite: `'dot'`, `'neato'`, `'twopi'`, `'circo'` or `'fdp'`
- `edge_labels` – boolean (default: `True`)
- `color_by_label` – boolean (default: `False`)
- `rankdir` – string (default: `'down'`)
- `subgraph_clusters` – (default: `[]`) a list of lists of vertices, if supported by the layout engine, nodes belonging to the same cluster subgraph are drawn together, with the entire drawing of the cluster contained within a bounding rectangle.

EXAMPLES:

```
sage: # needs sage.graphs
sage: from sage.misc.latex_standalone import TikzPicture
sage: g = graphs.PetersenGraph()
sage: tikz = TikzPicture.from_graph(g)                                  #␣
↪optional - dot2tex graphviz
doctest:...: FutureWarning: This class/method/function is marked as␣
↪experimental.
It, its functionality or its interface might change without a formal␣
↪deprecation.
See https://github.com/sagemath/sage/issues/20343 for details.
sage: _ = tikz.pdf()      # not tested
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> from sage.misc.latex_standalone import TikzPicture
>>> g = graphs.PetersenGraph()
>>> tikz = TikzPicture.from_graph(g)                                  # optional -
↪ dot2tex graphviz
doctest:...: FutureWarning: This class/method/function is marked as␣
↪experimental.
```

(continues on next page)

(continued from previous page)

```
It, its functionality or its interface might change without a formal␣
↪deprecation.
See https://github.com/sagemath/sage/issues/20343 for details.
>>> _ = tikz.pdf()      # not tested
```

Using `prog`:

```
sage: # needs sage.graphs
sage: tikz = TikzPicture.from_graph(g, prog='neato',        # long time (3s),␣
↪optional - dot2tex graphviz
....:                               color_by_label=True)
sage: _ = tikz.pdf()      # not tested
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> tikz = TikzPicture.from_graph(g, prog='neato',        # long time (3s),␣
↪optional - dot2tex graphviz
...                               color_by_label=True)
>>> _ = tikz.pdf()      # not tested
```

Using `rankdir`:

```
sage: tikz = TikzPicture.from_graph(g, rankdir='right')     # long time (3s),␣
↪optional - dot2tex graphviz, needs sage.graphs
sage: _ = tikz.pdf()      # not tested
```

```
>>> from sage.all import *
>>> tikz = TikzPicture.from_graph(g, rankdir='right')     # long time (3s),␣
↪optional - dot2tex graphviz, needs sage.graphs
>>> _ = tikz.pdf()      # not tested
```

Using `merge_multiedges`:

```
sage: # needs sage.graphs sage.modules sage.symbolic
sage: alpha = var('alpha')
sage: m = matrix(2, range(4)); m.set_immutable()
sage: G = DiGraph([(0,1,alpha), (0,1,0), (0,2,9), (0,2,m)],
....:             multiedges=True)
sage: tikz = TikzPicture.from_graph(G, merge_multiedges=True)       #␣
↪optional - dot2tex graphviz
sage: _ = tikz.pdf()      # not tested
```

```
>>> from sage.all import *
>>> # needs sage.graphs sage.modules sage.symbolic
>>> alpha = var('alpha')
>>> m = matrix(Integer(2), range(Integer(4))); m.set_immutable()
>>> G = DiGraph([(Integer(0),Integer(1),alpha), (Integer(0),Integer(1),
↪Integer(0)), (Integer(0),Integer(2),Integer(9)), (Integer(0),Integer(2),m)],
...             multiedges=True)
>>> tikz = TikzPicture.from_graph(G, merge_multiedges=True)       # optional -
↪ dot2tex graphviz
>>> _ = tikz.pdf()      # not tested
```

Using `merge_multiedges` with `merge_label_function`:

```
sage: # needs sage.graphs
sage: fn = lambda L: LatexExpr(','.join(map(str, L)))
sage: edges = [(0,1,'a'), (0,1,'b'), (0,2,'c'), (0,2,'d')]
sage: G = DiGraph(edges, multiedges=True)
sage: tikz = TikzPicture.from_graph(G,                                  #␣
↪optional - dot2tex graphviz
....:           merge_multiedges=True, merge_label_function=fn)
sage: _ = tikz.pdf()      # not tested
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> fn = lambda L: LatexExpr(','.join(map(str, L)))
>>> edges = [(Integer(0),Integer(1),'a'), (Integer(0),Integer(1),'b'),␣
↪(Integer(0),Integer(2),'c'), (Integer(0),Integer(2),'d')]
>>> G = DiGraph(edges, multiedges=True)
>>> tikz = TikzPicture.from_graph(G,                                  # optional -
↪ dot2tex graphviz
...           merge_multiedges=True, merge_label_function=fn)
>>> _ = tikz.pdf()      # not tested
```

Using subgraphs clusters (broken when using labels, see Issue #22070):

```
sage: S = FiniteSetMaps(5)
sage: I = S((0,1,2,3,4))
sage: a = S((0,1,3,0,0))
sage: b = S((0,2,4,1,0))
sage: roots = [I]
sage: succ = lambda v: [v*a,v*b,a*v,b*v]
sage: R = RecursivelyEnumeratedSet(roots, succ)
sage: G = R.to_digraph()                                                #␣
↪needs sage.graphs
sage: G                                                                 #␣
↪needs sage.graphs
Looped multi-digraph on 27 vertices
sage: C = G.strongly_connected_components()                             #␣
↪needs sage.graphs
sage: tikz = TikzPicture.from_graph(G,                                  #␣
↪optional - dot2tex graphviz, needs sage.graphs
....:               merge_multiedges=False, subgraph_clusters=C)
sage: _ = tikz.pdf()      # not tested
```

```
>>> from sage.all import *
>>> S = FiniteSetMaps(Integer(5))
>>> I = S((Integer(0),Integer(1),Integer(2),Integer(3),Integer(4)))
>>> a = S((Integer(0),Integer(1),Integer(3),Integer(0),Integer(0)))
>>> b = S((Integer(0),Integer(2),Integer(4),Integer(1),Integer(0)))
>>> roots = [I]
>>> succ = lambda v: [v*a,v*b,a*v,b*v]
>>> R = RecursivelyEnumeratedSet(roots, succ)
>>> G = R.to_digraph()                                                  #␣
↪needs sage.graphs
```

(continues on next page)

(continued from previous page)

```
>>> G                                                                          #␣
↪needs sage.graphs
Looped multi-digraph on 27 vertices
>>> C = G.strongly_connected_components()                                      #␣
↪needs sage.graphs
>>> tikz = TikzPicture.from_graph(G,                                  # optional -
↪ dot2tex graphviz, needs sage.graphs
...              merge_multiedges=False, subgraph_clusters=C)
>>> _ = tikz.pdf()      # not tested
```

An example coming from `graphviz_string` documentation in SageMath:

```
sage: # needs sage.graphs sage.symbolic
sage: f(x) = -1 / x
sage: g(x) = 1 / (x + 1)
sage: G = DiGraph()
sage: G.add_edges((i, f(i), f) for i in (1, 2, 1/2, 1/4))
sage: G.add_edges((i, g(i), g) for i in (1, 2, 1/2, 1/4))
sage: tikz = TikzPicture.from_graph(G)      # optional - dot2tex graphviz
sage: _ = tikz.pdf()      # not tested
sage: def edge_options(data):
....:     u, v, label = data
....:     options = {"color": {f: "red", g: "blue"}[label]}
....:     if (u,v) == (1/2, -2): options["label"]       = "coucou"; options[
↪"label_style"] = "string"
....:     if (u,v) == (1/2,2/3): options["dot"]         = "x=1,y=2"
....:     if (u,v) == (1,   -1): options["label_style"] = "latex"
....:     if (u,v) == (1,  1/2): options["dir"]         = "back"
....:     return options
sage: tikz = TikzPicture.from_graph(G, edge_options=edge_options)    #␣
↪optional - dot2tex graphviz
sage: _ = tikz.pdf()      # not tested
```

```
>>> from sage.all import *
>>> # needs sage.graphs sage.symbolic
>>> __tmp__=var("x"); f = symbolic_expression(-Integer(1) / x).function(x)
>>> __tmp__=var("x"); g = symbolic_expression(Integer(1) / (x + Integer(1))).
↪function(x)
>>> G = DiGraph()
>>> G.add_edges((i, f(i), f) for i in (Integer(1), Integer(2), Integer(1)/
↪Integer(2), Integer(1)/Integer(4)))
>>> G.add_edges((i, g(i), g) for i in (Integer(1), Integer(2), Integer(1)/
↪Integer(2), Integer(1)/Integer(4)))
>>> tikz = TikzPicture.from_graph(G)      # optional - dot2tex graphviz
>>> _ = tikz.pdf()      # not tested
>>> def edge_options(data):
...     u, v, label = data
...     options = {"color": {f: "red", g: "blue"}[label]}
...     if (u,v) == (Integer(1)/Integer(2), -Integer(2)): options["label"]    ␣
↪   = "coucou"; options["label_style"] = "string"
...     if (u,v) == (Integer(1)/Integer(2),Integer(2)/Integer(3)): options[
↪"dot"]         = "x=1,y=2"
```

(continues on next page)

(continued from previous page)

```
...     if (u,v) == (Integer(1),   -Integer(1)): options["label_style"] =
↪"latex"
...     if (u,v) == (Integer(1),  Integer(1)/Integer(2)): options["dir"]     ␣
↪   = "back"
...     return options
>>> tikz = TikzPicture.from_graph(G, edge_options=edge_options)    # optional -
↪ dot2tex graphviz
>>> _ = tikz.pdf()      # not tested
```

classmethod from_graph_with_pos(*graph*, *scale=1*, *merge_multiedges=True*, *merge_label_function=<class 'tuple'>*)

Convert a graph with positions defined for vertices to a tikzpicture.

Warning

This method might be deleted in the future in favor of a method in the graph class returning a tikz picture.

INPUT:

- `graph` – graph (with predefined positions)
- `scale` – number (default: `1`); tikzpicture scale
- `merge_multiedges` – boolean (default: `True`); if the graph has multiple edges, whether to merge the multiedges into one single edge
- `merge_label_function` – function (default: `tuple`); a function to apply to each list of labels to be merged. It is ignored if `merge_multiedges` is not `True` or if the graph has no multiple edges.

EXAMPLES:

```
sage: from sage.misc.latex_standalone import TikzPicture

sage: # needs sage.graphs
sage: g = graphs.PetersenGraph()
sage: tikz = TikzPicture.from_graph_with_pos(g)
doctest:...: FutureWarning: This class/method/function is marked as␣
↪experimental.
It, its functionality or its interface might change without a formal␣
↪deprecation.
See https://github.com/sagemath/sage/issues/20343 for details.
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture

>>> # needs sage.graphs
>>> g = graphs.PetersenGraph()
>>> tikz = TikzPicture.from_graph_with_pos(g)
doctest:...: FutureWarning: This class/method/function is marked as␣
↪experimental.
It, its functionality or its interface might change without a formal␣
↪deprecation.
See https://github.com/sagemath/sage/issues/20343 for details.
```

```
sage: # needs sage.graphs
sage: edges = [(0,0,'a'),(0,1,'b'),(0,1,'c')]
sage: kwds = dict(format='list_of_edges', loops=True, multiedges=True)
sage: G = DiGraph(edges, **kwds)
sage: G.set_pos({0:(0,0), 1:(1,0)})
sage: f = lambda label:','.join(label)
sage: TikzPicture.from_graph_with_pos(G, merge_label_function=f)
\documentclass[tikz]{standalone}
\standaloneconfig{border=4mm}
\begin{document}
\begin{tikzpicture}
[auto,scale=1]
% vertices
\node (node_0) at (0, 0) {0};
\node (node_1) at (1, 0) {1};
% edges
\draw[->] (node_0) -- node {b,c} (node_1);
% loops
\draw (node_0) edge [loop above] node {a} ();
\end{tikzpicture}
\end{document}
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> edges = [(Integer(0),Integer(0),'a'),(Integer(0),Integer(1),'b'),
↪(Integer(0),Integer(1),'c')]
>>> kwds = dict(format='list_of_edges', loops=True, multiedges=True)
>>> G = DiGraph(edges, **kwds)
>>> G.set_pos({Integer(0):(Integer(0),Integer(0)), Integer(1):(Integer(1),
↪Integer(0))})
>>> f = lambda label:','.join(label)
>>> TikzPicture.from_graph_with_pos(G, merge_label_function=f)
\documentclass[tikz]{standalone}
\standaloneconfig{border=4mm}
\begin{document}
\begin{tikzpicture}
[auto,scale=1]
% vertices
\node (node_0) at (0, 0) {0};
\node (node_1) at (1, 0) {1};
% edges
\draw[->] (node_0) -- node {b,c} (node_1);
% loops
\draw (node_0) edge [loop above] node {a} ();
\end{tikzpicture}
\end{document}
```

classmethod from_poset(*poset*, ***kwds*)

Convert a poset to a tikzpicture using graphviz and dot2tex.

Note

Prerequisite: dot2tex optional Sage package and graphviz must be installed.

Warning

This method might be deleted in the future in favor of a method in the graph class returning a tikz picture.

INPUT:

- `poset` – poset
- `prog` – string (default: `'dot'`); the program used for the layout corresponding to one of the software of the graphviz suite: `'dot'`, `'neato'`, `'twopi'`, `'circo'` or `'fdp'`
- `edge_labels` – boolean (default: `True`)
- `color_by_label` – boolean (default: `False`)
- `rankdir` – string (default: `'down'`)

EXAMPLES:

```
sage: from sage.misc.latex_standalone import TikzPicture

sage: # needs sage.graphs sage.modules
sage: P = posets.PentagonPoset()
sage: tikz = TikzPicture.from_poset(P)                                  #␣
↪optional - dot2tex graphviz
doctest:...: FutureWarning: This class/method/function is marked as␣
↪experimental.
It, its functionality or its interface might change without a formal␣
↪deprecation.
See https://github.com/sagemath/sage/issues/20343 for details.
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture

>>> # needs sage.graphs sage.modules
>>> P = posets.PentagonPoset()
>>> tikz = TikzPicture.from_poset(P)                                # optional -
↪ dot2tex graphviz
doctest:...: FutureWarning: This class/method/function is marked as␣
↪experimental.
It, its functionality or its interface might change without a formal␣
↪deprecation.
See https://github.com/sagemath/sage/issues/20343 for details.
```

```
sage: tikz = TikzPicture.from_poset(P, prog='neato',        # long time (3s),␣
↪optional - dot2tex, needs sage.graphs sage.modules
....:                               color_by_label=True)
```

```
>>> from sage.all import *
>>> tikz = TikzPicture.from_poset(P, prog='neato',        # long time (3s),␣
```

(continues on next page)

(continued from previous page)

```
↪optional - dot2tex, needs sage.graphs sage.modules
...                                 color_by_label=True)
```

```
sage: # needs sage.graphs
sage: P = posets.SymmetricGroupWeakOrderPoset(4)
sage: tikz = TikzPicture.from_poset(P)                          # long time (4s),␣
↪optional - dot2tex graphviz
sage: tikz = TikzPicture.from_poset(P, prog='neato')            # long time (4s),␣
↪optional - dot2tex graphviz
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> P = posets.SymmetricGroupWeakOrderPoset(Integer(4))
>>> tikz = TikzPicture.from_poset(P)                          # long time (4s),␣
↪optional - dot2tex graphviz
>>> tikz = TikzPicture.from_poset(P, prog='neato')            # long time (4s),␣
↪optional - dot2tex graphviz
```

tikz_picture_code()

EXAMPLES:

```
sage: from sage.misc.latex_standalone import TikzPicture
sage: s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
sage: t = TikzPicture(s)
sage: print(t.tikz_picture_code())
\begin{tikzpicture}
\draw (0,0) -- (1,1);
\end{tikzpicture}
```

```
>>> from sage.all import *
>>> from sage.misc.latex_standalone import TikzPicture
>>> s = "\\begin{tikzpicture}\n\\draw (0,0) -- (1,1);\n\\end{tikzpicture}"
>>> t = TikzPicture(s)
>>> print(t.tikz_picture_code())
\begin{tikzpicture}
\draw (0,0) -- (1,1);
\end{tikzpicture}
```

CHAPTER

FIVE

SAVING AND LOADING SAGE OBJECTS

5.1 Support for persistent functions in .sage files

Persistent functions are functions whose values are stored on disk so they do not have to be recomputed.

The inputs to the function must be hashable (so lists are not allowed). Though a hash is used, in the incredibly unlikely event that a hash collision occurs, your function will not return an incorrect result because of this (though the cache might not be used either).

This is meant to be used from `.sage` files, not from library `.py` files.

To use this disk caching mechanism, just put `@func_persist` right before your function definition. For example,

```
@func_persist
def bern(n):
    "Return the n-th Bernoulli number, caching the result to disk."
    return bernoulli(n)
```

You can then use the function `bern` as usual, except it will almost instantly return values that have already been computed, even if you quit and restart.

The disk cache files are stored by default in the subdirectory `func_persist` of the current working directory, with one file for each evaluation of the function.

class sage.misc.func_persist.**func_persist**(*f*, *dir='func_persist'*)

Bases: `object`

Put `@func_persist` right before your function definition to cache values it computes to disk.

5.2 Object persistence

You can load and save most Sage object to disk using the load and save member functions and commands.

Note

It is impossible to save certain Sage objects to disk. For example, if x is a MAGMA object, i.e., a wrapper around an object that is defined in MAGMA, there is no way to save x to disk, since MAGMA doesn't support saving of individual objects to disk.

- Versions: Loading and saving of objects is guaranteed to work even if the version of Python changes. Saved objects can be loaded in future versions of Python. However, if the data structure that defines the object, e.g., in Sage code, changes drastically (or changes name or disappears), then the object might not load correctly or work correctly.
- Objects are zlib compressed for space efficiency.

class sage.misc.persist.**SagePickler**(*file_obj*, *persistent_id=None*, *py2compat=True*)

Bases: _BasePickler

Subclass pickle.Pickler with Sage-specific default options, and built-in support for external object persistence.

INPUT:

- file_obj – a readable file-like object returning bytes from which the pickle data will be loaded
- persistent_id – callable or None; if given this callable takes a single object to be pickled, and returns an "ID" (a key with which to restore the object upon unpickling, which may itself be any pickleable object). See the Python documentation on pickling and unpickling external objects for more details.
- py2compat – on Python 3 only, this creates pickles that have a better chance of being read on Python 2, by using protocol version 2 (instead of 4) and fixing up imports of standard library modules and types whose names changed between Python 2 and 3. This is enabled by default for the best chances of cross-Python compatibility.
- Further arguments are passed to pickle.load(), where in Python-3 Sage sets the default encoding='latin1'. This is essential to make pickles readable in Python-3 that were created in Python-2. See Issue #28444 for details.

EXAMPLES:

```
sage: from sage.misc.persist import (
....:     unpickle_override, register_unpickle_override, SageUnpickler)
sage: from sage.rings.integer import make_integer
sage: from io import BytesIO
sage: def fake_constructor(x):
....:     print("unpickling an Integer")
....:     return make_integer(x)
sage: register_unpickle_override('sage.rings.integer', 'make_integer',
....:                            fake_constructor)
sage: unp = SageUnpickler(BytesIO(dumps(1, compress=False)))
sage: unp.load()
unpickling an Integer
1
sage: del unpickle_override[('sage.rings.integer', 'make_integer')]
```

```
>>> from sage.all import *
>>> from sage.misc.persist import (
...     unpickle_override, register_unpickle_override, SageUnpickler)
>>> from sage.rings.integer import make_integer
>>> from io import BytesIO
>>> def fake_constructor(x):
...     print("unpickling an Integer")
...     return make_integer(x)
>>> register_unpickle_override('sage.rings.integer', 'make_integer',
...                            fake_constructor)
>>> unp = SageUnpickler(BytesIO(dumps(Integer(1), compress=False)))
>>> unp.load()
unpickling an Integer
1
>>> del unpickle_override[('sage.rings.integer', 'make_integer')]
```

The SagePickler can also be passed a persistent_id function:

```
sage: table = {1: 'a', 2: 'b'}
sage: # in practice this might be a database or something...
sage: def load_object_from_table(obj_id):
....:     tag, obj_id
....:     return table[obj_id]
```

```
>>> from sage.all import *
>>> table = {Integer(1): 'a', Integer(2): 'b'}
>>> # in practice this might be a database or something...
>>> def load_object_from_table(obj_id):
...     tag, obj_id
...     return table[obj_id]
```

classmethod dumps(*obj*, ***kwargs*)

Equivalent to `pickle.dumps()` but using the *sage.misc.persist.SagePickler*.

INPUT:

- `obj` – the object to pickle
- `kwargs` – keyword arguments passed to the *sage.misc.persist.SagePickler* constructor

OUTPUT: `pickle` – the pickled object as `bytes`

EXAMPLES:

```
sage: import pickle
sage: from sage.misc.persist import SagePickler
sage: gherkin = SagePickler.dumps(1)
sage: pickle.loads(gherkin)
1
```

```
>>> from sage.all import *
>>> import pickle
>>> from sage.misc.persist import SagePickler
>>> gherkin = SagePickler.dumps(Integer(1))
>>> pickle.loads(gherkin)
1
```

class sage.misc.persist.**SageUnpickler**(*file_obj*, *persistent_load=None*, ***kwargs*)

Bases: `_BaseUnpickler`

Subclass `pickle.Unpickler` to control how certain objects get unpickled (registered overrides, specifically).

This is only needed in Python 3 and up. On Python 2 the behavior of the `cPickle` module is customized differently.

This class simply overrides `Unpickler.find_class` to wrap `sage.misc.persist.unpickle_global`.

INPUT:

- `file_obj` – a readable file-like object returning `bytes` from which the pickle data will be loaded
- `persistent_load` – callable or None; if given this callable implements loading of persistent external objects. The function should take a single argument, the persistent object ID. See the Python documentation on pickling and unpickling external objects for more details.
- `kwargs` – additional keyword arguments passed to the `pickle.Unpickler` constructor

EXAMPLES:

```
sage: from sage.misc.persist import (
....:     unpickle_override, register_unpickle_override, SageUnpickler)
sage: from sage.rings.integer import make_integer
sage: from io import BytesIO
sage: def fake_constructor(x):
....:     print("unpickling an Integer")
....:     return make_integer(x)
sage: register_unpickle_override('sage.rings.integer', 'make_integer',
....:                            fake_constructor)
sage: unp = SageUnpickler(BytesIO(dumps(1, compress=False)))
sage: unp.load()
unpickling an Integer
1
sage: del unpickle_override[('sage.rings.integer', 'make_integer')]
```

```
>>> from sage.all import *
>>> from sage.misc.persist import (
...     unpickle_override, register_unpickle_override, SageUnpickler)
>>> from sage.rings.integer import make_integer
>>> from io import BytesIO
>>> def fake_constructor(x):
...     print("unpickling an Integer")
...     return make_integer(x)
>>> register_unpickle_override('sage.rings.integer', 'make_integer',
...                            fake_constructor)
>>> unp = SageUnpickler(BytesIO(dumps(Integer(1), compress=False)))
>>> unp.load()
unpickling an Integer
1
>>> del unpickle_override[('sage.rings.integer', 'make_integer')]
```

The `SageUnpickler` can also be passed a `persistent_load` function:

```
sage: table = {1: 'a', 2: 'b'}
sage: # in practice this might be a database or something...
sage: def load_object_from_table(obj_id):
....:     tag, obj_id
....:     return table[obj_id]
```

```
>>> from sage.all import *
>>> table = {Integer(1): 'a', Integer(2): 'b'}
>>> # in practice this might be a database or something...
>>> def load_object_from_table(obj_id):
...     tag, obj_id
...     return table[obj_id]
```

classmethod loads(*data*, ***kwargs*)

Equivalent to `pickle.loads()` but using the *sage.misc.persist.SagePickler*.

INPUT:

- `data` – the pickle data as `bytes`
- `kwargs` – keyword arguments passed to the *sage.misc.persist.SageUnpickler* constructor

OUTPUT: `obj` – the object that was serialized to the given pickle data

EXAMPLES:

```
sage: import pickle
sage: from sage.misc.persist import SageUnpickler
sage: gherkin = pickle.dumps(1)
sage: SageUnpickler.loads(gherkin)
1
```

```
>>> from sage.all import *
>>> import pickle
>>> from sage.misc.persist import SageUnpickler
>>> gherkin = pickle.dumps(Integer(1))
>>> SageUnpickler.loads(gherkin)
1
```

`sage.misc.persist.`**`db`**(*name*)

Load object with given name from the Sage database. Use x.db(name) or db_save(x, name) to save objects to the database.

The database directory is `$HOME/.sage/db`.

`sage.misc.persist.`**`db_save`**(*x*, *name=None*)

Save x to the Sage database.

The database directory is `$HOME/.sage/db`.

`sage.misc.persist.`**`dumps`**(*obj*, *compress=True*)

Dump obj to a string s. To recover obj, use `loads(s)`.

See also

loads()

EXAMPLES:

```
sage: a = 2/3
sage: s = dumps(a)
sage: a2 = loads(s)
sage: type(a) is type(a2)
True
sage: a2
2/3
```

```
>>> from sage.all import *
>>> a = Integer(2)/Integer(3)
>>> s = dumps(a)
>>> a2 = loads(s)
>>> type(a) is type(a2)
True
>>> a2
2/3
```

sage.misc.persist.**load**(*compress=True*, *verbose=True*, **filename*, ***kwargs*)

Load Sage object from the file with name filename, which will have an `.sobj` extension added if it doesn't have one. Or, if the input is a filename ending in `.py`, `.pyx`, `.sage`, `.spyx`, `.f`, `.f90` or `.m`, load that file into the current running session using `sage.repl.load.load()`.

Loaded files are not loaded into their own namespace, i.e., this is much more like Python's `execfile` than Python's `import`.

This function also loads a `.sobj` file over a network by specifying the full URL. (Setting `verbose = False` suppresses the loading progress indicator.)

When a pickle created with Python 2 is unpickled in Python 3, Sage uses the default encoding `latin1` to unpickle data of type `str`.

Finally, if you give multiple positional input arguments, then all of those files are loaded, or all of the objects are loaded and a list of the corresponding loaded objects is returned.

If `compress` is true (the default), then the data stored in the file are supposed to be compressed. If `verbose` is true (the default), then some logging is printed when accessing remote files. Further keyword arguments are passed to `pickle.load()`.

EXAMPLES:

```
sage: u = 'https://www.sagemath.org/files/test.sobj'
sage: s = load(u)                                                    # optional -␣
↪internet
Attempting to load remote file: https://www.sagemath.org/files/test.sobj
Loading started
Loading ended
sage: s                                                              # optional -␣
↪internet
'hello SageMath'
```

```
>>> from sage.all import *
>>> u = 'https://www.sagemath.org/files/test.sobj'
>>> s = load(u)                                                      # optional -␣
↪internet
Attempting to load remote file: https://www.sagemath.org/files/test.sobj
Loading started
Loading ended
>>> s                                                               # optional -␣
↪internet
'hello SageMath'
```

We test loading a file or multiple files or even mixing loading files and objects:

```
sage: t = tmp_filename(ext='.py')
sage: with open(t, 'w') as f:
....:     _ = f.write("print('hello world')")
sage: load(t)
hello world
sage: load(t,t)
hello world
hello world
sage: t2 = tmp_filename(); save(2/3,t2)
sage: load(t,t,t2)
```

(continues on next page)

(continued from previous page)

```
hello world
hello world
[None, None, 2/3]
```

```
>>> from sage.all import *
>>> t = tmp_filename(ext='.py')
>>> with open(t, 'w') as f:
...     _ = f.write("print('hello world')")
>>> load(t)
hello world
>>> load(t,t)
hello world
hello world
>>> t2 = tmp_filename(); save(Integer(2)/Integer(3),t2)
>>> load(t,t,t2)
hello world
hello world
[None, None, 2/3]
```

Files with a `.sage` extension are preparsed. Also note that we can access global variables:

```
sage: t = tmp_filename(ext='.sage')
sage: with open(t, 'w') as f:
....:     _ = f.write("a += Mod(2/3, 11)")  # This evaluates to Mod(8, 11)
sage: a = -1
sage: load(t)
sage: a
7
```

```
>>> from sage.all import *
>>> t = tmp_filename(ext='.sage')
>>> with open(t, 'w') as f:
...     _ = f.write("a += Mod(2/3, 11)")  # This evaluates to Mod(8, 11)
>>> a = -Integer(1)
>>> load(t)
>>> a
7
```

We can load Fortran files:

```
sage: code = '      subroutine hello\n          print *, "Hello World!"\n      end␣
↪subroutine hello\n'
sage: t = tmp_filename(ext='.F')
sage: with open(t, 'w') as f:
....:     _ = f.write(code)
sage: load(t)                                                                 #␣
↪needs numpy
sage: hello                                                                   #␣
↪needs numpy
<fortran ...>
```

```
>>> from sage.all import *
>>> code = '      subroutine hello\n         print *, "Hello World!"\n      end␣
↪subroutine hello\n'
>>> t = tmp_filename(ext='.F')
>>> with open(t, 'w') as f:
...     _ = f.write(code)
>>> load(t)                                                                    #␣
↪needs numpy
>>> hello                                                                      #␣
↪needs numpy
<fortran ...>
```

sage.misc.persist.**load_sage_element**(*cls*, *parent*, *dic_pic*)

sage.misc.persist.**load_sage_object**(*cls*, *dic*)

sage.misc.persist.**loads**(*s*, *compress=True*, ***kwargs*)

Recover an object x that has been dumped to a string s using `s = dumps(x)`.

See also

dumps()

EXAMPLES:

```
sage: a = matrix(2, [1,2, 3,-4/3])                                             #␣
↪needs sage.modules
sage: s = dumps(a)                                                             #␣
↪needs sage.modules
sage: loads(s)                                                                 #␣
↪needs sage.modules
[   1    2]
[   3 -4/3]
```

```
>>> from sage.all import *
>>> a = matrix(Integer(2), [Integer(1),Integer(2), Integer(3),-Integer(4)/
↪Integer(3)])                                                  # needs sage.modules
>>> s = dumps(a)                                                               #␣
↪needs sage.modules
>>> loads(s)                                                                   #␣
↪needs sage.modules
[   1    2]
[   3 -4/3]
```

If compress is `True` (the default), it will try to decompress the data with zlib and with bz2 (in turn); if neither succeeds, it will assume the data is actually uncompressed. If `compress==False` is explicitly specified, then no decompression is attempted. Further arguments are passed to python's `pickle.load()`.

```
sage: v = [1..10]
sage: loads(dumps(v, compress=False)) == v
True
sage: loads(dumps(v, compress=False), compress=True) == v
```

(continues on next page)

(continued from previous page)

```
True
sage: loads(dumps(v, compress=True), compress=False)
Traceback (most recent call last):
...
UnpicklingError: invalid load key, 'x'.
```

```
>>> from sage.all import *
>>> v = (ellipsis_range(Integer(1),Ellipsis,Integer(10)))
>>> loads(dumps(v, compress=False)) == v
True
>>> loads(dumps(v, compress=False), compress=True) == v
True
>>> loads(dumps(v, compress=True), compress=False)
Traceback (most recent call last):
...
UnpicklingError: invalid load key, 'x'.
```

The next example demonstrates that Sage strives to avoid data loss in the transition from Python-2 to Python-3. The problem is that Python-3 by default would not be able to unpickle a non-ASCII Python-2 string appearing in a pickle. See Issue #28444 for details.

```
sage: class Foo():
....:     def __init__(self, s):
....:         self.bar = s
....:     def __reduce__(self):
....:         return Foo, (self.bar,)
....:
sage: import __main__
sage: __main__.Foo = Foo
```

```
>>> from sage.all import *
>>> class Foo():
...     def __init__(self, s):
...         self.bar = s
...     def __reduce__(self):
...         return Foo, (self.bar,)
....:
>>> import __main__
>>> __main__.Foo = Foo
```

The data that is passed to `loads` in the following line was created by `dumps(Foo('\x80\x07')` in Python-2.

```
sage: g = loads(b'x\x9ck`J\x8e\x8f\xcfM\xcc\xcc\x8b\x8f\xe7r\xcb\xcf\xe7*d\x0cej`/
↪dj\r*d\xd6\x03\x00\x89\xc5\x08{')
sage: type(g), g.bar
(<class '__main__.Foo'>, '\x80\x07')
```

```
>>> from sage.all import *
>>> g = loads(b'x\x9ck`J\x8e\x8f\xcfM\xcc\xcc\x8b\x8f\xe7r\xcb\xcf\xe7*d\x0cej`/
↪dj\r*d\xd6\x03\x00\x89\xc5\x08{')
>>> type(g), g.bar
(<class '__main__.Foo'>, '\x80\x07')
```

The following line demonstrates what would happen without Issue #28444:

```
sage: loads(b'x\x9ck`J\x8e\x8f\xcfM\xcc\xcc\x8b\x8f\xe7r\xcb\xcf\xe7*d\x0cej`/dj\
↪r*d\xd6\x03\x00\x89\xc5\x08{', encoding='ASCII')
Traceback (most recent call last):
...
UnicodeDecodeError: 'ascii' codec can...t decode byte 0x80 in position 0: ordinal␣
↪not in range(128)
```

```
>>> from sage.all import *
>>> loads(b'x\x9ck`J\x8e\x8f\xcfM\xcc\xcc\x8b\x8f\xe7r\xcb\xcf\xe7*d\x0cej`/dj\
↪r*d\xd6\x03\x00\x89\xc5\x08{', encoding='ASCII')
Traceback (most recent call last):
...
UnicodeDecodeError: 'ascii' codec can...t decode byte 0x80 in position 0: ordinal␣
↪not in range(128)
```

sage.misc.persist.**make_None**(**args*, ***kwds*)

Do nothing and return None. Used for overriding pickles when that pickle is no longer needed.

EXAMPLES:

```
sage: from sage.misc.persist import make_None
sage: print(make_None(42, pi, foo='bar'))                                   #␣
↪needs sage.symbolic
None
```

```
>>> from sage.all import *
>>> from sage.misc.persist import make_None
>>> print(make_None(Integer(42), pi, foo='bar'))                             ␣
↪     # needs sage.symbolic
None
```

sage.misc.persist.**picklejar**(*obj*, *dir=None*)

Create pickled sobj of obj in dir, with name the absolute value of the hash of the pickle of obj. This is used in conjunction with *unpickle_all()*.

To use this to test the whole Sage library right now, set the environment variable SAGE_PICKLE_JAR, which will make it so *dumps()* will by default call *picklejar()* with the default dir. Once you do that and doctest Sage, you'll find that the DOT_SAGE/pickle_jar directory contains a bunch of pickled objects along with corresponding txt descriptions of them. Use the *unpickle_all()* to see if they unpickle later.

INPUT:

- obj – a pickleable object
- dir – string or None; if None then dir defaults to DOT_SAGE/pickle_jar

EXAMPLES:

```
sage: dir = tmp_dir()
sage: sage.misc.persist.picklejar(1, dir)
sage: sage.misc.persist.picklejar('test', dir)
sage: len(os.listdir(dir))    # Two entries (sobj and txt) for each object
4
```

```
>>> from sage.all import *
>>> dir = tmp_dir()
>>> sage.misc.persist.picklejar(Integer(1), dir)
>>> sage.misc.persist.picklejar('test', dir)
>>> len(os.listdir(dir))    # Two entries (sobj and txt) for each object
4
```

sage.misc.persist.**register_unpickle_override**(*module*, *name*, *callable*, *call_name=None*)

Python pickles include the module and class name of classes. This means that rearranging the Sage source can invalidate old pickles. To keep the old pickles working, you can call register_unpickle_override with an old module name and class name, and the Python callable (function, class with __call__ method, etc.) to use for unpickling. (If this callable is a value in some module, you can specify the module name and class name, for the benefit of *explain_pickle()* when called with `in_current_sage=True`).)

EXAMPLES:

Imagine that there used to be an `old_integer` module and old pickles essentially trying to do the following:

```
sage: unpickle_global('sage.rings.old_integer', 'OldInteger')
Traceback (most recent call last):
...
ImportError: cannot import OldInteger from sage.rings.old_integer, call register_
↪unpickle_override('sage.rings.old_integer', 'OldInteger', ...) to fix this
```

```
>>> from sage.all import *
>>> unpickle_global('sage.rings.old_integer', 'OldInteger')
Traceback (most recent call last):
...
ImportError: cannot import OldInteger from sage.rings.old_integer, call register_
↪unpickle_override('sage.rings.old_integer', 'OldInteger', ...) to fix this
```

After following the advice from the error message, unpickling works:

```
sage: from sage.misc.persist import register_unpickle_override
sage: register_unpickle_override('sage.rings.old_integer', 'OldInteger', Integer)
sage: unpickle_global('sage.rings.old_integer', 'OldInteger')
<... 'sage.rings.integer.Integer'>
```

```
>>> from sage.all import *
>>> from sage.misc.persist import register_unpickle_override
>>> register_unpickle_override('sage.rings.old_integer', 'OldInteger', Integer)
>>> unpickle_global('sage.rings.old_integer', 'OldInteger')
<... 'sage.rings.integer.Integer'>
```

In many cases, unpickling problems for old pickles can be resolved with a simple call to `register_unpickle_override`, as in the example above and in many of the `sage` source files. However, if the underlying data structure has changed significantly then unpickling may fail and it will be necessary to explicitly implement unpickling methods for the associated objects. The python pickle protocol is described in detail on the web and, in particular, in the python pickling documentation. For example, the following excerpt from this documentation shows that the unpickling of classes is controlled by their `__setstate__()` method.

```
object.__setstate__(state)
```

(continues on next page)

(continued from previous page)

```
    Upon unpickling, if the class also defines the method :meth:`__setstate__`,␣
↪it is
    called with the unpickled state. If there is no :meth:`__setstate__` method,
    the pickled state must be a dictionary and its items are assigned to the new
    instance's dictionary. If a class defines both :meth:`__getstate__` and
    :meth:`__setstate__`, the state object needn't be a dictionary and these␣
↪methods
    can do what they want.
```

By implementing a `__setstate__()` method for a class it should be possible to fix any unpickling problems for the class. As an example of what needs to be done, we show how to unpickle a `CombinatorialObject` object using a class which also inherits from `Element`. This exact problem often arises when refactoring old code into the element framework. First we create a pickle to play with:

```
sage: from sage.structure.element import Element
sage: class SourPickle(CombinatorialObject): pass
sage: class SweetPickle(CombinatorialObject, Element): pass
sage: import __main__
sage: __main__.SourPickle = SourPickle
sage: __main__.SweetPickle = SweetPickle  # a hack to allow us to pickle command␣
↪line classes
sage: gherkin = dumps(SourPickle([1, 2, 3]))
```

```
>>> from sage.all import *
>>> from sage.structure.element import Element
>>> class SourPickle(CombinatorialObject): pass
>>> class SweetPickle(CombinatorialObject, Element): pass
>>> import __main__
>>> __main__.SourPickle = SourPickle
>>> __main__.SweetPickle = SweetPickle  # a hack to allow us to pickle command␣
↪line classes
>>> gherkin = dumps(SourPickle([Integer(1), Integer(2), Integer(3)]))
```

Using *register_unpickle_override()* we try to sweeten our pickle, but we are unable to eat it:

```
sage: from sage.misc.persist import register_unpickle_override
sage: register_unpickle_override('__main__', 'SourPickle', SweetPickle)
sage: loads(gherkin)
Traceback (most recent call last):
...
KeyError: 0
```

```
>>> from sage.all import *
>>> from sage.misc.persist import register_unpickle_override
>>> register_unpickle_override('__main__', 'SourPickle', SweetPickle)
>>> loads(gherkin)
Traceback (most recent call last):
...
KeyError: 0
```

The problem is that the `SweetPickle` has inherited a `__setstate__()` method from `Element` which is not compatible with unpickling for `CombinatorialObject`. We can fix this by explicitly defining a new `__setstate__()` method:

```
sage: class SweeterPickle(CombinatorialObject, Element):
....:     def __setstate__(self, state):
....:         # a pickle from CombinatorialObject is just its instance
....:         # dictionary
....:         if isinstance(state, dict):
....:             # this is a fudge: we need an appropriate parent here
....:             self._set_parent(Tableaux())
....:             self.__dict__ = state
....:         else:
....:             P, D = state
....:             if P is not None:
....:                 self._set_parent(P)
....:             self.__dict__ = D
sage: __main__.SweeterPickle = SweeterPickle
sage: register_unpickle_override('__main__', 'SourPickle', SweeterPickle)
sage: loads(gherkin)                                                          #␣
↪needs sage.combinat
[1, 2, 3]
sage: loads(dumps(SweeterPickle([1, 2, 3])))  # check that pickles work for␣
↪SweeterPickle
[1, 2, 3]
```

```
>>> from sage.all import *
>>> class SweeterPickle(CombinatorialObject, Element):
...     def __setstate__(self, state):
...         # a pickle from CombinatorialObject is just its instance
...         # dictionary
...         if isinstance(state, dict):
...             # this is a fudge: we need an appropriate parent here
...             self._set_parent(Tableaux())
...             self.__dict__ = state
...         else:
...             P, D = state
...             if P is not None:
...                 self._set_parent(P)
...             self.__dict__ = D
>>> __main__.SweeterPickle = SweeterPickle
>>> register_unpickle_override('__main__', 'SourPickle', SweeterPickle)
>>> loads(gherkin)                                                          #␣
↪needs sage.combinat
[1, 2, 3]
>>> loads(dumps(SweeterPickle([Integer(1), Integer(2), Integer(3)])))  # check␣
↪that pickles work for SweeterPickle
[1, 2, 3]
```

The `state` passed to `__setstate__()` will usually be something like the instance dictionary of the pickled object, however, with some older classes such as `CombinatorialObject` it will be a tuple. In general, the `state` can be any python object. `Sage` provides a special tool, *`explain_pickle()`*, which can help in figuring out the contents of an old pickle. Here is a second example.

```
sage: class A():
....:     def __init__(self, value):
....:         self.original_attribute = value
```

(continues on next page)

(continued from previous page)

```
....:     def __repr__(self):
....:         return 'A(%s)' % self.original_attribute
sage: class B():
....:     def __init__(self, value):
....:         self.new_attribute = value
....:     def __setstate__(self, state):
....:         try:
....:             self.new_attribute = state['new_attribute']
....:         except KeyError:      # an old pickle
....:             self.new_attribute = state['original_attribute']
....:     def __repr__(self):
....:         return 'B(%s)' % self.new_attribute
sage: import __main__
sage: # a hack to allow us to pickle command line classes
sage: __main__.A = A
sage: __main__.B = B
sage: A(10)
A(10)
sage: loads(dumps(A(10)))
A(10)
sage: sage.misc.explain_pickle.explain_pickle(dumps(A(10)))
pg_A = unpickle_global('__main__', 'A')
si = unpickle_newobj(pg_A, ())
pg_make_integer = unpickle_global('sage.rings.integer', 'make_integer')
unpickle_build(si, {'original_attribute':pg_make_integer('a')})
si
sage: from sage.misc.persist import register_unpickle_override
sage: register_unpickle_override('__main__', 'A', B)
sage: loads(dumps(A(10)))
B(10)
sage: loads(dumps(B(10)))
B(10)
```

```
>>> from sage.all import *
>>> class A():
...     def __init__(self, value):
...         self.original_attribute = value
...     def __repr__(self):
...         return 'A(%s)' % self.original_attribute
>>> class B():
...     def __init__(self, value):
...         self.new_attribute = value
...     def __setstate__(self, state):
...         try:
...             self.new_attribute = state['new_attribute']
...         except KeyError:      # an old pickle
...             self.new_attribute = state['original_attribute']
...     def __repr__(self):
...         return 'B(%s)' % self.new_attribute
>>> import __main__
>>> # a hack to allow us to pickle command line classes
>>> __main__.A = A
```

(continues on next page)

(continued from previous page)

```
>>> __main__.B = B
>>> A(Integer(10))
A(10)
>>> loads(dumps(A(Integer(10))))
A(10)
>>> sage.misc.explain_pickle.explain_pickle(dumps(A(Integer(10))))
pg_A = unpickle_global('__main__', 'A')
si = unpickle_newobj(pg_A, ())
pg_make_integer = unpickle_global('sage.rings.integer', 'make_integer')
unpickle_build(si, {'original_attribute':pg_make_integer('a')})
si
>>> from sage.misc.persist import register_unpickle_override
>>> register_unpickle_override('__main__', 'A', B)
>>> loads(dumps(A(Integer(10))))
B(10)
>>> loads(dumps(B(Integer(10))))
B(10)
```

Pickling for python classes and extension classes, such as cython, is different – again this is discussed in the python pickling documentation. For the unpickling of extension classes you need to write a `__reduce__()` method which typically returns a tuple `(f, args, ...)` such that `f(*args)` returns (a copy of) the original object. The following code snippet is the `__reduce__()` method from `sage.rings.integer.Integer`.

```
def __reduce__(self):
    'Including the documentation properly causes a doc-test failure so we include␣
↪it as a comment:'
    #* '''
    #* This is used when pickling integers.
    #*
    #* EXAMPLES::
    #*
    #*     sage: n = 5
    #*     sage: t = n.__reduce__(); t
    #*     (<built-in function make_integer>, ('5',))
    #*     sage: t[0](*t[1])
    #*     5
    #*     sage: loads(dumps(n)) == n
    #*     True
    #* '''
    # This single line below took me HOURS to figure out.
    # It is the *trick* needed to pickle Cython extension types.
    # The trick is that you must put a pure Python function
    # as the first argument, and that function must return
    # the result of unpickling with the argument in the second
    # tuple as input. All kinds of problems happen
    # if we don't do this.
    return sage.rings.integer.make_integer, (self.str(32),)
```

`sage.misc.persist.`**`save`**(*obj*, *filename*, *compress=True*, ***kwargs*)

Save `obj` to the file with name `filename`, which will have an `.sobj` extension added if it doesn't have one and if `obj` doesn't have its own `save()` method, like e.g. Python tuples.

For image objects and the like (which have their own `save()` method), you may have to specify a specific extension,

e.g. `.png`, if you don't want the object to be saved as a Sage object (or likewise, if `filename` could be interpreted as already having some extension).

Warning

This will *replace* the contents of the file if it already exists.

EXAMPLES:

```
sage: import tempfile
sage: d = tempfile.TemporaryDirectory()
sage: a = matrix(2, [1,2, 3,-5/2])                                              #␣
↪needs sage.modules
sage: objfile = os.path.join(d.name, 'test.sobj')
sage: objfile_short = os.path.join(d.name, 'test')
sage: save(a, objfile)                                                          #␣
↪needs sage.modules
sage: load(objfile_short)                                                       #␣
↪needs sage.modules
[   1    2]
[   3 -5/2]

sage: # needs sage.plot sage.schemes
sage: E = EllipticCurve([-1,0])
sage: P = plot(E)
sage: save(P, objfile_short)   # saves the plot to "test.sobj"
sage: save(P, filename=os.path.join(d.name, "sage.png"), xmin=-2)
sage: save(P, os.path.join(d.name, "filename.with.some.wrong.ext"))
Traceback (most recent call last):
...
ValueError: allowed file extensions for images are
'.eps', '.pdf', '.pgf', '.png', '.ps', '.sobj', '.svg'!
sage: print(load(objfile))
Graphics object consisting of 2 graphics primitives

sage: save("A python string", os.path.join(d.name, 'test'))
sage: load(objfile)
'A python string'
sage: load(objfile_short)
'A python string'
sage: d.cleanup()
```

```
>>> from sage.all import *
>>> import tempfile
>>> d = tempfile.TemporaryDirectory()
>>> a = matrix(Integer(2), [Integer(1),Integer(2), Integer(3),-Integer(5)/
↪Integer(2)])                                                  # needs sage.modules
>>> objfile = os.path.join(d.name, 'test.sobj')
>>> objfile_short = os.path.join(d.name, 'test')
>>> save(a, objfile)                                                            #␣
↪needs sage.modules
>>> load(objfile_short)                                                         #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.modules
[   1    2]
[   3 -5/2]

>>> # needs sage.plot sage.schemes
>>> E = EllipticCurve([-Integer(1),Integer(0)])
>>> P = plot(E)
>>> save(P, objfile_short)    # saves the plot to "test.sobj"
>>> save(P, filename=os.path.join(d.name, "sage.png"), xmin=-Integer(2))
>>> save(P, os.path.join(d.name, "filename.with.some.wrong.ext"))
Traceback (most recent call last):
...
ValueError: allowed file extensions for images are
'.eps', '.pdf', '.pgf', '.png', '.ps', '.sobj', '.svg'!
>>> print(load(objfile))
Graphics object consisting of 2 graphics primitives

>>> save("A python string", os.path.join(d.name, 'test'))
>>> load(objfile)
'A python string'
>>> load(objfile_short)
'A python string'
>>> d.cleanup()
```

sage.misc.persist.**unpickle_all**(*target*, *debug=False*, *run_test_suite=False*)

Unpickle all `.sobj` files in a directory or tar archive.

INPUT:

- `target` – string; the name of a directory or of a (possibly compressed) tar archive that contains a single directory of `.sobj` files. The tar archive can be in any format that python's `tarfile` module understands; for example, `.tar.gz` or `.tar.bz2`.
- `debug` – boolean (default: `False`) whether to report a stacktrace in case of failure
- `run_test_suite` – boolean (default: `False`) whether to run `TestSuite(x).run()` on the unpickled objects

OUTPUT:

Typically, two lines are printed: the first reporting the number of successfully unpickled files, and the second reporting the number (zero) of failures. If there are failures, however, then a list of failed files will be printed before either of those lines, and the failure count will of course be nonzero.

Warning

You must only pass trusted data to this function, including tar archives. We use the "data" filter from PEP 706 if possible while extracting the archive, but even that is not a perfect solution, and it is only available since Python 3.11.4.

EXAMPLES:

```
sage: dir = tmp_dir()
sage: sage.misc.persist.picklejar('hello', dir)
```

(continues on next page)

(continued from previous page)

```
sage: sage.misc.persist.unpickle_all(dir)
Successfully unpickled 1 objects.
Failed to unpickle 0 objects.
```

```
>>> from sage.all import *
>>> dir = tmp_dir()
>>> sage.misc.persist.picklejar('hello', dir)
>>> sage.misc.persist.unpickle_all(dir)
Successfully unpickled 1 objects.
Failed to unpickle 0 objects.
```

sage.misc.persist.**unpickle_global**(*module*, *name*)

Given a module name and a name within that module (typically a class name), retrieve the corresponding object. This normally just looks up the name in the module, but it can be overridden by register_unpickle_override. This is used in the Sage unpickling mechanism, so if the Sage source code organization changes, register_unpickle_override can allow old pickles to continue to work.

EXAMPLES:

```
sage: from sage.misc.persist import unpickle_override, register_unpickle_override
sage: unpickle_global('sage.rings.integer', 'Integer')
<class 'sage.rings.integer.Integer'>
```

```
>>> from sage.all import *
>>> from sage.misc.persist import unpickle_override, register_unpickle_override
>>> unpickle_global('sage.rings.integer', 'Integer')
<class 'sage.rings.integer.Integer'>
```

Now we horribly break the pickling system:

```
sage: register_unpickle_override('sage.rings.integer', 'Integer', Rational, call_
↪name=('sage.rings.rational', 'Rational'))
sage: unpickle_global('sage.rings.integer', 'Integer')
<class 'sage.rings.rational.Rational'>
```

```
>>> from sage.all import *
>>> register_unpickle_override('sage.rings.integer', 'Integer', Rational, call_
↪name=('sage.rings.rational', 'Rational'))
>>> unpickle_global('sage.rings.integer', 'Integer')
<class 'sage.rings.rational.Rational'>
```

and we reach into the internals and put it back:

```
sage: del unpickle_override[('sage.rings.integer', 'Integer')]
sage: unpickle_global('sage.rings.integer', 'Integer')
<class 'sage.rings.integer.Integer'>
```

```
>>> from sage.all import *
>>> del unpickle_override[('sage.rings.integer', 'Integer')]
>>> unpickle_global('sage.rings.integer', 'Integer')
<class 'sage.rings.integer.Integer'>
```

A meaningful error message with resolution instructions is displayed for old pickles that accidentally got broken because a class or entire module was moved or renamed:

```
sage: unpickle_global('sage.all', 'some_old_class')
Traceback (most recent call last):
...
ImportError: cannot import some_old_class from sage.all, call
register_unpickle_override('sage.all', 'some_old_class', ...)
to fix this

sage: unpickle_global('sage.some_old_module', 'some_old_class')
Traceback (most recent call last):
...
ImportError: cannot import some_old_class from sage.some_old_module, call
register_unpickle_override('sage.some_old_module', 'some_old_class', ...)
to fix this
```

```
>>> from sage.all import *
>>> unpickle_global('sage.all', 'some_old_class')
Traceback (most recent call last):
...
ImportError: cannot import some_old_class from sage.all, call
register_unpickle_override('sage.all', 'some_old_class', ...)
to fix this

>>> unpickle_global('sage.some_old_module', 'some_old_class')
Traceback (most recent call last):
...
ImportError: cannot import some_old_class from sage.some_old_module, call
register_unpickle_override('sage.some_old_module', 'some_old_class', ...)
to fix this
```

5.3 Function pickling

REFERENCE: The python cookbook.

sage.misc.fpickle.**call_pickled_function**(*fpargs*)

sage.misc.fpickle.**code_ctor**(**args*)

EXAMPLES:

This indirectly tests this function.

```
sage: def foo(a, b, c=10): return a+b+c
sage: sage.misc.fpickle.reduce_code(foo.__code__)
(<cyfunction code_ctor at ...>, ...)
sage: unpickle_function(pickle_function(foo))
<function foo at ...>
```

```
>>> from sage.all import *
>>> def foo(a, b, c=Integer(10)): return a+b+c
>>> sage.misc.fpickle.reduce_code(foo.__code__)
(<cyfunction code_ctor at ...>, ...)
```

(continues on next page)

(continued from previous page)

```
>>> unpickle_function(pickle_function(foo))
<function foo at ...>
```

sage.misc.fpickle.**pickleMethod**(*method*)

support function for copyreg to pickle method refs

sage.misc.fpickle.**pickleModule**(*module*)

support function for copyreg to pickle module refs

sage.misc.fpickle.**pickle_function**(*func*)

Pickle the Python function func. This is not a normal pickle; you must use the unpickle_function method to unpickle the pickled function.

NOTE: This does not work on all functions, but does work on 'surprisingly' many functions. In particular, it does not work on functions that includes nested functions.

INPUT:

- `func` – a Python function

OUTPUT: string

EXAMPLES:

```
sage: def f(N): return N+1
...
sage: g = pickle_function(f)
sage: h = unpickle_function(g)
sage: h(10)
11
```

```
>>> from sage.all import *
>>> def f(N): return N+Integer(1)
...
>>> g = pickle_function(f)
>>> h = unpickle_function(g)
>>> h(Integer(10))
11
```

sage.misc.fpickle.**reduce_code**(*co*)

EXAMPLES:

```
sage: def foo(N): return N+1
sage: sage.misc.fpickle.reduce_code(foo.__code__)
(<cyfunction code_ctor at ...>, ...)
```

```
>>> from sage.all import *
>>> def foo(N): return N+Integer(1)
>>> sage.misc.fpickle.reduce_code(foo.__code__)
(<cyfunction code_ctor at ...>, ...)
```

Test that the constructed code matches the original code:

```
sage: ctor, args = sage.misc.fpickle.reduce_code(foo.__code__)
sage: ctor(*args) == foo.__code__
True
```

```
>>> from sage.all import *
>>> ctor, args = sage.misc.fpickle.reduce_code(foo.__code__)
>>> ctor(*args) == foo.__code__
True
```

sage.misc.fpickle.**unpickleMethod**(*im_name*, *__self__*, *im_class*)

support function for copyreg to unpickle method refs

sage.misc.fpickle.**unpickleModule**(*name*)

support function for copyreg to unpickle module refs

sage.misc.fpickle.**unpickle_function**(*pickled*)

Unpickle a pickled function.

EXAMPLES:

```
sage: def f(N, M): return N*M
...
sage: unpickle_function(pickle_function(f))(3,5)
15
```

```
>>> from sage.all import *
>>> def f(N, M): return N*M
...
>>> unpickle_function(pickle_function(f))(Integer(3),Integer(5))
15
```

5.4 A tool for inspecting Python pickles

AUTHORS:

- Carl Witty (2009-03)

The *explain_pickle()* function takes a pickle and produces Sage code that will evaluate to the contents of the pickle. Ideally, the combination of *explain_pickle()* to produce Sage code and *sage_eval()* to evaluate the code would be a 100% compatible implementation of cPickle's unpickler; this is almost the case now.

EXAMPLES:

```
sage: explain_pickle(dumps(12345))
pg_make_integer = unpickle_global('sage.rings.integer', 'make_integer')
pg_make_integer('c1p')
sage: explain_pickle(dumps(polygen(QQ)))
pg_Polynomial_rational_flint = unpickle_global('sage.rings.polynomial.polynomial_
↪rational_flint', 'Polynomial_rational_flint')
pg_unpickle_PolynomialRing = unpickle_global('sage.rings.polynomial.polynomial_ring_
↪constructor', 'unpickle_PolynomialRing')
pg_RationalField = unpickle_global('sage.rings.rational_field', 'RationalField')
pg = unpickle_instantiate(pg_RationalField, ())
```

(continues on next page)

(continued from previous page)

```
pg_make_rational = unpickle_global('sage.rings.rational', 'make_rational')
pg_Polynomial_rational_flint(pg_unpickle_PolynomialRing(pg, ('x',), None, False), [pg_
↪make_rational('0'), pg_make_rational('1')], False, True)
sage: sage_eval(explain_pickle(dumps(polygen(QQ)))) == polygen(QQ)
True
```

```
>>> from sage.all import *
>>> explain_pickle(dumps(Integer(12345)))
pg_make_integer = unpickle_global('sage.rings.integer', 'make_integer')
pg_make_integer('c1p')
>>> explain_pickle(dumps(polygen(QQ)))
pg_Polynomial_rational_flint = unpickle_global('sage.rings.polynomial.polynomial_
↪rational_flint', 'Polynomial_rational_flint')
pg_unpickle_PolynomialRing = unpickle_global('sage.rings.polynomial.polynomial_ring_
↪constructor', 'unpickle_PolynomialRing')
pg_RationalField = unpickle_global('sage.rings.rational_field', 'RationalField')
pg = unpickle_instantiate(pg_RationalField, ())
pg_make_rational = unpickle_global('sage.rings.rational', 'make_rational')
pg_Polynomial_rational_flint(pg_unpickle_PolynomialRing(pg, ('x',), None, False), [pg_
↪make_rational('0'), pg_make_rational('1')], False, True)
>>> sage_eval(explain_pickle(dumps(polygen(QQ)))) == polygen(QQ)
True
```

By default (as above) the code produced contains calls to several utility functions (*unpickle_global()*, etc.); this is done so that the code is truly equivalent to the pickle. If the pickle can be loaded into a future version of Sage, then the code that *explain_pickle()* produces today should work in that future Sage as well.

It is also possible to produce simpler code, that is tied to the current version of Sage; here are the above two examples again:

```
sage: explain_pickle(dumps(12345), in_current_sage=True)
from sage.rings.integer import make_integer
make_integer('c1p')
sage: explain_pickle(dumps(polygen(QQ)), in_current_sage=True)
from sage.rings.polynomial.polynomial_rational_flint import Polynomial_rational_flint
from sage.rings.polynomial.polynomial_ring_constructor import unpickle_PolynomialRing
from sage.rings.rational import make_rational
Polynomial_rational_flint(unpickle_PolynomialRing(RationalField(), ('x',), None,␣
↪False), [make_rational('0'), make_rational('1')], False, True)
```

```
>>> from sage.all import *
>>> explain_pickle(dumps(Integer(12345)), in_current_sage=True)
from sage.rings.integer import make_integer
make_integer('c1p')
>>> explain_pickle(dumps(polygen(QQ)), in_current_sage=True)
from sage.rings.polynomial.polynomial_rational_flint import Polynomial_rational_flint
from sage.rings.polynomial.polynomial_ring_constructor import unpickle_PolynomialRing
from sage.rings.rational import make_rational
Polynomial_rational_flint(unpickle_PolynomialRing(RationalField(), ('x',), None,␣
↪False), [make_rational('0'), make_rational('1')], False, True)
```

The *explain_pickle()* function has several use cases.

- Write pickling support for your classes

  You can use *explain_pickle()* to see what will happen when a pickle is unpickled. Consider: is this sequence of commands something that can be easily supported in all future Sage versions, or does it expose internal design decisions that are subject to change?

- Debug old pickles

  If you have a pickle from an old version of Sage that no longer unpickles, you can use *explain_pickle()* to see what it is trying to do, to figure out how to fix it.

- Use *explain_pickle()* in doctests to help maintenance

  If you have a `loads(dumps(S))` doctest, you could also add an `explain_pickle(dumps(S))` doctest. Then if something changes in a way that would invalidate old pickles, the output of *explain_pickle()* will also change. At that point, you can add the previous output of *explain_pickle* as a new set of doctests (and then update the *explain_pickle* doctest to use the new output), to ensure that old pickles will continue to work.

As mentioned above, there are several output modes for *explain_pickle()*, that control fidelity versus simplicity of the output. For example, the GLOBAL instruction takes a module name and a class name and produces the corresponding class. So GLOBAL of `sage.rings.integer`, `Integer` is approximately equivalent to `sage.rings.integer.Integer`.

However, this class lookup process can be customized (using *sage.misc.persist.register_unpickle_override()*). For instance, if some future version of Sage renamed `sage/rings/integer.pyx` to `sage/rings/knuth_was_here.pyx`, old pickles would no longer work unless register_unpickle_override was used; in that case, GLOBAL of `sage.rings.integer`, `integer` would mean `sage.rings.knuth_was_here.integer`.

By default, *explain_pickle()* will map this GLOBAL instruction to `unpickle_global('sage.rings.integer', 'integer')`. Then when this code is evaluated, *unpickle_global()* will look up the current mapping in the *register_unpickle_override()* table, so the generated code will continue to work even in hypothetical future versions of Sage where `integer.pyx` has been renamed.

If you pass the flag `in_current_sage=True`, then *explain_pickle()* will generate code that may only work in the current version of Sage, not in future versions. In this case, it would generate:

```
from sage.rings.integer import integer
```

and if you ran *explain_pickle()* in hypothetical future sage, it would generate:

```
from sage.rings.knuth_was_here import integer
```

but the current code wouldn't work in the future sage.

If you pass the flag `default_assumptions=True`, then *explain_pickle()* will generate code that would work in the absence of any special unpickling information. That is, in either current Sage or hypothetical future Sage, it would generate:

```
from sage.rings.integer import integer
```

The intention is that `default_assumptions` output is prettier (more human-readable), but may not actually work; so it is only intended for human reading.

There are several functions used in the output of *explain_pickle()*. Here I give a brief description of what they usually do, as well as how to modify their operation (for instance, if you're trying to get old pickles to work).

- `unpickle_global(module, classname)`: `unpickle_global('sage.foo.bar', 'baz')` is usually equivalent to `sage.foo.bar.baz`, but this can be customized with *register_unpickle_override()*.

- `unpickle_newobj(klass, args)`: Usually equivalent to `klass.__new__(klass, *args)`. If `klass` is a Python class, then you can define `__new__()` to control the result (this result actually need not be an instance of `klass`). (This doesn't work for Cython classes.)
- `unpickle_build(obj, state)`: If `obj` has a `__setstate__()` method, then this is equivalent to `obj.__setstate__(state)`. Otherwise uses `state` to set the attributes of `obj`. Customize by defining `__setstate__()`.
- `unpickle_instantiate(klass, args)`: Usually equivalent to `klass(*args)`. Cannot be customized.
- `unpickle_appends(lst, vals)`: Appends the values in `vals` to `lst`. If not `isinstance(lst, list)`, can be customized by defining a `append()` method.

class sage.misc.explain_pickle.**EmptyNewstyleClass**

Bases: `object`

A featureless new-style class (inherits from object); used for testing *explain_pickle()*.

class sage.misc.explain_pickle.**EmptyOldstyleClass**

Bases: `object`

A featureless old-style class (does not inherit from object); used for testing *explain_pickle()*.

class sage.misc.explain_pickle.**PickleDict**(*items*)

Bases: `object`

An object which can be used as the value of a *PickleObject*. The items is a list of key-value pairs, where the keys and values are *SageInputExpression* objects. We use this to help construct dictionary literals, instead of always starting with an empty dictionary and assigning to it.

class sage.misc.explain_pickle.**PickleExplainer**(*sib*, *in_current_sage=False*, *default_assumptions=False*, *pedantic=False*)

Bases: `object`

An interpreter for the pickle virtual machine, that executes symbolically and constructs *SageInputExpression* objects instead of directly constructing values.

APPEND()

APPENDS()

BINFLOAT(*f*)

BINGET(*n*)

BININT(*n*)

BININT1(*n*)

BININT2(*n*)

BINPERSID()

BINPUT(*n*)

BINSTRING(*s*)

BINUNICODE(*s*)

BUILD()

DICT()

DUP()

EMPTY_DICT()

EMPTY_LIST()

EMPTY_TUPLE()

EXT1(*n*)

EXT2(*n*)

EXT4(*n*)

FLOAT(*f*)

GET(*n*)

GLOBAL(*name*)

INST(*name*)

INT(*n*)

LIST()

LONG(*n*)

LONG1(*n*)

LONG4(*n*)

LONG_BINGET(*n*)

LONG_BINPUT(*n*)

MARK()

NEWFALSE()

NEWOBJ()

NEWTRUE()

NONE()

OBJ()

PERSID(*id*)

POP()

POP_MARK()

PROTO(*proto*)

PUT(*n*)

REDUCE()

SETITEM()

SETITEMS()

SHORT_BINSTRING(*s*)

STOP()

STRING(*s*)

TUPLE()

TUPLE1()

TUPLE2()

TUPLE3()

UNICODE(*s*)

check_value(*v*)

Check that the given value is either a *SageInputExpression* or a *PickleObject*. Used for internal sanity checking.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: from sage.misc.sage_input import SageInputBuilder
sage: sib = SageInputBuilder()
sage: pe = PickleExplainer(sib, in_current_sage=True, default_
↪assumptions=False, pedantic=True)
sage: pe.check_value(7)
Traceback (most recent call last):
...
AssertionError
sage: pe.check_value(sib(7))
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> from sage.misc.sage_input import SageInputBuilder
>>> sib = SageInputBuilder()
>>> pe = PickleExplainer(sib, in_current_sage=True, default_assumptions=False,
↪ pedantic=True)
>>> pe.check_value(Integer(7))
Traceback (most recent call last):
...
AssertionError
>>> pe.check_value(sib(Integer(7)))
```

is_mutable_pickle_object(*v*)

Test whether a *PickleObject* is mutable (has never been converted to a *SageInputExpression*).

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: from sage.misc.sage_input import SageInputBuilder
```

(continues on next page)

(continued from previous page)

```
sage: sib = SageInputBuilder()
sage: pe = PickleExplainer(sib, in_current_sage=True,
....:                      default_assumptions=False, pedantic=True)
sage: v = PickleObject(1, sib(1))
sage: pe.is_mutable_pickle_object(v)
True
sage: sib(v)
{atomic:1}
sage: pe.is_mutable_pickle_object(v)
False
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> from sage.misc.sage_input import SageInputBuilder
>>> sib = SageInputBuilder()
>>> pe = PickleExplainer(sib, in_current_sage=True,
...                      default_assumptions=False, pedantic=True)
>>> v = PickleObject(Integer(1), sib(Integer(1)))
>>> pe.is_mutable_pickle_object(v)
True
>>> sib(v)
{atomic:1}
>>> pe.is_mutable_pickle_object(v)
False
```

pop()

Pop a value from the virtual machine's stack, and return it.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: from sage.misc.sage_input import SageInputBuilder
sage: sib = SageInputBuilder()
sage: pe = PickleExplainer(sib, in_current_sage=True, default_
↪assumptions=False, pedantic=True)
sage: pe.push(sib(7))
sage: pe.pop()
{atomic:7}
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> from sage.misc.sage_input import SageInputBuilder
>>> sib = SageInputBuilder()
>>> pe = PickleExplainer(sib, in_current_sage=True, default_assumptions=False,
↪ pedantic=True)
>>> pe.push(sib(Integer(7)))
>>> pe.pop()
{atomic:7}
```

pop_to_mark()

Pop all values down to the 'mark' from the virtual machine's stack, and return the values as a list.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: from sage.misc.sage_input import SageInputBuilder
sage: sib = SageInputBuilder()
sage: pe = PickleExplainer(sib, in_current_sage=True, default_
↪assumptions=False, pedantic=True)
sage: pe.push_mark()
sage: pe.push(sib(7))
sage: pe.push(sib('hello'))
sage: pe.pop_to_mark()
[{atomic:7}, {atomic:'hello'}]
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> from sage.misc.sage_input import SageInputBuilder
>>> sib = SageInputBuilder()
>>> pe = PickleExplainer(sib, in_current_sage=True, default_assumptions=False,
↪ pedantic=True)
>>> pe.push_mark()
>>> pe.push(sib(Integer(7)))
>>> pe.push(sib('hello'))
>>> pe.pop_to_mark()
[{atomic:7}, {atomic:'hello'}]
```

push(*v*)

Push a value onto the virtual machine's stack.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: from sage.misc.sage_input import SageInputBuilder
sage: sib = SageInputBuilder()
sage: pe = PickleExplainer(sib, in_current_sage=True, default_
↪assumptions=False, pedantic=True)
sage: pe.push(sib(7))
sage: pe.stack[-1]
{atomic:7}
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> from sage.misc.sage_input import SageInputBuilder
>>> sib = SageInputBuilder()
>>> pe = PickleExplainer(sib, in_current_sage=True, default_assumptions=False,
↪ pedantic=True)
>>> pe.push(sib(Integer(7)))
>>> pe.stack[-Integer(1)]
{atomic:7}
```

push_and_share(*v*)

Push a value onto the virtual machine's stack; also mark it as shared for *sage_input()* if we are in pedantic mode.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: from sage.misc.sage_input import SageInputBuilder
sage: sib = SageInputBuilder()
sage: pe = PickleExplainer(sib, in_current_sage=True, default_
↪assumptions=False, pedantic=True)
sage: pe.push_and_share(sib(7))
sage: pe.stack[-1]
{atomic:7}
sage: pe.stack[-1]._sie_share
True
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> from sage.misc.sage_input import SageInputBuilder
>>> sib = SageInputBuilder()
>>> pe = PickleExplainer(sib, in_current_sage=True, default_assumptions=False,
↪ pedantic=True)
>>> pe.push_and_share(sib(Integer(7)))
>>> pe.stack[-Integer(1)]
{atomic:7}
>>> pe.stack[-Integer(1)]._sie_share
True
```

push_mark()

Push a 'mark' onto the virtual machine's stack.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: from sage.misc.sage_input import SageInputBuilder
sage: sib = SageInputBuilder()
sage: pe = PickleExplainer(sib, in_current_sage=True, default_
↪assumptions=False, pedantic=True)
sage: pe.push_mark()
sage: pe.stack[-1]
'mark'
sage: pe.stack[-1] is the_mark
True
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> from sage.misc.sage_input import SageInputBuilder
>>> sib = SageInputBuilder()
>>> pe = PickleExplainer(sib, in_current_sage=True, default_assumptions=False,
↪ pedantic=True)
>>> pe.push_mark()
>>> pe.stack[-Integer(1)]
'mark'
>>> pe.stack[-Integer(1)] is the_mark
True
```

run_pickle(*p*)

Given an (uncompressed) pickle as a string, run the pickle in this virtual machine. Once a STOP has been

executed, return the result (a *SageInputExpression* representing code which, when evaluated, will give the value of the pickle).

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: from sage.misc.sage_input import SageInputBuilder
sage: sib = SageInputBuilder()
sage: pe = PickleExplainer(sib, in_current_sage=True, default_
↪assumptions=False, pedantic=True)
sage: sib(pe.run_pickle('T\5\0\0\0hello.'))  # py2
{atomic:'hello'}
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> from sage.misc.sage_input import SageInputBuilder
>>> sib = SageInputBuilder()
>>> pe = PickleExplainer(sib, in_current_sage=True, default_assumptions=False,
↪ pedantic=True)
>>> sib(pe.run_pickle('T\5\0\0\0hello.'))  # py2
{atomic:'hello'}
```

share(*v*)

Mark a *sage_input()* value as shared, if we are in pedantic mode.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: from sage.misc.sage_input import SageInputBuilder
sage: sib = SageInputBuilder()
sage: pe = PickleExplainer(sib, in_current_sage=True,
....:                      default_assumptions=False, pedantic=True)
sage: v = sib(7)
sage: v._sie_share
False
sage: pe.share(v)
{atomic:7}
sage: v._sie_share
True
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> from sage.misc.sage_input import SageInputBuilder
>>> sib = SageInputBuilder()
>>> pe = PickleExplainer(sib, in_current_sage=True,
...                      default_assumptions=False, pedantic=True)
>>> v = sib(Integer(7))
>>> v._sie_share
False
>>> pe.share(v)
{atomic:7}
>>> v._sie_share
True
```

class sage.misc.explain_pickle.**PickleInstance**(*klass*)

Bases: object

An object which can be used as the value of a *PickleObject*. Unlike other possible values of a *PickleObject*, a *PickleInstance* doesn't represent an exact value; instead, it gives the class (type) of the object.

class sage.misc.explain_pickle.**PickleObject**(*value*, *expression*)

Bases: object

Pickles have a stack-based virtual machine. The *explain_pickle()* pickle interpreter mostly uses *sage.misc.sage_input.SageInputExpression* objects as the stack values. However, sometimes we want some more information about the value on the stack, so that we can generate better (prettier, less confusing) code. In such cases, we push a *PickleObject* instead of a *SageInputExpression*. A *PickleObject* contains a value (which may be a standard Python value, or a *PickleDict* or *PickleInstance*), an expression (a *SageInputExpression*), and an "immutable" flag (which checks whether this object has been converted to a *SageInputExpression*; if it has, then we must not mutate the object, since the *SageInputExpression* would not reflect the changes).

class sage.misc.explain_pickle.**TestAppendList**(*iterable=()*, */*)

Bases: list

A subclass of list, with deliberately-broken append and extend methods. Used for testing *explain_pickle()*.

append()

A deliberately broken append method.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: v = TestAppendList()
sage: v.append(7)
Traceback (most recent call last):
...
TypeError: ...append() takes 1 positional argument but 2 were given
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> v = TestAppendList()
>>> v.append(Integer(7))
Traceback (most recent call last):
...
TypeError: ...append() takes 1 positional argument but 2 were given
```

We can still append by directly using the list method:

```
sage: list.append(v, 7)
sage: v
[7]
```

```
>>> from sage.all import *
>>> list.append(v, Integer(7))
>>> v
[7]
```

extend()

A deliberately broken extend method.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: v = TestAppendList()
sage: v.extend([3,1,4,1,5,9])
Traceback (most recent call last):
...
TypeError: ...extend() takes 1 positional argument but 2 were given
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> v = TestAppendList()
>>> v.extend([Integer(3),Integer(1),Integer(4),Integer(1),Integer(5),
↪Integer(9)])
Traceback (most recent call last):
...
TypeError: ...extend() takes 1 positional argument but 2 were given
```

We can still extend by directly using the list method:

```
sage: list.extend(v, (3,1,4,1,5,9))
sage: v
[3, 1, 4, 1, 5, 9]
```

```
>>> from sage.all import *
>>> list.extend(v, (Integer(3),Integer(1),Integer(4),Integer(1),Integer(5),
↪Integer(9)))
>>> v
[3, 1, 4, 1, 5, 9]
```

class sage.misc.explain_pickle.**TestAppendNonlist**

Bases: object

A list-like class, carefully designed to test exact unpickling behavior. Used for testing *explain_pickle()*.

class sage.misc.explain_pickle.**TestBuild**

Bases: object

A simple class with a __getstate__() but no __setstate__(). Used for testing *explain_pickle()*.

class sage.misc.explain_pickle.**TestBuildSetstate**

Bases: *TestBuild*

A simple class with a __getstate__() and a __setstate__(). Used for testing *explain_pickle()*.

class sage.misc.explain_pickle.**TestGlobalFunnyName**

Bases: object

A featureless new-style class which has a name that's not a legal Python identifier.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: globals()['funny$name'] = TestGlobalFunnyName # see comment at end of file
sage: TestGlobalFunnyName.__name__
'funny$name'
```

(continues on next page)

(continued from previous page)

```
sage: globals()['funny$name'] is TestGlobalFunnyName
True
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> globals()['funny$name'] = TestGlobalFunnyName # see comment at end of file
>>> TestGlobalFunnyName.__name__
'funny$name'
>>> globals()['funny$name'] is TestGlobalFunnyName
True
```

class sage.misc.explain_pickle.**TestGlobalNewName**

Bases: object

A featureless new-style class. When you try to unpickle an instance of *TestGlobalOldName*, it is redirected to create an instance of this class instead. Used for testing *explain_pickle()*.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: loads(dumps(TestGlobalOldName()))
TestGlobalNewName
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> loads(dumps(TestGlobalOldName()))
TestGlobalNewName
```

class sage.misc.explain_pickle.**TestGlobalOldName**

Bases: object

A featureless new-style class. When you try to unpickle an instance of this class, it is redirected to create a *TestGlobalNewName* instead. Used for testing *explain_pickle()*.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: loads(dumps(TestGlobalOldName()))
TestGlobalNewName
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> loads(dumps(TestGlobalOldName()))
TestGlobalNewName
```

class sage.misc.explain_pickle.**TestReduceGetinitargs**

Bases: object

An old-style class with a __getinitargs__() method. Used for testing *explain_pickle()*.

class sage.misc.explain_pickle.**TestReduceNoGetinitargs**

Bases: object

An old-style class with no __getinitargs__() method. Used for testing *explain_pickle()*.

sage.misc.explain_pickle.**explain_pickle**(*pickle=None*, *file=None*, *compress=True*, ***kwargs*)

Explain a pickle. That is, produce source code such that evaluating the code is equivalent to loading the pickle. Feeding the result of *explain_pickle()* to *sage_eval()* should be totally equivalent to loading the pickle with cPickle.

INPUT:

- pickle – string (default: None); the pickle to explain
- file – a filename of a pickle (default: None)
- compress – boolean (default: True); if False, don't attempt to decompress the pickle
- in_current_sage – boolean (default: False); if True, produce potentially simpler code that is tied to the current version of Sage
- default_assumptions – boolean (default: False); if True, produce potentially simpler code that assumes that generic unpickling code will be used. This code may not actually work.
- eval – boolean (default: False); if True, then evaluate the resulting code and return the evaluated result
- preparse – if True, then produce code to be evaluated with Sage's preparser; if False, then produce standard Python code; if None, then produce code that will work either with or without the preparser. (default: True)
- pedantic – boolean (default: False); if True, then carefully ensures that the result has at least as much sharing as the result of cPickle (it may have more, for immutable objects)

Exactly one of pickle (a string containing a pickle) or file (the filename of a pickle) must be provided.

EXAMPLES:

```
sage: explain_pickle(dumps({('a', 'b'): [1r, 2r]}))
{('a', 'b'):[1r, 2r]}
sage: explain_pickle(dumps(RR(pi)), in_current_sage=True)                    #␣
↪needs sage.symbolic
from sage.rings.real_mpfr import __create__RealNumber_version0
from sage.rings.real_mpfr import __create__RealField_version0
__create__RealNumber_version0(__create__RealField_version0(53r, False, 'RNDN'),
↪'3.4gvml245kc0@0', 32r)
sage: s = 'hi'
sage: explain_pickle(dumps((s, s)))
('hi', 'hi')
sage: explain_pickle(dumps((s, s)), pedantic=True)
si = 'hi'
(si, si)
sage: explain_pickle(dumps(5r))
5r
sage: explain_pickle(dumps(5r), preparse=False)
5
sage: explain_pickle(dumps(5r), preparse=None)
int(5)
sage: explain_pickle(dumps(22/7))
pg_make_rational = unpickle_global('sage.rings.rational', 'make_rational')
pg_make_rational('m/7')
sage: explain_pickle(dumps(22/7), in_current_sage=True)
from sage.rings.rational import make_rational
make_rational('m/7')
sage: explain_pickle(dumps(22/7), default_assumptions=True)
```

(continues on next page)

(continued from previous page)

```
from sage.rings.rational import make_rational
make_rational('m/7')
```

```
>>> from sage.all import *
>>> explain_pickle(dumps({('a', 'b'): [1, 2]}))
{('a', 'b'):[1r, 2r]}
>>> explain_pickle(dumps(RR(pi)), in_current_sage=True)                    #␣
↪needs sage.symbolic
from sage.rings.real_mpfr import __create__RealNumber_version0
from sage.rings.real_mpfr import __create__RealField_version0
__create__RealNumber_version0(__create__RealField_version0(53r, False, 'RNDN'),
↪'3.4gvml245kc0@0', 32r)
>>> s = 'hi'
>>> explain_pickle(dumps((s, s)))
('hi', 'hi')
>>> explain_pickle(dumps((s, s)), pedantic=True)
si = 'hi'
(si, si)
>>> explain_pickle(dumps(5))
5r
>>> explain_pickle(dumps(5), preparse=False)
5
>>> explain_pickle(dumps(5), preparse=None)
int(5)
>>> explain_pickle(dumps(Integer(22)/Integer(7)))
pg_make_rational = unpickle_global('sage.rings.rational', 'make_rational')
pg_make_rational('m/7')
>>> explain_pickle(dumps(Integer(22)/Integer(7)), in_current_sage=True)
from sage.rings.rational import make_rational
make_rational('m/7')
>>> explain_pickle(dumps(Integer(22)/Integer(7)), default_assumptions=True)
from sage.rings.rational import make_rational
make_rational('m/7')
```

sage.misc.explain_pickle.**explain_pickle_string**(*pickle*, *in_current_sage=False*, *default_assumptions=False*, *eval=False*, *preparse=True*, *pedantic=False*)

This is a helper function for *explain_pickle()*. It takes a decompressed pickle string as input; other than that, its options are all the same as *explain_pickle()*.

EXAMPLES:

```
sage: sage.misc.explain_pickle.explain_pickle_string(dumps("Hello, world",␣
↪compress=False))
'Hello, world'
```

```
>>> from sage.all import *
>>> sage.misc.explain_pickle.explain_pickle_string(dumps("Hello, world",␣
↪compress=False))
'Hello, world'
```

(See the documentation for *explain_pickle()* for many more examples.)

sage.misc.explain_pickle.**name_is_valid**(*name*)

Test whether a string is a valid Python identifier. (We use a conservative test, that only allows ASCII identifiers.)

EXAMPLES:

```
sage: from sage.misc.explain_pickle import name_is_valid
sage: name_is_valid('fred')
True
sage: name_is_valid('Yes!ValidName')
False
sage: name_is_valid('_happy_1234')
True
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import name_is_valid
>>> name_is_valid('fred')
True
>>> name_is_valid('Yes!ValidName')
False
>>> name_is_valid('_happy_1234')
True
```

sage.misc.explain_pickle.**test_pickle**(*p*, *verbose_eval=False*, *pedantic=False*, *args=()*)

Test *explain_pickle()* on a given pickle `p`.

`p` can be:

- a string containing an uncompressed pickle (which will always end with a '.')
- a string containing a pickle fragment (not ending with '.') test_pickle will synthesize a pickle that will push args onto the stack (using persistent IDs), run the pickle fragment, and then STOP (if the string 'mark' occurs in args, then a mark will be pushed)
- an arbitrary object; *test_pickle()* will pickle the object

Once it has a pickle, *test_pickle()* will print the pickle's disassembly, run *explain_pickle()* with `in_current_sage=True` and `False`, print the results, evaluate the results, unpickle the object with cPickle, and compare all three results.

If `verbose_eval` is `True`, then *test_pickle()* will print messages before evaluating the pickles; this is to allow for tests where the unpickling prints messages (to verify that the same operations occur in all cases).

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: test_pickle(['a'])
    0: \x80 PROTO      2
    2: ]    EMPTY_LIST
    3: q    BINPUT     0
    5: X    BINUNICODE 'a'
   11: q    BINPUT     1
   13: a    APPEND
   14: .    STOP
highest protocol among opcodes = 2
explain_pickle in_current_sage=True/False:
['a']
result: ['a']
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> test_pickle(['a'])
    0: \x80 PROTO      2
    2: ]    EMPTY_LIST
    3: q    BINPUT     0
    5: X    BINUNICODE 'a'
   11: q    BINPUT     1
   13: a    APPEND
   14: .    STOP
highest protocol among opcodes = 2
explain_pickle in_current_sage=True/False:
['a']
result: ['a']
```

sage.misc.explain_pickle.**unpickle_appends**(*lst*, *vals*)

Given a list (or list-like object) and a sequence of values, appends the values to the end of the list. This is careful to do so using the exact same technique that cPickle would use. Used by *explain_pickle()*.

EXAMPLES:

```
sage: v = []
sage: unpickle_appends(v, (1, 2, 3))
sage: v
[1, 2, 3]
```

```
>>> from sage.all import *
>>> v = []
>>> unpickle_appends(v, (Integer(1), Integer(2), Integer(3)))
>>> v
[1, 2, 3]
```

sage.misc.explain_pickle.**unpickle_build**(*obj*, *state*)

Set the state of an object. Used by *explain_pickle()*.

EXAMPLES:

```
sage: from sage.misc.explain_pickle import *
sage: v = EmptyNewstyleClass()
sage: unpickle_build(v, {'hello': 42})
sage: v.hello
42
```

```
>>> from sage.all import *
>>> from sage.misc.explain_pickle import *
>>> v = EmptyNewstyleClass()
>>> unpickle_build(v, {'hello': Integer(42)})
>>> v.hello
42
```

sage.misc.explain_pickle.**unpickle_extension**(*code*)

Take an integer index and return the extension object with that index. Used by *explain_pickle()*.

EXAMPLES:

```
sage: from copyreg import *
sage: add_extension('sage.misc.explain_pickle', 'EmptyNewstyleClass', 42)
sage: unpickle_extension(42)
<class 'sage.misc.explain_pickle.EmptyNewstyleClass'>
sage: remove_extension('sage.misc.explain_pickle', 'EmptyNewstyleClass', 42)
```

```
>>> from sage.all import *
>>> from copyreg import *
>>> add_extension('sage.misc.explain_pickle', 'EmptyNewstyleClass', Integer(42))
>>> unpickle_extension(Integer(42))
<class 'sage.misc.explain_pickle.EmptyNewstyleClass'>
>>> remove_extension('sage.misc.explain_pickle', 'EmptyNewstyleClass',␣
↪Integer(42))
```

sage.misc.explain_pickle.**unpickle_instantiate**(*fn*, *args*)

Instantiate a new object of class `fn` with arguments `args`. Almost always equivalent to `fn(*args)`. Used by *explain_pickle()*.

EXAMPLES:

```
sage: unpickle_instantiate(Integer, ('42',))
42
```

```
>>> from sage.all import *
>>> unpickle_instantiate(Integer, ('42',))
42
```

sage.misc.explain_pickle.**unpickle_newobj**(*klass*, *args*)

Create a new object; this corresponds to the C code `klass->tp_new(klass, args, NULL)`. Used by *explain_pickle()*.

EXAMPLES:

```
sage: unpickle_newobj(tuple, ([1, 2, 3],))
(1, 2, 3)
```

```
>>> from sage.all import *
>>> unpickle_newobj(tuple, ([Integer(1), Integer(2), Integer(3)],))
(1, 2, 3)
```

sage.misc.explain_pickle.**unpickle_persistent**(*s*)

Take an integer index and return the persistent object with that index; works by calling whatever callable is stored in `unpickle_persistent_loader`. Used by *explain_pickle()*.

EXAMPLES:

```
sage: import sage.misc.explain_pickle
sage: sage.misc.explain_pickle.unpickle_persistent_loader = lambda n: n+7
sage: unpickle_persistent(35)
42
```

```
>>> from sage.all import *
>>> import sage.misc.explain_pickle
```

(continues on next page)

(continued from previous page)

```
>>> sage.misc.explain_pickle.unpickle_persistent_loader = lambda n: n+Integer(7)
>>> unpickle_persistent(Integer(35))
42
```

5.5 Fixing pickle for nested classes

As of Python 2.7, names for nested classes are set by Python in a way which is incompatible with the pickling of such classes (pickling by name):

```
sage: class A:
....:     class B:
....:         pass
sage: A.B.__name__
'B'
```

```
>>> from sage.all import *
>>> class A:
...     class B:
...         pass
>>> A.B.__name__
'B'
```

instead of more natural `'A.B'`. Furthermore upon pickling *and* unpickling a class with name `'A.B'` in a module `mod`, the standard cPickle module searches for `'A.B'` in `mod.__dict__` instead of looking up `'A'` and then `'B'` in the result. See: https://groups.google.com/forum/#!topic/sage-devel/bHBV9KWAt64

This module provides two utilities to workaround this issue:

- *nested_pickle()* "fixes" recursively the name of the subclasses of a class and inserts their fullname `'A.B'` in `mod.__dict__`
- *NestedClassMetaclass* is a metaclass ensuring that *nested_pickle()* is called on a class upon creation.

See also *sage.misc.test_nested_class*.

Note

In Python 3, nested classes, like any class for that matter, have `__qualname__` and the standard pickle module uses it for pickling and unpickling. Thus the pickle module searches for `'A.B'` first by looking up `'A'` in `mod`, and then `'B'` in the result. So there is no pickling problem for nested classes in Python 3, and the two utilities are not really necessary. However, *NestedClassMetaclass* is used widely in Sage and affects behaviors of Sage objects in other respects than in pickling and unpickling. Hence we keep *NestedClassMetaclass* even with Python 3, for now. This module will be removed when we eventually drop support for Python 2.

EXAMPLES:

```
sage: from sage.misc.nested_class import A1, nested_pickle

sage: A1.A2.A3.__name__
'A3'
sage: A1.A2.A3
<class 'sage.misc.nested_class.A1.A2.A3'>
```

(continues on next page)

(continued from previous page)

```
sage: nested_pickle(A1)
<class 'sage.misc.nested_class.A1'>

sage: A1.A2
<class 'sage.misc.nested_class.A1.A2'>

sage: A1.A2.A3
<class 'sage.misc.nested_class.A1.A2.A3'>
sage: A1.A2.A3.__name__
'A1.A2.A3'

sage: sage.misc.nested_class.__dict__['A1.A2'] is A1.A2
True
sage: sage.misc.nested_class.__dict__['A1.A2.A3'] is A1.A2.A3
True
```

```
>>> from sage.all import *
>>> from sage.misc.nested_class import A1, nested_pickle

>>> A1.A2.A3.__name__
'A3'
>>> A1.A2.A3
<class 'sage.misc.nested_class.A1.A2.A3'>

>>> nested_pickle(A1)
<class 'sage.misc.nested_class.A1'>

>>> A1.A2
<class 'sage.misc.nested_class.A1.A2'>

>>> A1.A2.A3
<class 'sage.misc.nested_class.A1.A2.A3'>
>>> A1.A2.A3.__name__
'A1.A2.A3'

>>> sage.misc.nested_class.__dict__['A1.A2'] is A1.A2
True
>>> sage.misc.nested_class.__dict__['A1.A2.A3'] is A1.A2.A3
True
```

All of this is not perfect. In the following scenario:

```
sage: class A1:
....:     class A2:
....:         pass
sage: class B1:
....:     A2 = A1.A2

sage: nested_pickle(A1)
<class '__main__.A1'>
sage: nested_pickle(B1)
```

(continues on next page)

(continued from previous page)

```
<class '__main__.B1'>
sage: A1.A2
<class '__main__.A1.A2'>
sage: B1.A2
<class '__main__.A1.A2'>
```

```
>>> from sage.all import *
>>> class A1:
...     class A2:
...         pass
>>> class B1:
...     A2 = A1.A2

>>> nested_pickle(A1)
<class '__main__.A1'>
>>> nested_pickle(B1)
<class '__main__.B1'>
>>> A1.A2
<class '__main__.A1.A2'>
>>> B1.A2
<class '__main__.A1.A2'>
```

The name for `'A1.A2'` could potentially be set to `'B1.A2'`. But that will work anyway.

class sage.misc.nested_class.**MainClass**

Bases: `object`

A simple class to test nested_pickle.

EXAMPLES:

```
sage: from sage.misc.nested_class import *
sage: loads(dumps(MainClass()))
<sage.misc.nested_class.MainClass object at 0x...>
```

```
>>> from sage.all import *
>>> from sage.misc.nested_class import *
>>> loads(dumps(MainClass()))
<sage.misc.nested_class.MainClass object at 0x...>
```

class NestedClass

Bases: `object`

EXAMPLES:

```
sage: from sage.misc.nested_class import *
sage: loads(dumps(MainClass.NestedClass()))
<sage.misc.nested_class.MainClass.NestedClass object at 0x...>
```

```
>>> from sage.all import *
>>> from sage.misc.nested_class import *
>>> loads(dumps(MainClass.NestedClass()))
<sage.misc.nested_class.MainClass.NestedClass object at 0x...>
```

class NestedSubClass

Bases: object

EXAMPLES:

```
sage: from sage.misc.nested_class import *
sage: loads(dumps(MainClass.NestedClass.NestedSubClass()))
<sage.misc.nested_class.MainClass.NestedClass.NestedSubClass object at 0x.
↪..>
sage: getattr(sage.misc.nested_class, 'MainClass.NestedClass.
↪NestedSubClass')
<class 'sage.misc.nested_class.MainClass.NestedClass.NestedSubClass'>
sage: MainClass.NestedClass.NestedSubClass.__name__
'MainClass.NestedClass.NestedSubClass'
```

```
>>> from sage.all import *
>>> from sage.misc.nested_class import *
>>> loads(dumps(MainClass.NestedClass.NestedSubClass()))
<sage.misc.nested_class.MainClass.NestedClass.NestedSubClass object at 0x.
↪..>
>>> getattr(sage.misc.nested_class, 'MainClass.NestedClass.NestedSubClass
↪')
<class 'sage.misc.nested_class.MainClass.NestedClass.NestedSubClass'>
>>> MainClass.NestedClass.NestedSubClass.__name__
'MainClass.NestedClass.NestedSubClass'
```

dummy(*x*, *r=(1, 2, 3.4)*, **args*, ***kwds*)

A dummy method to demonstrate the embedding of method signature for nested classes.

class sage.misc.nested_class.**NestedClassMetaclass**

Bases: type

A metaclass for nested pickling.

Check that one can use a metaclass to ensure nested_pickle is called on any derived subclass:

```
sage: from sage.misc.nested_class import NestedClassMetaclass
sage: class ASuperClass(object, metaclass=NestedClassMetaclass):
....:     pass
sage: class A3(ASuperClass):
....:     class B():
....:         pass
sage: A3.B.__name__
'A3.B'
sage: getattr(sys.modules['__main__'], 'A3.B', 'Not found')
<class '__main__.A3.B'>
```

```
>>> from sage.all import *
>>> from sage.misc.nested_class import NestedClassMetaclass
>>> class ASuperClass(object, metaclass=NestedClassMetaclass):
...     pass
>>> class A3(ASuperClass):
...     class B():
...         pass
```

(continues on next page)

(continued from previous page)

```
>>> A3.B.__name__
'A3.B'
>>> getattr(sys.modules['__main__'], 'A3.B', 'Not found')
<class '__main__.A3.B'>
```

sage.misc.nested_class.**modify_for_nested_pickle**(*cls*, *name_prefix*, *module*, *first_run=True*)

Modify the subclasses of the given class to be picklable, by giving them a mangled name and putting the mangled name in the module namespace.

INPUT:

- `cls` – the class to modify
- `name_prefix` – the prefix to prepend to the class name
- `module` – the module object to modify with the mangled name
- `first_run` – boolean (default: `True`); whether or not this function is run for the first time on `cls`

NOTE:

This function would usually not be directly called. It is internally used in *NestedClassMetaclass*.

EXAMPLES:

```
sage: from sage.misc.nested_class import *
sage: class A():
....:     class B():
....:         pass
sage: module = sys.modules['__main__']
sage: A.B.__name__
'B'
sage: getattr(module, 'A.B', 'Not found')
'Not found'
sage: modify_for_nested_pickle(A, 'A', module)
sage: A.B.__name__
'A.B'
sage: getattr(module, 'A.B', 'Not found')
<class '__main__.A.B'>
```

```
>>> from sage.all import *
>>> from sage.misc.nested_class import *
>>> class A():
...     class B():
...         pass
>>> module = sys.modules['__main__']
>>> A.B.__name__
'B'
>>> getattr(module, 'A.B', 'Not found')
'Not found'
>>> modify_for_nested_pickle(A, 'A', module)
>>> A.B.__name__
'A.B'
>>> getattr(module, 'A.B', 'Not found')
<class '__main__.A.B'>
```

Here we demonstrate the effect of the `first_run` argument:

```
sage: modify_for_nested_pickle(A, 'X', module)
sage: A.B.__name__  # nothing changed
'A.B'
sage: modify_for_nested_pickle(A, 'X', module, first_run=False)
sage: A.B.__name__
'X.A.B'
```

```
>>> from sage.all import *
>>> modify_for_nested_pickle(A, 'X', module)
>>> A.B.__name__  # nothing changed
'A.B'
>>> modify_for_nested_pickle(A, 'X', module, first_run=False)
>>> A.B.__name__
'X.A.B'
```

Note that the class is now found in the module under both its old and its new name:

```
sage: getattr(module, 'A.B', 'Not found')
<class '__main__.A.B'>
sage: getattr(module, 'X.A.B', 'Not found')
<class '__main__.A.B'>
```

```
>>> from sage.all import *
>>> getattr(module, 'A.B', 'Not found')
<class '__main__.A.B'>
>>> getattr(module, 'X.A.B', 'Not found')
<class '__main__.A.B'>
```

sage.misc.nested_class.**nested_pickle**(*cls*)

This decorator takes a class that potentially contains nested classes. For each such nested class, its name is modified to a new illegal identifier, and that name is set in the module. For example, if you have:

```
sage: from sage.misc.nested_class import nested_pickle
sage: module = sys.modules['__main__']
sage: class A():
....:     class B:
....:         pass
sage: nested_pickle(A)
<class '__main__.A'>
```

```
>>> from sage.all import *
>>> from sage.misc.nested_class import nested_pickle
>>> module = sys.modules['__main__']
>>> class A():
...     class B:
...         pass
>>> nested_pickle(A)
<class '__main__.A'>
```

then the name of class `'B'` will be modified to `'A.B'`, and the `'A.B'` attribute of the module will be set to class `'B'`:

```
sage: A.B.__name__
'A.B'
sage: getattr(module, 'A.B', 'Not found')
<class '__main__.A.B'>
```

```
>>> from sage.all import *
>>> A.B.__name__
'A.B'
>>> getattr(module, 'A.B', 'Not found')
<class '__main__.A.B'>
```

In Python 2.6, decorators work with classes; then `@nested_pickle` should work as a decorator:

```
sage: @nested_pickle    # todo: not implemented
....: class A2():
....:     class B:
....:         pass
sage: A2.B.__name__    # todo: not implemented
'A2.B'
sage: getattr(module, 'A2.B', 'Not found')    # todo: not implemented
<class __main__.A2.B at ...>
```

```
>>> from sage.all import *
>>> @nested_pickle    # todo: not implemented
... class A2():
...     class B:
...         pass
>>> A2.B.__name__    # todo: not implemented
'A2.B'
>>> getattr(module, 'A2.B', 'Not found')    # todo: not implemented
<class __main__.A2.B at ...>
```

EXAMPLES:

```
sage: from sage.misc.nested_class import *
sage: loads(dumps(MainClass.NestedClass())) # indirect doctest
<sage.misc.nested_class.MainClass.NestedClass object at 0x...>
```

```
>>> from sage.all import *
>>> from sage.misc.nested_class import *
>>> loads(dumps(MainClass.NestedClass())) # indirect doctest
<sage.misc.nested_class.MainClass.NestedClass object at 0x...>
```

5.6 Loading and saving sessions and listing all variables

EXAMPLES:

We reset the current session, then define a rational number `2/3`, and verify that it is listed as a newly defined variable:

```
sage: reset()
sage: w = 2/3; w
2/3
```

(continues on next page)

(continued from previous page)

```
sage: show_identifiers()
['w']
```

```
>>> from sage.all import *
>>> reset()
>>> w = Integer(2)/Integer(3); w
2/3
>>> show_identifiers()
['w']
```

We next save this session. We are using a temporary directory to hold the session file but we do this *for testing only*. Please do not do this if you want to save your session permanently. Also note that the `tempfile` module weasels its way into the session:

```
::
```

sage: from tempfile import TemporaryDirectory sage: d = TemporaryDirectory() sage: save_session(os.path.join(d.name, 'session'))

This saves a dictionary with `w` as one of the keys:

```
sage: z = load(os.path.join(d.name, 'session'))
sage: list(z)
['w', 'd']
sage: z['w']
2/3
```

```
>>> from sage.all import *
>>> z = load(os.path.join(d.name, 'session'))
>>> list(z)
['w', 'd']
>>> z['w']
2/3
```

Next we reset all variables in the session except for the temporary directory name. We verify that the session is reset, and then load it back.:

```
sage: sage.misc.reset.EXCLUDE.add('d')
sage: reset()
sage: show_identifiers()
['d']
sage: load_session(os.path.join(d.name, 'session'))
```

```
>>> from sage.all import *
>>> sage.misc.reset.EXCLUDE.add('d')
>>> reset()
>>> show_identifiers()
['d']
>>> load_session(os.path.join(d.name, 'session'))
```

Indeed `w` is now defined again.:

```
sage: show_identifiers()
['d', 'w']
sage: w
2/3
```

```
>>> from sage.all import *
>>> show_identifiers()
['d', 'w']
>>> w
2/3
```

Finally, we clean up the temporary directory:

```
sage: d.cleanup()
```

```
>>> from sage.all import *
>>> d.cleanup()
```

AUTHOR:

- William Stein

sage.misc.session.**init**(*state=None*)

Initialize some dictionaries needed by the *show_identifiers()*, *save_session()*, and *load_session()* functions.

INPUT:

- `state` – dictionary or `None`; if `None` the `locals()` of the caller is used

EXAMPLES:

```
sage: reset()
sage: w = 10
sage: show_identifiers()
['w']
```

```
>>> from sage.all import *
>>> reset()
>>> w = Integer(10)
>>> show_identifiers()
['w']
```

When we call *init()* below it reinitializes the internal table, so the `w` we just defined doesn't count as a new identifier:

```
sage: sage.misc.session.init()
sage: show_identifiers()
[]
```

```
>>> from sage.all import *
>>> sage.misc.session.init()
>>> show_identifiers()
[]
```

sage.misc.session.**load_session**(*name='sage_session'*, *verbose=False*)

Load a saved session.

This merges in all variables from a previously saved session. It does not clear out the variables in the current sessions, unless they are overwritten. You can thus merge multiple sessions, and don't necessarily loose all your current work when you use this command.

Note

In the Sage notebook the session name is searched for both in the current working cell and the DATA directory.

EXAMPLES:

```
sage: a = 5
sage: f = lambda x: x^2
```

```
>>> from sage.all import *
>>> a = Integer(5)
>>> f = lambda x: x**Integer(2)
```

For testing, we use a temporary file, that will be removed as soon as Sage is left. Of course, for permanently saving your session, you should choose a permanent file.

```
sage: tmp_f = tmp_filename()
sage: save_session(tmp_f)
sage: del a; del f
sage: load_session(tmp_f)
sage: print(a)
5
```

```
>>> from sage.all import *
>>> tmp_f = tmp_filename()
>>> save_session(tmp_f)
>>> del a; del f
>>> load_session(tmp_f)
>>> print(a)
5
```

Note that f does not come back, since it is a function, hence couldn't be saved:

```
sage: print(f)
Traceback (most recent call last):
...
NameError: name 'f' is not defined
```

```
>>> from sage.all import *
>>> print(f)
Traceback (most recent call last):
...
NameError: name 'f' is not defined
```

sage.misc.session.**save_session**(*name='sage_session'*, *verbose=False*)

Save all variables that can be saved to the given filename. The variables will be saved to a dictionary, which can be loaded using `load(name)` or *load_session()*.

Note

1. Function and anything else that can't be pickled is not saved. This failure is silent unless you set `verbose=True`.
2. One can still make sessions that can't be reloaded. E.g., define a class with:

   ```
   class Foo: pass
   ```

   and make an instance with:

   ```
   f = Foo()
   ```

   Then *save_session()* followed by `quit` and *load_session()* fails. I doubt there is any good way to deal with this. Fortunately, one can simply re-evaluate the code to define `Foo`, and suddenly *load_session()* works fine.

INPUT:

- `name` – string (default: `'sage_session'`); name of `sobj` to save the session to
- `verbose` – boolean (default: `False`); if `True`, print info about why certain variables can't be saved

OUTPUT: creates a file and returns silently

EXAMPLES:

For testing, we use a temporary file that will be removed as soon as Sage is left. Of course, for permanently saving your session, you should choose a permanent file.

```
sage: a = 5
sage: tmp_f = tmp_filename()
sage: save_session(tmp_f)
sage: del a
sage: load_session(tmp_f)
sage: print(a)
5
```

```
>>> from sage.all import *
>>> a = Integer(5)
>>> tmp_f = tmp_filename()
>>> save_session(tmp_f)
>>> del a
>>> load_session(tmp_f)
>>> print(a)
5
```

We illustrate what happens when one of the variables is a function:

```
sage: f = lambda x : x^2
sage: save_session(tmp_f)
sage: save_session(tmp_f, verbose=True)
```

(continues on next page)

(continued from previous page)

```
...
Not saving f: f is a function or method
```

```
>>> from sage.all import *
>>> f = lambda x : x**Integer(2)
>>> save_session(tmp_f)
>>> save_session(tmp_f, verbose=True)
...
Not saving f: f is a function or method
```

Something similar happens for cython-defined functions:

```
sage: g = cython_lambda('double x', 'x*x + 1.5')
sage: save_session(tmp_f, verbose=True)
...
Not saving g: g is a cython function or method
```

```
>>> from sage.all import *
>>> g = cython_lambda('double x', 'x*x + 1.5')
>>> save_session(tmp_f, verbose=True)
...
Not saving g: g is a cython function or method
```

And the same for a lazy import:

```
sage: from sage.misc.lazy_import import LazyImport
sage: lazy_ZZ = LazyImport('sage.rings.integer_ring', 'ZZ')
sage: save_session(tmp_f, verbose=True)
...
Not saving lazy_ZZ: lazy_ZZ is a lazy import
```

```
>>> from sage.all import *
>>> from sage.misc.lazy_import import LazyImport
>>> lazy_ZZ = LazyImport('sage.rings.integer_ring', 'ZZ')
>>> save_session(tmp_f, verbose=True)
...
Not saving lazy_ZZ: lazy_ZZ is a lazy import
```

sage.misc.session.**show_identifiers**(*hidden=False*)

Return a list of all variable names that have been defined during this session. By default, this returns only those identifiers that don't start with an underscore.

INPUT:

- `hidden` – boolean (default: `False`); if `True`, also return identifiers that start with an underscore

OUTPUT: list of variable names

EXAMPLES:

We reset the state of all variables, and see that none are defined:

```
sage: reset()
sage: show_identifiers()
[]
```

```
>>> from sage.all import *
>>> reset()
>>> show_identifiers()
[]
```

We then define two variables, one which overwrites the default factor function; both are shown by *show_identifiers()*:

```
sage: a = 10
sage: factor = 20
sage: show_identifiers()
['factor', 'a']
```

```
>>> from sage.all import *
>>> a = Integer(10)
>>> factor = Integer(20)
>>> show_identifiers()
['factor', 'a']
```

To get the actual value of a variable from the list, use the `globals()` function.:

```
sage: globals()['factor']
20
```

```
>>> from sage.all import *
>>> globals()['factor']
20
```

By default *show_identifiers()* only returns variables that don't start with an underscore. There is an option hidden that allows one to list those as well:

```
sage: _hello = 10
sage: show_identifiers()
['factor', 'a']
sage: '_hello' in show_identifiers(hidden=True)
True
```

```
>>> from sage.all import *
>>> _hello = Integer(10)
>>> show_identifiers()
['factor', 'a']
>>> '_hello' in show_identifiers(hidden=True)
True
```

Many of the hidden variables are part of the IPython command history, at least in command line mode.:

```
sage: show_identifiers(hidden=True)        # random output
['__builtin__', '_ih', '_oh', '_dh', 'exit', 'quit', '_', '__', '___',
```

(continues on next page)

(continued from previous page)

```
'_i', '_ii', '_iii', '_i1', 'factor', '_i2', '_2', '_i3', 'a', '_i4',
'_i5', '_5', '_i6', '_6', '_i7', '_hello', '_i8', '_8', '_i9', '_9',
'_i10']
```

```
>>> from sage.all import *
>>> show_identifiers(hidden=True)        # random output
['__builtin__', '_ih', '_oh', '_dh', 'exit', 'quit', '_', '__', '___',
'_i', '_ii', '_iii', '_i1', 'factor', '_i2', '_2', '_i3', 'a', '_i4',
'_i5', '_5', '_i6', '_6', '_i7', '_hello', '_i8', '_8', '_i9', '_9',
'_i10']
```

CHAPTER

SIX

INTERACTIVE USAGE SUPPORT

6.1 Interactive Sage Sessions

6.1.1 SageMath version and banner info

sage.misc.banner.**banner**()

Print the Sage banner.

OUTPUT: none

If the environment variable SAGE_BANNER is set to no, no banner is displayed. If SAGE_BANNER is set to bare, a simplified plain ASCII banner is displayed. Otherwise, the full banner with box art is displayed.

EXAMPLES:

```
sage: import sage.misc.banner; sage.misc.banner.SAGE_BANNER = ''
sage: sage.misc.banner.banner()
┌────────────────────────────────────────────────────────────────────┐
│ SageMath version ..., Release Date: ...                            │
│ Using Python .... Type "help()" for help.                          │
...
```

```
>>> from sage.all import *
>>> import sage.misc.banner; sage.misc.banner.SAGE_BANNER = ''
>>> sage.misc.banner.banner()
┌────────────────────────────────────────────────────────────────────┐
│ SageMath version ..., Release Date: ...                            │
│ Using Python .... Type "help()" for help.                          │
...
```

sage.misc.banner.**banner_text**(*full=True*)

Text for the Sage banner.

INPUT:

- full – boolean (default: True)

OUTPUT:

A string containing the banner message.

If option full is False, a simplified plain ASCII banner is displayed; if True the full banner with box art is displayed.

EXAMPLES:

```
sage: print(sage.misc.banner.banner_text(full=True))
┌────────────────────────────────────────────────────────────────────┐
│ SageMath version ...
sage: print(sage.misc.banner.banner_text(full=False))
SageMath version ..., Release Date: ...
```

```
>>> from sage.all import *
>>> print(sage.misc.banner.banner_text(full=True))
┌────────────────────────────────────────────────────────────────────┐
│ SageMath version ...
>>> print(sage.misc.banner.banner_text(full=False))
SageMath version ..., Release Date: ...
```

sage.misc.banner.**require_version**(*major*, *minor=0*, *tiny=0*, *prerelease=False*, *print_message=False*)

Return `True` if Sage version is at least `major.minor.tiny`.

INPUT:

- `major` – integer
- `minor` – integer (default: 0)
- `tiny` – float (default: 0)
- `prerelease` – boolean (default: `False`)
- `print_message` – boolean (default: `False`)

OUTPUT: `True` if `major.minor.tiny` is <= version of Sage, `False` otherwise

For example, if the Sage version number is 3.1.2, then require_version(3, 1, 3) will return False, while require_version(3, 1, 2) will return True. If the Sage version is 3.1.2.alpha0, then require_version(3, 1, 1) will return True, while, by default, require_version(3, 1, 2) will return False. Note, though, that require_version(3, 1, 2, prerelease=True) will return True: if the optional argument prerelease is True, then a prerelease version of Sage counts as if it were the released version.

If optional argument print_message is `True` and this function is returning False, print a warning message.

EXAMPLES:

```
sage: from sage.misc.banner import require_version
sage: require_version(2, 1, 3)
True
sage: require_version(821, 4)
False
sage: require_version(821, 4, print_message=True)
This code requires at least version 821.4 of SageMath to run correctly.
You are running version ...
False
```

```
>>> from sage.all import *
>>> from sage.misc.banner import require_version
>>> require_version(Integer(2), Integer(1), Integer(3))
True
>>> require_version(Integer(821), Integer(4))
False
>>> require_version(Integer(821), Integer(4), print_message=True)
```

(continues on next page)

(continued from previous page)

```
This code requires at least version 821.4 of SageMath to run correctly.
You are running version ...
False
```

sage.misc.banner.**version**()

Return the version of Sage.

OUTPUT: string

EXAMPLES:

```
sage: version()
'SageMath version ..., Release Date: ...'
```

```
>>> from sage.all import *
>>> version()
'SageMath version ..., Release Date: ...'
```

sage.misc.banner.**version_dict**()

A dictionary describing the version of Sage.

OUTPUT: dictionary with keys 'major', 'minor', 'tiny', 'prerelease'

This process the Sage version string and produces a dictionary. It expects the Sage version to be in one of these forms:

```
N.N
N.N.N
N.N.N.N
N.N.str
N.N.N.str
N.N.N.N.str
```

where 'N' stands for an integer and 'str' stands for a string. The first integer is stored under the 'major' key and the second integer under 'minor'. If there is one more integer, it is stored under 'tiny'; if there are two more integers, then they are stored together as a float N.N under 'tiny'. If there is a string, then the key 'prerelease' returns True.

For example, if the Sage version is '3.2.1', then the dictionary is {'major': 3, 'minor': 2, 'tiny': 1, 'prerelease': False}. If the Sage version is '3.2.1.2', then the dictionary is {'major': 3, 'minor': 2, 'tiny': 1.200…, 'prerelease': False}. If the Sage version is '3.2.alpha0', then the dictionary is {'major': 3, 'minor': 2, 'tiny': 0, 'prerelease': True}.

EXAMPLES:

```
sage: from sage.misc.banner import version_dict
sage: print("SageMath major version is %s" % version_dict()['major'])
SageMath major version is ...
sage: version_dict()['major'] == int(sage.version.version.split('.')[0])
True
```

```
>>> from sage.all import *
>>> from sage.misc.banner import version_dict
>>> print("SageMath major version is %s" % version_dict()['major'])
SageMath major version is ...
>>> version_dict()['major'] == int(sage.version.version.split('.')[Integer(0)])
True
```

6.1.2 Interpreter reset

sage.misc.reset.**reset**(*vars=None*, *attached=False*)

Delete all user-defined variables, reset all global variables back to their default states, and reset all interfaces to other computer algebra systems.

If vars is specified, just restore the value of vars and leave all other variables alone (i.e., call restore).

Note that the variables in the set `sage.misc.reset.EXCLUDE` are excluded from being reset.

INPUT:

- `vars` – list or space or comma separated string (default: `None`); variables to restore
- `attached` – boolean (default: `False`); if `vars` is not `None`, whether to detach all attached files

EXAMPLES:

```
sage: x = 5
sage: reset()
sage: x                                                                     #␣
↪needs sage.symbolic
x

sage: fn = tmp_filename(ext='.py')
sage: sage.misc.reset.EXCLUDE.add('fn')
sage: with open(fn, 'w') as f:
....:     _ = f.write('a = 111')
sage: attach(fn)
sage: af = attached_files(); len(af)
1
sage: af == [fn]
True
sage: reset()
sage: af = attached_files(); len(af)
1
sage: reset(attached=True)
sage: af = attached_files(); len(af)
0
sage: sage.misc.reset.EXCLUDE.remove('fn')
```

```
>>> from sage.all import *
>>> x = Integer(5)
>>> reset()
>>> x                                                                       #␣
↪needs sage.symbolic
x

>>> fn = tmp_filename(ext='.py')
>>> sage.misc.reset.EXCLUDE.add('fn')
>>> with open(fn, 'w') as f:
...     _ = f.write('a = 111')
>>> attach(fn)
>>> af = attached_files(); len(af)
1
>>> af == [fn]
```

(continues on next page)

(continued from previous page)

```
True
>>> reset()
>>> af = attached_files(); len(af)
1
>>> reset(attached=True)
>>> af = attached_files(); len(af)
0
>>> sage.misc.reset.EXCLUDE.remove('fn')
```

sage.misc.reset.**reset_interfaces**()

sage.misc.reset.**restore**(*vars=None*)

Restore predefined global variables to their default values.

INPUT:

- `vars` – string or list (default: `None`); if not `None`, restores just the given variables to the default value

EXAMPLES:

```
sage: x = 10; y = 15/3; QQ='red'
sage: QQ
'red'
sage: restore('QQ')
sage: QQ
Rational Field
sage: x
10
sage: y = var('y')                                                          #␣
↪needs sage.symbolic
sage: restore('x y')
sage: x                                                                     #␣
↪needs sage.symbolic
x
sage: y
Traceback (most recent call last):
...
NameError: name 'y' is not defined
sage: x = 10; y = 15/3; QQ='red'
sage: ww = 15
sage: restore()
sage: x, QQ, ww                                                             #␣
↪needs sage.symbolic
(x, Rational Field, 15)
sage: restore('ww')
sage: ww
Traceback (most recent call last):
...
NameError: name 'ww' is not defined
```

```
>>> from sage.all import *
>>> x = Integer(10); y = Integer(15)/Integer(3); QQ='red'
>>> QQ
```

(continues on next page)

(continued from previous page)

```
'red'
>>> restore('QQ')
>>> QQ
Rational Field
>>> x
10
>>> y = var('y')                                                    #␣
↪needs sage.symbolic
>>> restore('x y')
>>> x                                                               #␣
↪needs sage.symbolic
x
>>> y
Traceback (most recent call last):
...
NameError: name 'y' is not defined
>>> x = Integer(10); y = Integer(15)/Integer(3); QQ='red'
>>> ww = Integer(15)
>>> restore()
>>> x, QQ, ww                                                       #␣
↪needs sage.symbolic
(x, Rational Field, 15)
>>> restore('ww')
>>> ww
Traceback (most recent call last):
...
NameError: name 'ww' is not defined
```

6.1.3 Determination of programs for viewing web pages, etc.

The function *default_viewer()* defines reasonable defaults for these programs. To use something else, use `viewer`. First import it:

```
sage: from sage.misc.viewer import viewer
```

```
>>> from sage.all import *
>>> from sage.misc.viewer import viewer
```

On OS X, PDFs are opened by default using the 'open' command, which runs whatever has been designated as the PDF viewer in the OS. To change this to use 'Adobe Reader':

```
sage: viewer.pdf_viewer('open -a /Applications/Adobe\ Reader.app') # not tested
```

```
>>> from sage.all import *
>>> viewer.pdf_viewer('open -a /Applications/Adobe\ Reader.app') # not tested
```

Similarly, you can set `viewer.browser(...)`, `viewer.dvi_viewer(...)`, and `viewer.png_viewer(...)`. You can make this change permanent by adding lines like these to your `SAGE_STARTUP_FILE` (which is `$HOME/.sage/init.sage` by default):

```
from sage.misc.viewer import viewer
viewer.pdf_viewer('open -a /Applications/Adobe\ Reader.app')
```

Functions and classes

class sage.misc.viewer.**Viewer**

Bases: SageObject

Set defaults for various viewing applications: a web browser, a dvi viewer, a pdf viewer, and a png viewer.

EXAMPLES:

```
sage: from sage.misc.viewer import viewer
sage: old_browser = viewer.browser()  # indirect doctest
sage: viewer.browser('open -a /Applications/Firefox.app')
sage: viewer.browser()
'open -a /Applications/Firefox.app'
sage: viewer.browser(old_browser) # restore old value
```

```
>>> from sage.all import *
>>> from sage.misc.viewer import viewer
>>> old_browser = viewer.browser()  # indirect doctest
>>> viewer.browser('open -a /Applications/Firefox.app')
>>> viewer.browser()
'open -a /Applications/Firefox.app'
>>> viewer.browser(old_browser) # restore old value
```

browser(*app=None*)

Change the default browser. Return the current setting if arg is None, which is the default.

INPUT:

- app – None or a string, the program to use

EXAMPLES:

```
sage: from sage.misc.viewer import viewer
sage: old_browser = viewer.browser()
sage: viewer.browser('open -a /Applications/Firefox.app') # indirect doctest
sage: viewer.browser()
'open -a /Applications/Firefox.app'
sage: viewer.browser(old_browser) # restore old value
```

```
>>> from sage.all import *
>>> from sage.misc.viewer import viewer
>>> old_browser = viewer.browser()
>>> viewer.browser('open -a /Applications/Firefox.app') # indirect doctest
>>> viewer.browser()
'open -a /Applications/Firefox.app'
>>> viewer.browser(old_browser) # restore old value
```

dvi_viewer(*app=None*)

Change the default dvi viewer. Return the current setting if arg is None, which is the default.

INPUT:

- app – None or a string, the program to use

EXAMPLES:

```
sage: from sage.misc.viewer import viewer
sage: old_dvi_app = viewer.dvi_viewer()
sage: viewer.dvi_viewer('/usr/bin/xdvi') # indirect doctest
sage: viewer.dvi_viewer()
'/usr/bin/xdvi'
sage: viewer.dvi_viewer(old_dvi_app) # restore old value
```

```
>>> from sage.all import *
>>> from sage.misc.viewer import viewer
>>> old_dvi_app = viewer.dvi_viewer()
>>> viewer.dvi_viewer('/usr/bin/xdvi') # indirect doctest
>>> viewer.dvi_viewer()
'/usr/bin/xdvi'
>>> viewer.dvi_viewer(old_dvi_app) # restore old value
```

pdf_viewer(*app=None*)

Change the default pdf viewer. Return the current setting if arg is `None`, which is the default.

INPUT:

- `app` – `None` or a string, the program to use

EXAMPLES:

```
sage: from sage.misc.viewer import viewer
sage: old_pdf_app = viewer.pdf_viewer()
sage: viewer.pdf_viewer('/usr/bin/pdfopen') # indirect doctest
sage: viewer.pdf_viewer()
'/usr/bin/pdfopen'
sage: viewer.pdf_viewer(old_pdf_app) # restore old value
```

```
>>> from sage.all import *
>>> from sage.misc.viewer import viewer
>>> old_pdf_app = viewer.pdf_viewer()
>>> viewer.pdf_viewer('/usr/bin/pdfopen') # indirect doctest
>>> viewer.pdf_viewer()
'/usr/bin/pdfopen'
>>> viewer.pdf_viewer(old_pdf_app) # restore old value
```

png_viewer(*app=None*)

Change the default png viewer. Return the current setting if arg is `None`, which is the default.

INPUT:

- `app` – `None` or a string, the program to use

EXAMPLES:

```
sage: from sage.misc.viewer import viewer
sage: old_png_app = viewer.png_viewer()
sage: viewer.png_viewer('display') # indirect doctest
sage: viewer.png_viewer()
'display'
sage: viewer.png_viewer(old_png_app) # restore old value
```

```
>>> from sage.all import *
>>> from sage.misc.viewer import viewer
>>> old_png_app = viewer.png_viewer()
>>> viewer.png_viewer('display') # indirect doctest
>>> viewer.png_viewer()
'display'
>>> viewer.png_viewer(old_png_app) # restore old value
```

sage.misc.viewer.**browser**()

Return the program used to open a web page. By default, the program used depends on the platform and other factors, like settings of certain environment variables. To use a different program, call `viewer.browser('PROG')`, where 'PROG' is the desired program.

EXAMPLES:

```
sage: from sage.misc.viewer import browser
sage: browser() # random -- depends on OS, etc.
'open'
```

```
>>> from sage.all import *
>>> from sage.misc.viewer import browser
>>> browser() # random -- depends on OS, etc.
'open'
```

sage.misc.viewer.**default_viewer**(*viewer=None*)

Set up default programs for opening web pages, PDFs, PNGs, and DVI files.

INPUT:

- `viewer` – `None` or a string; one of `'browser'`, `'pdf'`, `'png'`, `'dvi'`. Return the name of the corresponding program. `None` is treated the same as `'browser'`.

EXAMPLES:

```
sage: from sage.misc.viewer import default_viewer
sage: default_viewer(None) # random -- depends on OS, etc.
'open'
sage: default_viewer('pdf') # random -- depends on OS, etc.
'xdg-open'
sage: default_viewer('jpg')
Traceback (most recent call last):
...
ValueError: Unknown type of viewer: jpg.
```

```
>>> from sage.all import *
>>> from sage.misc.viewer import default_viewer
>>> default_viewer(None) # random -- depends on OS, etc.
'open'
>>> default_viewer('pdf') # random -- depends on OS, etc.
'xdg-open'
>>> default_viewer('jpg')
Traceback (most recent call last):
...
ValueError: Unknown type of viewer: jpg.
```

sage.misc.viewer.**dvi_viewer**()

Return the program used to display a dvi file. By default, the program used depends on the platform and other factors, like settings of certain environment variables. To use a different program, call `viewer.dvi_viewer('PROG')`, where 'PROG' is the desired program.

EXAMPLES:

```
sage: from sage.misc.viewer import dvi_viewer
sage: dvi_viewer() # random -- depends on OS, etc.
'open'
```

```
>>> from sage.all import *
>>> from sage.misc.viewer import dvi_viewer
>>> dvi_viewer() # random -- depends on OS, etc.
'open'
```

sage.misc.viewer.**pdf_viewer**()

Return the program used to display a pdf file. By default, the program used depends on the platform and other factors, like settings of certain environment variables. To use a different program, call `viewer.pdf_viewer('PROG')`, where 'PROG' is the desired program.

EXAMPLES:

```
sage: from sage.misc.viewer import pdf_viewer, viewer
sage: old_pdf_app = viewer.pdf_viewer()
sage: viewer.pdf_viewer('acroread')
sage: pdf_viewer()
'acroread'
sage: viewer.pdf_viewer('old_pdf_app')
```

```
>>> from sage.all import *
>>> from sage.misc.viewer import pdf_viewer, viewer
>>> old_pdf_app = viewer.pdf_viewer()
>>> viewer.pdf_viewer('acroread')
>>> pdf_viewer()
'acroread'
>>> viewer.pdf_viewer('old_pdf_app')
```

sage.misc.viewer.**png_viewer**()

Return the program used to display a png file. By default, the program used depends on the platform and other factors, like settings of certain environment variables. To use a different program, call `viewer.png_viewer('PROG')`, where 'PROG' is the desired program.

EXAMPLES:

```
sage: from sage.misc.viewer import png_viewer
sage: png_viewer() # random -- depends on OS, etc.
'xdg-open'
```

```
>>> from sage.all import *
>>> from sage.misc.viewer import png_viewer
>>> png_viewer() # random -- depends on OS, etc.
'xdg-open'
```

6.1.4 Pager for showing strings

Currently we just use the IPython pager. If we want to use something else, we can just change this function.

Any code in sage that uses a pager should use this pager.

`sage.misc.pager.`**`pager`**`()`

6.1.5 Format Sage documentation for viewing with IPython and the notebook

AUTHORS:

- William Stein (2005): initial version.
- Nick Alexander (2007): nodetex functions
- Nick Alexander (2008): search_src, search_def improvements
- Martin Albrecht (2008-03-21): parse LaTeX description environments in sagedoc
- John Palmieri (2009-04-11): fix for #5754 plus doctests
- Dan Drake (2009-05-21): refactor search_* functions, use system 'find' instead of sage -grep
- John Palmieri (2009-06-28): don't use 'find' – use Python (os.walk, re.search) instead.
- Simon King (2011-09): Use os.linesep, avoid destruction of embedding information, enable nodetex in a docstring. Consequently use sage_getdoc.

`sage.misc.sagedoc.`**`detex`**`(`*s*, *embedded=False*`)`

This strips LaTeX commands from a string; it is used by the `format` function to process docstrings for display from the command line interface.

INPUT:

- `s` – string
- `embedded` – boolean (default: `False`)

If `embedded` is `False`, then do the replacements in both `math_substitutes` and `nonmath_substitutes`. If `True`, then only do `nonmath_substitutes`.

OUTPUT: string

EXAMPLES:

```
sage: from sage.misc.sagedoc import detex
sage: detex(r'Some math: `n \geq k`.  A website: \url{sagemath.org}.')
'Some math: n >= k.  A website: sagemath.org.\n'
sage: detex(r'More math: `x \mapsto y`.  {\bf Bold face}.')
'More math: x  |-->  y.  { Bold face}.\n'
sage: detex(r'`a, b, c, \ldots, z`')
'a, b, c, ..., z\n'
sage: detex(r'`a, b, c, \ldots, z`', embedded=True)
'`a, b, c, \\ldots, z`'
sage: detex(r'`\left(\lvert x\ast y \rvert\right]`')
'(| x * y |]\n'
sage: detex(r'`\left(\leq\le\leftarrow \rightarrow\unknownmacro\to`')
'(<=<=<-- -->\\unknownmacro-->\n'
```

```
>>> from sage.all import *
>>> from sage.misc.sagedoc import detex
>>> detex(r'Some math: `n \geq k`.  A website: \url{sagemath.org}.')
'Some math: n >= k.  A website: sagemath.org.\n'
>>> detex(r'More math: `x \mapsto y`.  {\bf Bold face}.')
'More math: x  |-->  y.  { Bold face}.\n'
>>> detex(r'`a, b, c, \ldots, z`')
'a, b, c, ..., z\n'
>>> detex(r'`a, b, c, \ldots, z`', embedded=True)
'`a, b, c, \\ldots, z`'
>>> detex(r'`\left(\lvert x\ast y \rvert\right]`')
'(| x * y |]\n'
>>> detex(r'`\left(\leq\le\leftarrow \rightarrow\unknownmacro\to`')
'(<=<=<-- -->\\unknownmacro-->\n'
```

sage.misc.sagedoc.**format**(*s*, *embedded=False*)

noreplace Format Sage documentation `s` for viewing with IPython.

This calls *detex()* on `s` to convert LaTeX commands to plain text, unless the directive `nodetex` is given in the first line of the string.

Also, if `s` contains a string of the form `<<<obj>>>`, then it replaces it with the docstring for `obj`, unless the directive `noreplace` is given in the first line. If an error occurs under the attempt to find the docstring for `obj`, then the substring `<<<obj>>>` is preserved.

Directives must be separated by a comma.

INPUT:

- `s` – string
- `embedded` – boolean (default: `False`)

OUTPUT: string

Set `embedded` equal to `True` if formatting for use in the notebook; this just gets passed as an argument to *detex()*.

See also

sage.misc.sageinspect.sage_getdoc() to get the formatted documentation of a given object.

EXAMPLES:

```
sage: from sage.misc.sagedoc import format
sage: format('Let `A` be an `m` by `n` (0,1)-matrix. We identify `A` with a␣
↪chessboard')
'Let A be an m by n (0,1)-matrix. We identify A with a chessboard\n'
```

```
>>> from sage.all import *
>>> from sage.misc.sagedoc import format
>>> format('Let `A` be an `m` by `n` (0,1)-matrix. We identify `A` with a␣
↪chessboard')
'Let A be an m by n (0,1)-matrix. We identify A with a chessboard\n'
```

If the first line of the string is 'nodetex', remove 'nodetex' but don't modify any TeX commands:

```
sage: format("nodetex\n`x \\geq y`")
'`x \\geq y`'
```

```
>>> from sage.all import *
>>> format("nodetex\n`x \\geq y`")
'`x \\geq y`'
```

Testing a string enclosed in triple angle brackets:

```
sage: format('<<<identity_matrix')
'<<<identity_matrix\n'
sage: format('identity_matrix>>>')
'identity_matrix>>>\n'
sage: format('<<<identity_matrix>>>')                                    #␣
↪needs sage.modules
'...Definition: identity_matrix(...'
sage: format('<<<identity_matrix>>>')[:28]                               #␣
↪needs sphinx
'Definition: identity_matrix('
```

```
>>> from sage.all import *
>>> format('<<<identity_matrix')
'<<<identity_matrix\n'
>>> format('identity_matrix>>>')
'identity_matrix>>>\n'
>>> format('<<<identity_matrix>>>')                                    #␣
↪needs sage.modules
'...Definition: identity_matrix(...'
>>> format('<<<identity_matrix>>>')[:Integer(28)]                      ␣
↪     # needs sphinx
'Definition: identity_matrix('
```

sage.misc.sagedoc.**format_search_as_html**(*what*, *results*, *search*)

Format the output from `search_src`, `search_def`, or `search_doc` as html, for use in the notebook.

INPUT:

- `what` – string; what was searched (source code or documentation)
- `results` – string or list; the results of the search as a string or list of search results
- `search` – string or list; what was being searched for, either as a string which is taken verbatim, or a list of multiple search terms if there were more than one

This function parses `results`: each line should have either the form `FILENAME` or `FILENAME: string` where FILENAME is the file in which the string that matched the search was found. If FILENAME ends in '.html', then this is part of the documentation; otherwise, it is in the source code. In either case, an appropriate link is created.

EXAMPLES:

```
sage: from sage.misc.sagedoc import format_search_as_html
sage: format_search_as_html('Source', 'algebras/steenrod_algebra_element.py:     ␣
↪  an antihomomorphism: if we call the antipode `c`, then', 'antipode␣
↪antihomomorphism')
'<html><font color="black"><h2>Search Source: "antipode antihomomorphism"</h2></
```

(continues on next page)

(continued from previous page)

```
↪font><font color="darkpurple"><ol><li><a href="/src/algebras/steenrod_algebra_
↪element.py" target="_blank"><tt>algebras/steenrod_algebra_element.py</tt></a>\n
↪</ol></font></html>'
sage: format_search_as_html('Other', 'html/en/reference/sage/algebras/steenrod_
↪algebra_element.html:an antihomomorphism: if we call the antipode <span class=
↪"math">c</span>, then', 'antipode antihomomorphism')
'<html><font color="black"><h2>Search Other: "antipode antihomomorphism"</h2></
↪font><font color="darkpurple"><ol><li><a href="/doc/live/reference/sage/
↪algebras/steenrod_algebra_element.html" target="_blank"><tt>reference/sage/
↪algebras/steenrod_algebra_element.html</tt></a>\n</ol></font></html>'
```

```
>>> from sage.all import *
>>> from sage.misc.sagedoc import format_search_as_html
>>> format_search_as_html('Source', 'algebras/steenrod_algebra_element.py:␣
↪an antihomomorphism: if we call the antipode `c`, then', 'antipode␣
↪antihomomorphism')
'<html><font color="black"><h2>Search Source: "antipode antihomomorphism"</h2></
↪font><font color="darkpurple"><ol><li><a href="/src/algebras/steenrod_algebra_
↪element.py" target="_blank"><tt>algebras/steenrod_algebra_element.py</tt></a>\n
↪</ol></font></html>'
>>> format_search_as_html('Other', 'html/en/reference/sage/algebras/steenrod_
↪algebra_element.html:an antihomomorphism: if we call the antipode <span class=
↪"math">c</span>, then', 'antipode antihomomorphism')
'<html><font color="black"><h2>Search Other: "antipode antihomomorphism"</h2></
↪font><font color="darkpurple"><ol><li><a href="/doc/live/reference/sage/
↪algebras/steenrod_algebra_element.html" target="_blank"><tt>reference/sage/
↪algebras/steenrod_algebra_element.html</tt></a>\n</ol></font></html>'
```

sage.misc.sagedoc.**format_src**(*s*)

Format Sage source code `s` for viewing with IPython.

If `s` contains a string of the form "<<<obj>>>", then it replaces it with the source code for "obj".

INPUT:

- `s` – string

OUTPUT: string

EXAMPLES:

```
sage: from sage.misc.sagedoc import format_src
sage: format_src('unladen swallow')
'unladen swallow'
sage: format_src('<<<Sq>>>')[5:15]                                          #␣
↪needs sage.combinat sage.modules
'Sq(*nums):'
```

```
>>> from sage.all import *
>>> from sage.misc.sagedoc import format_src
>>> format_src('unladen swallow')
'unladen swallow'
>>> format_src('<<<Sq>>>')[Integer(5):Integer(15)]                          ␣
```

(continues on next page)

(continued from previous page)

```
↪              # needs sage.combinat sage.modules
'Sq(*nums):'
```

sage.misc.sagedoc.**help**(*module=None*)

If there is an argument `module`, print the Python help message for `module`. With no argument, print a help message about getting help in Sage.

EXAMPLES:

```
sage: help()
Welcome to Sage ...
```

```
>>> from sage.all import *
>>> help()
Welcome to Sage ...
```

sage.misc.sagedoc.**my_getsource**(*obj*, *oname=''*)

Retrieve the source code for `obj`.

INPUT:

- `obj` – a Sage object, function, etc.
- `oname` – string (optional); a name under which the object is known. Currently ignored by Sage

OUTPUT:

Its documentation (string)

EXAMPLES:

```
sage: from sage.misc.sagedoc import my_getsource
sage: s = my_getsource(identity_matrix)                                    #␣
↪needs sage.modules
sage: s[15:34]                                                             #␣
↪needs sage.modules
'def identity_matrix'
```

```
>>> from sage.all import *
>>> from sage.misc.sagedoc import my_getsource
>>> s = my_getsource(identity_matrix)                                      #␣
↪needs sage.modules
>>> s[Integer(15):Integer(34)]                                              ␣
↪              # needs sage.modules
'def identity_matrix'
```

sage.misc.sagedoc.**process_dollars**(*s*)

Replace dollar signs with backticks.

More precisely, do a regular expression search. Replace a plain dollar sign ($) by a backtick (`). Replace an escaped dollar sign (\$) by a dollar sign ($). Don't change a dollar sign preceded or followed by a backtick (`$ or $`), because of strings like "`$HOME`". Don't make any changes on lines starting with more spaces than the first nonempty line in `s`, because those are indented and hence part of a block of code or examples.

This also doesn't replaces dollar signs enclosed in curly braces, to avoid nested math environments.

EXAMPLES:

```
sage: from sage.misc.sagedoc import process_dollars
sage: process_dollars('hello')
'hello'
sage: process_dollars('some math: $x=y$')
doctest:warning...
DeprecationWarning: using dollar signs to mark up math in Sage docstrings
is deprecated; use backticks instead
See https://github.com/sagemath/sage/issues/33973 for details.
'some math: `x=y`'
```

```
>>> from sage.all import *
>>> from sage.misc.sagedoc import process_dollars
>>> process_dollars('hello')
'hello'
>>> process_dollars('some math: $x=y$')
doctest:warning...
DeprecationWarning: using dollar signs to mark up math in Sage docstrings
is deprecated; use backticks instead
See https://github.com/sagemath/sage/issues/33973 for details.
'some math: `x=y`'
```

Replace \$ with $, and don't do anything when backticks are involved:

```
sage: process_dollars(r'a ``$REAL`` dollar sign: \$')
'a ``$REAL`` dollar sign: $'
```

```
>>> from sage.all import *
>>> process_dollars(r'a ``$REAL`` dollar sign: \$')
'a ``$REAL`` dollar sign: $'
```

Don't make any changes on lines indented more than the first nonempty line:

```
sage: s = '\n first line\n     indented $x=y$'
sage: s == process_dollars(s)
True
```

```
>>> from sage.all import *
>>> s = '\n first line\n     indented $x=y$'
>>> s == process_dollars(s)
True
```

Don't replace dollar signs enclosed in curly braces:

```
sage: process_dollars(r'f(n) = 0 \text{ if $n$ is prime}')
'f(n) = 0 \\text{ if $n$ is prime}'
```

```
>>> from sage.all import *
>>> process_dollars(r'f(n) = 0 \text{ if $n$ is prime}')
'f(n) = 0 \\text{ if $n$ is prime}'
```

This is not perfect:

```
sage: process_dollars(r'$f(n) = 0 \text{ if $n$ is prime}$')
'`f(n) = 0 \\text{ if $n$ is prime}$'
```

```
>>> from sage.all import *
>>> process_dollars(r'$f(n) = 0 \text{ if $n$ is prime}$')
'`f(n) = 0 \\text{ if $n$ is prime}$'
```

The regular expression search doesn't find the last $. Fortunately, there don't seem to be any instances of this kind of expression in the Sage library, as of this writing.

sage.misc.sagedoc.**process_extlinks**(*s*, *embedded=False*)

In docstrings at the command line, process markup related to the Sphinx extlinks extension. For example, replace `:issue:`NUM`` with `https://github.com/sagemath/sage/issues/NUM`, and similarly with `:python:TEXT` and `:wikipedia:TEXT`, looking up the url from the dictionary `extlinks` in `sage_docbuild.conf`. If `TEXT` is of the form `blah <LINK>`, then it uses `LINK` rather than `TEXT` to construct the url.

In the notebook, don't do anything: let sphinxify take care of it.

INPUT:

- `s` – string, in practice a docstring
- `embedded` – boolean (default: `False`)

This function is called by *`format()`*, and if in the notebook, it sets `embedded` to be `True`, otherwise `False`.

EXAMPLES:

```
sage: from sage.misc.sagedoc import process_extlinks
sage: process_extlinks('See :issue:`1234`, :wikipedia:`Wikipedia <Sage_
↪(mathematics_software)>`, and :issue:`4321` ...')
'See https://github.com/sagemath/sage/issues/1234, https://en.wikipedia.org/wiki/
↪Sage_(mathematics_software), and https://github.com/sagemath/sage/issues/4321 ..
↪.'
sage: process_extlinks('See :issue:`1234` for more information.', embedded=True)
'See :issue:`1234` for more information.'
sage: process_extlinks('see :python:`Implementing Descriptors <reference/
↪datamodel.html#implementing-descriptors>` ...')
'see https://docs.python.org/release/.../reference/datamodel.html#implementing-
↪descriptors ...'
```

```
>>> from sage.all import *
>>> from sage.misc.sagedoc import process_extlinks
>>> process_extlinks('See :issue:`1234`, :wikipedia:`Wikipedia <Sage_(mathematics_
↪software)>`, and :issue:`4321` ...')
'See https://github.com/sagemath/sage/issues/1234, https://en.wikipedia.org/wiki/
↪Sage_(mathematics_software), and https://github.com/sagemath/sage/issues/4321 ..
↪.'
>>> process_extlinks('See :issue:`1234` for more information.', embedded=True)
'See :issue:`1234` for more information.'
>>> process_extlinks('see :python:`Implementing Descriptors <reference/datamodel.
↪html#implementing-descriptors>` ...')
'see https://docs.python.org/release/.../reference/datamodel.html#implementing-
↪descriptors ...'
```

sage.misc.sagedoc.**process_mathtt**(*s*)

Replace \mathtt{BLAH} with BLAH in the command line.

INPUT:

- `s` – string, in practice a docstring

This function is called by *format()*.

EXAMPLES:

```
sage: from sage.misc.sagedoc import process_mathtt
sage: process_mathtt(r'e^\mathtt{self}')
'e^self'
```

```
>>> from sage.all import *
>>> from sage.misc.sagedoc import process_mathtt
>>> process_mathtt(r'e^\mathtt{self}')
'e^self'
```

sage.misc.sagedoc.**process_optional_doctest_tags**(*s*)

Remove `# optional/needs` doctest tags for present features from docstring `s`.

EXAMPLES:

sage: from sage.misc.sagedoc import process_optional_doctest_tags sage: process_optional_doctest_tags("sage: # needs sage.rings.finite_ringsnsage: K.<x> = FunctionField(GF(5^2,'a')); KnRational function field in x over Finite Field in a of size 5^2") # needs sage.rings.finite_rings "sage: K.<x> = FunctionField(GF(5^2,'a')); KnRational function field in x over Finite Field in a of size 5^2"

sage.misc.sagedoc.**search_def**(*name*, *extra1=''*, *extra2=''*, *extra3=''*, *extra4=''*, *extra5=''*, ***kwds*)

Search Sage library source code for function definitions containing `name`. The search is case-insensitive by default.

INPUT: same as for *search_src()*.

OUTPUT: same as for *search_src()*

Note

The regular expression used by this function only finds function definitions that are preceded by spaces, so if you use tabs on a "def" line, this function will not find it. As tabs are not allowed in Sage library code, this should not be a problem.

EXAMPLES:

See the documentation for *search_src()* for more examples.

```
sage: print(search_def("fetch", interact=False))  # random # long time
matrix/matrix0.pyx:    cdef fetch(self, key):
matrix/matrix0.pxd:    cdef fetch(self, key)

sage: print(search_def("fetch", path_re="pyx", interact=False))  # random # long␣
↪time
matrix/matrix0.pyx:    cdef fetch(self, key):
```

```
>>> from sage.all import *
>>> print(search_def("fetch", interact=False))  # random # long time
matrix/matrix0.pyx:    cdef fetch(self, key):
matrix/matrix0.pxd:    cdef fetch(self, key)

>>> print(search_def("fetch", path_re="pyx", interact=False))  # random # long␣
↪time
matrix/matrix0.pyx:    cdef fetch(self, key):
```

sage.misc.sagedoc.**search_doc**(*string*, *extra1=''*, *extra2=''*, *extra3=''*, *extra4=''*, *extra5=''*, ***kwds*)

Search Sage HTML documentation for lines containing `string`. The search is case-insensitive by default.

The file paths in the output are relative to `$SAGE_DOC`.

INPUT: same as for *search_src()*.

OUTPUT: same as for *search_src()*

EXAMPLES:

See the documentation for *search_src()* for more examples.

```
sage: search_doc('creates a polynomial', path_re='tutorial', interact=False) #␣
↪random
html/en/tutorial/tour_polynomial.html:<p>This creates a polynomial ring and tells␣
↪Sage to use (the string)
```

```
>>> from sage.all import *
>>> search_doc('creates a polynomial', path_re='tutorial', interact=False) #␣
↪random
html/en/tutorial/tour_polynomial.html:<p>This creates a polynomial ring and tells␣
↪Sage to use (the string)
```

If you search the documentation for 'tree', then you will get too many results, because many lines in the documentation contain the word 'toctree'. If you use the `whole_word` option, though, you can search for 'tree' without returning all of the instances of 'toctree'. In the following, since `search_doc('tree', interact=False)` returns a string with one line for each match, counting the length of `search_doc('tree', interact=False).splitlines()` gives the number of matches.

```
sage: # long time, needs sagemath_doc_html
sage: N = len(search_doc('tree', interact=False).splitlines())
sage: L = search_doc('tree', whole_word=True, interact=False).splitlines()
sage: len(L) < N
True
sage: import re
sage: tree_re = re.compile(r'(^|\W)tree(\W|$)', re.I)
sage: all(tree_re.search(l) for l in L)
True
```

```
>>> from sage.all import *
>>> # long time, needs sagemath_doc_html
>>> N = len(search_doc('tree', interact=False).splitlines())
>>> L = search_doc('tree', whole_word=True, interact=False).splitlines()
>>> len(L) < N
True
```

(continues on next page)

(continued from previous page)

```
>>> import re
>>> tree_re = re.compile(r'(^|\W)tree(\W|$)', re.I)
>>> all(tree_re.search(l) for l in L)
True
```

sage.misc.sagedoc.**search_src**(*string*, *extra1=''*, *extra2=''*, *extra3=''*, *extra4=''*, *extra5=''*, ***kwds*)

Search Sage library source code for lines containing `string`. The search is case-insensitive by default.

INPUT:

- `string` – string to find in the Sage source code
- `extra1`, ..., `extra5` – additional strings to require when searching. Lines must match all of these, as well as `string`
- `whole_word` – (default: `False`) if `True`, search for `string` and `extra1` (etc.) as whole words only. This assumes that each of these arguments is a single word, not a regular expression, and it might have unexpected results if used with regular expressions.
- `ignore_case` – boolean (default: `True`); if `False`, perform a case-sensitive search
- `multiline` – (default: `False`) if `True`, search more than one line at a time. In this case, print any matching file names, but don't print line numbers.
- `interact` – boolean (default: `True`); if `False`, return a string with all the matches. Otherwise, this function returns `None`, and the results are displayed appropriately, according to whether you are using the notebook or the command-line interface. You should not ordinarily need to use this.
- `path_re` – (default: `''`) regular expression which the filename (including the path) must match
- `module` – (default: `'sage'`) the module in which to search. The default is 'sage', the entire Sage library. If `module` doesn't start with "sage", then the links in the notebook output may not function.

OUTPUT:

If `interact` is `False`, then return a string with all of the matches, separated by newlines. On the other hand, if `interact` is `True` (the default), there is no output. Instead: at the command line, the search results are printed on the screen in the form `filename:line_number:line of text`, showing the filename in which each match occurs, the line number where it occurs, and the actual matching line. (If `multiline` is `True`, then only the filename is printed for each match.) The file paths in the output are relative to `$SAGE_SRC`. In the notebook, each match produces a link to the actual file in which it occurs.

The `string` and `extraN` arguments are treated as regular expressions, as is `path_re`, and errors will be raised if they are invalid. The matches will be case-insensitive unless `ignore_case` is `False`.

Note

The `extraN` parameters are present only because `search_src(string, *extras, interact=False)` is not parsed correctly by Python 2.6; see http://bugs.python.org/issue1909.

EXAMPLES:

First note that without using `interact=False`, this function produces no output, while with `interact=False`, the output is a string. These examples almost all use this option, so that they have something to which to compare their output.

You can search for "matrix" by typing `search_src("matrix")`. This particular search will produce many results:

```
sage: len(search_src("matrix", interact=False).splitlines())  # random # long time
9522
```

```
>>> from sage.all import *
>>> len(search_src("matrix", interact=False).splitlines())  # random # long time
9522
```

You can restrict to the Sage calculus code with `search_src("matrix", module="sage.calculus")`, and this produces many fewer results:

```
sage: len(search_src("matrix", module="sage.calculus", interact=False).
↪splitlines())  # random
26
```

```
>>> from sage.all import *
>>> len(search_src("matrix", module="sage.calculus", interact=False).
↪splitlines())  # random
26
```

Note that you can do tab completion on the `module` string. Another way to accomplish a similar search:

```
sage: len(search_src("matrix", path_re="calc",                                  #␣
↪needs sage.modules
....:                 interact=False).splitlines()) > 15
True
```

```
>>> from sage.all import *
>>> len(search_src("matrix", path_re="calc",                                  #␣
↪needs sage.modules
...                 interact=False).splitlines()) > Integer(15)
True
```

The following produces an error because the string 'fetch(' is a malformed regular expression:

```
sage: try:
....:     print(search_src(" fetch(", "def", interact=False))
....: except Exception as e:
....:     print(e)
missing ), unterminated subpattern at position 6
```

```
>>> from sage.all import *
>>> try:
...     print(search_src(" fetch(", "def", interact=False))
... except Exception as e:
...     print(e)
missing ), unterminated subpattern at position 6
```

To fix this, *escape* the parenthesis with a backslash:

```
sage: print(search_src(r" fetch\(", "def", interact=False))  # random # long time
matrix/matrix0.pyx:    cdef fetch(self, key):
matrix/matrix0.pxd:    cdef fetch(self, key)
```

(continues on next page)

(continued from previous page)

```
sage: print(search_src(r" fetch\(", "def", "pyx", interact=False))  # random #␣
↪long time
matrix/matrix0.pyx:    cdef fetch(self, key):
```

```
>>> from sage.all import *
>>> print(search_src(r" fetch\(", "def", interact=False))  # random # long time
matrix/matrix0.pyx:    cdef fetch(self, key):
matrix/matrix0.pxd:    cdef fetch(self, key)

>>> print(search_src(r" fetch\(", "def", "pyx", interact=False))  # random # long␣
↪time
matrix/matrix0.pyx:    cdef fetch(self, key):
```

As noted above, the search is case-insensitive, but you can make it case-sensitive with the 'ignore_case' key word:

```
sage: s = search_src('Matrix', path_re='matrix', interact=False); s.find('x') > 0
True

sage: s = search_src('MatRiX', path_re='matrix', interact=False); s.find('x') > 0
True

sage: s = search_src('MatRiX', path_re='matrix',
....:                interact=False, ignore_case=False); s.find('x') > 0
False
```

```
>>> from sage.all import *
>>> s = search_src('Matrix', path_re='matrix', interact=False); s.find('x') >␣
↪Integer(0)
True

>>> s = search_src('MatRiX', path_re='matrix', interact=False); s.find('x') >␣
↪Integer(0)
True

>>> s = search_src('MatRiX', path_re='matrix',
...                interact=False, ignore_case=False); s.find('x') > Integer(0)
False
```

Searches are by default restricted to single lines, but this can be changed by setting `multiline` to be True. In the following, since `search_src(string, interact=False)` returns a string with one line for each match, counting the length of `search_src(string, interact=False).splitlines()` gives the number of matches.

```
sage: len(search_src('log', 'derivative', interact=False).splitlines()) < 40
True
sage: len(search_src('log', 'derivative',
....:                interact=False, multiline=True).splitlines()) > 70
True
```

```
>>> from sage.all import *
>>> len(search_src('log', 'derivative', interact=False).splitlines()) <␣
↪Integer(40)
```

(continues on next page)

(continued from previous page)

```
True
>>> len(search_src('log', 'derivative',
...                interact=False, multiline=True).splitlines()) > Integer(70)
True
```

A little recursive narcissism: let's do a doctest that searches for this function's doctests. Note that you can't put "sage:" in the doctest string because it will get replaced by the Python ">>>" prompt.

```
sage: print(search_src(r'^ *sage[:] .*search_src\(', interact=False))  # long time
misc/sagedoc.py:... len(search_src("matrix", interact=False).splitlines())...
misc/sagedoc.py:... len(search_src("matrix", module="sage.calculus",␣
↪interact=False).splitlines())...
misc/sagedoc.py:... len(search_src("matrix", path_re="calc"...
misc/sagedoc.py:... print(search_src(r" fetch\(", "def", interact=False))...
misc/sagedoc.py:... print(search_src(r" fetch\(", "def", "pyx", interact=False))..
↪.
misc/sagedoc.py:... s = search_src('Matrix', path_re='matrix', interact=False); s.
↪find('x') > 0...
misc/sagedoc.py:... s = search_src('MatRiX', path_re='matrix', interact=False); s.
↪find('x') > 0...
misc/sagedoc.py:... s = search_src('MatRiX', path_re='matrix',...
misc/sagedoc.py:... len(search_src('log', 'derivative', interact=False).
↪splitlines()) < 40...
misc/sagedoc.py:... len(search_src('log', 'derivative'...
misc/sagedoc.py:... print(search_src(r'^ *sage[:] .*search_src\(',␣
↪interact=False))...
misc/sagedoc.py:... len(search_src("matrix", interact=False).splitlines()) > 9000.
↪..
misc/sagedoc.py:... print(search_src('matrix', 'column', 'row', 'sub',...
misc/sagedoc.py:... sage: results = search_src('format_search_as_html',...
```

```
>>> from sage.all import *
>>> print(search_src(r'^ *sage[:] .*search_src\(', interact=False))  # long time
misc/sagedoc.py:... len(search_src("matrix", interact=False).splitlines())...
misc/sagedoc.py:... len(search_src("matrix", module="sage.calculus",␣
↪interact=False).splitlines())...
misc/sagedoc.py:... len(search_src("matrix", path_re="calc"...
misc/sagedoc.py:... print(search_src(r" fetch\(", "def", interact=False))...
misc/sagedoc.py:... print(search_src(r" fetch\(", "def", "pyx", interact=False))..
↪.
misc/sagedoc.py:... s = search_src('Matrix', path_re='matrix', interact=False); s.
↪find('x') > 0...
misc/sagedoc.py:... s = search_src('MatRiX', path_re='matrix', interact=False); s.
↪find('x') > 0...
misc/sagedoc.py:... s = search_src('MatRiX', path_re='matrix',...
misc/sagedoc.py:... len(search_src('log', 'derivative', interact=False).
↪splitlines()) < 40...
misc/sagedoc.py:... len(search_src('log', 'derivative'...
misc/sagedoc.py:... print(search_src(r'^ *sage[:] .*search_src\(',␣
↪interact=False))...
misc/sagedoc.py:... len(search_src("matrix", interact=False).splitlines()) > 9000.
↪..
```

(continues on next page)

(continued from previous page)

```
misc/sagedoc.py:... print(search_src('matrix', 'column', 'row', 'sub',...
misc/sagedoc.py:... sage: results = search_src('format_search_as_html',...
```

sage.misc.sagedoc.**skip_TESTS_block**(*docstring*)

Remove blocks labeled "TESTS:" from `docstring`.

INPUT:

- `docstring` – string

A "TESTS" block is a block starting "TESTS:" (or the same with two colons), on a line on its own, and ending either with a line indented less than "TESTS", or with a line with the same level of indentation – not more – matching one of the following:

- a Sphinx directive of the form ".. foo:", optionally followed by other text.
- text of the form "UPPERCASE:", optionally followed by other text.
- lines which look like a reST header: one line containing anything, followed by a line consisting only of a string of hyphens, equal signs, or other characters which are valid markers for reST headers: `- = ` : ' " ~ _ ^ * + # < >`. However, lines only containing double colons :: do not end "TESTS" blocks.

Return the string obtained from `docstring` by removing these blocks.

EXAMPLES:

```
sage: from sage.misc.sagedoc import skip_TESTS_block
sage: start = ' Docstring\n\n'
sage: test = ' TESTS: \n\n Here is a test::\n     sage: 2+2 \n     5 \n\n'
sage: test2 = ' TESTS:: \n\n     sage: 2+2 \n     6 \n\n'
```

```
>>> from sage.all import *
>>> from sage.misc.sagedoc import skip_TESTS_block
>>> start = ' Docstring\n\n'
>>> test = ' TESTS: \n\n Here is a test::\n     sage: 2+2 \n     5 \n\n'
>>> test2 = ' TESTS:: \n\n     sage: 2+2 \n     6 \n\n'
```

Test lines starting with "REFERENCES:":

```
sage: refs = ' REFERENCES: \n text text \n'
sage: skip_TESTS_block(start + test + refs).rstrip() == (start + refs).rstrip()
True
sage: skip_TESTS_block(start + test + test2 + refs).rstrip() == (start + refs).
↪rstrip()
True
sage: skip_TESTS_block(start + test + refs + test2).rstrip() == (start + refs).
↪rstrip()
True
```

```
>>> from sage.all import *
>>> refs = ' REFERENCES: \n text text \n'
>>> skip_TESTS_block(start + test + refs).rstrip() == (start + refs).rstrip()
True
>>> skip_TESTS_block(start + test + test2 + refs).rstrip() == (start + refs).
↪rstrip()
True
```

(continues on next page)

(continued from previous page)

```
>>> skip_TESTS_block(start + test + refs + test2).rstrip() == (start + refs).
↪rstrip()
True
```

Test Sphinx directives:

```
sage: directive = ' .. todo:: \n     do some stuff \n'
sage: skip_TESTS_block(start + test + refs + test2 + directive).rstrip() ==␣
↪(start + refs + directive).rstrip()
True
```

```
>>> from sage.all import *
>>> directive = ' .. todo:: \n     do some stuff \n'
>>> skip_TESTS_block(start + test + refs + test2 + directive).rstrip() == (start␣
↪+ refs + directive).rstrip()
True
```

Test unindented lines:

```
sage: unindented = 'NOT INDENTED\n'
sage: skip_TESTS_block(start + test + unindented).rstrip() == (start +␣
↪unindented).rstrip()
True
sage: skip_TESTS_block(start + test + unindented + test2 + unindented).rstrip()␣
↪== (start + unindented + unindented).rstrip()
True
```

```
>>> from sage.all import *
>>> unindented = 'NOT INDENTED\n'
>>> skip_TESTS_block(start + test + unindented).rstrip() == (start + unindented).
↪rstrip()
True
>>> skip_TESTS_block(start + test + unindented + test2 + unindented).rstrip() ==␣
↪(start + unindented + unindented).rstrip()
True
```

Test headers:

```
sage: header = ' Header:\n ~~~~~~~~'
sage: skip_TESTS_block(start + test + header) == start + header
True
```

```
>>> from sage.all import *
>>> header = ' Header:\n ~~~~~~~~'
>>> skip_TESTS_block(start + test + header) == start + header
True
```

Not a header because the characters on the second line must all be the same:

```
sage: fake_header = ' Header:\n -=-=-=-=-='
sage: skip_TESTS_block(start + test + fake_header).rstrip() == start.rstrip()
True
```

```
>>> from sage.all import *
>>> fake_header = ' Header:\n -=-=-=-=-='
>>> skip_TESTS_block(start + test + fake_header).rstrip() == start.rstrip()
True
```

Not a header because it's indented compared to 'TEST' in the string `test`:

```
sage: another_fake = '\n    blah\n    ----'
sage: skip_TESTS_block(start + test + another_fake).rstrip() == start.rstrip()
True
```

```
>>> from sage.all import *
>>> another_fake = '\n    blah\n    ----'
>>> skip_TESTS_block(start + test + another_fake).rstrip() == start.rstrip()
True
```

Double colons `::` are also not considered as headers (Issue #27896):

```
sage: colons = ' ::\n\n     sage: 2+2\n     4\n\n'
sage: skip_TESTS_block(start + test2 + colons).rstrip() == start.rstrip()
True
```

```
>>> from sage.all import *
>>> colons = ' ::\n\n     sage: 2+2\n     4\n\n'
>>> skip_TESTS_block(start + test2 + colons).rstrip() == start.rstrip()
True
```

6.1.6 Sphinx configuration shared by sage.misc.sphinxify and sage_docbuild

class sage.misc.sagedoc_conf.**SagemathTransform**(*document*, *startnode=None*)

Bases: `Transform`

Transform for code-blocks.

This allows Sphinx to treat code-blocks with prompt "sage:" as associated with the pycon lexer, and in particular, to change "<BLANKLINE>" to a blank line.

apply()

default_priority = 500

Numerical priority of this transform, 0 through 999 (override).

sage.misc.sagedoc_conf.**process_directives**(*app*, *what*, *name*, *obj*, *options*, *docstringlines*)

Remove 'nodetex' and other directives from the first line of any docstring where they appear.

sage.misc.sagedoc_conf.**process_docstring_aliases**(*app*, *what*, *name*, *obj*, *options*, *docstringlines*)

Change the docstrings for aliases to point to the original object.

sage.misc.sagedoc_conf.**process_docstring_cython**(*app*, *what*, *name*, *obj*, *options*, *docstringlines*)

Remove Cython's filename and location embedding.

sage.misc.sagedoc_conf.**process_docstring_module_title**(*app*, *what*, *name*, *obj*, *options*, *docstringlines*)

Removes the first line from the beginning of the module's docstring. This corresponds to the title of the module's documentation page.

sage.misc.sagedoc_conf.**process_dollars**(*app*, *what*, *name*, *obj*, *options*, *docstringlines*)

Replace dollar signs with backticks.

See sage.misc.sagedoc.process_dollars for more information.

sage.misc.sagedoc_conf.**process_inherited**(*app*, *what*, *name*, *obj*, *options*, *docstringlines*)

If we're including inherited members, omit their docstrings.

sage.misc.sagedoc_conf.**setup**(*app*)

sage.misc.sagedoc_conf.**skip_TESTS_block**(*app*, *what*, *name*, *obj*, *options*, *docstringlines*)

Skip blocks labeled "TESTS:".

See sage.misc.sagedoc.skip_TESTS_block for more information.

6.1.7 Process docstrings with Sphinx

Processes docstrings with Sphinx. Can also be used as a commandline script:

```
python sphinxify.py <text>
```

AUTHORS:

- Tim Joseph Dumol (2009-09-29): initial version

sage.misc.sphinxify.**sphinxify**(*docstring*, *format='html'*)

Run Sphinx on a `docstring`, and output the processed documentation.

INPUT:

- `docstring` – string; a ReST-formatted docstring
- `format` – string (default: `'html'`); either `'html'` or `'text'`

OUTPUT:

- `string` – Sphinx-processed documentation, in either HTML or plain text format, depending on the value of `format`

EXAMPLES:

```
sage: from sage.misc.sphinxify import sphinxify
sage: sphinxify('A test')
'<div class="docstring">\n    \n  <p>A test</p>\n\n\n</div>'
sage: sphinxify('**Testing**\n`monospace`')
'<div class="docstring"...<strong>Testing</strong>\n<span class="math...</p>\n\n\n
↪</div>'
sage: sphinxify('`x=y`')
'<div class="docstring">\n    \n  <p><span class="math notranslate nohighlight">
↪x=y</span></p>\n\n\n</div>'
sage: sphinxify('`x=y`', format='text')
'x=y\n'
sage: sphinxify(':math:`x=y`', format='text')
'x=y\n'
```

```
>>> from sage.all import *
>>> from sage.misc.sphinxify import sphinxify
>>> sphinxify('A test')
'<div class="docstring">\n    \n  <p>A test</p>\n\n\n</div>'
```

(continues on next page)

(continued from previous page)

```
>>> sphinxify('**Testing**\n`monospace`')
'<div class="docstring"...<strong>Testing</strong>\n<span class="math...</p>\n\n\n
↪</div>'
>>> sphinxify('`x=y`')
'<div class="docstring">\n    \n  <p><span class="math notranslate nohighlight">
↪x=y</span></p>\n\n\n</div>'
>>> sphinxify('`x=y`', format='text')
'x=y\n'
>>> sphinxify(':math:`x=y`', format='text')
'x=y\n'
```

6.2 Distribution

6.2.1 Listing Sage packages

This module can be used to see which Sage packages are installed and which packages are available for installation.

For more information about creating Sage packages, see the "Packaging Third-Party Code" section of the Sage Developer's Guide.

Actually installing the packages should be done via the command line, using the following commands:

- `sage -i PACKAGE_NAME` – install the given package
- `sage -f PACKAGE_NAME` – re-install the given package, even if it was already installed

To list the packages available, either use in a terminal one of `sage -standard`, `sage -optional` or `sage -experimental`. Or the following command inside Sage:

```
sage: from sage.misc.package import list_packages
sage: pkgs = list_packages(local=True)  # optional - sage_spkg
sage: sorted(pkgs.keys())  # optional - sage_spkg, random
['4ti2',
 'alabaster',
 ...
 'zlib']
```

```
>>> from sage.all import *
>>> from sage.misc.package import list_packages
>>> pkgs = list_packages(local=True)  # optional - sage_spkg
>>> sorted(pkgs.keys())  # optional - sage_spkg, random
['4ti2',
 'alabaster',
 ...
 'zlib']
```

Functions

class sage.misc.package.**PackageInfo**(*name: str*, *type: str | None = None*, *source: str | None = None*, *installed_version: str | None = None*, *remote_version: str | None = None*)

Bases: `NamedTuple`

Represents information about a package.

installed_version: str | None

Alias for field number 3

is_installed()

Whether the package is installed in the system.

name: str

Alias for field number 0

remote_version: str | None

Alias for field number 4

source: str | None

Alias for field number 2

type: str | None

Alias for field number 1

sage.misc.package.**installed_packages**(*exclude_pip=True*)

Return a dictionary of all installed packages, with version numbers.

INPUT:

- exclude_pip – boolean (default: True); whether "pip" packages are excluded from the list

EXAMPLES:

Below we test for a standard package without spkg-configure.m4 script that should be installed in SAGE_LOCAL. When Sage is installed by the Sage distribution (indicated by feature sage_spkg), we should have the installation record for this package. (We do not test for installation records of Python packages. Our SAGE_VENV is not necessarily the main Sage venv; it could be a user-created venv or a venv created by tox.):

```
sage: # optional - sage_spkg
sage: from sage.misc.package import installed_packages
sage: sorted(installed_packages().keys())
[...'gnulib', ...]
sage: installed_packages()['gnulib']  # random
'f9b39c4e337f1dc0dd07c4f3985c476fb875d799'
```

```
>>> from sage.all import *
>>> # optional - sage_spkg
>>> from sage.misc.package import installed_packages
>>> sorted(installed_packages().keys())
[...'gnulib', ...]
>>> installed_packages()['gnulib']  # random
'f9b39c4e337f1dc0dd07c4f3985c476fb875d799'
```

See also

sage.misc.package.list_packages()

sage.misc.package.**is_package_installed**(*package*, *exclude_pip=True*)

Return whether (any version of) package is installed.

INPUT:

- package – the name of the package

- `exclude_pip` – boolean (default: `True`); whether to consider pip type packages

EXAMPLES:

```
sage: from sage.misc.package import is_package_installed
sage: is_package_installed('gnulib')  # optional - sage_spkg
True
```

```
>>> from sage.all import *
>>> from sage.misc.package import is_package_installed
>>> is_package_installed('gnulib')  # optional - sage_spkg
True
```

Giving just the beginning of the package name is not good enough:

```
sage: is_package_installed('conway_poly')          # optional - sage_spkg
False
```

```
>>> from sage.all import *
>>> is_package_installed('conway_poly')          # optional - sage_spkg
False
```

Otherwise, installing "pillow" would cause this function to think that "pil" is installed, for example.

Note

Do not use this function to check whether you can use a feature from an external library. This only checks whether something was installed with `sage -i` but it may have been installed by other means (for example if this copy of Sage has been installed as part of a distribution.) Use the framework provided by `sage.features` to check whether a library is installed and functional.

`sage.misc.package.`**`is_package_installed_and_updated`**(*package*)

Return whether the given package is installed and up-to-date.

INPUT:

- `package` – the name of the package

EXAMPLES:

```
sage: from sage.misc.package import is_package_installed_and_updated
sage: is_package_installed_and_updated("alabaster")    # optional - build, random
False
```

```
>>> from sage.all import *
>>> from sage.misc.package import is_package_installed_and_updated
>>> is_package_installed_and_updated("alabaster")    # optional - build, random
False
```

`sage.misc.package.`**`list_packages`**(*pkg_sources*, *local*, *ignore_URLError*, *exclude_pip*, **pkg_types*)

Return a dictionary of information about each package.

The keys are package names and values are named tuples with the following keys:

- `'type'` – either `'base'`, `'standard'`, `'optional'`, or `'experimental'`

- `'source'` – either `'normal'`, ``'pip'`, or `'script'`
- `'installed'` – boolean
- `'installed_version'` – `None` or a string
- `'remote_version'` – string

INPUT:

- `pkg_types` – (optional) a sublist of `'base'`, `'standard'`, `'optional'`, or `'experimental'`. If provided, list only the packages with the given type(s), otherwise list all packages.
- `pkg_sources` – (optional) a sublist of `'normal'`, ``'pip'`, or `'script'`. If provided, list only the packages with the given source(s), otherwise list all packages.
- `local` – boolean (default: `False`); if set to `True`, then do not consult remote (PyPI) repositories for package versions (only applicable for `'pip'` type)
- `exclude_pip` – boolean (default: `False`); if set to `True`, then pip packages are not considered. This is the same as removing `'pip'` from `pkg_sources`
- `ignore_URLError` – boolean (default: `False`); if set to `True`, then connection errors will be ignored

EXAMPLES:

```
sage: # optional - sage_spkg
sage: from sage.misc.package import list_packages
sage: L = list_packages('standard')
sage: sorted(L.keys())  # random
['alabaster',
 'babel',
 ...
 'zlib']
sage: sage_conf_info = L['sage_conf']
sage: sage_conf_info.type
'standard'
sage: sage_conf_info.is_installed()
True
sage: sage_conf_info.source
'script'

sage: # optional - sage_spkg internet
sage: L = list_packages(pkg_sources=['pip'], local=True)
sage: bp_info = L['biopython']
sage: bp_info.type
'optional'
sage: bp_info.source
'pip'
```

```
>>> from sage.all import *
>>> # optional - sage_spkg
>>> from sage.misc.package import list_packages
>>> L = list_packages('standard')
>>> sorted(L.keys())  # random
['alabaster',
 'babel',
 ...
```

(continues on next page)

(continued from previous page)

```
 'zlib']
>>> sage_conf_info = L['sage_conf']
>>> sage_conf_info.type
'standard'
>>> sage_conf_info.is_installed()
True
>>> sage_conf_info.source
'script'

>>> # optional - sage_spkg internet
>>> L = list_packages(pkg_sources=['pip'], local=True)
>>> bp_info = L['biopython']
>>> bp_info.type
'optional'
>>> bp_info.source
'pip'
```

Check the option `exclude_pip`:

```
sage: [p for p, d in list_packages('optional', exclude_pip=True).items()  #␣
↪optional - sage_spkg
....:  if d.source == 'pip']
[]
```

```
>>> from sage.all import *
>>> [p for p, d in list_packages('optional', exclude_pip=True).items()  #␣
↪optional - sage_spkg
...  if d.source == 'pip']
[]
```

`sage.misc.package.`**`package_manifest`**(*package*)

Return the manifest for `package`.

INPUT:

- `package` – package name

The manifest is written in the file `SAGE_SPKG_INST/package-VERSION`. It is a JSON file containing a dictionary with the package name, version, installation date, list of installed files, etc.

EXAMPLES:

```
sage: # optional - sage_spkg
sage: from sage.misc.package import package_manifest
sage: manifest = package_manifest('gnulib')
sage: manifest['package_name'] == 'gnulib'
True
sage: 'files' in manifest
True
```

```
>>> from sage.all import *
>>> # optional - sage_spkg
>>> from sage.misc.package import package_manifest
>>> manifest = package_manifest('gnulib')
```

(continues on next page)

(continued from previous page)

```
>>> manifest['package_name'] == 'gnulib'
True
>>> 'files' in manifest
True
```

Test a nonexistent package:

```
sage: package_manifest('dummy-package')                    # optional - sage_spkg
Traceback (most recent call last):
...
KeyError: 'dummy-package'
```

```
>>> from sage.all import *
>>> package_manifest('dummy-package')                    # optional - sage_spkg
Traceback (most recent call last):
...
KeyError: 'dummy-package'
```

sage.misc.package.**package_versions**(*package_type*, *local=False*)

Return version information for each Sage package.

INPUT:

- `package_type` – string; one of `'standard'`, `'optional'` or `'experimental'`
- `local` – boolean (default: `False`); only query local data (no internet needed)

For packages of the given type, return a dictionary whose entries are of the form `'package': (installed, latest)`, where `installed` is the installed version (or `None` if not installed) and `latest` is the latest available version. If the package has a directory in `SAGE_ROOT/build/pkgs/`, then `latest` is determined by the file `package-version.txt` in that directory. If `local` is `False`, then Sage's servers are queried for package information.

See also

sage.misc.package.list_packages()

EXAMPLES:

```
sage: # optional - sage_spkg
sage: from sage.misc.package import package_versions
sage: std = package_versions('standard', local=True)
sage: 'gap' in std
True
sage: std['zlib']  # random
('1.2.11.p0', '1.2.11.p0')
```

```
>>> from sage.all import *
>>> # optional - sage_spkg
>>> from sage.misc.package import package_versions
>>> std = package_versions('standard', local=True)
>>> 'gap' in std
True
```

(continues on next page)

(continued from previous page)

```
>>> std['zlib']  # random
('1.2.11.p0', '1.2.11.p0')
```

sage.misc.package.**pip_installed_packages**(*normalization=None*)

Return a dictionary $name- > version$ of installed pip packages.

This command returns *all* pip-installed packages. Not only Sage packages.

INPUT:

- `normalization` – (default: `None`) according to which rule to normalize the package name, either `None` (as is) or `'spkg'` (format as in the Sage distribution in `build/pkgs/`), i.e., lowercased and dots and dashes replaced by underscores.

EXAMPLES:

```
sage: # optional - sage_spkg
sage: from sage.misc.package import pip_installed_packages
sage: d = pip_installed_packages()
sage: 'scipy' in d or 'SciPy' in d                                              #␣
↪needs scipy
True
sage: 'beautifulsoup4' in d                              # needs beautifulsoup4
True
sage: 'prompt-toolkit' in d or 'prompt_toolkit' in d    # whether - or _ appears␣
↪in the name depends on the setuptools version used for building the package
True
sage: d = pip_installed_packages(normalization='spkg')
sage: d['prompt_toolkit']
'...'
sage: d['scipy']                                                                #␣
↪needs scipy
'...'
```

```
>>> from sage.all import *
>>> # optional - sage_spkg
>>> from sage.misc.package import pip_installed_packages
>>> d = pip_installed_packages()
>>> 'scipy' in d or 'SciPy' in d                                                #␣
↪needs scipy
True
>>> 'beautifulsoup4' in d                                # needs beautifulsoup4
True
>>> 'prompt-toolkit' in d or 'prompt_toolkit' in d    # whether - or _ appears in␣
↪the name depends on the setuptools version used for building the package
True
>>> d = pip_installed_packages(normalization='spkg')
>>> d['prompt_toolkit']
'...'
>>> d['scipy']                                                                  #␣
↪needs scipy
'...'
```

sage.misc.package.**pip_remote_version**(*pkg*, *pypi_url='https://pypi.org/pypi'*, *ignore_URLError=False*)

Return the version of this pip package available on PyPI.

INPUT:

- `pkg` – the package
- `pypi_url` – string (default: standard PyPI url) an optional Python package repository to use
- `ignore_URLError` – boolean (default: `False`); if set to `True` then no error is raised if the connection fails and the function returns `None`

EXAMPLES:

The following test does fail if there is no TLS support (see e.g. Issue #19213):

```
sage: from sage.misc.package import pip_remote_version
sage: pip_remote_version('beautifulsoup4') # optional - internet # not tested
'...'
```

```
>>> from sage.all import *
>>> from sage.misc.package import pip_remote_version
>>> pip_remote_version('beautifulsoup4') # optional - internet # not tested
'...'
```

These tests are reliable since the tested package does not exist:

```
sage: nap = 'hey_this_is_NOT_a_python_package'
sage: pypi = 'http://this.is.not.pypi.com/'
sage: pip_remote_version(nap, pypi_url=pypi, ignore_URLError=True) # optional -␣
↪internet
doctest:...: UserWarning: failed to fetch the version of
pkg='hey_this_is_NOT_a_python_package' at
http://this.is.not.pypi.com/.../json
sage: pip_remote_version(nap, pypi_url=pypi, ignore_URLError=False) # optional -␣
↪internet
Traceback (most recent call last):
...
HTTPError: HTTP Error 404: Not Found
```

```
>>> from sage.all import *
>>> nap = 'hey_this_is_NOT_a_python_package'
>>> pypi = 'http://this.is.not.pypi.com/'
>>> pip_remote_version(nap, pypi_url=pypi, ignore_URLError=True) # optional -␣
↪internet
doctest:...: UserWarning: failed to fetch the version of
pkg='hey_this_is_NOT_a_python_package' at
http://this.is.not.pypi.com/.../json
>>> pip_remote_version(nap, pypi_url=pypi, ignore_URLError=False) # optional -␣
↪internet
Traceback (most recent call last):
...
HTTPError: HTTP Error 404: Not Found
```

sage.misc.package.**pkgname_split**(*name*)

Split a pkgname into a list of strings, 'name, version'.

For some packages, the version string might be empty.

EXAMPLES:

```
sage: from sage.misc.package import pkgname_split
sage: pkgname_split('hello_world-1.2')
['hello_world', '1.2']
```

```
>>> from sage.all import *
>>> from sage.misc.package import pkgname_split
>>> pkgname_split('hello_world-1.2')
['hello_world', '1.2']
```

sage.misc.package.**spkg_type**(*name*)

Return the type of the Sage package with the given name.

INPUT:

- `name` – string giving the subdirectory name of the package under `SAGE_PKGS`

EXAMPLES:

```
sage: from sage.misc.package import spkg_type
sage: spkg_type('pip')                                  # optional - sage_spkg
'standard'
```

```
>>> from sage.all import *
>>> from sage.misc.package import spkg_type
>>> spkg_type('pip')                                  # optional - sage_spkg
'standard'
```

OUTPUT:

The type as a string in `('base', 'standard', 'optional', 'experimental')`. If no `SPKG` exists with the given name (or the directory `SAGE_PKGS` is not available), `None` is returned.

6.3 Credits

6.3.1 Dependency usage tracking for citations

sage.misc.citation.**cython_profile_enabled**()

Return whether Cython profiling is enabled.

EXAMPLES:

```
sage: from sage.misc.citation import cython_profile_enabled
sage: cython_profile_enabled()  # random
False
sage: type(cython_profile_enabled()) is bool
True
```

```
>>> from sage.all import *
>>> from sage.misc.citation import cython_profile_enabled
>>> cython_profile_enabled()  # random
False
```

(continues on next page)

(continued from previous page)

```
>>> type(cython_profile_enabled()) is bool
True
```

sage.misc.citation.**get_systems**(*cmd*)

Return a list of the systems used in running the command `cmd`.

Note that the results can sometimes include systems that did not actually contribute to the computation. Due to caching, it could miss some dependencies as well.

INPUT:

- `cmd` – string to run

Warning

In order to properly support Cython code, this requires that Sage was compiled with the environment variable `SAGE_PROFILE=yes`. If this was not the case, a warning will be given when calling this function.

EXAMPLES:

```
sage: from sage.misc.citation import get_systems
sage: get_systems('print("hello")')  # random (may print warning)
[]
sage: integrate(x^2, x)  # Priming coercion model                              #␣
↪needs sage.symbolic
1/3*x^3
sage: get_systems('integrate(x^2, x)')                                         #␣
↪needs sage.symbolic
['Maxima', 'ginac']
sage: R.<x,y,z> = QQ[]
sage: I = R.ideal(x^2+y^2, z^2+y)
sage: get_systems('I.primary_decomposition()')
['Singular']
```

```
>>> from sage.all import *
>>> from sage.misc.citation import get_systems
>>> get_systems('print("hello")')  # random (may print warning)
[]
>>> integrate(x**Integer(2), x)  # Priming coercion model                      ␣
↪      # needs sage.symbolic
1/3*x^3
>>> get_systems('integrate(x^2, x)')                                          #␣
↪needs sage.symbolic
['Maxima', 'ginac']
>>> R = QQ['x, y, z']; (x, y, z,) = R._first_ngens(3)
>>> I = R.ideal(x**Integer(2)+y**Integer(2), z**Integer(2)+y)
>>> get_systems('I.primary_decomposition()')
['Singular']
```

6.3.2 License

class sage.misc.copying.**License**

Bases: object

CHAPTER

SEVEN

DEVELOPMENT TOOLS

7.1 Testing

7.1.1 Unit testing for Sage objects

class sage.misc.sage_unittest.**InstanceTester**(*instance*, *elements=None*, *verbose=False*, *prefix=''*, *max_runs=4096*, *max_samples=None*, ***options*)

Bases: TestCase

A gadget attached to an instance providing it with testing utilities.

EXAMPLES:

```
sage: from sage.misc.sage_unittest import InstanceTester
sage: InstanceTester(instance = ZZ, verbose = True, elements = [1,2,3])
Testing utilities for Integer Ring
```

```
>>> from sage.all import *
>>> from sage.misc.sage_unittest import InstanceTester
>>> InstanceTester(instance = ZZ, verbose = True, elements = [Integer(1),
↪Integer(2),Integer(3)])
Testing utilities for Integer Ring
```

This is used by SageObject._tester, which see:

```
sage: QQ._tester()
Testing utilities for Rational Field
```

```
>>> from sage.all import *
>>> QQ._tester()
Testing utilities for Rational Field
```

info(*message*, *newline=True*)

Display user information.

EXAMPLES:

```
sage: from sage.misc.sage_unittest import InstanceTester
sage: tester = InstanceTester(ZZ, verbose = True)

sage: tester.info("hello"); tester.info("world")
hello
```

(continues on next page)

(continued from previous page)

```
world

sage: tester = InstanceTester(ZZ, verbose = False)
sage: tester.info("hello"); tester.info("world")

sage: tester = InstanceTester(ZZ, verbose = True)
sage: tester.info("hello", newline = False); tester.info(" world")
hello world
```

```
>>> from sage.all import *
>>> from sage.misc.sage_unittest import InstanceTester
>>> tester = InstanceTester(ZZ, verbose = True)

>>> tester.info("hello"); tester.info("world")
hello
world

>>> tester = InstanceTester(ZZ, verbose = False)
>>> tester.info("hello"); tester.info("world")

>>> tester = InstanceTester(ZZ, verbose = True)
>>> tester.info("hello", newline = False); tester.info(" world")
hello world
```

longMessage = False

runTest()

Trivial implementation of `unittest.TestCase.runTest()` to please the super class `TestCase`. That's the price to pay for abusively inheriting from it.

EXAMPLES:

```
sage: from sage.misc.sage_unittest import InstanceTester
sage: tester = InstanceTester(ZZ, verbose = True)
sage: tester.runTest()
```

```
>>> from sage.all import *
>>> from sage.misc.sage_unittest import InstanceTester
>>> tester = InstanceTester(ZZ, verbose = True)
>>> tester.runTest()
```

some_elements(*S=None*, *repeat=None*)

Return a list (or iterable) of elements of the instance on which the tests should be run.

This is only meaningful for container objects like parents.

INPUT:

- `S` – set of elements to select from; by default this will use the elements passed to this tester at creation time, or the result of *some_elements()* if no elements were specified
- `repeat` – integer (default: `None`); if given, instead returns a list of tuples of length `repeat` from `S`

OUTPUT:

A list of at most `self._max_runs` elements of `S^r`, or a sample of at most `self._max_samples` if that is not `None`.

EXAMPLES:

By default, this calls *some_elements()* on the instance:

```
sage: from sage.misc.sage_unittest import InstanceTester
sage: class MyParent(Parent):
....:     def some_elements(self):
....:         return [1,2,3,4,5]
...
sage: tester = InstanceTester(MyParent())
sage: list(tester.some_elements())
[1, 2, 3, 4, 5]

sage: tester = InstanceTester(MyParent(), max_runs=3)
sage: list(tester.some_elements())
[1, 2, 3]

sage: tester = InstanceTester(MyParent(), max_runs=7)
sage: list(tester.some_elements())
[1, 2, 3, 4, 5]

sage: tester = InstanceTester(MyParent(), elements=[1,3,5])
sage: list(tester.some_elements())
[1, 3, 5]

sage: tester = InstanceTester(MyParent(), elements=[1,3,5], max_runs=2)
sage: list(tester.some_elements())
[1, 3]

sage: tester = InstanceTester(FiniteEnumeratedSet(['a','b','c','d']), max_
↪runs=3)
sage: tester.some_elements()
['a', 'b', 'c']

sage: tester = InstanceTester(FiniteEnumeratedSet([]))
sage: list(tester.some_elements())
[]

sage: tester = InstanceTester(ZZ)
sage: ZZ.some_elements()              # yikes, shamelessly trivial ...
<generator object ..._some_elements_from_iterator at 0x...>
sage: list(tester.some_elements())
[0, 1, -1, 2, -2, ..., 49, -49, 50]

sage: tester = InstanceTester(ZZ, elements = ZZ, max_runs=5)
sage: list(tester.some_elements())
[0, 1, -1, 2, -2]

sage: tester = InstanceTester(ZZ, elements = srange(100), max_runs=5)
sage: list(tester.some_elements())
[0, 1, 2, 3, 4]
```

(continues on next page)

(continued from previous page)

```
sage: tester = InstanceTester(ZZ, elements = srange(3), max_runs=5)
sage: list(tester.some_elements())
[0, 1, 2]
```

```
>>> from sage.all import *
>>> from sage.misc.sage_unittest import InstanceTester
>>> class MyParent(Parent):
...     def some_elements(self):
...         return [Integer(1),Integer(2),Integer(3),Integer(4),Integer(5)]
...
>>> tester = InstanceTester(MyParent())
>>> list(tester.some_elements())
[1, 2, 3, 4, 5]

>>> tester = InstanceTester(MyParent(), max_runs=Integer(3))
>>> list(tester.some_elements())
[1, 2, 3]

>>> tester = InstanceTester(MyParent(), max_runs=Integer(7))
>>> list(tester.some_elements())
[1, 2, 3, 4, 5]

>>> tester = InstanceTester(MyParent(), elements=[Integer(1),Integer(3),
↪Integer(5)])
>>> list(tester.some_elements())
[1, 3, 5]

>>> tester = InstanceTester(MyParent(), elements=[Integer(1),Integer(3),
↪Integer(5)], max_runs=Integer(2))
>>> list(tester.some_elements())
[1, 3]

>>> tester = InstanceTester(FiniteEnumeratedSet(['a','b','c','d']), max_
↪runs=Integer(3))
>>> tester.some_elements()
['a', 'b', 'c']

>>> tester = InstanceTester(FiniteEnumeratedSet([]))
>>> list(tester.some_elements())
[]

>>> tester = InstanceTester(ZZ)
>>> ZZ.some_elements()              # yikes, shamelessly trivial ...
<generator object ..._some_elements_from_iterator at 0x...>
>>> list(tester.some_elements())
[0, 1, -1, 2, -2, ..., 49, -49, 50]

>>> tester = InstanceTester(ZZ, elements = ZZ, max_runs=Integer(5))
>>> list(tester.some_elements())
[0, 1, -1, 2, -2]
```

(continues on next page)

(continued from previous page)

```
>>> tester = InstanceTester(ZZ, elements = srange(Integer(100)), max_
↪runs=Integer(5))
>>> list(tester.some_elements())
[0, 1, 2, 3, 4]

>>> tester = InstanceTester(ZZ, elements = srange(Integer(3)), max_
↪runs=Integer(5))
>>> list(tester.some_elements())
[0, 1, 2]
```

The `repeat` keyword can give pairs or triples from `S`:

```
sage: list(tester.some_elements(repeat=2))
[(0, 0), (0, 1), (0, 2), (1, 0), (1, 1)]
```

```
>>> from sage.all import *
>>> list(tester.some_elements(repeat=Integer(2)))
[(0, 0), (0, 1), (0, 2), (1, 0), (1, 1)]
```

You can use `max_samples` to sample at random, instead of in order:

```
sage: tester = InstanceTester(ZZ, elements = srange(8), max_samples = 4)
sage: all(t in srange(8) for t in tester.some_elements())
True
sage: all(s in srange(8) and t in srange(8) for s,t in tester.some_
↪elements(repeat=2))
True
```

```
>>> from sage.all import *
>>> tester = InstanceTester(ZZ, elements = srange(Integer(8)), max_samples =␣
↪Integer(4))
>>> all(t in srange(Integer(8)) for t in tester.some_elements())
True
>>> all(s in srange(Integer(8)) and t in srange(Integer(8)) for s,t in tester.
↪some_elements(repeat=Integer(2)))
True
```

Test for Issue #15919, Issue #16244:

```
sage: Z = IntegerModRing(25) # random.sample, which was used pre #16244, has␣
↪a threshold at 21!
sage: Z[1]                   # since #8389, indexed access is used for ring␣
↪extensions
Traceback (most recent call last):
...
ValueError: variable name '1' does not start with a letter
sage: tester = InstanceTester(Z, elements=Z, max_runs=5)
sage: list(tester.some_elements())
[0, 1, 2, 3, 4]

sage: C = cartesian_product([Z]*4)
sage: len(C)
```

(continues on next page)

(continued from previous page)

```
390625
sage: tester = InstanceTester(C, elements = C, max_runs=4)
sage: list(tester.some_elements())
[(0, 0, 0, 0), (0, 0, 0, 1), (0, 0, 0, 2), (0, 0, 0, 3)]
```

```
>>> from sage.all import *
>>> Z = IntegerModRing(Integer(25)) # random.sample, which was used pre
↪#16244, has a threshold at 21!
>>> Z[Integer(1)]                   # since #8389, indexed access is used for␣
↪ring extensions
Traceback (most recent call last):
...
ValueError: variable name '1' does not start with a letter
>>> tester = InstanceTester(Z, elements=Z, max_runs=Integer(5))
>>> list(tester.some_elements())
[0, 1, 2, 3, 4]

>>> C = cartesian_product([Z]*Integer(4))
>>> len(C)
390625
>>> tester = InstanceTester(C, elements = C, max_runs=Integer(4))
>>> list(tester.some_elements())
[(0, 0, 0, 0), (0, 0, 0, 1), (0, 0, 0, 2), (0, 0, 0, 3)]
```

class sage.misc.sage_unittest.**PythonObjectWithTests**(*instance*)

Bases: object

Utility class for running basis tests on a plain Python object (that is not in SageObject). More test methods can be added here.

EXAMPLES:

```
sage: TestSuite("bla").run()
```

```
>>> from sage.all import *
>>> TestSuite("bla").run()
```

class sage.misc.sage_unittest.**TestSuite**(*instance*)

Bases: object

Test suites for Sage objects.

EXAMPLES:

```
sage: TestSuite(ZZ).run()
```

```
>>> from sage.all import *
>>> TestSuite(ZZ).run()
```

No output means that all tests passed. Which tests? In practice this calls all the methods `._test_*` of this object, in alphabetic order:

```
sage: TestSuite(1).run(verbose = True)
running ._test_category() . . . pass
running ._test_eq() . . . pass
running ._test_new() . . . pass
running ._test_nonzero_equal() . . . pass
running ._test_not_implemented_methods() . . . pass
running ._test_pickling() . . . pass
```

```
>>> from sage.all import *
>>> TestSuite(Integer(1)).run(verbose = True)
running ._test_category() . . . pass
running ._test_eq() . . . pass
running ._test_new() . . . pass
running ._test_nonzero_equal() . . . pass
running ._test_not_implemented_methods() . . . pass
running ._test_pickling() . . . pass
```

Those methods are typically implemented by abstract super classes, in particular via categories, in order to enforce standard behavior and API, or provide mathematical sanity checks. For example if `self` is in the category of finite semigroups, this checks that the multiplication is associative (at least on some elements):

```
sage: S = FiniteSemigroups().example(alphabet = ('a', 'b'))
sage: TestSuite(S).run(verbose = True)
running ._test_an_element() . . . pass
running ._test_associativity() . . . pass
running ._test_cardinality() . . . pass
running ._test_category() . . . pass
running ._test_construction() . . . pass
running ._test_elements() . . .
  Running the test suite of self.an_element()
  running ._test_category() . . . pass
  running ._test_eq() . . . pass
  running ._test_new() . . . pass
  running ._test_not_implemented_methods() . . . pass
  running ._test_pickling() . . . pass
  pass
running ._test_elements_eq_reflexive() . . . pass
running ._test_elements_eq_symmetric() . . . pass
running ._test_elements_eq_transitive() . . . pass
running ._test_elements_neq() . . . pass
running ._test_enumerated_set_contains() . . . pass
running ._test_enumerated_set_iter_cardinality() . . . pass
running ._test_enumerated_set_iter_list() . . . pass
running ._test_eq() . . . pass
running ._test_new() . . . pass
running ._test_not_implemented_methods() . . . pass
running ._test_pickling() . . . pass
running ._test_some_elements() . . . pass
```

```
>>> from sage.all import *
>>> S = FiniteSemigroups().example(alphabet = ('a', 'b'))
>>> TestSuite(S).run(verbose = True)
```

(continues on next page)

(continued from previous page)

```
running ._test_an_element() . . . pass
running ._test_associativity() . . . pass
running ._test_cardinality() . . . pass
running ._test_category() . . . pass
running ._test_construction() . . . pass
running ._test_elements() . . .
  Running the test suite of self.an_element()
  running ._test_category() . . . pass
  running ._test_eq() . . . pass
  running ._test_new() . . . pass
  running ._test_not_implemented_methods() . . . pass
  running ._test_pickling() . . . pass
  pass
running ._test_elements_eq_reflexive() . . . pass
running ._test_elements_eq_symmetric() . . . pass
running ._test_elements_eq_transitive() . . . pass
running ._test_elements_neq() . . . pass
running ._test_enumerated_set_contains() . . . pass
running ._test_enumerated_set_iter_cardinality() . . . pass
running ._test_enumerated_set_iter_list() . . . pass
running ._test_eq() . . . pass
running ._test_new() . . . pass
running ._test_not_implemented_methods() . . . pass
running ._test_pickling() . . . pass
running ._test_some_elements() . . . pass
```

The different test methods can be called independently:

```
sage: S._test_associativity()
```

```
>>> from sage.all import *
>>> S._test_associativity()
```

Debugging tip: in case of failure of some test, use `%pdb on` to turn on automatic debugging on error. Run the failing test independently: the debugger will stop right where the first assertion fails. Then, introspection can be used to analyse what exactly the problem is. See also the `catch = False` option to *run()*.

When meaningful, one can further customize on which elements the tests are run. Here, we use it to *prove* that the multiplication is indeed associative, by running the test on all the elements:

```
sage: S._test_associativity(elements = S)
```

```
>>> from sage.all import *
>>> S._test_associativity(elements = S)
```

Adding a new test boils down to adding a new method in the class of the object or any super class (e.g. in a category). This method should use the utility `_tester()` to handle standard options and report test failures. See the code of `_test_an_element()` for an example. Note: Python's testunit convention is to look for methods called `.test*`; we use instead `._test_*` so as not to pollute the object's interface.

Eventually, every implementation of a `SageObject` should run a *TestSuite* on one of its instances in its doctest (replacing the current `loads(dumps(x))` tests).

Finally, running `TestSuite` on a standard Python object does some basic sanity checks:

```
sage: TestSuite(int(1)).run(verbose = True)
running ._test_new() . . . pass
running ._test_pickling() . . . pass
```

```
>>> from sage.all import *
>>> TestSuite(int(Integer(1))).run(verbose = True)
running ._test_new() . . . pass
running ._test_pickling() . . . pass
```

Todo

- Allow for customized behavior in case of failing assertion (warning, error, statistic accounting). This involves reimplementing the methods fail / failIf / … of unittest.TestCase in InstanceTester
- Don't catch the exceptions if `TestSuite(..).run()` is called under the debugger, or with `%pdb` on (how to detect this? see `get_ipython()`, `IPython.Magic.shell.call_pdb`, …) In the mean time, see the `catch=False` option.
- Run the tests according to the inheritance order, from most generic to most specific, rather than alphabetically. Then, the first failure will be the most relevant, the others being usually consequences.
- Improve integration with doctests (statistics on failing/passing tests)
- Add proper support for nested testsuites.
- Integration with unittest: Make TestSuite inherit from unittest.TestSuite? Make `.run(...)` accept a result object
- Add some standard option `proof = True`, asking for the test method to choose appropriately the elements so as to prove the desired property. The test method may assume that a parent implements properly all the super categories. For example, the `_test_commutative` method of the category `CommutativeSemigroups()` may just check that the provided generators commute, implicitly assuming that generators indeed generate the semigroup (as required by `Semigroups()`).

run(*category=None*, *skip=[]*, *catch=True*, *raise_on_failure=False*, ***options*)

Run all the tests from this test suite:

INPUT:

- `category` – a category; reserved for future use
- `skip` – string or list (or iterable) of strings
- `raise_on_failure` – boolean (default: `False`)
- `catch` – boolean (default: `True`)

All other options are passed down to the individual tests.

EXAMPLES:

```
sage: TestSuite(ZZ).run()
```

```
>>> from sage.all import *
>>> TestSuite(ZZ).run()
```

We now use the `verbose` option:

```
sage: TestSuite(1).run(verbose = True)
running ._test_category() . . . pass
running ._test_eq() . . . pass
running ._test_new() . . . pass
running ._test_nonzero_equal() . . . pass
running ._test_not_implemented_methods() . . . pass
running ._test_pickling() . . . pass
```

```
>>> from sage.all import *
>>> TestSuite(Integer(1)).run(verbose = True)
running ._test_category() . . . pass
running ._test_eq() . . . pass
running ._test_new() . . . pass
running ._test_nonzero_equal() . . . pass
running ._test_not_implemented_methods() . . . pass
running ._test_pickling() . . . pass
```

Some tests may be skipped using the `skip` option:

```
sage: TestSuite(1).run(verbose = True, skip ='_test_pickling')
running ._test_category() . . . pass
running ._test_eq() . . . pass
running ._test_new() . . . pass
running ._test_nonzero_equal() . . . pass
running ._test_not_implemented_methods() . . . pass
sage: TestSuite(1).run(verbose = True, skip =["_test_pickling", "_test_
↪category"])
running ._test_eq() . . . pass
running ._test_new() . . . pass
running ._test_nonzero_equal() . . . pass
running ._test_not_implemented_methods() . . . pass
```

```
>>> from sage.all import *
>>> TestSuite(Integer(1)).run(verbose = True, skip ='_test_pickling')
running ._test_category() . . . pass
running ._test_eq() . . . pass
running ._test_new() . . . pass
running ._test_nonzero_equal() . . . pass
running ._test_not_implemented_methods() . . . pass
>>> TestSuite(Integer(1)).run(verbose = True, skip =["_test_pickling", "_test_
↪category"])
running ._test_eq() . . . pass
running ._test_new() . . . pass
running ._test_nonzero_equal() . . . pass
running ._test_not_implemented_methods() . . . pass
```

We now show (and test) some standard error reports:

```
sage: class Blah(SageObject):
....:     def _test_a(self, tester): pass
....:     def _test_b(self, tester): tester.fail()
....:     def _test_c(self, tester): pass
....:     def _test_d(self, tester): tester.fail()
```

(continues on next page)

(continued from previous page)

```
sage: TestSuite(Blah()).run()
Failure in _test_b:
Traceback (most recent call last):
  ...
AssertionError: None
------------------------------------------------------------
Failure in _test_d:
Traceback (most recent call last):
  ...
AssertionError: None
------------------------------------------------------------
Failure in _test_pickling:
Traceback (most recent call last):
  ...
...PicklingError: Can't pickle <class '__main__.Blah'>: attribute
lookup ...Blah... failed
------------------------------------------------------------
The following tests failed: _test_b, _test_d, _test_pickling

sage: TestSuite(Blah()).run(verbose = True)
running ._test_a() . . . pass
running ._test_b() . . . fail
Traceback (most recent call last):
  ...
AssertionError: None
------------------------------------------------------------
running ._test_c() . . . pass
running ._test_category() . . . pass
running ._test_d() . . . fail
Traceback (most recent call last):
  ...
AssertionError: None
------------------------------------------------------------
running ._test_new() . . . pass
running ._test_not_implemented_methods() . . . pass
running ._test_pickling() . . . fail
Traceback (most recent call last):
  ...
...PicklingError: Can't pickle <class '__main__.Blah'>: attribute
lookup ...Blah... failed
------------------------------------------------------------
The following tests failed: _test_b, _test_d, _test_pickling

File "/opt/sage/local/lib/python/site-packages/sage/misc/sage_unittest.py",␣
↪line 183, in run
test_method(tester = tester)
```

```
>>> from sage.all import *
>>> class Blah(SageObject):
...     def _test_a(self, tester): pass
...     def _test_b(self, tester): tester.fail()
```

(continues on next page)

(continued from previous page)

```
...     def _test_c(self, tester): pass
...     def _test_d(self, tester): tester.fail()

>>> TestSuite(Blah()).run()
Failure in _test_b:
Traceback (most recent call last):
  ...
AssertionError: None
----------------------------------------------------------------------
Failure in _test_d:
Traceback (most recent call last):
  ...
AssertionError: None
----------------------------------------------------------------------
Failure in _test_pickling:
Traceback (most recent call last):
  ...
...PicklingError: Can't pickle <class '__main__.Blah'>: attribute
lookup ...Blah... failed
----------------------------------------------------------------------
The following tests failed: _test_b, _test_d, _test_pickling

>>> TestSuite(Blah()).run(verbose = True)
running ._test_a() . . . pass
running ._test_b() . . . fail
Traceback (most recent call last):
  ...
AssertionError: None
----------------------------------------------------------------------
running ._test_c() . . . pass
running ._test_category() . . . pass
running ._test_d() . . . fail
Traceback (most recent call last):
  ...
AssertionError: None
----------------------------------------------------------------------
running ._test_new() . . . pass
running ._test_not_implemented_methods() . . . pass
running ._test_pickling() . . . fail
Traceback (most recent call last):
  ...
...PicklingError: Can't pickle <class '__main__.Blah'>: attribute
lookup ...Blah... failed
----------------------------------------------------------------------
The following tests failed: _test_b, _test_d, _test_pickling

File "/opt/sage/local/lib/python/site-packages/sage/misc/sage_unittest.py",␣
↪line 183, in run
test_method(tester = tester)
```

The `catch=False` option prevents `TestSuite` from catching exceptions:

```
sage: TestSuite(Blah()).run(catch=False)
Traceback (most recent call last):
  ...
  File ..., in _test_b
    def _test_b(self, tester): tester.fail()
  ...
AssertionError: None
```

```
>>> from sage.all import *
>>> TestSuite(Blah()).run(catch=False)
Traceback (most recent call last):
  ...
  File ..., in _test_b
    def _test_b(self, tester): tester.fail()
  ...
AssertionError: None
```

In conjunction with `%pdb on`, this allows for the debugger to jump directly to the first failure location.

exception sage.misc.sage_unittest.**TestSuiteFailure**

Bases: AssertionError

sage.misc.sage_unittest.**instance_tester**(*instance*, *tester=None*, ***options*)

Return a gadget attached to `instance` providing testing utilities.

EXAMPLES:

```
sage: from sage.misc.sage_unittest import instance_tester
sage: tester = instance_tester(ZZ)

sage: tester.assertTrue(1 == 1)
sage: tester.assertTrue(1 == 0)
Traceback (most recent call last):
...
AssertionError: False is not true
sage: tester.assertTrue(1 == 0, "this is expected to fail")
Traceback (most recent call last):
...
AssertionError: this is expected to fail

sage: tester.assertEqual(1, 1)
sage: tester.assertEqual(1, 0)
Traceback (most recent call last):
...
AssertionError: 1 != 0
```

```
>>> from sage.all import *
>>> from sage.misc.sage_unittest import instance_tester
>>> tester = instance_tester(ZZ)

>>> tester.assertTrue(Integer(1) == Integer(1))
>>> tester.assertTrue(Integer(1) == Integer(0))
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
AssertionError: False is not true
>>> tester.assertTrue(Integer(1) == Integer(0), "this is expected to fail")
Traceback (most recent call last):
...
AssertionError: this is expected to fail

>>> tester.assertEqual(Integer(1), Integer(1))
>>> tester.assertEqual(Integer(1), Integer(0))
Traceback (most recent call last):
...
AssertionError: 1 != 0
```

The available assertion testing facilities are the same as in `unittest.TestCase` [UNITTEST], which see (actually, by a slight abuse, tester is currently an instance of this class).

7.1.2 Random testing

Some Sage modules do random testing in their doctests; that is, they construct test cases using a random number generator. To get the broadest possible test coverage, we want everybody who runs the doctests to use a different random seed; but we also want to be able to reproduce the problems when debugging. This module provides a decorator to help write random testers that meet these goals.

`sage.misc.random_testing.`**`random_testing`**(*fn*)

This decorator helps create random testers. These can be run as part of the standard Sage test suite; everybody who runs the test will use a different random number seed, so many different random tests will eventually be run.

INPUT:

- `fn` – the function that we are wrapping for random testing

The resulting function will take two additional arguments, *seed* (default: `None`) and *print_seed* (default: `False`). The result will set the random number seed to the given seed value (or to a truly random value, if *seed* is not specified), then call the original function. If *print_seed* is true, then the seed will be printed before calling the original function. If the original function raises an exception, then the random seed that was used will be displayed, along with a message entreating the user to submit a bug report. All other arguments will be passed through to the original function.

Here is a set of recommendations for using this wrapper.

The function to be tested should take arguments specifying the difficulty of the test (size of the test cases, number of iterations, etc.), as well as an argument *verbose* (defaulting to false). With *verbose* true, it should print the values being tested. Suppose `test_foo()` takes an argument for number of iterations. Then the doctests could be:

```
test_foo(2, verbose=True, seed=0)
test_foo(10)
test_foo(100) # long time
```

The first doctest, with the specified seed and `verbose=True`, simply verifies that the tests really are reproducible (that `test_foo` is correctly using the `randstate` framework). The next two tests use truly random seeds, and will print out the seed used if the test fails (raises an exception).

If you want a very long-running test using this setup, you should do something like:

```
for _ in range(10^10): test_foo(100)
```

instead of:

```
test_foo(10^12)
```

If the test fails after several hours, the latter snippet would make you rerun the test for several hours while reproducing and debugging the problem. With the former snippet, you only need to rerun `test_foo(100)` with a known-failing random seed.

See *sage.misc.random_testing.test_add_commutes()* for a simple example using this decorator, and `sage.rings.tests` for realistic uses.

Setting *print_seed* to true is useless in doctests, because the random seed printed will never match the expected doctest result (and using `# random` means the doctest framework will never report an error even if one happens). However, it is useful if you have a random test that sometimes segfaults. The normal print-the-random-seed-on-exceptions won't work then, so you can run:

```
while True: test_foo(print_seed=True)
```

and look at the last seed that was printed before it crashed.

sage.misc.random_testing.**test_add_commutes**(**args*, ***kwargs*)

This is a simple demonstration of the *random_testing()* decorator and its recommended usage.

We test that addition is commutative over rationals.

EXAMPLES:

```
sage: from sage.misc.random_testing import test_add_commutes
sage: test_add_commutes(2, verbose=True, seed=0)
a == -4, b == 0 ...
Passes!
a == -1/2, b == -1/95 ...
Passes!
sage: test_add_commutes(10)
sage: test_add_commutes(1000) # long time
```

```
>>> from sage.all import *
>>> from sage.misc.random_testing import test_add_commutes
>>> test_add_commutes(Integer(2), verbose=True, seed=Integer(0))
a == -4, b == 0 ...
Passes!
a == -1/2, b == -1/95 ...
Passes!
>>> test_add_commutes(Integer(10))
>>> test_add_commutes(Integer(1000)) # long time
```

sage.misc.random_testing.**test_add_is_mul**(**args*, ***kwargs*)

This example demonstrates a failing *random_testing()* test, and shows how to reproduce the error.

DO NOT USE THIS AS AN EXAMPLE OF HOW TO USE *random_testing()*! Instead, look at *sage.misc.random_testing.test_add_commutes()*.

We test that `a+b == a*b`, for *a*, *b* rational. This is of course false, so the test will almost always fail.

EXAMPLES:

```
sage: from sage.misc.random_testing import test_add_is_mul
```

```
>>> from sage.all import *
>>> from sage.misc.random_testing import test_add_is_mul
```

We start by testing that we get reproducible results when setting *seed* to 0.

```
sage: test_add_is_mul(2, verbose=True, seed=0)
a == -4, b == 0 ...
Random testing has revealed a problem in test_add_is_mul
Please report this bug!  You may be the first
person in the world to have seen this problem.
Please include this random seed in your bug report:
Random seed: 0
AssertionError()
```

```
>>> from sage.all import *
>>> test_add_is_mul(Integer(2), verbose=True, seed=Integer(0))
a == -4, b == 0 ...
Random testing has revealed a problem in test_add_is_mul
Please report this bug!  You may be the first
person in the world to have seen this problem.
Please include this random seed in your bug report:
Random seed: 0
AssertionError()
```

Normally in a `@random_testing` doctest, we would leave off the `verbose=True` and the `# random`. We put it in here so that we can verify that we are seeing the exact same error when we reproduce the error below.

```
sage: test_add_is_mul(10, verbose=True) # random
a == -2/7, b == 1 ...
Random testing has revealed a problem in test_add_is_mul
Please report this bug!  You may be the first
person in the world to have seen this problem.
Please include this random seed in your bug report:
Random seed: 216390410596009428782506007128692114173
AssertionError()
```

```
>>> from sage.all import *
>>> test_add_is_mul(Integer(10), verbose=True) # random
a == -2/7, b == 1 ...
Random testing has revealed a problem in test_add_is_mul
Please report this bug!  You may be the first
person in the world to have seen this problem.
Please include this random seed in your bug report:
Random seed: 216390410596009428782506007128692114173
AssertionError()
```

OK, now assume that some user has reported a *test_add_is_mul()* failure. We can specify the same *random_seed* that was found in the bug report, and we will get the exact same failure so that we can debug the "problem".

```
sage: test_add_is_mul(10, verbose=True,␣
↪seed=216390410596009428782506007128692114173)
a == -2/7, b == 1 ...
```

(continues on next page)

(continued from previous page)

```
Random testing has revealed a problem in test_add_is_mul
Please report this bug!  You may be the first
person in the world to have seen this problem.
Please include this random seed in your bug report:
Random seed: 216390410596009428782506007128692114173
AssertionError()
```

```
>>> from sage.all import *
>>> test_add_is_mul(Integer(10), verbose=True,␣
↪seed=Integer(216390410596009428782506007128692114173))
a == -2/7, b == 1 ...
Random testing has revealed a problem in test_add_is_mul
Please report this bug!  You may be the first
person in the world to have seen this problem.
Please include this random seed in your bug report:
Random seed: 216390410596009428782506007128692114173
AssertionError()
```

7.1.3 Test for nested class Parent

This file contains a discussion, examples, and tests about nested classes and parents. It is kept in a separate file to avoid import loops.

EXAMPLES:

Currently pickling fails for parents using nested classes (typically for categories), but deriving only from Parent:

```
sage: from sage.misc.test_nested_class import TestParent1, TestParent2, TestParent3,␣
↪TestParent4
sage: P = TestParent1()
sage: TestSuite(P).run()
Failure ...
The following tests failed: _test_elements, _test_pickling
```

```
>>> from sage.all import *
>>> from sage.misc.test_nested_class import TestParent1, TestParent2, TestParent3,␣
↪TestParent4
>>> P = TestParent1()
>>> TestSuite(P).run()
Failure ...
The following tests failed: _test_elements, _test_pickling
```

They actually need to be in the NestedClassMetaclass. However, due to a technical detail, this is currently not directly supported:

```
sage: P = TestParent2()
Traceback (most recent call last):
...
TypeError: metaclass conflict: the metaclass of a derived class must be a (non-
↪strict) subclass of the metaclasses of all its bases
sage: TestSuite(P).run()  # not tested
```

```
>>> from sage.all import *
>>> P = TestParent2()
Traceback (most recent call last):
...
TypeError: metaclass conflict: the metaclass of a derived class must be a (non-
↪strict) subclass of the metaclasses of all its bases
>>> TestSuite(P).run()  # not tested
```

Instead, the easiest is to inherit from UniqueRepresentation, which is what you want to do anyway most of the time:

```
sage: P = TestParent3()
sage: TestSuite(P).run()
```

```
>>> from sage.all import *
>>> P = TestParent3()
>>> TestSuite(P).run()
```

This is what all Sage's parents using categories currently do. An alternative is to use ClasscallMetaclass as metaclass:

```
sage: P = TestParent4()
sage: TestSuite(P).run()
```

```
>>> from sage.all import *
>>> P = TestParent4()
>>> TestSuite(P).run()
```

7.2 Benchmarking and Profiling

7.2.1 Benchmarks

sage.misc.benchmark.**bench0**()

Run a benchmark.

BENCHMARK:

```
sage: from sage.misc.benchmark import *
sage: print(bench0()[0])
Benchmark 0: Factor the following polynomial over
    the rational numbers: (x^97+19*x+1)*(x^103-19*x^97+14)*(x^100-1)
```

```
>>> from sage.all import *
>>> from sage.misc.benchmark import *
>>> print(bench0()[Integer(0)])
Benchmark 0: Factor the following polynomial over
    the rational numbers: (x^97+19*x+1)*(x^103-19*x^97+14)*(x^100-1)
```

sage.misc.benchmark.**bench1**()

Run a benchmark.

BENCHMARK:

```
sage: from sage.misc.benchmark import *
sage: print(bench1()[0])
Find the Mordell-Weil group of the elliptic curve 5077A using mwrank
```

```
>>> from sage.all import *
>>> from sage.misc.benchmark import *
>>> print(bench1()[Integer(0)])
Find the Mordell-Weil group of the elliptic curve 5077A using mwrank
```

sage.misc.benchmark.**bench2**()

Run a benchmark.

BENCHMARK:

```
sage: from sage.misc.benchmark import *
sage: print(bench2()[0])
Some basic arithmetic with very large Integer numbers: '3^1000001 * 19^100001
```

```
>>> from sage.all import *
>>> from sage.misc.benchmark import *
>>> print(bench2()[Integer(0)])
Some basic arithmetic with very large Integer numbers: '3^1000001 * 19^100001
```

sage.misc.benchmark.**bench3**()

Run a benchmark.

BENCHMARK:

```
sage: from sage.misc.benchmark import *
sage: print(bench3()[0])
Some basic arithmetic with very large Rational numbers: '(2/3)^100001 * (17/19)^
↪100001
```

```
>>> from sage.all import *
>>> from sage.misc.benchmark import *
>>> print(bench3()[Integer(0)])
Some basic arithmetic with very large Rational numbers: '(2/3)^100001 * (17/19)^
↪100001
```

sage.misc.benchmark.**bench4**()

Run a benchmark.

BENCHMARK:

```
sage: from sage.misc.benchmark import *
sage: print(bench4()[0])
Rational polynomial arithmetic using Sage. Compute (x^29+17*x-5)^200.
```

```
>>> from sage.all import *
>>> from sage.misc.benchmark import *
>>> print(bench4()[Integer(0)])
Rational polynomial arithmetic using Sage. Compute (x^29+17*x-5)^200.
```

sage.misc.benchmark.**bench5**()

Run a benchmark.

BENCHMARK:

```
sage: from sage.misc.benchmark import *
sage: print(bench5()[0])
Rational polynomial arithmetic using Sage. Compute (x^19 - 18*x + 1)^50 one␣
↪hundred times.
```

```
>>> from sage.all import *
>>> from sage.misc.benchmark import *
>>> print(bench5()[Integer(0)])
Rational polynomial arithmetic using Sage. Compute (x^19 - 18*x + 1)^50 one␣
↪hundred times.
```

sage.misc.benchmark.**bench6**()

Run a benchmark.

BENCHMARK:

```
sage: from sage.misc.benchmark import *
sage: print(bench6()[0])
Compute the p-division polynomials of y^2 = x^3 + 37*x - 997 for primes p < 40.
```

```
>>> from sage.all import *
>>> from sage.misc.benchmark import *
>>> print(bench6()[Integer(0)])
Compute the p-division polynomials of y^2 = x^3 + 37*x - 997 for primes p < 40.
```

sage.misc.benchmark.**bench7**()

Run a benchmark.

BENCHMARK:

```
sage: from sage.misc.benchmark import *
sage: print(bench7()[0])
Compute the Mordell-Weil group of y^2 = x^3 + 37*x - 997.
```

```
>>> from sage.all import *
>>> from sage.misc.benchmark import *
>>> print(bench7()[Integer(0)])
Compute the Mordell-Weil group of y^2 = x^3 + 37*x - 997.
```

sage.misc.benchmark.**benchmark**(*n=-1*)

Run a well-chosen range of Sage commands and record the time it takes for each to run.

INPUT:

- n – integer (default: -1); the benchmark number; the default of -1 runs all the benchmarks

OUTPUT:

list – summary of timings for each benchmark. int – if n == -1, also return the total time

EXAMPLES:

```
sage: from sage.misc.benchmark import *
sage: _ = benchmark()
Running benchmark 0
Benchmark 0: Factor the following polynomial over
    the rational numbers: (x^97+19*x+1)*(x^103-19*x^97+14)*(x^100-1)
Time: ... seconds
Running benchmark 1
Find the Mordell-Weil group of the elliptic curve 5077A using mwrank
Time: ... seconds
Running benchmark 2
Some basic arithmetic with very large Integer numbers: '3^1000001 * 19^100001
Time: ... seconds
Running benchmark 3
Some basic arithmetic with very large Rational numbers: '(2/3)^100001 * (17/19)^
↪100001
Time: ... seconds
Running benchmark 4
Rational polynomial arithmetic using Sage. Compute (x^29+17*x-5)^200.
Time: ... seconds
Running benchmark 5
Rational polynomial arithmetic using Sage. Compute (x^19 - 18*x + 1)^50 one␣
↪hundred times.
Time: ... seconds
Running benchmark 6
Compute the p-division polynomials of y^2 = x^3 + 37*x - 997 for primes p < 40.
Time: ... seconds
Running benchmark 7
Compute the Mordell-Weil group of y^2 = x^3 + 37*x - 997.
Time: ... seconds
Running benchmark 8
```

```
>>> from sage.all import *
>>> from sage.misc.benchmark import *
>>> _ = benchmark()
Running benchmark 0
Benchmark 0: Factor the following polynomial over
    the rational numbers: (x^97+19*x+1)*(x^103-19*x^97+14)*(x^100-1)
Time: ... seconds
Running benchmark 1
Find the Mordell-Weil group of the elliptic curve 5077A using mwrank
Time: ... seconds
Running benchmark 2
Some basic arithmetic with very large Integer numbers: '3^1000001 * 19^100001
Time: ... seconds
Running benchmark 3
Some basic arithmetic with very large Rational numbers: '(2/3)^100001 * (17/19)^
↪100001
Time: ... seconds
Running benchmark 4
Rational polynomial arithmetic using Sage. Compute (x^29+17*x-5)^200.
Time: ... seconds
Running benchmark 5
```

(continues on next page)

(continued from previous page)

```
Rational polynomial arithmetic using Sage. Compute (x^19 - 18*x + 1)^50 one␣
↪hundred times.
Time: ... seconds
Running benchmark 6
Compute the p-division polynomials of y^2 = x^3 + 37*x - 997 for primes p < 40.
Time: ... seconds
Running benchmark 7
Compute the Mordell-Weil group of y^2 = x^3 + 37*x - 997.
Time: ... seconds
Running benchmark 8
```

7.2.2 Accurate timing information for Sage commands

This is an implementation of nice timeit functionality, like the `%timeit` magic command in IPython. To use it, use the `timeit` command. This command then calls *sage_timeit()*, which you can find below.

EXAMPLES:

```
sage: timeit('1+1')     # random output
625 loops, best of 3: 314 ns per loop
```

```
>>> from sage.all import *
>>> timeit('1+1')     # random output
625 loops, best of 3: 314 ns per loop
```

AUTHOR:

– William Stein, based on code by Fernando Perez included in IPython

class sage.misc.sage_timeit.**SageTimeitResult**(*stats*, *series=None*)

Bases: object

Represent the statistics of a timeit() command.

Prints as a string so that it can be easily returned to a user.

INPUT:

- `stats` – tuple of length 5 containing the following information:
  - integer, number of loops
  - integer, repeat number
  - Python integer, number of digits to print
  - number, best timing result
  - str, time unit

EXAMPLES:

```
sage: from sage.misc.sage_timeit import SageTimeitResult
sage: SageTimeitResult( (3, 5, int(8), pi, 'ms') )                              #␣
↪needs sage.symbolic
3 loops, best of 5: 3.1415927 ms per loop
```

```
>>> from sage.all import *
>>> from sage.misc.sage_timeit import SageTimeitResult
>>> SageTimeitResult( (Integer(3), Integer(5), int(Integer(8)), pi, 'ms') )
↪                        # needs sage.symbolic
3 loops, best of 5: 3.1415927 ms per loop
```

```
sage: units = [u"s", u"ms", u"µs", u"ns"]
sage: scaling = [1, 1e3, 1e6, 1e9]
sage: number = 7
sage: repeat = 13
sage: precision = int(5)
sage: best = pi / 10 ^ 9                                                    #␣
↪needs sage.symbolic
sage: order = 3
sage: stats = (number, repeat, precision, best * scaling[order], units[order])  #␣
↪needs sage.symbolic
sage: SageTimeitResult(stats)                                               #␣
↪needs sage.symbolic
7 loops, best of 13: 3.1416 ns per loop
```

```
>>> from sage.all import *
>>> units = [u"s", u"ms", u"µs", u"ns"]
>>> scaling = [Integer(1), RealNumber('1e3'), RealNumber('1e6'), RealNumber('1e9
↪')]
>>> number = Integer(7)
>>> repeat = Integer(13)
>>> precision = int(Integer(5))
>>> best = pi / Integer(10) ** Integer(9)
↪                # needs sage.symbolic
>>> order = Integer(3)
>>> stats = (number, repeat, precision, best * scaling[order], units[order])  #␣
↪needs sage.symbolic
>>> SageTimeitResult(stats)                                                 #␣
↪needs sage.symbolic
7 loops, best of 13: 3.1416 ns per loop
```

If the third argument is not a Python integer, a `TypeError` is raised:

```
sage: SageTimeitResult( (1, 2, 3, 4, 's') )
<repr(<sage.misc.sage_timeit.SageTimeitResult at 0x...>) failed: TypeError: *␣
↪wants int>
```

```
>>> from sage.all import *
>>> SageTimeitResult( (Integer(1), Integer(2), Integer(3), Integer(4), 's') )
<repr(<sage.misc.sage_timeit.SageTimeitResult at 0x...>) failed: TypeError: *␣
↪wants int>
```

sage.misc.sage_timeit.**sage_timeit**(*stmt*, *globals_dict=None*, *preparse=None*, *number=0*, *repeat=3*, *precision=3*, *seconds=False*)

Accurately measure the wall time required to execute `stmt`.

INPUT:

- `stmt` – a text string

- `globals_dict` – dictionary or `None` (default). Evaluate `stmt` in the context of the globals dictionary. If not set, the current `globals()` dictionary is used.
- `preparse` – (default: use globals preparser default) if `True` preparse `stmt` using the Sage preparser
- `number` – integer; (default: 0); number of loops
- `repeat` – integer; (default: 3); number of repetition
- `precision` – integer; (default: 3); precision of output time
- `seconds` – boolean (default: `False`); whether to just return time in seconds

OUTPUT:

An instance of `SageTimeitResult` unless the optional parameter `seconds=True` is passed. In that case, the elapsed time in seconds is returned as a floating-point number.

EXAMPLES:

```
sage: from sage.misc.sage_timeit import sage_timeit
sage: sage_timeit('3^100000', globals(), preparse=True, number=50)       # random␣
↪output
'50 loops, best of 3: 1.97 ms per loop'
sage: sage_timeit('3^100000', globals(), preparse=False, number=50)      # random␣
↪output
'50 loops, best of 3: 67.1 ns per loop'
sage: a = 10
sage: sage_timeit('a^2', globals(), number=50)                             #␣
↪random output
'50 loops, best of 3: 4.26 us per loop'
```

```
>>> from sage.all import *
>>> from sage.misc.sage_timeit import sage_timeit
>>> sage_timeit('3^100000', globals(), preparse=True, number=Integer(50))      #␣
↪random output
'50 loops, best of 3: 1.97 ms per loop'
>>> sage_timeit('3^100000', globals(), preparse=False, number=Integer(50))     #␣
↪random output
'50 loops, best of 3: 67.1 ns per loop'
>>> a = Integer(10)
>>> sage_timeit('a^2', globals(), number=Integer(50))
↪# random output
'50 loops, best of 3: 4.26 us per loop'
```

If you only want to see the timing and not have access to additional information, just use the `timeit` object:

```
sage: timeit('10^2', number=50)
50 loops, best of 3: ... per loop
```

```
>>> from sage.all import *
>>> timeit('10^2', number=Integer(50))
50 loops, best of 3: ... per loop
```

Using sage_timeit gives you more information though:

```
sage: s = sage_timeit('10^2', globals(), repeat=1000)
sage: len(s.series)
1000
sage: mean(s.series)   # random output                                          #␣
↪needs sage.modules
3.1298141479492283e-07
sage: min(s.series)    # random output
2.9258728027343752e-07
sage: t = stats.TimeSeries(s.series)                                           #␣
↪needs numpy sage.modules
sage: t.scale(10^6).plot_histogram(bins=20,figsize=[12,6], ymax=2)             #␣
↪needs numpy sage.modules sage.plot
Graphics object consisting of 20 graphics primitives
```

```
>>> from sage.all import *
>>> s = sage_timeit('10^2', globals(), repeat=Integer(1000))
>>> len(s.series)
1000
>>> mean(s.series)   # random output                                           #␣
↪needs sage.modules
3.1298141479492283e-07
>>> min(s.series)    # random output
2.9258728027343752e-07
>>> t = stats.TimeSeries(s.series)                                            #␣
↪needs numpy sage.modules
>>> t.scale(Integer(10)**Integer(6)).plot_histogram(bins=Integer(20),
↪figsize=[Integer(12),Integer(6)], ymax=Integer(2))              # needs numpy␣
↪sage.modules sage.plot
Graphics object consisting of 20 graphics primitives
```

The input expression can contain newlines (but doctests cannot, so we use `os.linesep` here):

```
sage: from sage.misc.sage_timeit import sage_timeit
sage: from os import linesep as CR
sage: # sage_timeit(r'a = 2\nb=131\nfactor(a^b-1)')
sage: sage_timeit('a = 2' + CR + 'b=131' + CR + 'factor(a^b-1)',               #␣
↪needs sage.libs.pari
....:             globals(), number=10)
10 loops, best of 3: ... per loop
```

```
>>> from sage.all import *
>>> from sage.misc.sage_timeit import sage_timeit
>>> from os import linesep as CR
>>> # sage_timeit(r'a = 2\nb=131\nfactor(a^b-1)')
>>> sage_timeit('a = 2' + CR + 'b=131' + CR + 'factor(a^b-1)',               #␣
↪needs sage.libs.pari
...             globals(), number=Integer(10))
10 loops, best of 3: ... per loop
```

Test to make sure that `timeit` behaves well with output:

```
sage: timeit("print('Hi')", number=50)
50 loops, best of 3: ... per loop
```

```
>>> from sage.all import *
>>> timeit("print('Hi')", number=Integer(50))
50 loops, best of 3: ... per loop
```

If you want a machine-readable output, use the `seconds=True` option:

```
sage: timeit("print('Hi')", seconds=True)    # random output
1.42555236816e-06
sage: t = timeit("print('Hi')", seconds=True)
sage: t      #r random output
3.6010742187499999e-07
```

```
>>> from sage.all import *
>>> timeit("print('Hi')", seconds=True)    # random output
1.42555236816e-06
>>> t = timeit("print('Hi')", seconds=True)
>>> t      #r random output
3.6010742187499999e-07
```

7.2.3 The `timeit` command

This uses the function *sage_timeit()*.

class sage.misc.sage_timeit_class.**SageTimeit**

Bases: `object`

Time execution of a command or block of commands.

Displays the best WALL TIME for execution of the given code. This is based on the Python `timeit` module, which avoids a number of common traps for measuring execution times. It is also based on IPython's `%timeit` command.

TYPICAL INPUT FORMAT:

```
timeit(statement, preparse=None, number=0, repeat=3, precision=3)
```

EXAMPLES:

```
sage: timeit('2^10000')
625 loops, best of 3: ... per loop
```

```
>>> from sage.all import *
>>> timeit('2^10000')
625 loops, best of 3: ... per loop
```

We illustrate some options:

```
sage: timeit('2+2',precision=2,number=20,repeat=5)
20 loops, best of 5: ... per loop
```

```
>>> from sage.all import *
>>> timeit('2+2',precision=Integer(2),number=Integer(20),repeat=Integer(5))
20 loops, best of 5: ... per loop
```

The preparser is on by default (if it is on), but the preparse option allows us to override it:

```
sage: timeit('2^10000', preparse=False, number=50)
50 loops, best of 3: ... per loop
```

```
>>> from sage.all import *
>>> timeit('2^10000', preparse=False, number=Integer(50))
50 loops, best of 3: ... per loop
```

The input can contain newlines:

```
sage: timeit("a = 2\nb=131\nfactor(a^b-1)", number=25)                    #␣
↪needs sage.libs.pari
25 loops, best of 3: ... per loop
```

```
>>> from sage.all import *
>>> timeit("a = 2\nb=131\nfactor(a^b-1)", number=Integer(25))              ␣
↪     # needs sage.libs.pari
25 loops, best of 3: ... per loop
```

See also

`runsnake()`

eval(*code*, *globs=None*, *locals=None*, ***kwds*)

This eval function is called when doing %timeit in the notebook.

INPUT:

- `code` – string of code to evaluate; may contain newlines
- `globs` – global variables; if not given, uses module scope globals
- `locals` – ignored completely
- `kwds` – passed onto sage_timeit. Common options are `preparse`, `number`, `repeat`, `precision`. See *sage_timeit()* for details.

OUTPUT: string; timing information

EXAMPLES:

```
sage: timeit.eval("2+2")                      # random output
'625 loops, best of 3: 1.47 us per loop'
```

```
>>> from sage.all import *
>>> timeit.eval("2+2")                      # random output
'625 loops, best of 3: 1.47 us per loop'
```

We emphasize that timeit times WALL TIME. This is good in the context of Sage where commands often call out to other subprocesses that do not appear in CPU time.

```
sage: timeit('sleep(float(0.5))', number=3)  # long time (5s on sage.math,␣
↪2012)
3 loops, best of 3: ... ms per loop
```

```
>>> from sage.all import *
>>> timeit('sleep(float(0.5))', number=Integer(3))  # long time (5s on sage.
↪math, 2012)
3 loops, best of 3: ... ms per loop
```

7.2.4 Simple profiling tool

AUTHORS:

- David Harvey (August 2006)
- Martin Albrecht

class sage.misc.profiler.**Profiler**(*systems=[]*, *verbose=False*)

Bases: object

Keeps track of CPU time used between a series of user-defined checkpoints.

It's probably not a good idea to use this class in an inner loop :-)

EXAMPLES:

```
from sage.misc.profiler import Profiler
sage: def f():                          # not tested
....:     p = Profiler()
```

Calling p(message) creates a checkpoint:

```
sage: p("try factoring 15")           # not tested
```

```
>>> from sage.all import *
>>> p("try factoring 15")           # not tested
```

Do something time-consuming:

```
sage: x = factor(15)                  # not tested
```

```
>>> from sage.all import *
>>> x = factor(Integer(15))                  # not tested
```

You can create a checkpoints without a string; Profiler will use the source code instead:

```
sage: # not tested
sage: p()
sage: y = factor(25)
sage: p("last step")
sage: z = factor(35)
sage: p()
```

```
>>> from sage.all import *
>>> # not tested
>>> p()
>>> y = factor(Integer(25))
>>> p("last step")
```

(continues on next page)

(continued from previous page)

```
>>> z = factor(Integer(35))
>>> p()
```

This will give a nice list of timings between checkpoints:

```
sage: print(p)                          # not tested
```

```
>>> from sage.all import *
>>> print(p)                          # not tested
```

Let's try it out:

```
sage: f()                               # not tested
    3.020s -- try factoring 15
   15.240s -- line 17: y = factor(25)
 5000.190s -- last step
```

```
>>> from sage.all import *
>>> f()                               # not tested
    3.020s -- try factoring 15
   15.240s -- line 17: y = factor(25)
 5000.190s -- last step
```

See also

`runsnake()`

Todo

- Add Pyrex source code inspection (I assume it doesn't currently do this)
- Add ability to sort output by time
- Add option to constructor to print timing immediately when checkpoint is reached
- Migrate to Pyrex?
- Add ability to return timings in a more machine-friendly format

AUTHOR:

- David Harvey (August 2006)

clear()

print_last()

Print the last profiler step.

7.2.5 C Function Profiler Using Google Perftools

Note that the profiler samples 100x per second by default. In particular, you cannot profile anything shorter than 10ms. You can adjust the rate with the `CPUPROFILE_FREQUENCY` environment variable if you want to change it.

EXAMPLES:

```
sage: from sage.misc.gperftools import Profiler, run_100ms
sage: prof = Profiler()
sage: prof.start()       # optional - gperftools
sage: run_100ms()
sage: prof.stop()        # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
```

```
>>> from sage.all import *
>>> from sage.misc.gperftools import Profiler, run_100ms
>>> prof = Profiler()
>>> prof.start()       # optional - gperftools
>>> run_100ms()
>>> prof.stop()        # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
```

REFERENCE:

Uses the Google performance analysis tools. Note that they are not included in Sage, you have to install them yourself on your system.

AUTHORS:

- Volker Braun (2014-03-31): initial version

class sage.misc.gperftools.**Profiler**(*filename=None*)

Bases: SageObject

Interface to the gperftools profiler.

INPUT:

- `filename` – string or `None` (default). The file name to log to. By default, a new temporary file is created.

EXAMPLES:

```
sage: from sage.misc.gperftools import Profiler
sage: Profiler()
Profiler logging to ...
```

```
>>> from sage.all import *
>>> from sage.misc.gperftools import Profiler
>>> Profiler()
Profiler logging to ...
```

filename()

Return the file name.

OUTPUT: string

EXAMPLES:

```
sage: from sage.misc.gperftools import Profiler
sage: prof = Profiler()
sage: prof.filename()
'.../tmp_....perf'
```

```
>>> from sage.all import *
>>> from sage.misc.gperftools import Profiler
>>> prof = Profiler()
>>> prof.filename()
'.../tmp_....perf'
```

save(*filename*, *cumulative=True*, *verbose=True*)

Save report to disk.

INPUT:

- `filename` – string; the filename to save at. Must end with one of `.dot`, `.ps`, `.pdf`, `.svg`, `.gif`, or `.txt` to specify the output file format.
- `cumulative` – boolean (default: `True`); whether to return cumulative timings
- `verbose` – boolean (default: `True`); whether to print informational messages

EXAMPLES:

```
sage: from sage.misc.gperftools import Profiler, run_100ms
sage: prof = Profiler()
sage: prof.start()     # optional - gperftools
sage: run_100ms()      # optional - gperftools
sage: prof.stop()      # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
sage: f = tmp_filename(ext='.txt')       # optional - gperftools
sage: prof.save(f, verbose=False)        # optional - gperftools
```

```
>>> from sage.all import *
>>> from sage.misc.gperftools import Profiler, run_100ms
>>> prof = Profiler()
>>> prof.start()     # optional - gperftools
>>> run_100ms()      # optional - gperftools
>>> prof.stop()      # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
>>> f = tmp_filename(ext='.txt')       # optional - gperftools
>>> prof.save(f, verbose=False)        # optional - gperftools
```

start()

Start profiling.

EXAMPLES:

```
sage: from sage.misc.gperftools import Profiler, run_100ms
sage: prof = Profiler()
sage: prof.start()     # optional - gperftools
sage: run_100ms()
sage: prof.stop()      # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
```

```
>>> from sage.all import *
>>> from sage.misc.gperftools import Profiler, run_100ms
>>> prof = Profiler()
>>> prof.start()     # optional - gperftools
>>> run_100ms()
>>> prof.stop()      # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
```

stop()

Stop the CPU profiler.

EXAMPLES:

```
sage: from sage.misc.gperftools import Profiler, run_100ms
sage: prof = Profiler()
sage: prof.start()     # optional - gperftools
sage: run_100ms()
sage: prof.stop()      # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
```

```
>>> from sage.all import *
>>> from sage.misc.gperftools import Profiler, run_100ms
>>> prof = Profiler()
>>> prof.start()     # optional - gperftools
>>> run_100ms()
>>> prof.stop()      # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
```

top(*cumulative=True*)

Print text report.

OUTPUT: nothing; a textual report is printed to stdout

EXAMPLES:

```
sage: from sage.misc.gperftools import Profiler
sage: prof = Profiler()
sage: prof.start()     # optional - gperftools
sage: # do something
sage: prof.stop()      # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
sage: prof.top()    # optional - gperftools
Using local file ...
Using local file ...
```

```
>>> from sage.all import *
>>> from sage.misc.gperftools import Profiler
>>> prof = Profiler()
>>> prof.start()     # optional - gperftools
>>> # do something
>>> prof.stop()      # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
>>> prof.top()    # optional - gperftools
```

(continues on next page)

(continued from previous page)

```
Using local file ...
Using local file ...
```

sage.misc.gperftools.**crun**(*s*, *evaluator*)

Profile single statement.

- `s` – string; Sage code to profile
- `evaluator` – callable to evaluate

EXAMPLES:

```
sage: import sage.misc.gperftools as gperf
sage: ev = lambda ex:eval(ex, globals(), locals())
sage: gperf.crun('gperf.run_100ms()', evaluator=ev)    # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
Using local file ...
Using local file ...
```

```
>>> from sage.all import *
>>> import sage.misc.gperftools as gperf
>>> ev = lambda ex:eval(ex, globals(), locals())
>>> gperf.crun('gperf.run_100ms()', evaluator=ev)    # optional - gperftools
PROFILE: interrupts/evictions/bytes = ...
Using local file ...
Using local file ...
```

sage.misc.gperftools.**run_100ms**()

Used for doctesting.

A function that performs some computation for more than (but not that much more than) 100ms.

EXAMPLES:

```
sage: from sage.misc.gperftools import run_100ms
sage: run_100ms()
```

```
>>> from sage.all import *
>>> from sage.misc.gperftools import run_100ms
>>> run_100ms()
```

7.3 Miscellaneous Inspection and Development Tools

7.3.1 Dynamic documentation for instances of classes

The functionality in this module allows to define specific docstrings of *instances* of a class, which are different from the class docstring. A typical use case is given by cached methods: the documentation of a cached method should not be the documentation of the class `CachedMethod`; it should be the documentation of the underlying method.

In order to use this, define a class docstring as usual. Also define a method `def _instancedoc_(self)` which should return the docstring of the instance `self`. Finally, add the decorator `@instancedoc` to the class.

Warning

Since the `__doc__` attribute is never inherited, the decorator `@instancedoc` must be added to all subclasses of the class defining `_instancedoc_`. Doing it on the base class is not sufficient.

EXAMPLES:

```
sage: from sage.misc.instancedoc import instancedoc
sage: @instancedoc
....: class X():
....:     "Class docstring"
....:     def _instancedoc_(self):
....:         return "Instance docstring"
sage: X.__doc__
'Class docstring'
sage: X().__doc__
'Instance docstring'
```

```
>>> from sage.all import *
>>> from sage.misc.instancedoc import instancedoc
>>> @instancedoc
... class X():
...     "Class docstring"
...     def _instancedoc_(self):
...         return "Instance docstring"
>>> X.__doc__
'Class docstring'
>>> X().__doc__
'Instance docstring'
```

For a Cython `cdef class`, a decorator cannot be used. Instead, call *`instancedoc()`* as a function after defining the class:

```
sage: cython(                                                                #␣
↪needs sage.misc.cython
....: '''
....: from sage.misc.instancedoc import instancedoc
....: cdef class Y:
....:     "Class docstring"
....:     def _instancedoc_(self):
....:         return "Instance docstring"
....: instancedoc(Y)
....: ''')
sage: Y.__doc__                                                              #␣
↪needs sage.misc.cython
'File:...\nClass docstring'
sage: Y().__doc__                                                            #␣
↪needs sage.misc.cython
'Instance docstring'
```

```
>>> from sage.all import *
>>> cython(                                                                  #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.misc.cython
... '''
... from sage.misc.instancedoc import instancedoc
... cdef class Y:
...     "Class docstring"
...     def _instancedoc_(self):
...         return "Instance docstring"
... instancedoc(Y)
... ''')
>>> Y.__doc__                                                                #␣
↪needs sage.misc.cython
'File:...\nClass docstring'
>>> Y().__doc__                                                              #␣
↪needs sage.misc.cython
'Instance docstring'
```

One can still add a custom `__doc__` attribute on a particular instance:

```
sage: obj = X()
sage: obj.__doc__ = "Very special doc"
sage: print(obj.__doc__)
Very special doc
```

```
>>> from sage.all import *
>>> obj = X()
>>> obj.__doc__ = "Very special doc"
>>> print(obj.__doc__)
Very special doc
```

This normally does not work on extension types:

```
sage: Y().__doc__ = "Very special doc"                                        #␣
↪needs sage.misc.cython
Traceback (most recent call last):
...
AttributeError: attribute '__doc__' of 'Y' objects is not writable
```

```
>>> from sage.all import *
>>> Y().__doc__ = "Very special doc"                                         #␣
↪needs sage.misc.cython
Traceback (most recent call last):
...
AttributeError: attribute '__doc__' of 'Y' objects is not writable
```

This is an example involving a metaclass, where the instances are classes. In this case, the `_instancedoc_` from the metaclass is only used if the instance of the metaclass (the class) does not have a docstring:

```
sage: @instancedoc
....: class Meta(type):
....:     "Metaclass doc"
....:     def _instancedoc_(self):
....:         return "Docstring for {}".format(self)
```

(continues on next page)

(continued from previous page)

```
sage: class T(metaclass=Meta):
....:     pass
sage: print(T.__doc__)
Docstring for <class '__main__.T'>
sage: class U(metaclass=Meta):
....:     "Special doc for U"
sage: print(U.__doc__)
Special doc for U
```

```
>>> from sage.all import *
>>> @instancedoc
... class Meta(type):
...     "Metaclass doc"
...     def _instancedoc_(self):
...         return "Docstring for {}".format(self)
>>> class T(metaclass=Meta):
...     pass
>>> print(T.__doc__)
Docstring for <class '__main__.T'>
>>> class U(metaclass=Meta):
...     "Special doc for U"
>>> print(U.__doc__)
Special doc for U
```

class sage.misc.instancedoc.**InstanceDocDescriptor**

Bases: object

Descriptor for dynamic documentation, to be installed as the __doc__ attribute.

INPUT:

- classdoc – string; class documentation
- instancedoc – (method) documentation for an instance
- attr – string (default: __doc__); attribute name to use for custom docstring on the instance

EXAMPLES:

```
sage: from sage.misc.instancedoc import InstanceDocDescriptor
sage: def instancedoc(self):
....:     return "Instance doc"
sage: docattr = InstanceDocDescriptor("Class doc", instancedoc)
sage: class Z():
....:     __doc__ = InstanceDocDescriptor("Class doc", instancedoc)
sage: Z.__doc__
'Class doc'
sage: Z().__doc__
'Instance doc'
```

```
>>> from sage.all import *
>>> from sage.misc.instancedoc import InstanceDocDescriptor
>>> def instancedoc(self):
...     return "Instance doc"
```

(continues on next page)

(continued from previous page)

```
>>> docattr = InstanceDocDescriptor("Class doc", instancedoc)
>>> class Z():
...     __doc__ = InstanceDocDescriptor("Class doc", instancedoc)
>>> Z.__doc__
'Class doc'
>>> Z().__doc__
'Instance doc'
```

We can still override the `__doc__` attribute of the instance:

```
sage: obj = Z()
sage: obj.__doc__ = "Custom doc"
sage: obj.__doc__
'Custom doc'
sage: del obj.__doc__
sage: obj.__doc__
'Instance doc'
```

```
>>> from sage.all import *
>>> obj = Z()
>>> obj.__doc__ = "Custom doc"
>>> obj.__doc__
'Custom doc'
>>> del obj.__doc__
>>> obj.__doc__
'Instance doc'
```

`sage.misc.instancedoc.`**`instancedoc`**(*cls*)

Add support for `_instancedoc_` to the class `cls`.

Typically, this will be used as decorator.

INPUT:

- `cls` – a new-style class

OUTPUT: `cls`

Warning

`instancedoc` mutates the given class. So you are *not* supposed to use it as `newcls = instancedoc(cls)` because that would mutate `cls` (and `newcls` would be the same object as `cls`)

7.3.2 Inspect Python, Sage, and Cython objects

This module extends parts of Python's inspect module to Cython objects.

EXAMPLES:

```
sage: from sage.misc.sageinspect import *
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import *
```

Test introspection of modules defined in Python and Cython files:

Cython modules:

```
sage: sage_getfile(sage.rings.rational)
'.../rational.pyx'
sage: sage_getdoc(sage.rings.rational).lstrip()
'Rational Numbers...'
sage: sage_getsource(sage.rings.rational)
'# distutils: ...Rational Numbers...'
```

```
>>> from sage.all import *
>>> sage_getfile(sage.rings.rational)
'.../rational.pyx'
>>> sage_getdoc(sage.rings.rational).lstrip()
'Rational Numbers...'
>>> sage_getsource(sage.rings.rational)
'# distutils: ...Rational Numbers...'
```

Python modules:

```
sage: sage_getfile(sage.misc.sageinspect)
'.../sageinspect.py'
sage: print(sage_getdoc(sage.misc.sageinspect).lstrip()[:40])
Inspect Python, Sage, and Cython objects
sage: sage_getsource(sage.misc.sageinspect).lstrip()[51:-1]
'Inspect Python, Sage, and Cython objects...'
```

```
>>> from sage.all import *
>>> sage_getfile(sage.misc.sageinspect)
'.../sageinspect.py'
>>> print(sage_getdoc(sage.misc.sageinspect).lstrip()[:Integer(40)])
Inspect Python, Sage, and Cython objects
>>> sage_getsource(sage.misc.sageinspect).lstrip()[Integer(51):-Integer(1)]
'Inspect Python, Sage, and Cython objects...'
```

Test introspection of classes defined in Python and Cython files:

Cython classes:

```
sage: sage_getfile(sage.rings.rational.Rational)
'.../rational.pyx'
sage: sage_getdoc(sage.rings.rational.Rational).lstrip()
'A rational number...'
sage: sage_getsource(sage.rings.rational.Rational)
'cdef class Rational...'
```

```
>>> from sage.all import *
>>> sage_getfile(sage.rings.rational.Rational)
'.../rational.pyx'
>>> sage_getdoc(sage.rings.rational.Rational).lstrip()
'A rational number...'
>>> sage_getsource(sage.rings.rational.Rational)
'cdef class Rational...'
```

Python classes:

```
sage: sage_getfile(BlockFinder)
'.../sage/misc/sageinspect.py'
sage: sage_getdoc(BlockFinder).lstrip()[:50]                                #␣
↪needs sphinx
'Provide a "tokeneater()" method to detect the end '
sage: sage_getsource(BlockFinder)
'class BlockFinder:...'
```

```
>>> from sage.all import *
>>> sage_getfile(BlockFinder)
'.../sage/misc/sageinspect.py'
>>> sage_getdoc(BlockFinder).lstrip()[:Integer(50)]                          ␣
↪     # needs sphinx
'Provide a "tokeneater()" method to detect the end '
>>> sage_getsource(BlockFinder)
'class BlockFinder:...'
```

Test introspection of functions defined in Python and Cython files:

Cython functions:

```
sage: sage_getdef(sage.rings.rational.make_rational, obj_name='mr')
'mr(s)'
sage: sage_getfile(sage.rings.rational.make_rational)
'.../rational.pyx'
sage: sage_getdoc(sage.rings.rational.make_rational).lstrip()
'Make a rational number ...'
sage: sage_getsource(sage.rings.rational.make_rational)
'@cython.binding(True)\ndef make_rational(s):...'
```

```
>>> from sage.all import *
>>> sage_getdef(sage.rings.rational.make_rational, obj_name='mr')
'mr(s)'
>>> sage_getfile(sage.rings.rational.make_rational)
'.../rational.pyx'
>>> sage_getdoc(sage.rings.rational.make_rational).lstrip()
'Make a rational number ...'
>>> sage_getsource(sage.rings.rational.make_rational)
'@cython.binding(True)\ndef make_rational(s):...'
```

Python functions:

```
sage: sage_getdef(sage.misc.sageinspect.sage_getfile, obj_name='sage_getfile')
'sage_getfile(obj)'
sage: sage_getfile(sage.misc.sageinspect.sage_getfile)
'.../sageinspect.py'
sage: sage_getdoc(sage.misc.sageinspect.sage_getfile).lstrip()
'Get the full file name associated to "obj" as a string...'
sage: sage_getsource(sage.misc.sageinspect.sage_getfile)[4:]
'sage_getfile(obj):...'
```

```
>>> from sage.all import *
>>> sage_getdef(sage.misc.sageinspect.sage_getfile, obj_name='sage_getfile')
'sage_getfile(obj)'
>>> sage_getfile(sage.misc.sageinspect.sage_getfile)
'.../sageinspect.py'
>>> sage_getdoc(sage.misc.sageinspect.sage_getfile).lstrip()
'Get the full file name associated to "obj" as a string...'
>>> sage_getsource(sage.misc.sageinspect.sage_getfile)[Integer(4):]
'sage_getfile(obj):...'
```

Unfortunately, no argspec is extractable from builtins. Hence, we use a generic argspec:

```
sage: sage_getdef(''.find, 'find')
'find(*args, **kwds)'
sage: sage_getdef(str.find, 'find')
'find(*args, **kwds)'
```

```
>>> from sage.all import *
>>> sage_getdef(''.find, 'find')
'find(*args, **kwds)'
>>> sage_getdef(str.find, 'find')
'find(*args, **kwds)'
```

By Issue #9976 and Issue #14017, introspection also works for interactively defined Cython code, and with rather tricky argument lines:

```
sage: # needs sage.misc.cython
sage: cython('def foo(unsigned int x=1, a=\')"\', b={not (2+1==3):\'bar\'}, *args,␣
↪**kwds): return')
sage: print(sage_getsource(foo))
def foo(unsigned int x=1, a=')"', b={not (2+1==3):'bar'}, *args, **kwds): return
sage: sage_getargspec(foo)
FullArgSpec(args=['x', 'a', 'b'], varargs='args', varkw='kwds', defaults=(1, ')"',
↪{False: 'bar'}), kwonlyargs=[], kwonlydefaults=None, annotations={})
```

```
>>> from sage.all import *
>>> # needs sage.misc.cython
>>> cython('def foo(unsigned int x=1, a=\')"\', b={not (2+1==3):\'bar\'}, *args,␣
↪**kwds): return')
>>> print(sage_getsource(foo))
def foo(unsigned int x=1, a=')"', b={not (2+1==3):'bar'}, *args, **kwds): return
>>> sage_getargspec(foo)
FullArgSpec(args=['x', 'a', 'b'], varargs='args', varkw='kwds', defaults=(1, ')"',
↪{False: 'bar'}), kwonlyargs=[], kwonlydefaults=None, annotations={})
```

AUTHORS:

- Originally taken from Fernando Perez's IPython
- William Stein: extensive modifications
- William Stein: in `_sage_getargspec_cython()`, a modified version of `inspect.getargspec` from the Python Standard Library, which was taken from IPython for use in Sage
- Nick Alexander: extensions, testing

- Simon King: some extension for Cython, generalisation of SageArgSpecVisitor
- Simon King: in *sage_getsourcelines()*, if a class has no docstring then let the class definition be found starting from the __init__ method.
- Simon King: in *sage_getsourcelines()*, get source lines for dynamic classes
- Simon King: in _sage_getargspec_cython(), return an ArgSpec, fix some bugs
- Simon King (2011-09): added _sage_getsourcelines_name_with_dot()
- Simon King (2013-02): in _sage_getargspec_cython(), recognise varargs and default values in cython code, and return an ArgSpec

class sage.misc.sageinspect.**BlockFinder**

Bases: object

Provide a *tokeneater()* method to detect the end of a code block.

This is the Python library's inspect.BlockFinder modified to recognize Cython definitions.

tokeneater(*type*, *token*, *srow_scol*, *erow_ecol*, *line*)

class sage.misc.sageinspect.**SageArgSpecVisitor**

Bases: NodeVisitor

A simple visitor class that walks an abstract-syntax tree (AST) for a Python function's argspec. It returns the contents of nodes representing the basic Python types: None, booleans, numbers, strings, lists, tuples, and dictionaries. We use this class in _sage_getargspec_from_ast() to extract an argspec from a function's or method's source code.

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: visitor.visit(ast.parse('[1,2,3]').body[0].value)
[1, 2, 3]
sage: v = visitor.visit(ast.parse("{'a':('e',2,[None,({False:True},'pi')]), 37.0:
↪'temp'}").body[0].value)
sage: sorted(v.items(), key=lambda x: str(x[0]))
[(37.0, 'temp'), ('a', ('e', 2, [None, ({False: True}, 'pi')]))]
sage: v = ast.parse("jc = ['veni', 'vidi', 'vici']").body[0]; v
<...ast.Assign object at ...>
sage: attrs = [x for x in dir(v) if not x.startswith('__')]
sage: '_attributes' in attrs and '_fields' in attrs and 'col_offset' in attrs
True
sage: visitor.visit(v.targets[0])
'jc'
sage: visitor.visit(v.value)
['veni', 'vidi', 'vici']
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> visitor.visit(ast.parse('[1,2,3]').body[Integer(0)].value)
[1, 2, 3]
>>> v = visitor.visit(ast.parse("{'a':('e',2,[None,({False:True},'pi')]), 37.0:
↪'temp'}").body[Integer(0)].value)
```

(continues on next page)

(continued from previous page)

```
>>> sorted(v.items(), key=lambda x: str(x[Integer(0)]))
[(37.0, 'temp'), ('a', ('e', 2, [None, ({False: True}, 'pi')]))]
>>> v = ast.parse("jc = ['veni', 'vidi', 'vici']").body[Integer(0)]; v
<...ast.Assign object at ...>
>>> attrs = [x for x in dir(v) if not x.startswith('__')]
>>> '_attributes' in attrs and '_fields' in attrs and 'col_offset' in attrs
True
>>> visitor.visit(v.targets[Integer(0)])
'jc'
>>> visitor.visit(v.value)
['veni', 'vidi', 'vici']
```

visit_BinOp(*node*)

Visit a Python AST `ast.BinOp` node.

INPUT:

- `node` – the node instance to visit

OUTPUT: the result that `node` represents

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: vis = lambda x: visitor.visit(ast.parse(x).body[0].value)
sage: [vis(d) for d in ['(3+(2*4))', '7|8', '5^3', '7/3', '7//3', '3<<4']]
↪#indirect doctest
[11, 15, 6, 2.3333333333333335, 2, 48]
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> vis = lambda x: visitor.visit(ast.parse(x).body[Integer(0)].value)
>>> [vis(d) for d in ['(3+(2*4))', '7|8', '5^3', '7/3', '7//3', '3<<4']]
↪#indirect doctest
[11, 15, 6, 2.3333333333333335, 2, 48]
```

visit_BoolOp(*node*)

Visit a Python AST `ast.BoolOp` node.

INPUT:

- `node` – the node instance to visit

OUTPUT: the result that `node` represents

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: vis = lambda x: visitor.visit(ast.parse(x).body[0].value)
sage: [vis(d) for d in ['True and 1', 'False or 3 or None', '3 and 4']]
↪#indirect doctest
[1, 3, 4]
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> vis = lambda x: visitor.visit(ast.parse(x).body[Integer(0)].value)
>>> [vis(d) for d in ['True and 1', 'False or 3 or None', '3 and 4']]
↪#indirect doctest
[1, 3, 4]
```

visit_Compare(*node*)

Visit a Python AST `ast.Compare` node.

INPUT:

- `node` – the node instance to visit

OUTPUT: the result that `node` represents

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: vis = lambda x: visitor.visit_Compare(ast.parse(x).body[0].value)
sage: [vis(d) for d in ['1<2==2!=3', '1==1>2', '1<2>1', '1<3<2<4']]
[True, False, True, False]
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> vis = lambda x: visitor.visit_Compare(ast.parse(x).body[Integer(0)].value)
>>> [vis(d) for d in ['1<2==2!=3', '1==1>2', '1<2>1', '1<3<2<4']]
[True, False, True, False]
```

visit_Dict(*node*)

Visit a Python AST `ast.Dict` node.

INPUT:

- `node` – the node instance to visit

OUTPUT: the dictionary the `node` represents

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: vis = lambda x: visitor.visit_Dict(ast.parse(x).body[0].value)
sage: v = [vis(d) for d in ['{}', "{1:one, 'two':2, other:bother}"]]
sage: [sorted(d.items(), key=lambda x: str(x[0])) for d in v]
[[], [(1, 'one'), ('other', 'bother'), ('two', 2)]]
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> vis = lambda x: visitor.visit_Dict(ast.parse(x).body[Integer(0)].value)
>>> v = [vis(d) for d in ['{}', "{1:one, 'two':2, other:bother}"]]
```

(continues on next page)

(continued from previous page)

```
>>> [sorted(d.items(), key=lambda x: str(x[Integer(0)])) for d in v]
[[], [(1, 'one'), ('other', 'bother'), ('two', 2)]]
```

visit_List(*node*)

Visit a Python AST `ast.List` node.

INPUT:

- `node` – the node instance to visit

OUTPUT: the list the `node` represents

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: vis = lambda x: visitor.visit_List(ast.parse(x).body[0].value)
sage: [vis(l) for l in ['[]', "['s', 't', 'u']", '[[e], [], [pi]]']]
[[], ['s', 't', 'u'], [['e'], [], ['pi']]]
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> vis = lambda x: visitor.visit_List(ast.parse(x).body[Integer(0)].value)
>>> [vis(l) for l in ['[]', "['s', 't', 'u']", '[[e], [], [pi]]']]
[[], ['s', 't', 'u'], [['e'], [], ['pi']]]
```

visit_Name(*node*)

Visit a Python AST `ast.Name` node.

INPUT:

- `node` – the node instance to visit

OUTPUT: `None`, `True`, `False`, or the `node`'s name as a string

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: vis = lambda x: visitor.visit_Name(ast.parse(x).body[0].value)
sage: [vis(n) for n in ['foo', 'bar']]
['foo', 'bar']
sage: [type(vis(n)) for n in ['foo', 'bar']]
[<class 'str'>, <class 'str'>]
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> vis = lambda x: visitor.visit_Name(ast.parse(x).body[Integer(0)].value)
>>> [vis(n) for n in ['foo', 'bar']]
['foo', 'bar']
>>> [type(vis(n)) for n in ['foo', 'bar']]
[<class 'str'>, <class 'str'>]
```

visit_NameConstant(*node*)

Visit a Python AST `ast.NameConstant` node.

This is an optimization added in Python 3.4 for the special cases of True, False, and None.

INPUT:

- `node` – the node instance to visit

OUTPUT: `None`, `True`, `False`

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: vis = lambda x: visitor.visit_NameConstant(ast.parse(x).body[0].value)
sage: [vis(n) for n in ['True', 'False', 'None']]
[True, False, None]
sage: [type(vis(n)) for n in ['True', 'False', 'None']]
[<class 'bool'>, <class 'bool'>, <class 'NoneType'>]
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> vis = lambda x: visitor.visit_NameConstant(ast.parse(x).body[Integer(0)].
↪value)
>>> [vis(n) for n in ['True', 'False', 'None']]
[True, False, None]
>>> [type(vis(n)) for n in ['True', 'False', 'None']]
[<class 'bool'>, <class 'bool'>, <class 'NoneType'>]
```

visit_Num(*node*)

Visit a Python AST `ast.Num` node.

INPUT:

- `node` – the node instance to visit

OUTPUT: the number the `node` represents

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: vis = lambda x: visitor.visit_Num(ast.parse(x).body[0].value)
sage: [vis(n) for n in ['123', '0.0']]
[123, 0.0]
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> vis = lambda x: visitor.visit_Num(ast.parse(x).body[Integer(0)].value)
>>> [vis(n) for n in ['123', '0.0']]
[123, 0.0]
```

Note

On Python 3 negative numbers are parsed first, for some reason, as a UnaryOp node.

visit_Str(*node*)

Visit a Python AST `ast.Str` node.

INPUT:

- `node` – the node instance to visit

OUTPUT: the string the `node` represents

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: vis = lambda x: visitor.visit_Str(ast.parse(x).body[0].value)
sage: [vis(s) for s in ['"abstract"', "'syntax'", r'''r"tr\ee"''']]
['abstract', 'syntax', 'tr\\ee']
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> vis = lambda x: visitor.visit_Str(ast.parse(x).body[Integer(0)].value)
>>> [vis(s) for s in ['"abstract"', "'syntax'", r'''r"tr\ee"''']]
['abstract', 'syntax', 'tr\\ee']
```

visit_Tuple(*node*)

Visit a Python AST `ast.Tuple` node.

INPUT:

- `node` – the node instance to visit

OUTPUT: the tuple the `node` represents

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: vis = lambda x: visitor.visit_Tuple(ast.parse(x).body[0].value)
sage: [vis(t) for t in ['()', '(x,y)', '("Au", "Al", "Cu")']]
[(), ('x', 'y'), ('Au', 'Al', 'Cu')]
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> vis = lambda x: visitor.visit_Tuple(ast.parse(x).body[Integer(0)].value)
>>> [vis(t) for t in ['()', '(x,y)', '("Au", "Al", "Cu")']]
[(), ('x', 'y'), ('Au', 'Al', 'Cu')]
```

visit_UnaryOp(*node*)

Visit a Python AST `ast.BinOp` node.

INPUT:

- `node` – the node instance to visit

OUTPUT: the result that `node` represents

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: visitor = sms.SageArgSpecVisitor()
sage: vis = lambda x: visitor.visit_UnaryOp(ast.parse(x).body[0].value)
sage: [vis(d) for d in ['+(3*2)', '-(3*2)']]
[6, -6]
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> visitor = sms.SageArgSpecVisitor()
>>> vis = lambda x: visitor.visit_UnaryOp(ast.parse(x).body[Integer(0)].value)
>>> [vis(d) for d in ['+(3*2)', '-(3*2)']]
[6, -6]
```

visit_arg(*node*)

Visit a Python AST `ast.arg` node.

This node type is only on Python 3, where function arguments are more complex than just an identifier (e.g. they may also include annotations).

For now we simply return the argument identifier as a string.

INPUT:

- `node` – the node instance to visit

OUTPUT: the argument name

EXAMPLES:

```
sage: import ast, sage.misc.sageinspect as sms
sage: s = "def f(a, b=2, c={'a': [4, 5.5, False]}, d=(None, True)):\n    ␣
↪return"
sage: visitor = sms.SageArgSpecVisitor()
sage: args = ast.parse(s).body[0].args.args
sage: [visitor.visit_arg(n) for n in args]
['a', 'b', 'c', 'd']
```

```
>>> from sage.all import *
>>> import ast, sage.misc.sageinspect as sms
>>> s = "def f(a, b=2, c={'a': [4, 5.5, False]}, d=(None, True)):\n    return"
>>> visitor = sms.SageArgSpecVisitor()
>>> args = ast.parse(s).body[Integer(0)].args.args
>>> [visitor.visit_arg(n) for n in args]
['a', 'b', 'c', 'd']
```

`sage.misc.sageinspect.`**find_object_modules**(*obj*)

Return a dictionary whose keys are the names of the modules where `obj` appear and the value at a given module name is the list of names that `obj` have in that module.

It is very unlikely that the output dictionary has several keys except when `obj` is an instance of a class.

EXAMPLES:

```
sage: from sage.misc.sageinspect import find_object_modules
sage: find_object_modules(RR)                                                  #␣
↪needs sage.rings.real_mpfr
{'sage.rings.real_mpfr': ['RR']}
sage: find_object_modules(ZZ)
{'sage.rings.integer_ring': ['Z', 'ZZ']}
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import find_object_modules
>>> find_object_modules(RR)                                                    #␣
↪needs sage.rings.real_mpfr
{'sage.rings.real_mpfr': ['RR']}
>>> find_object_modules(ZZ)
{'sage.rings.integer_ring': ['Z', 'ZZ']}
```

sage.misc.sageinspect.**formatannotation**(*annotation*, *base_module=None*)

This is taken from Python 3.7's inspect.py; the only change is to add documentation.

INPUT:

- `annotation` – annotation for a function
- `base_module` – (default: `None`)

This is only relevant with Python 3, so the doctests are marked accordingly.

EXAMPLES:

```
sage: from sage.misc.sageinspect import formatannotation
sage: import inspect
sage: def foo(a, *, b:int, **kwargs):
....:     pass
sage: s = inspect.signature(foo)

sage: a = s.parameters['a'].annotation
sage: a
<class 'inspect._empty'>
sage: formatannotation(a)
'inspect._empty'

sage: b = s.parameters['b'].annotation
sage: b
<class 'int'>
sage: formatannotation(b)
'int'
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import formatannotation
>>> import inspect
>>> def foo(a, *, b:int, **kwargs):
...     pass
>>> s = inspect.signature(foo)

>>> a = s.parameters['a'].annotation
>>> a
```

(continues on next page)

(continued from previous page)

```
<class 'inspect._empty'>
>>> formatannotation(a)
'inspect._empty'

>>> b = s.parameters['b'].annotation
>>> b
<class 'int'>
>>> formatannotation(b)
'int'
```

sage.misc.sageinspect.**is_function_or_cython_function**(*obj*)

Check whether something is a function.

This is a variant of `inspect.isfunction()`: We assume that anything which has a genuine `__code__` attribute (not using `__getattr__` overrides) is a function. This is meant to support Cython functions.

Think twice before using this function (or any function from the `inspect` or *sage.misc.sageinspect* modules). Most uses of `inspect.isfunction()` in ordinary library code can be replaced by `callable()`.

EXAMPLES:

```
sage: from sage.misc.sageinspect import is_function_or_cython_function
sage: def f(): pass
sage: is_function_or_cython_function(f)
True
sage: is_function_or_cython_function(lambda x:x)
True
sage: from sage.categories.coercion_methods import _mul_parent
sage: is_function_or_cython_function(_mul_parent)
True
sage: is_function_or_cython_function(Integer.digits)      # unbound method
False
sage: is_function_or_cython_function(Integer(1).digits)   # bound method
False
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import is_function_or_cython_function
>>> def f(): pass
>>> is_function_or_cython_function(f)
True
>>> is_function_or_cython_function(lambda x:x)
True
>>> from sage.categories.coercion_methods import _mul_parent
>>> is_function_or_cython_function(_mul_parent)
True
>>> is_function_or_cython_function(Integer.digits)      # unbound method
False
>>> is_function_or_cython_function(Integer(Integer(1)).digits)   # bound method
False
```

sage.misc.sageinspect.**isclassinstance**(*obj*)

Check if argument is instance of non built-in class.

INPUT:

- `obj` – object

EXAMPLES:

```
sage: from sage.misc.sageinspect import isclassinstance
sage: isclassinstance(int)
False
sage: class myclass: pass
sage: isclassinstance(myclass())
True
sage: isclassinstance(myclass)
False
sage: class mymetaclass(type): pass
sage: class myclass2(metaclass=mymetaclass): pass
sage: isclassinstance(myclass2)
False
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import isclassinstance
>>> isclassinstance(int)
False
>>> class myclass: pass
>>> isclassinstance(myclass())
True
>>> isclassinstance(myclass)
False
>>> class mymetaclass(type): pass
>>> class myclass2(metaclass=mymetaclass): pass
>>> isclassinstance(myclass2)
False
```

sage.misc.sageinspect.**sage_formatargspec**(*args*, *varargs=None*, *varkw=None*, *defaults=None*, *kwonlyargs=()*, *kwonlydefaults=None*, *annotations={}*, *formatarg=<class 'str'>*, *formatvarargs=None*, *formatvarkw=None*, *formatvalue=None*, *formatreturns=None*, *formatannotation=None*)

Format an argument spec from the values returned by getfullargspec.

The first seven arguments are (args, varargs, varkw, defaults, kwonlyargs, kwonlydefaults, annotations). The other five arguments are the corresponding optional formatting functions that are called to turn names and values into strings. The last argument is an optional function to format the sequence of arguments.

This is taken from Python 3.7's inspect.py, where it is deprecated. The only change, aside from documentation (this paragraph and the next, plus doctests), is to remove the deprecation warning.

Sage uses this function to format arguments, as obtained by *sage_getargspec()*. Since *sage_getargspec()* works for Cython functions while Python's inspect module does not, it makes sense to keep this function for formatting instances of `inspect.FullArgSpec`.

EXAMPLES:

```
sage: from sage.misc.sageinspect import sage_formatargspec
sage: args = ['a', 'b', 'c']
sage: defaults = [3]
sage: sage_formatargspec(args, defaults=defaults)
'(a, b, c=3)'
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import sage_formatargspec
>>> args = ['a', 'b', 'c']
>>> defaults = [Integer(3)]
>>> sage_formatargspec(args, defaults=defaults)
'(a, b, c=3)'
```

sage.misc.sageinspect.**sage_getargspec**(*obj*)

Return the names and default values of a function's arguments.

INPUT:

- `obj` – any callable object

OUTPUT:

A named tuple `FullArgSpec` is returned, as specified by the Python library function `inspect.getfullargspec()`.

NOTE:

If the object has a method `_sage_argspec_`, then the output of that method is transformed into a named tuple and then returned.

If a class instance has a method `_sage_src_`, then its output is studied to determine the argspec. This is because currently the *CachedMethod* decorator has no `_sage_argspec_` method.

EXAMPLES:

```
sage: from sage.misc.sageinspect import sage_getargspec
sage: def f(x, y, z=1, t=2, *args, **keywords):
....:     pass
sage: sage_getargspec(f)
FullArgSpec(args=['x', 'y', 'z', 't'], varargs='args', varkw='keywords',
            defaults=(1, 2), kwonlyargs=[], kwonlydefaults=None, annotations={})
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import sage_getargspec
>>> def f(x, y, z=Integer(1), t=Integer(2), *args, **keywords):
...     pass
>>> sage_getargspec(f)
FullArgSpec(args=['x', 'y', 'z', 't'], varargs='args', varkw='keywords',
            defaults=(1, 2), kwonlyargs=[], kwonlydefaults=None, annotations={})
```

We now run sage_getargspec on some functions from the Sage library:

```
sage: sage_getargspec(identity_matrix)                                          #␣
↪needs sage.modules
FullArgSpec(args=['ring', 'n', 'sparse'], varargs=None, varkw=None,
            defaults=(0, False), kwonlyargs=[], kwonlydefaults=None,
            annotations={})
sage: sage_getargspec(factor)
FullArgSpec(args=['n', 'proof', 'int_', 'algorithm', 'verbose'],
            varargs=None, varkw='kwds', defaults=(None, False, 'pari', 0),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
```

```
>>> from sage.all import *
>>> sage_getargspec(identity_matrix)                                    #␣
↪needs sage.modules
FullArgSpec(args=['ring', 'n', 'sparse'], varargs=None, varkw=None,
            defaults=(0, False), kwonlyargs=[], kwonlydefaults=None,
            annotations={})
>>> sage_getargspec(factor)
FullArgSpec(args=['n', 'proof', 'int_', 'algorithm', 'verbose'],
            varargs=None, varkw='kwds', defaults=(None, False, 'pari', 0),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
```

In the case of a class or a class instance, the `FullArgSpec` of the `__new__`, `__init__` or `__call__` method is returned:

```
sage: P.<x,y> = QQ[]
sage: sage_getargspec(P)                                                #␣
↪needs sage.libs.singular
FullArgSpec(args=['base_ring', 'n', 'names', 'order'],
            varargs=None, varkw=None, defaults=('degrevlex',),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
sage: sage_getargspec(P.__class__)                                      #␣
↪needs sage.libs.singular
FullArgSpec(args=['self', 'x'], varargs='args', varkw='kwds', defaults=(0,),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
```

```
>>> from sage.all import *
>>> P = QQ['x, y']; (x, y,) = P._first_ngens(2)
>>> sage_getargspec(P)                                                  #␣
↪needs sage.libs.singular
FullArgSpec(args=['base_ring', 'n', 'names', 'order'],
            varargs=None, varkw=None, defaults=('degrevlex',),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
>>> sage_getargspec(P.__class__)                                        #␣
↪needs sage.libs.singular
FullArgSpec(args=['self', 'x'], varargs='args', varkw='kwds', defaults=(0,),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
```

The following tests against various bugs that were fixed in Issue #9976:

```
sage: from sage.rings.polynomial.real_roots import bernstein_polynomial_factory_
↪ratlist     # needs sage.modules
sage: sage_getargspec(bernstein_polynomial_factory_ratlist.coeffs_bitsize)  ␣
↪          # needs sage.modules
FullArgSpec(args=['self'], varargs=None, varkw=None, defaults=None,
            kwonlyargs=[], kwonlydefaults=None, annotations={})
sage: from sage.rings.polynomial.pbori.pbori import BooleanMonomialMonoid   #␣
↪needs sage.rings.polynomial.pbori
sage: sage_getargspec(BooleanMonomialMonoid.gen)                        #␣
↪needs sage.rings.polynomial.pbori
FullArgSpec(args=['self', 'i'], varargs=None, varkw=None, defaults=(0,),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
sage: I = P*[x,y]
sage: sage_getargspec(I.groebner_basis)                                 #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.libs.singular
FullArgSpec(args=['self', 'algorithm', 'deg_bound', 'mult_bound', 'prot'],
            varargs='args', varkw='kwds', defaults=('', None, None, False),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
sage: cython("cpdef int foo(x,y) except -1: return 1")                    #␣
↪needs sage.misc.cython
sage: sage_getargspec(foo)                                                #␣
↪needs sage.misc.cython
FullArgSpec(args=['x', 'y'], varargs=None, varkw=None, defaults=None,
            kwonlyargs=[], kwonlydefaults=None, annotations={})
```

```
>>> from sage.all import *
>>> from sage.rings.polynomial.real_roots import bernstein_polynomial_factory_
↪ratlist     # needs sage.modules
>>> sage_getargspec(bernstein_polynomial_factory_ratlist.coeffs_bitsize)      ␣
↪        # needs sage.modules
FullArgSpec(args=['self'], varargs=None, varkw=None, defaults=None,
            kwonlyargs=[], kwonlydefaults=None, annotations={})
>>> from sage.rings.polynomial.pbori.pbori import BooleanMonomialMonoid      #␣
↪needs sage.rings.polynomial.pbori
>>> sage_getargspec(BooleanMonomialMonoid.gen)                              #␣
↪needs sage.rings.polynomial.pbori
FullArgSpec(args=['self', 'i'], varargs=None, varkw=None, defaults=(0,),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
>>> I = P*[x,y]
>>> sage_getargspec(I.groebner_basis)                                       #␣
↪needs sage.libs.singular
FullArgSpec(args=['self', 'algorithm', 'deg_bound', 'mult_bound', 'prot'],
            varargs='args', varkw='kwds', defaults=('', None, None, False),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
>>> cython("cpdef int foo(x,y) except -1: return 1")                        #␣
↪needs sage.misc.cython
>>> sage_getargspec(foo)                                                    #␣
↪needs sage.misc.cython
FullArgSpec(args=['x', 'y'], varargs=None, varkw=None, defaults=None,
            kwonlyargs=[], kwonlydefaults=None, annotations={})
```

If a `functools.partial()` instance is involved, we see no other meaningful solution than to return the argspec of the underlying function:

```
sage: def f(a, b, c, d=1):
....:     return a + b + c + d
sage: import functools
sage: f1 = functools.partial(f, 1, c=2)
sage: sage_getargspec(f1)
FullArgSpec(args=['a', 'b', 'c', 'd'], varargs=None, varkw=None, defaults=(1,),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
```

```
>>> from sage.all import *
>>> def f(a, b, c, d=Integer(1)):
...     return a + b + c + d
>>> import functools
```

(continues on next page)

(continued from previous page)

```
>>> f1 = functools.partial(f, Integer(1), c=Integer(2))
>>> sage_getargspec(f1)
FullArgSpec(args=['a', 'b', 'c', 'd'], varargs=None, varkw=None, defaults=(1,),
            kwonlyargs=[], kwonlydefaults=None, annotations={})
```

sage.misc.sageinspect.**sage_getdef**(*obj*, *obj_name=''*)

Return the definition header for any callable object.

INPUT:

- obj – function
- obj_name – string (default: ''); prepended to the output

EXAMPLES:

```
sage: from sage.misc.sageinspect import sage_getdef
sage: sage_getdef(identity_matrix)                                          #␣
↪needs sage.modules
'(ring, n=0, sparse=False)'
sage: sage_getdef(identity_matrix, 'identity_matrix')                       #␣
↪needs sage.modules
'identity_matrix(ring, n=0, sparse=False)'
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import sage_getdef
>>> sage_getdef(identity_matrix)                                            #␣
↪needs sage.modules
'(ring, n=0, sparse=False)'
>>> sage_getdef(identity_matrix, 'identity_matrix')                         #␣
↪needs sage.modules
'identity_matrix(ring, n=0, sparse=False)'
```

Check that Issue #6848 has been fixed:

```
sage: sage_getdef(RDF.random_element)
'(min=-1, max=1)'
```

```
>>> from sage.all import *
>>> sage_getdef(RDF.random_element)
'(min=-1, max=1)'
```

If an exception is generated, None is returned instead and the exception is suppressed.

sage.misc.sageinspect.**sage_getdoc**(*obj*, *obj_name=''*, *embedded=False*)

Return the docstring associated to obj as a string.

If obj is a Cython object with an embedded position in its docstring, the embedded position is stripped.

The optional boolean argument embedded controls the string formatting. It is False by default.

INPUT:

- obj – a function, module, etc.: something with a docstring

EXAMPLES:

```
sage: from sage.misc.sageinspect import sage_getdoc
sage: sage_getdoc(identity_matrix)[87:124]                                  #␣
↪needs sage.modules
'...the n x n identity matrix...'
sage: def f(a, b, c, d=1): return a+b+c+d
...
sage: import functools
sage: f1 = functools.partial(f, 1,c=2)
sage: f.__doc__ = "original documentation"
sage: f1.__doc__ = "specialised documentation"
sage: sage_getdoc(f)
'original documentation\n'
sage: sage_getdoc(f1)
'specialised documentation\n'
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import sage_getdoc
>>> sage_getdoc(identity_matrix)[Integer(87):Integer(124)]                  ␣
↪              # needs sage.modules
'...the n x n identity matrix...'
>>> def f(a, b, c, d=Integer(1)): return a+b+c+d
...
>>> import functools
>>> f1 = functools.partial(f, Integer(1),c=Integer(2))
>>> f.__doc__ = "original documentation"
>>> f1.__doc__ = "specialised documentation"
>>> sage_getdoc(f)
'original documentation\n'
>>> sage_getdoc(f1)
'specialised documentation\n'
```

sage.misc.sageinspect.**sage_getdoc_original**(*obj*)

Return the unformatted docstring associated to `obj` as a string.

If `obj` is a Cython object with an embedded position or signature in its docstring, the embedded information is stripped. If the stripped docstring is empty, then the stripped docstring of `obj.__init__` is returned instead.

Feed the results from this into the function *sage.misc.sagedoc.format()* for printing to the screen.

INPUT:

- `obj` – a function, module, etc.: something with a docstring

EXAMPLES:

```
sage: from sage.misc.sageinspect import sage_getdoc_original
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import sage_getdoc_original
```

Here is a class that has its own docstring:

```
sage: print(sage_getdoc_original(sage.rings.integer.Integer))

    The :class:`Integer` class represents arbitrary precision
```

(continues on next page)

(continued from previous page)

```
    integers. It derives from the :class:`Element` class, so
    integers can be used as ring elements anywhere in Sage.
...
```

```
>>> from sage.all import *
>>> print(sage_getdoc_original(sage.rings.integer.Integer))
<BLANKLINE>
    The :class:`Integer` class represents arbitrary precision
    integers. It derives from the :class:`Element` class, so
    integers can be used as ring elements anywhere in Sage.
...
```

If the class does not have a docstring, the docstring of the `__init__` method is used, but not the `__init__` method of the base class (this was fixed in Issue #24936):

```
sage: from sage.categories.category import Category
sage: class A(Category):
....:     def __init__(self):
....:         '''The __init__ docstring'''
sage: sage_getdoc_original(A)
'The __init__ docstring'
sage: class B(Category):
....:     pass
sage: sage_getdoc_original(B)
''
```

```
>>> from sage.all import *
>>> from sage.categories.category import Category
>>> class A(Category):
...     def __init__(self):
...         '''The __init__ docstring'''
>>> sage_getdoc_original(A)
'The __init__ docstring'
>>> class B(Category):
...     pass
>>> sage_getdoc_original(B)
''
```

Old-style classes are supported:

```
sage: class OldStyleClass:
....:     def __init__(self):
....:         '''The __init__ docstring'''
....:         pass
sage: print(sage_getdoc_original(OldStyleClass))
The __init__ docstring
```

```
>>> from sage.all import *
>>> class OldStyleClass:
...     def __init__(self):
...         '''The __init__ docstring'''
...         pass
```

(continues on next page)

(continued from previous page)

```
>>> print(sage_getdoc_original(OldStyleClass))
The __init__ docstring
```

When there is no `__init__` method, we just get an empty string:

```
sage: class OldStyleClass:
....:     pass
sage: sage_getdoc_original(OldStyleClass)
''
```

```
>>> from sage.all import *
>>> class OldStyleClass:
...     pass
>>> sage_getdoc_original(OldStyleClass)
''
```

If an instance of a class does not have its own docstring, the docstring of its class results:

```
sage: sage_getdoc_original(sage.plot.colors.aliceblue) == sage_getdoc_
↪original(sage.plot.colors.Color)          # needs sage.plot
True
```

```
>>> from sage.all import *
>>> sage_getdoc_original(sage.plot.colors.aliceblue) == sage_getdoc_original(sage.
↪plot.colors.Color)          # needs sage.plot
True
```

sage.misc.sageinspect.**sage_getfile**(*obj*)

Get the full file name associated to `obj` as a string.

INPUT:

- `obj` – a Sage object, module, etc.

EXAMPLES:

```
sage: from sage.misc.sageinspect import sage_getfile
sage: sage_getfile(sage.rings.rational)
'...sage/rings/rational.pyx'
sage: from sage.algebras.steenrod.steenrod_algebra import Sq                    #␣
↪needs sage.combinat sage.modules
sage: sage_getfile(Sq)                                                          #␣
↪needs sage.combinat sage.modules
'...sage/algebras/steenrod/steenrod_algebra.py'
sage: sage_getfile(x)                                                           #␣
↪needs sage.symbolic
'...sage/symbolic/expression.pyx'
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import sage_getfile
>>> sage_getfile(sage.rings.rational)
'...sage/rings/rational.pyx'
>>> from sage.algebras.steenrod.steenrod_algebra import Sq                      #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.combinat sage.modules
>>> sage_getfile(Sq)                                                    #␣
↪needs sage.combinat sage.modules
'...sage/algebras/steenrod/steenrod_algebra.py'
>>> sage_getfile(x)                                                     #␣
↪needs sage.symbolic
'...sage/symbolic/expression.pyx'
```

The following tests against some bugs fixed in Issue #9976:

```
sage: obj = sage.combinat.partition_algebra.SetPartitionsAk             #␣
↪needs sage.combinat sage.modules
sage: sage_getfile(obj)                                                 #␣
↪needs sage.combinat sage.modules
'...sage/combinat/partition_algebra.py'
```

```
>>> from sage.all import *
>>> obj = sage.combinat.partition_algebra.SetPartitionsAk               #␣
↪needs sage.combinat sage.modules
>>> sage_getfile(obj)                                                   #␣
↪needs sage.combinat sage.modules
'...sage/combinat/partition_algebra.py'
```

And here is another bug, fixed in Issue #11298:

```
sage: P.<x,y> = QQ[]
sage: sage_getfile(P)                                                   #␣
↪needs sage.libs.singular
'...sage/rings/polynomial/multi_polynomial_libsingular...'
```

```
>>> from sage.all import *
>>> P = QQ['x, y']; (x, y,) = P._first_ngens(2)
>>> sage_getfile(P)                                                     #␣
↪needs sage.libs.singular
'...sage/rings/polynomial/multi_polynomial_libsingular...'
```

Another bug with editable meson install:

```
sage: P.<x,y> = QQ[]
sage: I = P * [x,y]
sage: path = sage_getfile(I.groebner_basis); path
'.../sage/rings/qqbar_decorators.py'
sage: path == sage_getfile(sage.rings.qqbar_decorators)
True
```

```
>>> from sage.all import *
>>> P = QQ['x, y']; (x, y,) = P._first_ngens(2)
>>> I = P * [x,y]
>>> path = sage_getfile(I.groebner_basis); path
'.../sage/rings/qqbar_decorators.py'
>>> path == sage_getfile(sage.rings.qqbar_decorators)
True
```

A problem fixed in Issue #16309:

```
sage: cython(                                                                #␣
↪needs sage.misc.cython
....: '''
....: class Bar: pass
....: cdef class Foo: pass
....: ''')
sage: sage_getfile(Bar)                                                      #␣
↪needs sage.misc.cython
'...pyx'
sage: sage_getfile(Foo)                                                      #␣
↪needs sage.misc.cython
'...pyx'
```

```
>>> from sage.all import *
>>> cython(                                                                  #␣
↪needs sage.misc.cython
... '''
... class Bar: pass
... cdef class Foo: pass
... ''')
>>> sage_getfile(Bar)                                                       #␣
↪needs sage.misc.cython
'...pyx'
>>> sage_getfile(Foo)                                                       #␣
↪needs sage.misc.cython
'...pyx'
```

By Issue #18249, we return an empty string for Python builtins. In that way, there is no error when the user types, for example, `range?`:

```
sage: sage_getfile(range)
''
```

```
>>> from sage.all import *
>>> sage_getfile(range)
''
```

sage.misc.sageinspect.**sage_getfile_relative**(*obj*)

Get the file name associated to `obj` as a string.

This is the same as *sage_getfile()*, but if the source file is part of the `sage.*` namespace, it makes the file name relative so that it starts with `sage/`.

INPUT:

- `obj` – a Sage object, module, etc.

EXAMPLES:

```
sage: from sage.misc.sageinspect import sage_getfile_relative
sage: sage_getfile_relative(sage.rings.rational)
'sage/rings/rational.pyx'
sage: from sage.algebras.steenrod.steenrod_algebra import Sq                 #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.combinat sage.modules
sage: sage_getfile_relative(Sq)                                             #␣
↪needs sage.combinat sage.modules
'sage/algebras/steenrod/steenrod_algebra.py'
sage: sage_getfile_relative(x)                                              #␣
↪needs sage.symbolic
'sage/symbolic/expression.pyx'
sage: sage_getfile_relative(range)
''
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import sage_getfile_relative
>>> sage_getfile_relative(sage.rings.rational)
'sage/rings/rational.pyx'
>>> from sage.algebras.steenrod.steenrod_algebra import Sq                  #␣
↪needs sage.combinat sage.modules
>>> sage_getfile_relative(Sq)                                               #␣
↪needs sage.combinat sage.modules
'sage/algebras/steenrod/steenrod_algebra.py'
>>> sage_getfile_relative(x)                                                #␣
↪needs sage.symbolic
'sage/symbolic/expression.pyx'
>>> sage_getfile_relative(range)
''
```

sage.misc.sageinspect.**sage_getsource**(*obj*)

Return the source code associated to obj as a string, or None.

INPUT:

- obj – function, etc.

EXAMPLES:

```
sage: from sage.misc.sageinspect import sage_getsource
sage: sage_getsource(identity_matrix)[19:60]                                #␣
↪needs sage.modules
'identity_matrix(ring, n=0, sparse=False):'
sage: sage_getsource(identity_matrix)[19:60]                                #␣
↪needs sage.modules
'identity_matrix(ring, n=0, sparse=False):'
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import sage_getsource
>>> sage_getsource(identity_matrix)[Integer(19):Integer(60)]                ␣
↪              # needs sage.modules
'identity_matrix(ring, n=0, sparse=False):'
>>> sage_getsource(identity_matrix)[Integer(19):Integer(60)]                ␣
↪              # needs sage.modules
'identity_matrix(ring, n=0, sparse=False):'
```

sage.misc.sageinspect.**sage_getsourcelines**(*obj*)

Return a pair ([source_lines], starting line number) of the source code associated to obj, or None.

INPUT:

- `obj` – function, etc.

OUTPUT:

(source_lines, lineno) or None: `source_lines` is a list of strings, and `lineno` is an integer.

EXAMPLES:

```
sage: from sage.misc.sageinspect import sage_getsourcelines

sage: # needs sage.modules
sage: sage_getsourcelines(matrix)[1]
21
sage: sage_getsourcelines(matrix)[0][0]
'def matrix(*args, **kwds):\n'
```

```
>>> from sage.all import *
>>> from sage.misc.sageinspect import sage_getsourcelines

>>> # needs sage.modules
>>> sage_getsourcelines(matrix)[Integer(1)]
21
>>> sage_getsourcelines(matrix)[Integer(0)][Integer(0)]
'def matrix(*args, **kwds):\n'
```

Some classes customize this using a `_sage_src_lines_` method, which gives the source lines of a class instance, but not the class itself. We demonstrate this for *CachedFunction*:

```
sage: # needs sage.combinat
sage: cachedfib = cached_function(fibonacci)
sage: sage_getsourcelines(cachedfib)[0][0]
"def fibonacci(n, algorithm='pari') -> Integer:\n"
sage: sage_getsourcelines(type(cachedfib))[0][0]
'cdef class CachedFunction():\n'
```

```
>>> from sage.all import *
>>> # needs sage.combinat
>>> cachedfib = cached_function(fibonacci)
>>> sage_getsourcelines(cachedfib)[Integer(0)][Integer(0)]
"def fibonacci(n, algorithm='pari') -> Integer:\n"
>>> sage_getsourcelines(type(cachedfib))[Integer(0)][Integer(0)]
'cdef class CachedFunction():\n'
```

sage.misc.sageinspect.**sage_getvariablename**(*self*, *omit_underscore_names=True*)

Attempt to get the name of a Sage object.

INPUT:

- `self` – any object
- `omit_underscore_names` – boolean (default: `True`)

OUTPUT:

If the user has assigned an object `obj` to a variable name, then return that variable name. If several variables point to `obj`, return a sorted list of those names. If `omit_underscore_names` is `True` (the default) then omit names

starting with an underscore "_".

EXAMPLES:

```
sage: # needs sage.modules
sage: from sage.misc.sageinspect import sage_getvariablename
sage: A = random_matrix(ZZ, 100)
sage: sage_getvariablename(A)
'A'
sage: B = A
sage: sage_getvariablename(A)
['A', 'B']
```

```
>>> from sage.all import *
>>> # needs sage.modules
>>> from sage.misc.sageinspect import sage_getvariablename
>>> A = random_matrix(ZZ, Integer(100))
>>> sage_getvariablename(A)
'A'
>>> B = A
>>> sage_getvariablename(A)
['A', 'B']
```

If an object is not assigned to a variable, an empty list is returned:

```
sage: sage_getvariablename(random_matrix(ZZ, 60))                              #␣
↪needs sage.modules
[]
```

```
>>> from sage.all import *
>>> sage_getvariablename(random_matrix(ZZ, Integer(60)))                       ␣
↪     # needs sage.modules
[]
```

7.3.3 Edit the source code of Sage interactively

AUTHORS:

- Nils Bruin
- William Stein – touch up for inclusion in Sage.
- Simon King: Make it usable on extension classes that do not have a docstring; include this module into the reference manual and fix some syntax errors in the doc strings.

This module provides a routine to open the source file of a python object in an editor of your choice, if the source file can be figured out. For files that appear to be from the sage library, the path name gets modified to the corresponding file in the current branch, i.e., the file that gets copied into the library upon 'sage -br'.

The editor to be run, and the way it should be called to open the requested file at the right line number, can be supplied via a template. For a limited number of editors, templates are already known to the system. In those cases it suffices to give the editor name.

In fact, if the environment variable `EDITOR` is set to a known editor, then the system will use that if no template has been set explicitly.

sage.misc.edit_module.**edit**(*obj*, *editor=None*, *bg=None*)

Open source code of `obj` in editor of your choice.

INPUT:

- editor – string (default: `None`); if given, use specified editor. Choice is stored for next time.

AUTHOR:

Nils Bruin (2007-10-03)

EXAMPLES:

This is a typical example of how to use this routine:

```
# make some object obj
sage: edit(obj)     # not tested
```

Now for more details and customization:

```
sage: import sage.misc.edit_module as m
sage: m.set_edit_template("vi -c ${line} ${file}")
```

```
>>> from sage.all import *
>>> import sage.misc.edit_module as m
>>> m.set_edit_template("vi -c ${line} ${file}")
```

In fact, since `vi` is a well-known editor, you could also just use:

```
sage: m.set_editor("vi")
```

```
>>> from sage.all import *
>>> m.set_editor("vi")
```

To illustrate:

```
sage: m.edit_template.template
'vi -c ${line} ${file}'
```

```
>>> from sage.all import *
>>> m.edit_template.template
'vi -c ${line} ${file}'
```

And if your environment variable `EDITOR` is set to a recognised editor, you would not have to set anything.

To edit the source of an object, just type something like:

```
sage: edit(edit)            # not tested
```

```
>>> from sage.all import *
>>> edit(edit)            # not tested
```

sage.misc.edit_module.**edit_devel**(*self*, *filename*, *linenum*)

This function is for internal use and is called by IPython when you use the IPython commands `%edit` or `%ed`.

This hook calls the default implementation, but changes the filename for files that appear to be from the sage library: if the filename begins with 'SAGE_LOCAL/lib/python…/site-packages', it replaces this by 'SAGE_ROOT/src'.

EXAMPLES:

```
sage: %edit gcd          # indirect doctest, not tested
sage: %ed gcd            # indirect doctest, not tested
```

```
>>> from sage.all import *
>>> %edit gcd          # indirect doctest, not tested
>>> %ed gcd            # indirect doctest, not tested
```

The above should open your favorite editor (as stored in the environment variable EDITOR) with the file in which gcd is defined, and when your editor supports it, also at the line in which gcd is defined.

sage.misc.edit_module.**file_and_line**(*obj*)

Look up source file and line number of obj.

If the file lies in the Sage library, the path name of the corresponding file in the current branch (i.e., the file that gets copied into the Sage library upon running 'sage -br'). Note that the first line of a file is considered to be 1 rather than 0 because most editors think that this is the case.

AUTHORS:

- Nils Bruin (2007-10-03)
- Simon King (2011-05): Use *sageinspect* to get the file and the line.

EXAMPLES:

```
sage: import sage.misc.edit_module as edit_module
sage: edit_module.file_and_line(sage.cpython)
('...sage/cpython/__init__.py', 0)
```

```
>>> from sage.all import *
>>> import sage.misc.edit_module as edit_module
>>> edit_module.file_and_line(sage.cpython)
('...sage/cpython/__init__.py', 0)
```

The following tests against a bug that was fixed in Issue #11298:

```
sage: edit_module.file_and_line(x)                                              #␣
↪needs sage.symbolic
('...sage/symbolic/expression...pyx', ...)
```

```
>>> from sage.all import *
>>> edit_module.file_and_line(x)                                              #␣
↪needs sage.symbolic
('...sage/symbolic/expression...pyx', ...)
```

sage.misc.edit_module.**set_edit_template**(*template_string*)

Set the default edit template string.

It should reference ${file} and ${line}. This routine normally needs to be called prior to using 'edit'. However, if the editor set in the shell variable EDITOR is known, then the system will substitute an appropriate template for you. See edit_module.template_defaults for the recognised templates.

AUTHOR:

Nils Bruin (2007-10-03)

EXAMPLES:

```
sage: from sage.misc.edit_module import set_edit_template
sage: set_edit_template("echo EDIT ${file}:${line}")
sage: edit(sage)       # not tested
EDIT /usr/local/sage/src/sage/__init__.py:1
```

```
>>> from sage.all import *
>>> from sage.misc.edit_module import set_edit_template
>>> set_edit_template("echo EDIT ${file}:${line}")
>>> edit(sage)       # not tested
EDIT /usr/local/sage/src/sage/__init__.py:1
```

sage.misc.edit_module.**set_editor**(*editor_name*, *opts=''*)

Set the editor to be used by the edit command by basic editor name.

Currently, the system only knows appropriate call strings for a limited number of editors. If you want to use another editor, you should set the whole edit template via *set_edit_template()*.

AUTHOR:

Nils Bruin (2007-10-05)

EXAMPLES:

```
sage: from sage.misc.edit_module import set_editor
sage: set_editor('vi')
sage: sage.misc.edit_module.edit_template.template
'vi -c ${line} ${file}'
```

```
>>> from sage.all import *
>>> from sage.misc.edit_module import set_editor
>>> set_editor('vi')
>>> sage.misc.edit_module.edit_template.template
'vi -c ${line} ${file}'
```

sage.misc.edit_module.**template_fields**(*template*)

Given a String.Template object, returns the fields.

AUTHOR:

Nils Bruin (2007-10-22)

EXAMPLES:

```
sage: from sage.misc.edit_module import template_fields
sage: from string import Template
sage: t = Template("Template ${one} with ${two} and ${three}")
sage: sorted(template_fields(t))
['one', 'three', 'two']
```

```
>>> from sage.all import *
>>> from sage.misc.edit_module import template_fields
>>> from string import Template
>>> t = Template("Template ${one} with ${two} and ${three}")
>>> sorted(template_fields(t))
['one', 'three', 'two']
```

7.3.4 Class inheritance graphs

sage.misc.classgraph.**class_graph**(*top*, *depth=5*, *name_filter=None*, *classes=None*, *as_graph=True*)

Return the class inheritance graph of a module, class, or object.

INPUT:

- top – the module, class, or object to start with (e.g. sage, Integer, 3)
- depth – maximal recursion depth within submodules (default: 5)
- name_filter – e.g. 'sage.rings' to only consider classes in sage.rings
- classes – (optional) dictionary to be filled in (it is also returned)
- as_graph – boolean (default: True)

OUTPUT:

An oriented graph, with class names as vertices, and an edge from each class to each of its bases.

EXAMPLES:

We construct the inheritance graph of the classes within a given module:

```
sage: from sage.rings.polynomial.padics import polynomial_padic_capped_relative_
↪dense, polynomial_padic_flat
sage: G = class_graph(sage.rings.polynomial.padics); G
Digraph on 6 vertices
sage: G.vertices(sort=True)
['Polynomial',
 'Polynomial_generic_cdv',
 'Polynomial_generic_dense',
 'Polynomial_padic',
 'Polynomial_padic_capped_relative_dense',
 'Polynomial_padic_flat']
sage: G.edges(sort=True, labels=False)
[('Polynomial_padic', 'Polynomial'),
 ('Polynomial_padic_capped_relative_dense', 'Polynomial_generic_cdv'),
 ('Polynomial_padic_capped_relative_dense', 'Polynomial_padic'),
 ('Polynomial_padic_flat', 'Polynomial_generic_dense'),
 ('Polynomial_padic_flat', 'Polynomial_padic')]
```

```
>>> from sage.all import *
>>> from sage.rings.polynomial.padics import polynomial_padic_capped_relative_
↪dense, polynomial_padic_flat
>>> G = class_graph(sage.rings.polynomial.padics); G
Digraph on 6 vertices
>>> G.vertices(sort=True)
['Polynomial',
 'Polynomial_generic_cdv',
 'Polynomial_generic_dense',
 'Polynomial_padic',
 'Polynomial_padic_capped_relative_dense',
 'Polynomial_padic_flat']
>>> G.edges(sort=True, labels=False)
[('Polynomial_padic', 'Polynomial'),
 ('Polynomial_padic_capped_relative_dense', 'Polynomial_generic_cdv'),
```

(continues on next page)

(continued from previous page)

```
 ('Polynomial_padic_capped_relative_dense', 'Polynomial_padic'),
 ('Polynomial_padic_flat', 'Polynomial_generic_dense'),
 ('Polynomial_padic_flat', 'Polynomial_padic')]
```

We construct the inheritance graph of a given class:

```
sage: class_graph(Parent).edges(sort=True, labels=False)
[('CategoryObject', 'SageObject'), ('Parent', 'CategoryObject'), ('SageObject',
↪'object')]
```

```
>>> from sage.all import *
>>> class_graph(Parent).edges(sort=True, labels=False)
[('CategoryObject', 'SageObject'), ('Parent', 'CategoryObject'), ('SageObject',
↪'object')]
```

We construct the inheritance graph of the class of an object:

```
sage: class_graph([1,2,3]).edges(sort=True, labels=False)
[('list', 'object')]
```

```
>>> from sage.all import *
>>> class_graph([Integer(1),Integer(2),Integer(3)]).edges(sort=True, labels=False)
[('list', 'object')]
```

Warning

the output of `class_graph` used to be a dictionary mapping each class name to the list of names of its bases. This can be emulated by setting the option `as_graph` to `False`:

```
sage: class_graph(sage.rings.polynomial.padics, depth=2, as_graph=False)
{'Polynomial_padic': ['Polynomial'],
 'Polynomial_padic_capped_relative_dense': ['Polynomial_generic_cdv',
  'Polynomial_padic'],
 'Polynomial_padic_flat': ['Polynomial_generic_dense', 'Polynomial_padic']}
```

```
>>> from sage.all import *
>>> class_graph(sage.rings.polynomial.padics, depth=Integer(2), as_graph=False)
{'Polynomial_padic': ['Polynomial'],
 'Polynomial_padic_capped_relative_dense': ['Polynomial_generic_cdv',
  'Polynomial_padic'],
 'Polynomial_padic_flat': ['Polynomial_generic_dense', 'Polynomial_padic']}
```

Note

the `classes` and `as_graph` options are mostly intended for internal recursive use.

Note

`class_graph` does not yet handle nested classes

7.3.5 Some tools for developers

AUTHORS:

- Nicolas M. Thiery: initial version
- Vincent Delecroix (2012 and 2013): improve import_statements

`sage.misc.dev_tools.`**`find_objects_from_name`**(*name*, *module_name=None*, *include_lazy_imports=False*)

Return the list of objects from `module_name` whose name is `name`.

INPUT:

- `name` – string
- `module_name` – string or `None`:
  - If `module_name` is `None`, the function runs through all loaded modules and returns the list of objects whose name matches `name`.
  - If `module_name` is a string, then search only in submodules of `module_name`.
- `include_lazy_imports` – boolean (default: `False`); whether to include unresolved lazy imports (i.e., *`LazyImport`* objects) in the output.

In order to search through more modules you might use the function *`load_submodules()`*.

EXAMPLES:

```
sage: import sage.misc.dev_tools as dt
sage: dt.find_objects_from_name('FareySymbol')                                  #␣
↪needs sage.modular
[<class 'sage.modular.arithgroup.farey_symbol.Farey'>]

sage: # needs sympy
sage: import sympy
sage: dt.find_objects_from_name('RR')
[Real Field with 53 bits of precision, RR]
sage: dt.find_objects_from_name('RR', 'sage')
[Real Field with 53 bits of precision]
sage: dt.find_objects_from_name('RR', 'sympy')
[RR]
```

```
>>> from sage.all import *
>>> import sage.misc.dev_tools as dt
>>> dt.find_objects_from_name('FareySymbol')                                    #␣
↪needs sage.modular
[<class 'sage.modular.arithgroup.farey_symbol.Farey'>]

>>> # needs sympy
>>> import sympy
>>> dt.find_objects_from_name('RR')
[Real Field with 53 bits of precision, RR]
>>> dt.find_objects_from_name('RR', 'sage')
[Real Field with 53 bits of precision]
```

(continues on next page)

(continued from previous page)

```
>>> dt.find_objects_from_name('RR', 'sympy')
[RR]
```

Examples that do not belong to the global namespace but in a loaded module:

```
sage: 'find_objects_from_name' in globals()
False
sage: objs = dt.find_objects_from_name('find_objects_from_name')
sage: len(objs)
1
sage: dt.find_objects_from_name is dt.find_objects_from_name
True
```

```
>>> from sage.all import *
>>> 'find_objects_from_name' in globals()
False
>>> objs = dt.find_objects_from_name('find_objects_from_name')
>>> len(objs)
1
>>> dt.find_objects_from_name is dt.find_objects_from_name
True
```

When `include_lazy_imports=True` is used, several *LazyImport* objects that are resolving to the same object may be included in the output:

```
sage: dt.find_objects_from_name('RR', include_lazy_imports=True)                #␣
↪needs sage.rings.real_mpfr
[Real Field with 53 bits of precision,
 ...
 Real Field with 53 bits of precision,
 RR]
```

```
>>> from sage.all import *
>>> dt.find_objects_from_name('RR', include_lazy_imports=True)                  #␣
↪needs sage.rings.real_mpfr
[Real Field with 53 bits of precision,
 ...
 Real Field with 53 bits of precision,
 RR]
```

Note

It might be a good idea to move this function into *sage.misc.sageinspect*.

`sage.misc.dev_tools.`**`import_statement_string`**(*module*, *names*, *lazy*)

Return a (lazy) import statement for `names` from `module`.

INPUT:

- `module` – the name of a module
- `names` – list of 2-tuples containing names and alias to import

- `lazy` – boolean; whether to return a lazy import statement

EXAMPLES:

```
sage: import sage.misc.dev_tools as dt
sage: modname = 'sage.misc.dev_tools'
sage: names_and_aliases = [('import_statement_string', 'iss')]
sage: dt.import_statement_string(modname, names_and_aliases, False)
'from sage.misc.dev_tools import import_statement_string as iss'
sage: dt.import_statement_string(modname, names_and_aliases, True)
"lazy_import('sage.misc.dev_tools', 'import_statement_string', 'iss')"
sage: dt.import_statement_string(modname, [('a','b'),('c','c'),('d','e')], False)
'from sage.misc.dev_tools import a as b, c, d as e'
sage: dt.import_statement_string(modname, [(None,None)], False)
'import sage.misc.dev_tools'
```

```
>>> from sage.all import *
>>> import sage.misc.dev_tools as dt
>>> modname = 'sage.misc.dev_tools'
>>> names_and_aliases = [('import_statement_string', 'iss')]
>>> dt.import_statement_string(modname, names_and_aliases, False)
'from sage.misc.dev_tools import import_statement_string as iss'
>>> dt.import_statement_string(modname, names_and_aliases, True)
"lazy_import('sage.misc.dev_tools', 'import_statement_string', 'iss')"
>>> dt.import_statement_string(modname, [('a','b'),('c','c'),('d','e')], False)
'from sage.misc.dev_tools import a as b, c, d as e'
>>> dt.import_statement_string(modname, [(None,None)], False)
'import sage.misc.dev_tools'
```

sage.misc.dev_tools.**import_statements**(**objects*, ***kwds*)

Print import statements for the given objects.

INPUT:

- `*objects` – a sequence of objects or comma-separated strings of names
- `lazy` – boolean (default: `False`); whether to print a lazy import statement
- `verbose` – boolean (default: `True`); whether to print information in case of ambiguity
- `answer_as_str` – boolean (default: `False`); if `True` return a string instead of printing the statement

EXAMPLES:

```
sage: import_statements(WeylGroup, lazy_attribute)                              #␣
↪needs sage.libs.gap
from sage.combinat.root_system.weyl_group import WeylGroup
from sage.misc.lazy_attribute import lazy_attribute

sage: import_statements(IntegerRing)
from sage.rings.integer_ring import IntegerRing
```

```
>>> from sage.all import *
>>> import_statements(WeylGroup, lazy_attribute)                                #␣
↪needs sage.libs.gap
from sage.combinat.root_system.weyl_group import WeylGroup
```

(continues on next page)

(continued from previous page)

```
from sage.misc.lazy_attribute import lazy_attribute

>>> import_statements(IntegerRing)
from sage.rings.integer_ring import IntegerRing
```

If `lazy` is True, then *lazy_import()* statements are displayed instead:

```
sage: import_statements(WeylGroup, lazy_attribute, lazy=True)                  #␣
↪needs sage.libs.gap
from sage.misc.lazy_import import lazy_import
lazy_import('sage.combinat.root_system.weyl_group', 'WeylGroup')
lazy_import('sage.misc.lazy_attribute', 'lazy_attribute')
```

```
>>> from sage.all import *
>>> import_statements(WeylGroup, lazy_attribute, lazy=True)                    #␣
↪needs sage.libs.gap
from sage.misc.lazy_import import lazy_import
lazy_import('sage.combinat.root_system.weyl_group', 'WeylGroup')
lazy_import('sage.misc.lazy_attribute', 'lazy_attribute')
```

In principle, the function should also work on object which are instances. In case of ambiguity, one or two warning lines are printed:

```
sage: import_statements(RDF)
from sage.rings.real_double import RDF

sage: import_statements(ZZ)
# ** Warning **: several names for that object: Z, ZZ
from sage.rings.integer_ring import Z

sage: import_statements(euler_phi)
from sage.arith.misc import euler_phi

sage: import_statements(x)                                                     #␣
↪needs sage.symbolic
from sage.calculus.predefined import x
```

```
>>> from sage.all import *
>>> import_statements(RDF)
from sage.rings.real_double import RDF

>>> import_statements(ZZ)
# ** Warning **: several names for that object: Z, ZZ
from sage.rings.integer_ring import Z

>>> import_statements(euler_phi)
from sage.arith.misc import euler_phi

>>> import_statements(x)                                                       #␣
↪needs sage.symbolic
from sage.calculus.predefined import x
```

If you don't like the warning you can disable them with the option `verbose`:

```
sage: import_statements(ZZ, verbose=False)
from sage.rings.integer_ring import Z

sage: import_statements(x, verbose=False)                                   #␣
↪needs sage.symbolic
from sage.calculus.predefined import x
```

```
>>> from sage.all import *
>>> import_statements(ZZ, verbose=False)
from sage.rings.integer_ring import Z

>>> import_statements(x, verbose=False)                                     #␣
↪needs sage.symbolic
from sage.calculus.predefined import x
```

If the object has several names, an other way to get the import statement you expect is to use a string instead of the object:

```
sage: import_statements(matrix)                                             #␣
↪needs sage.modules
# ** Warning **: several names for that object: Matrix, matrix
from sage.matrix.constructor import Matrix

sage: import_statements('cached_function')
from sage.misc.cachefunc import cached_function
sage: import_statements('Z')
# **Warning**: distinct objects with name 'Z' in:
#   - sage.calculus.predefined
#   - sage.rings.integer_ring
from sage.rings.integer_ring import Z
```

```
>>> from sage.all import *
>>> import_statements(matrix)                                               #␣
↪needs sage.modules
# ** Warning **: several names for that object: Matrix, matrix
from sage.matrix.constructor import Matrix

>>> import_statements('cached_function')
from sage.misc.cachefunc import cached_function
>>> import_statements('Z')
# **Warning**: distinct objects with name 'Z' in:
#   - sage.calculus.predefined
#   - sage.rings.integer_ring
from sage.rings.integer_ring import Z
```

The strings are allowed to be comma-separated names, and parenthesis are stripped for convenience:

```
sage: import_statements('(floor, ceil)')                                    #␣
↪needs sage.symbolic
from sage.functions.other import floor, ceil
```

```
>>> from sage.all import *
```

(continues on next page)

(continued from previous page)

```
>>> import_statements('(floor, ceil)')                                    #␣
↪needs sage.symbolic
from sage.functions.other import floor, ceil
```

Specifying a string is also useful for objects that are not imported in the Sage interpreter namespace by default. In this case, an object with that name is looked up in all the modules that have been imported in this session:

```
sage: import_statement_string
Traceback (most recent call last):
...
NameError: name 'import_statement_string' is not defined

sage: import_statements("import_statement_string")
from sage.misc.dev_tools import import_statement_string
```

```
>>> from sage.all import *
>>> import_statement_string
Traceback (most recent call last):
...
NameError: name 'import_statement_string' is not defined

>>> import_statements("import_statement_string")
from sage.misc.dev_tools import import_statement_string
```

Sometimes objects are imported as an alias (from XXX import YYY as ZZZ) or are affected (XXX = YYY) and the function might detect it:

```
sage: import_statements('FareySymbol')
from sage.modular.arithgroup.farey_symbol import Farey as FareySymbol

sage: import_statements('power')
from sage.arith.power import generic_power as power
```

```
>>> from sage.all import *
>>> import_statements('FareySymbol')
from sage.modular.arithgroup.farey_symbol import Farey as FareySymbol

>>> import_statements('power')
from sage.arith.power import generic_power as power
```

In order to be able to detect functions that belong to a non-loaded module, you might call the helper *load_submodules()* as in the following:

```
sage: import_statements('HeckeMonoid')
Traceback (most recent call last):
...
LookupError: no object named 'HeckeMonoid'
sage: from sage.misc.dev_tools import load_submodules
sage: load_submodules(sage.monoids)
load sage.monoids.automatic_semigroup... succeeded
load sage.monoids.hecke_monoid... succeeded
load sage.monoids.indexed_free_monoid... succeeded
```

(continues on next page)

(continued from previous page)

```
sage: import_statements('HeckeMonoid')
from sage.monoids.hecke_monoid import HeckeMonoid
```

```
>>> from sage.all import *
>>> import_statements('HeckeMonoid')
Traceback (most recent call last):
...
LookupError: no object named 'HeckeMonoid'
>>> from sage.misc.dev_tools import load_submodules
>>> load_submodules(sage.monoids)
load sage.monoids.automatic_semigroup... succeeded
load sage.monoids.hecke_monoid... succeeded
load sage.monoids.indexed_free_monoid... succeeded
>>> import_statements('HeckeMonoid')
from sage.monoids.hecke_monoid import HeckeMonoid
```

We test different objects which have no appropriate answer:

```
sage: import_statements('my_tailor_is_rich')
Traceback (most recent call last):
...
LookupError: no object named 'my_tailor_is_rich'
sage: import_statements(5)
Traceback (most recent call last):
...
ValueError: no import statement found for '5'.
```

```
>>> from sage.all import *
>>> import_statements('my_tailor_is_rich')
Traceback (most recent call last):
...
LookupError: no object named 'my_tailor_is_rich'
>>> import_statements(Integer(5))
Traceback (most recent call last):
...
ValueError: no import statement found for '5'.
```

We test that it behaves well with lazy imported objects (Issue #14767):

```
sage: import_statements(NN)
from sage.rings.semirings.non_negative_integer_semiring import NN
sage: import_statements('NN')
from sage.rings.semirings.non_negative_integer_semiring import NN
```

```
>>> from sage.all import *
>>> import_statements(NN)
from sage.rings.semirings.non_negative_integer_semiring import NN
>>> import_statements('NN')
from sage.rings.semirings.non_negative_integer_semiring import NN
```

Deprecated lazy imports are ignored (see Issue #17458):

```
sage: lazy_import('sage.all', 'RR', 'deprecated_RR', namespace=sage.__dict__,␣
↪deprecation=17458)
sage: import_statements('deprecated_RR')
Traceback (most recent call last):
...
LookupError: object named 'deprecated_RR' is deprecated (see Issue #17458)
sage: lazy_import('sage.all', 'RR', namespace=sage.__dict__, deprecation=17458)
sage: import_statements('RR')
from sage.rings.real_mpfr import RR
```

```
>>> from sage.all import *
>>> lazy_import('sage.all', 'RR', 'deprecated_RR', namespace=sage.__dict__,␣
↪deprecation=Integer(17458))
>>> import_statements('deprecated_RR')
Traceback (most recent call last):
...
LookupError: object named 'deprecated_RR' is deprecated (see Issue #17458)
>>> lazy_import('sage.all', 'RR', namespace=sage.__dict__,␣
↪deprecation=Integer(17458))
>>> import_statements('RR')
from sage.rings.real_mpfr import RR
```

The following were fixed with Issue #15351:

```
sage: import_statements('Rationals')
from sage.rings.rational_field import RationalField as Rationals
sage: import_statements(sage.combinat.partition_algebra.SetPartitionsAk)
from sage.combinat.partition_algebra import SetPartitionsAk
sage: import_statements(CIF)
from sage.rings.cif import CIF
sage: import_statements(NaN)                                                #␣
↪needs sage.symbolic
from sage.symbolic.constants import NaN
sage: import_statements(pi)                                                 #␣
↪needs sage.symbolic
from sage.symbolic.constants import pi
sage: import_statements('SAGE_ENV')
from sage.env import SAGE_ENV
sage: import_statements('graph_decompositions')
import sage.graphs.graph_decompositions
```

```
>>> from sage.all import *
>>> import_statements('Rationals')
from sage.rings.rational_field import RationalField as Rationals
>>> import_statements(sage.combinat.partition_algebra.SetPartitionsAk)
from sage.combinat.partition_algebra import SetPartitionsAk
>>> import_statements(CIF)
from sage.rings.cif import CIF
>>> import_statements(NaN)                                                  #␣
↪needs sage.symbolic
from sage.symbolic.constants import NaN
>>> import_statements(pi)                                                   #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.symbolic
from sage.symbolic.constants import pi
>>> import_statements('SAGE_ENV')
from sage.env import SAGE_ENV
>>> import_statements('graph_decompositions')
import sage.graphs.graph_decompositions
```

Check that a name from the global namespace is properly found (see Issue #23779):

```
sage: import_statements('log')
from sage.misc.functional import log
```

```
>>> from sage.all import *
>>> import_statements('log')
from sage.misc.functional import log
```

Note

The programmers try to made this function as smart as possible. Nevertheless it is far from being perfect (for example it does not detect deprecated stuff). So, if you use it, double check the answer and report weird behaviors.

sage.misc.dev_tools.**load_submodules**(*module=None*, *exclude_pattern=None*)

Load all submodules of a given modules.

This method is intended to be used by developers and especially the one who uses *import_statements()*. By default it load the sage library and it takes around a minute.

INPUT:

- `module` – an optional module
- `exclude_pattern` – an optional regular expression pattern of module names that have to be excluded

EXAMPLES:

```
sage: sage.misc.dev_tools.load_submodules(sage.combinat)
load sage.combinat.algebraic_combinatorics... succeeded
...
load sage.combinat.words.suffix_trees... succeeded
```

```
>>> from sage.all import *
>>> sage.misc.dev_tools.load_submodules(sage.combinat)
load sage.combinat.algebraic_combinatorics... succeeded
...
load sage.combinat.words.suffix_trees... succeeded
```

Calling a second time has no effect (since the function does not import modules already imported):

```
sage: sage.misc.dev_tools.load_submodules(sage.combinat)
```

```
>>> from sage.all import *
>>> sage.misc.dev_tools.load_submodules(sage.combinat)
```

The second argument allows to exclude a pattern:

```
sage: sage.misc.dev_tools.load_submodules(sage.geometry, "database$|lattice")
load sage.geometry.cone... succeeded
load sage.geometry.cone_catalog... succeeded
load sage.geometry.fan_isomorphism... succeeded
...
load sage.geometry.riemannian_manifolds.surface3d_generators... succeeded

sage: sage.misc.dev_tools.load_submodules(sage.geometry)
load sage.geometry.polyhedron.lattice_euclidean_group_element... succeeded
load sage.geometry.polyhedron.palp_database... succeeded
load sage.geometry.polyhedron.ppl_lattice_polygon... succeeded
```

```
>>> from sage.all import *
>>> sage.misc.dev_tools.load_submodules(sage.geometry, "database$|lattice")
load sage.geometry.cone... succeeded
load sage.geometry.cone_catalog... succeeded
load sage.geometry.fan_isomorphism... succeeded
...
load sage.geometry.riemannian_manifolds.surface3d_generators... succeeded

>>> sage.misc.dev_tools.load_submodules(sage.geometry)
load sage.geometry.polyhedron.lattice_euclidean_group_element... succeeded
load sage.geometry.polyhedron.palp_database... succeeded
load sage.geometry.polyhedron.ppl_lattice_polygon... succeeded
```

sage.misc.dev_tools.**runsnake**(*command*)

Graphical profiling with `runsnake`.

INPUT:

- `command` – the command to be run as a string

EXAMPLES:

```
sage: from sage.misc.dev_tools import runsnake
sage: runsnake("list(SymmetricGroup(3))")        # optional - runsnake
...
```

```
>>> from sage.all import *
>>> from sage.misc.dev_tools import runsnake
>>> runsnake("list(SymmetricGroup(3))")        # optional - runsnake
...
```

`command` is first preparsed (see `preparse()`):

```
sage: runsnake('for x in range(1,4): print(x^2)') # optional - runsnake
1
4
9
```

```
>>> from sage.all import *
>>> runsnake('for x in range(1,4): print(x^2)') # optional - runsnake
```

(continues on next page)

(continued from previous page)

```
1
4
9
```

runsnake() requires the program `runsnake`. Due to non trivial dependencies (python-wxgtk, …), installing it within the Sage distribution is unpractical. Hence, we recommend installing it with the system wide Python. On Ubuntu 10.10, this can be done with:

```
> sudo apt-get install python-profiler python-wxgtk2.8 python-setuptools
> sudo easy_install RunSnakeRun
```

See the `runsnake` website for instructions for other platforms.

runsnake() further assumes that the system wide Python is installed in `/usr/bin/python`.

See also

- The runsnake website
- `%prun`
- *Profiler*

7.3.6 Function Mangling

This module provides utilities for extracting information about python functions.

AUTHORS:

- Tom Boothby (2009): Original version in Python
- Simon King (2011): Use Cython. Speedup of `fix_to_pos`, cleaning documentation.

class sage.misc.function_mangling.**ArgumentFixer**

Bases: `object`

This class provides functionality to normalize the arguments passed into a function. While the various ways of calling a function are perfectly equivalent from the perspective of the callee, they don't always look the same for an object watching the caller. For example,

```
sage: def f(x=10):
....:     return min(1,x)
```

```
>>> from sage.all import *
>>> def f(x=Integer(10)):
...     return min(Integer(1),x)
```

the following calls are equivalent,

```
sage: f()
1
sage: f(10)
1
sage: f(x=10)
1
```

```
>>> from sage.all import *
>>> f()
1
>>> f(Integer(10))
1
>>> f(x=Integer(10))
1
```

but from the perspective of a wrapper, they are different:

```
sage: def wrap(g):
....:     def _g(*args, **kwargs):
....:         print("{} {}".format(args, kwargs))
....:         return g(*args, **kwargs)
....:     return _g
sage: h = wrap(f)
sage: t = h()
() {}
sage: t = h(10)
(10,) {}
sage: t = h(x=10)
() {'x': 10}
```

```
>>> from sage.all import *
>>> def wrap(g):
...     def _g(*args, **kwargs):
...         print("{} {}".format(args, kwargs))
...         return g(*args, **kwargs)
...     return _g
>>> h = wrap(f)
>>> t = h()
() {}
>>> t = h(Integer(10))
(10,) {}
>>> t = h(x=Integer(10))
() {'x': 10}
```

For the purpose of cached functions, it is important not to distinguish between these uses.

INPUT:

- `f` – a function
- `classmethod` – boolean (default: `False`); `True` if the function is a classmethod and therefore the first argument is expected to be the class instance. In that case, we ignore the first argument.

EXAMPLES:

```
sage: from sage.misc.function_mangling import ArgumentFixer
sage: def wrap2(g):
....:     af = ArgumentFixer(g)
....:     def _g(*args, **kwargs):
....:         print(af.fix_to_pos())
....:         return g(*args, **kwargs)
....:     return _g
```

(continues on next page)

(continued from previous page)

```
sage: h2 = wrap2(f)
sage: t = h2()
((10,), ())
sage: t = h2(10)
((10,), ())
sage: t = h2(x=10)
((10,), ())
```

```
>>> from sage.all import *
>>> from sage.misc.function_mangling import ArgumentFixer
>>> def wrap2(g):
...     af = ArgumentFixer(g)
...     def _g(*args, **kwargs):
...         print(af.fix_to_pos())
...         return g(*args, **kwargs)
...     return _g
>>> h2 = wrap2(f)
>>> t = h2()
((10,), ())
>>> t = h2(Integer(10))
((10,), ())
>>> t = h2(x=Integer(10))
((10,), ())
```

```
sage: class one:
....:     def __init__(self, x=1):
....:         self.x = x
sage: af = ArgumentFixer(one.__init__, classmethod=True)
sage: af.fix_to_pos(1,2,3,a=31,b=2,n=3)
((1, 2, 3), (('a', 31), ('b', 2), ('n', 3)))
```

```
>>> from sage.all import *
>>> class one:
...     def __init__(self, x=Integer(1)):
...         self.x = x
>>> af = ArgumentFixer(one.__init__, classmethod=True)
>>> af.fix_to_pos(Integer(1),Integer(2),Integer(3),a=Integer(31),b=Integer(2),
↪n=Integer(3))
((1, 2, 3), (('a', 31), ('b', 2), ('n', 3)))
```

f

fix_to_named(**args*, ***kwargs*)

Normalize the arguments with a preference for named arguments.

INPUT:

- any positional and named arguments.

OUTPUT: we return a tuple

$$(e_1, e_2, ..., e_k), ((n_1, v_1), ..., (n_m, v_m))$$

where $n_1, ..., n_m$ are the names of the arguments and $v_1, ..., v_m$ are the values passed in; and $e_1, ..., e_k$ are the unnamed arguments. We minimize k.

The defaults are extracted from the function and filled into the list `K` of named arguments. The names $n_1, ..., n_t$ are in order of the function definition, where t is the number of named arguments. The remaining names, $n_{t+1}, ..., n_m$ are given in alphabetical order. This is useful to extract the names of arguments, but **does not** maintain equivalence of

```
A,K = self.fix_to_pos(...)
self.f(*A, **dict(K))`
```

and

```
self.f(...)
```

in all cases.

EXAMPLES:

```
sage: from sage.misc.function_mangling import ArgumentFixer
sage: def sum3(a, b, c=3, *args, **kwargs):
....:     return a + b + c
sage: AF = ArgumentFixer(sum3)
sage: AF.fix_to_named(1, 2, 3, 4, 5, 6, f=14, e=16)
((4, 5, 6), (('a', 1), ('b', 2), ('c', 3), ('e', 16), ('f', 14)))
sage: AF.fix_to_named(1,2,f=14)
((), (('a', 1), ('b', 2), ('c', 3), ('f', 14)))
```

```
>>> from sage.all import *
>>> from sage.misc.function_mangling import ArgumentFixer
>>> def sum3(a, b, c=Integer(3), *args, **kwargs):
...     return a + b + c
>>> AF = ArgumentFixer(sum3)
>>> AF.fix_to_named(Integer(1), Integer(2), Integer(3), Integer(4),␣
↪Integer(5), Integer(6), f=Integer(14), e=Integer(16))
((4, 5, 6), (('a', 1), ('b', 2), ('c', 3), ('e', 16), ('f', 14)))
>>> AF.fix_to_named(Integer(1),Integer(2),f=Integer(14))
((), (('a', 1), ('b', 2), ('c', 3), ('f', 14)))
```

fix_to_pos(**args*, ***kwds*)

Normalize the arguments with a preference for positional arguments.

INPUT:

- `*args`, `**kwds` – any positional or named arguments

OUTPUT: we return a tuple

$$(e_1, e_2, ..., e_k), ((n_1, v_1), ..., (n_m, v_m))$$

where $n_1, ..., n_m$ are the names of the arguments and $v_1, ..., v_m$ are the values passed in; and $e_1, ..., e_k$ are the unnamed arguments. We minimize m.

The commands

```
A,K = self.fix_to_pos(...)
self.f(*A, **dict(K))
```

are equivalent to

```
self.f(...)
```

though defaults are extracted from the function and appended to the tuple `A` of positional arguments. The names $n_1, ..., n_m$ are given in alphabetical order.

EXAMPLES:

```
sage: from sage.misc.function_mangling import ArgumentFixer
sage: def do_something(a, b, c=3, *args, **kwargs):
....:     print("{} {} {} {} {}".format(a, b, c, args,
....:                                   sorted(kwargs.items())))
sage: AF = ArgumentFixer(do_something)
sage: A, K = AF.fix_to_pos(1, 2, 3, 4, 5, 6, f=14, e=16)
sage: print("{} {}".format(A, K))
(1, 2, 3, 4, 5, 6) (('e', 16), ('f', 14))
sage: do_something(*A, **dict(K))
1 2 3 (4, 5, 6) [('e', 16), ('f', 14)]
sage: do_something(1, 2, 3, 4, 5, 6, f=14, e=16)
1 2 3 (4, 5, 6) [('e', 16), ('f', 14)]
```

```
>>> from sage.all import *
>>> from sage.misc.function_mangling import ArgumentFixer
>>> def do_something(a, b, c=Integer(3), *args, **kwargs):
...     print("{} {} {} {} {}".format(a, b, c, args,
...                                   sorted(kwargs.items())))
>>> AF = ArgumentFixer(do_something)
>>> A, K = AF.fix_to_pos(Integer(1), Integer(2), Integer(3), Integer(4),␣
↪Integer(5), Integer(6), f=Integer(14), e=Integer(16))
>>> print("{} {}".format(A, K))
(1, 2, 3, 4, 5, 6) (('e', 16), ('f', 14))
>>> do_something(*A, **dict(K))
1 2 3 (4, 5, 6) [('e', 16), ('f', 14)]
>>> do_something(Integer(1), Integer(2), Integer(3), Integer(4), Integer(5),␣
↪Integer(6), f=Integer(14), e=Integer(16))
1 2 3 (4, 5, 6) [('e', 16), ('f', 14)]
```

7.3.7 ReST index of functions

This module contains a function that generates a ReST index table of functions for use in doc-strings.

gen_rest_table_index()	Return a ReST table describing a list of functions.
gen_thematic_rest_table_index()	Return a ReST string of thematically sorted functions (or methods) of a module (or class).

sage.misc.rest_index_of_methods.**doc_index**(*name*)

Attribute an index name to a function.

This decorator can be applied to a function/method in order to specify in which index it must appear, in the index generated by *gen_thematic_rest_table_index()*.

INPUT:

- `name` – string, which will become the title of the index in which this function/method will appear

EXAMPLES:

```
sage: from sage.misc.rest_index_of_methods import doc_index
sage: @doc_index("Wouhouuuuu")
....: def a():
....:     print("Hey")
sage: a.doc_index
'Wouhouuuuu'
```

```
>>> from sage.all import *
>>> from sage.misc.rest_index_of_methods import doc_index
>>> @doc_index("Wouhouuuuu")
... def a():
...     print("Hey")
>>> a.doc_index
'Wouhouuuuu'
```

sage.misc.rest_index_of_methods.**gen_rest_table_index**(*obj*, *names=None*, *sort=True*, *only_local_functions=True*, *root=None*)

Return a ReST table describing a list of functions.

The list of functions can either be given explicitly, or implicitly as the functions/methods of a module or class.

In the case of a class, only non-inherited methods are listed.

INPUT:

- `obj` – list of functions, a module or a class. If given a list of functions, the generated table will consist of these. If given a module or a class, all functions/methods it defines will be listed, except deprecated or those starting with an underscore. In the case of a class, note that inherited methods are not displayed.
- `names` – dictionary associating a name to a function. Takes precedence over the automatically computed name for the functions. Only used when `list_of_entries` is a list.
- `sort` – boolean (default: `True`); whether to sort the list of methods lexicographically
- `only_local_functions` – boolean (default: `True`); if `list_of_entries` is a module, `only_local_functions = True` means that imported functions will be filtered out. This can be useful to disable for making indexes of e.g. catalog modules such as `sage.coding.codes_catalog`.
- `root` – module or class (default: `None`); the module, or class, whose elements are to be listed. This is needed to recover the class when this method is called from *`gen_thematic_rest_table_index()`* (see Issue #36178).

Warning

The ReST tables returned by this function use '@' as a delimiter for cells. This can cause trouble if the first sentence in the documentation of a function contains the '@' character.

EXAMPLES:

```
sage: from sage.misc.rest_index_of_methods import gen_rest_table_index
sage: print(gen_rest_table_index([graphs.PetersenGraph]))                    #␣
↪needs sage.graphs
.. csv-table::
   :class: contentstable
```

(continues on next page)

(continued from previous page)

```
   :widths: 30, 70
   :delim: @

   :func:`~sage.graphs.generators.smallgraphs.PetersenGraph` @ Return the␣
↪Petersen Graph.
```

```
>>> from sage.all import *
>>> from sage.misc.rest_index_of_methods import gen_rest_table_index
>>> print(gen_rest_table_index([graphs.PetersenGraph]))                    #␣
↪needs sage.graphs
.. csv-table::
   :class: contentstable
   :widths: 30, 70
   :delim: @
<BLANKLINE>
   :func:`~sage.graphs.generators.smallgraphs.PetersenGraph` @ Return the␣
↪Petersen Graph.
```

The table of a module:

```
sage: print(gen_rest_table_index(sage.misc.rest_index_of_methods))
.. csv-table::
   :class: contentstable
   :widths: 30, 70
   :delim: @

   :func:`~sage.misc.rest_index_of_methods.doc_index` @ Attribute an index name␣
↪to a function.
   :func:`~sage.misc.rest_index_of_methods.gen_rest_table_index` @ Return a ReST␣
↪table describing a list of functions.
   :func:`~sage.misc.rest_index_of_methods.gen_thematic_rest_table_index` @␣
↪Return a ReST string of thematically sorted functions (or methods) of a module␣
↪(or class).
   :func:`~sage.misc.rest_index_of_methods.list_of_subfunctions` @ Return the␣
↪functions (resp. methods) of a given module (resp. class) with their names.
```

```
>>> from sage.all import *
>>> print(gen_rest_table_index(sage.misc.rest_index_of_methods))
.. csv-table::
   :class: contentstable
   :widths: 30, 70
   :delim: @
<BLANKLINE>
   :func:`~sage.misc.rest_index_of_methods.doc_index` @ Attribute an index name␣
↪to a function.
   :func:`~sage.misc.rest_index_of_methods.gen_rest_table_index` @ Return a ReST␣
↪table describing a list of functions.
   :func:`~sage.misc.rest_index_of_methods.gen_thematic_rest_table_index` @␣
↪Return a ReST string of thematically sorted functions (or methods) of a module␣
↪(or class).
   :func:`~sage.misc.rest_index_of_methods.list_of_subfunctions` @ Return the␣
↪functions (resp. methods) of a given module (resp. class) with their names.
```

(continues on next page)

(continued from previous page)

```
<BLANKLINE>
<BLANKLINE>
```

The table of a class:

```
sage: print(gen_rest_table_index(Graph))                                    #␣
↪needs sage.graphs
.. csv-table::
   :class: contentstable
   :widths: 30, 70
   :delim: @
...
   :meth:`~sage.graphs.graph.Graph.sparse6_string` @ Return the sparse6␣
↪representation of the graph as an ASCII string.
...
```

```
>>> from sage.all import *
>>> print(gen_rest_table_index(Graph))                                      #␣
↪needs sage.graphs
.. csv-table::
   :class: contentstable
   :widths: 30, 70
   :delim: @
...
   :meth:`~sage.graphs.graph.Graph.sparse6_string` @ Return the sparse6␣
↪representation of the graph as an ASCII string.
...
```

sage.misc.rest_index_of_methods.**gen_thematic_rest_table_index**(*root*, *additional_categories=None*, *only_local_functions=True*)

Return a ReST string of thematically sorted functions (or methods) of a module (or class).

INPUT:

- `root` – the module, or class, whose elements are to be listed
- `additional_categories` – dictionary (default: `None`); a dictionary associating a category (given as a string) to a function's name. Can be used when the decorator *doc_index()* does not work on a function.
- `only_local_functions` – boolean (default: `True`); if `root` is a module, `only_local_functions = True` means that imported functions will be filtered out. This can be useful to disable for making indexes of e.g. catalog modules such as `sage.coding.codes_catalog`.

EXAMPLES:

```
sage: from sage.misc.rest_index_of_methods import gen_thematic_rest_table_index,␣
↪list_of_subfunctions
sage: l = list_of_subfunctions(Graph)[0]                                    #␣
↪needs sage.graphs
sage: Graph.bipartite_color in l                                            #␣
↪needs sage.graphs
True
```

```
>>> from sage.all import *
>>> from sage.misc.rest_index_of_methods import gen_thematic_rest_table_index,␣
↪list_of_subfunctions
>>> l = list_of_subfunctions(Graph)[Integer(0)]                                  ␣
↪     # needs sage.graphs
>>> Graph.bipartite_color in l                                                  #␣
↪needs sage.graphs
True
```

sage.misc.rest_index_of_methods.**list_of_subfunctions**(*root*, *only_local_functions=True*)

Return the functions (resp. methods) of a given module (resp. class) with their names.

INPUT:

- `root` – the module, or class, whose elements are to be listed
- `only_local_functions` – boolean (default: `True`); if `root` is a module, `only_local_functions = True` means that imported functions will be filtered out. This can be useful to disable for making indexes of e.g. catalog modules such as `sage.coding.codes_catalog`.

OUTPUT:

A pair `(list,dict)` where `list` is a list of function/methods and `dict` associates to every function/method the name under which it appears in `root`.

EXAMPLES:

```
sage: from sage.misc.rest_index_of_methods import list_of_subfunctions
sage: l = list_of_subfunctions(Graph)[0]                                      #␣
↪needs sage.graphs
sage: Graph.bipartite_color in l                                              #␣
↪needs sage.graphs
True
```

```
>>> from sage.all import *
>>> from sage.misc.rest_index_of_methods import list_of_subfunctions
>>> l = list_of_subfunctions(Graph)[Integer(0)]                                  ␣
↪     # needs sage.graphs
>>> Graph.bipartite_color in l                                                  #␣
↪needs sage.graphs
True
```

CHAPTER

EIGHT

LOW-LEVEL UTILITIES

8.1 Low-level memory allocation functions

AUTHORS:

- Jeroen Demeyer (2011-01-13): initial version (Issue #10258)
- Jeroen Demeyer (2014-12-14): add more functions (Issue #10257)
- Jeroen Demeyer (2015-03-02): move from `c_lib` to Cython (Issue #17881)

`sage.ext.memory.`**`init_memory_functions`**`()`

Set the MPIR/GMP memory functions to the above functions.

EXAMPLES:

```
sage: from sage.ext.memory import init_memory_functions
sage: init_memory_functions()
```

```
>>> from sage.all import *
>>> from sage.ext.memory import init_memory_functions
>>> init_memory_functions()
```

8.2 The C3 algorithm

The C3 algorithm is used as method resolution order for new style classes in Python. The implementation here is used to order the list of super categories of a category.

AUTHOR:

- Simon King (2011-11): initial version.

`sage.misc.c3.`**`C3_algorithm`**`(`*start*, *bases*, *attribute*, *proper*`)`

An implementation of the C3 algorithm.

C3 is the algorithm used by Python to construct the method resolution order for new style classes involving multiple inheritance.

After Issue #11943 this implementation was used to compute the list of super categories of a category; see `all_super_categories()`. The purpose is to ensure that list of super categories matches with the method resolution order of the parent or element classes of a category.

Since Issue #13589, this implementation is superseded by that in *sage.misc.c3_controlled*, that puts the `C3` algorithm under control of some total order on categories. This guarantees that `C3` always finds a consistent Method Resolution Order. For background, see *sage.misc.c3_controlled*.

INPUT:

- `start` – an object; the returned list is built upon data provided by certain attributes of `start`
- `bases` – string; the name of an attribute of `start` providing a list of objects
- `attribute` – string; the name of an attribute of the objects provided in `getattr(start,bases)`. That attribute is supposed to provide a list.

ASSUMPTIONS:

Our implementation of the algorithm only works on lists of objects that compare equal if and only if they are identical.

OUTPUT:

A list, the result of the C3 algorithm applied to the list `[getattr(X,attribute) for X in getattr(start, bases)]`.

EXAMPLES:

We create a class for elements in a hierarchy that uses the `C3` algorithm to compute, for each element, a linear extension of the elements above it:

```
.. TODO:: Move back the __init__ at the beginning
```

sage: from sage.misc.c3 import C3_algorithm sage: class HierarchyElement(UniqueRepresentation): ….: @lazy_attribute ….: def _all_bases(self): ….: return C3_algorithm(self, '_bases', '_all_bases', False) ….: def __repr__(self): ….: return self._name ….: def __init__(self, name, bases): ….: self._name = name ….: self._bases = list(bases)

We construct a little hierarchy:

```
sage: T = HierarchyElement("T", ())
sage: X = HierarchyElement("X", (T,))
sage: Y = HierarchyElement("Y", (T,))
sage: A = HierarchyElement("A", (X, Y))
sage: B = HierarchyElement("B", (Y, X))
sage: Foo = HierarchyElement("Foo", (A, B))
```

```
>>> from sage.all import *
>>> T = HierarchyElement("T", ())
>>> X = HierarchyElement("X", (T,))
>>> Y = HierarchyElement("Y", (T,))
>>> A = HierarchyElement("A", (X, Y))
>>> B = HierarchyElement("B", (Y, X))
>>> Foo = HierarchyElement("Foo", (A, B))
```

And inspect the linear extensions associated to each element:

```
sage: T._all_bases
[T]
sage: X._all_bases
[X, T]
sage: Y._all_bases
[Y, T]
sage: A._all_bases
```

(continues on next page)

(continued from previous page)

```
[A, X, Y, T]
sage: B._all_bases
[B, Y, X, T]
```

```
>>> from sage.all import *
>>> T._all_bases
[T]
>>> X._all_bases
[X, T]
>>> Y._all_bases
[Y, T]
>>> A._all_bases
[A, X, Y, T]
>>> B._all_bases
[B, Y, X, T]
```

So far so good. However:

```
sage: Foo._all_bases
Traceback (most recent call last):
...
ValueError: Cannot merge the items X, Y.
```

```
>>> from sage.all import *
>>> Foo._all_bases
Traceback (most recent call last):
...
ValueError: Cannot merge the items X, Y.
```

The `C3` algorithm is not able to create a consistent linear extension. Indeed, its specifications impose that, if `X` and `Y` appear in a certain order in the linear extension for an element of the hierarchy, then they should appear in the same order for any lower element. This is clearly not possibly for `Foo`, since `A` and `B` impose incompatible orders. If the above was a hierarchy of classes, Python would complain that it cannot calculate a consistent Method Resolution Order.

8.3 The C3 algorithm, under control of a total order

8.3.1 Abstract

Python handles multiple inheritance by computing, for each class, a linear extension of the poset of all its super classes (the Method Resolution Order, MRO). The MRO is calculated recursively from local information (the *ordered* list of the direct super classes), with the so-called `C3` algorithm. This algorithm can fail if the local information is not consistent; worst, there exist hierarchies of classes with provably no consistent local information.

For large hierarchy of classes, like those derived from categories in Sage, maintaining consistent local information by hand does not scale and leads to unpredictable `C3` failures (the dreaded "could not find a consistent method resolution order"); a maintenance nightmare.

This module implements a final solution to this problem. Namely, it allows for building automatically the local information from the bare class hierarchy in such a way that guarantees that the `C3` algorithm will never fail.

Err, but you said that this was provably impossible? Well, not if one relaxes a bit the hypotheses; but that's not something one would want to do by hand :-)

8.3.2 The problem

Consider the following hierarchy of classes:

```
sage: class A1(): pass
sage: class A2():
....:     def foo(self): return 2
sage: class A3(): pass
sage: class A4():
....:     def foo(self): return 4
sage: class A5(A2, A1):
....:     def foo(self): return 5
sage: class A6(A4, A3): pass
sage: class A7(A6, A5): pass
```

```
>>> from sage.all import *
>>> class A1(): pass
>>> class A2():
...     def foo(self): return Integer(2)
>>> class A3(): pass
>>> class A4():
...     def foo(self): return Integer(4)
>>> class A5(A2, A1):
...     def foo(self): return Integer(5)
>>> class A6(A4, A3): pass
>>> class A7(A6, A5): pass
```

If `a` is an instance of `A7`, then Python needs to choose which implementation to use upon calling `a.foo()`: that of `A4` or `A5`, but obviously not that of `A2`. In Python, like in many other dynamic object oriented languages, this is achieved by calculating once for all a specific linear extension of the hierarchy of the super classes of each class, called its Method Resolution Order (MRO):

```
sage: [cls.__name__ for cls in A7.mro()]
['A7', 'A6', 'A4', 'A3', 'A5', 'A2', 'A1', 'object']
```

```
>>> from sage.all import *
>>> [cls.__name__ for cls in A7.mro()]
['A7', 'A6', 'A4', 'A3', 'A5', 'A2', 'A1', 'object']
```

Thus, in our example, the implementation in `A4` is chosen:

```
sage: a = A7()
sage: a.foo()
4
```

```
>>> from sage.all import *
>>> a = A7()
>>> a.foo()
4
```

Specifically, the MRO is calculated using the so-called `C3` algorithm which guarantees that the MRO respects not only inheritance, but also the order in which the bases (direct super classes) are given for each class.

However, for large hierarchies of classes with lots of multiple inheritance, like those derived from categories in Sage, this algorithm easily fails if the order of the bases is not chosen consistently (here for `A2` w.r.t. `A1`):

```
sage: class B6(A1,A2): pass
sage: class B7(B6,A5): pass
Traceback (most recent call last):
...
TypeError: Cannot create a consistent method resolution
order (MRO) for bases A1, A2
```

```
>>> from sage.all import *
>>> class B6(A1,A2): pass
>>> class B7(B6,A5): pass
Traceback (most recent call last):
...
TypeError: Cannot create a consistent method resolution
order (MRO) for bases A1, A2
```

There actually exist hierarchies of classes for which `C3` fails whatever order of the bases is chosen; the smallest such example, admittedly artificial, has ten classes (see below). Still, this highlights that this problem has to be tackled in a systematic way.

Fortunately, one can trick `C3`, without changing the inheritance semantic, by adding some super classes of `A` to the bases of `A`. In the following example, we completely force a given MRO by specifying *all* the super classes of `A` as bases:

```
sage: class A7(A6, A5, A4, A3, A2, A1): pass
sage: [cls.__name__ for cls in A7.mro()]
['A7', 'A6', 'A5', 'A4', 'A3', 'A2', 'A1', 'object']
```

```
>>> from sage.all import *
>>> class A7(A6, A5, A4, A3, A2, A1): pass
>>> [cls.__name__ for cls in A7.mro()]
['A7', 'A6', 'A5', 'A4', 'A3', 'A2', 'A1', 'object']
```

Luckily this can be optimized; here it is sufficient to add a single base to enforce the same MRO:

```
sage: class A7(A6, A5, A4): pass
sage: [cls.__name__ for cls in A7.mro()]
['A7', 'A6', 'A5', 'A4', 'A3', 'A2', 'A1', 'object']
```

```
>>> from sage.all import *
>>> class A7(A6, A5, A4): pass
>>> [cls.__name__ for cls in A7.mro()]
['A7', 'A6', 'A5', 'A4', 'A3', 'A2', 'A1', 'object']
```

8.3.3 A strategy to solve the problem

We should recall at this point a design decision that we took for the hierarchy of classes derived from categories: *the semantic shall only depend on the inheritance order*, not on the specific MRO, and in particular not on the order of the bases (see On the order of super categories).

If a choice needs to be made (for example for efficiency reasons), then this should be done explicitly, on a method-by-method basis. In practice this design goal is not yet met.

Note

When managing large hierarchies of classes in other contexts this may be too strong a design decision.

The strategy we use for hierarchies of classes derived from categories is then:

1. To choose a global total order on the whole hierarchy of classes.
2. To control `C3` to get it to return MROs that follow this total order.

A basic approach for point 1., that will work for any hierarchy of classes, is to enumerate the classes while they are constructed (making sure that the bases of each class are enumerated before that class), and to order the classes according to that enumeration. A more conceptual ordering may be desirable, in particular to get deterministic and reproducible results. In the context of Sage, this is mostly relevant for those doctests displaying all the categories or classes that an object inherits from.

8.3.4 Getting fine control on C3

This module is about point 2.

The natural approach would be to change the algorithm used by Python to compute the MRO. However, changing Python's default algorithm just for our needs is obviously not an option, and there is currently no hook to customize specific classes to use a different algorithm. Pushing the addition of such a hook into stock Python would take too much time and effort.

Another approach would be to use the "adding bases" trick straightforwardly, putting the list of *all* the super classes of a class as its bases. However, this would have several drawbacks:

- It is not so elegant, in particular because it duplicates information: we already know through `A5` that `A7` is a subclass of `A1`. This duplication could be acceptable in our context because the hierarchy of classes is generated automatically from a conceptual hierarchy (the categories) which serves as single point of truth for calculating the bases of each class.
- It increases the complexity of the calculation of the MRO with `C3`. For example, for a linear hierarchy of classes, the complexity goes from $O(n^2)$ to $O(n^3)$ which is not acceptable.
- It increases the complexity of inspecting the classes. For example, the current implementation of the `dir` command in Python has no cache, and its complexity is linear in the number of maximal paths in the class hierarchy graph as defined by the bases. For a linear hierarchy, this is of complexity $O(p_n)$ where p_n is the number of integer partitions of n, which is exponential. And indeed, running `dir` for a typical class like `GradedHopfAlgebrasWithBasis(QQ).parent_class` with `37` super classes took 18 seconds with this approach.

  Granted: this mostly affects the `dir` command and could be blamed on its current implementation. With appropriate caching, it could be reimplemented to have a complexity roughly linear in the number of classes in the hierarchy. But this won't happen any time soon in a stock Python.

This module refines this approach to make it acceptable, if not seamless. Given a hierarchy and a total order on this hierarchy, it calculates for each element of the hierarchy the smallest list of additional bases that forces `C3` to return the desired MRO. This is achieved by implementing an instrumented variant of the `C3` algorithm (which we call *instrumented* `C3`) that detects when `C3` is about to take a wrong decision and adds one base to force the right decision. Then, running the standard `C3` algorithm with the updated list of bases (which we call *controlled* `C3`) yields the desired MRO.

EXAMPLES:

As an experimentation and testing tool, we use a class *`HierarchyElement`* whose instances can be constructed from a hierarchy described by a poset, a digraph, or more generally a successor relation. By default, the desired MRO is sorted decreasingly. Another total order can be specified using a sorting key.

We consider the smallest poset describing a class hierarchy admitting no MRO whatsoever:

```
sage: P = Poset({10: [9,8,7], 9: [6,1], 8: [5,2], 7: [4,3],                    #␣
↪needs sage.graphs
....:            6: [3,2], 5: [3,1], 4: [2,1]},
....:           linear_extension=True, facade=True)
```

```
>>> from sage.all import *
>>> P = Poset({Integer(10): [Integer(9),Integer(8),Integer(7)], Integer(9):␣
↪[Integer(6),Integer(1)], Integer(8): [Integer(5),Integer(2)], Integer(7):␣
↪[Integer(4),Integer(3)],                          # needs sage.graphs
...            Integer(6): [Integer(3),Integer(2)], Integer(5): [Integer(3),
↪Integer(1)], Integer(4): [Integer(2),Integer(1)]},
...           linear_extension=True, facade=True)
```

And build a *HierarchyElement* from it:

```
sage: from sage.misc.c3_controlled import HierarchyElement
sage: x = HierarchyElement(10, P)                                              #␣
↪needs sage.graphs
```

```
>>> from sage.all import *
>>> from sage.misc.c3_controlled import HierarchyElement
>>> x = HierarchyElement(Integer(10), P)                                        ␣
↪     # needs sage.graphs
```

Here are its bases:

```
sage: HierarchyElement(10, P)._bases                                           #␣
↪needs sage.graphs
[9, 8, 7]
```

```
>>> from sage.all import *
>>> HierarchyElement(Integer(10), P)._bases                                     ␣
↪     # needs sage.graphs
[9, 8, 7]
```

Using the standard `C3` algorithm fails:

```
sage: x.mro_standard                                                           #␣
↪needs sage.graphs
Traceback (most recent call last):
...
ValueError: Cannot merge the items 3, 3, 2.
```

```
>>> from sage.all import *
>>> x.mro_standard                                                             #␣
↪needs sage.graphs
Traceback (most recent call last):
...
ValueError: Cannot merge the items 3, 3, 2.
```

We also get a failure when we relabel P according to another linear extension. For easy relabelling, we first need to set an appropriate default linear extension for P:

```
sage: linear_extension = list(reversed(IntegerRange(1, 11)))
sage: P = P.with_linear_extension(linear_extension)                    #␣
↪needs sage.graphs
sage: list(P)                                                          #␣
↪needs sage.graphs
[10, 9, 8, 7, 6, 5, 4, 3, 2, 1]
```

```
>>> from sage.all import *
>>> linear_extension = list(reversed(IntegerRange(Integer(1), Integer(11))))
>>> P = P.with_linear_extension(linear_extension)                      #␣
↪needs sage.graphs
>>> list(P)                                                            #␣
↪needs sage.graphs
[10, 9, 8, 7, 6, 5, 4, 3, 2, 1]
```

Now we play with a specific linear extension of P:

```
sage: # needs sage.graphs
sage: Q = P.linear_extension([10, 9, 8, 7, 6, 5, 4, 1, 2, 3]).to_poset()
sage: Q.cover_relations()
[[10, 9], [10, 8], [10, 7], [9, 6], [9, 3], [8, 5], [8, 2], [7, 4],
 [7, 1], [6, 2], [6, 1], [5, 3], [5, 1], [4, 3], [4, 2]]
sage: x = HierarchyElement(10, Q)
sage: x.mro_standard
Traceback (most recent call last):
...
ValueError: Cannot merge the items 2, 3, 3.
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> Q = P.linear_extension([Integer(10), Integer(9), Integer(8), Integer(7),␣
↪Integer(6), Integer(5), Integer(4), Integer(1), Integer(2), Integer(3)]).to_poset()
>>> Q.cover_relations()
[[10, 9], [10, 8], [10, 7], [9, 6], [9, 3], [8, 5], [8, 2], [7, 4],
 [7, 1], [6, 2], [6, 1], [5, 3], [5, 1], [4, 3], [4, 2]]
>>> x = HierarchyElement(Integer(10), Q)
>>> x.mro_standard
Traceback (most recent call last):
...
ValueError: Cannot merge the items 2, 3, 3.
```

On the other hand, both the instrumented `C3` algorithm, and the controlled `C3` algorithm give the desired MRO:

```
sage: x.mro                                                            #␣
↪needs sage.graphs
[10, 9, 8, 7, 6, 5, 4, 3, 2, 1]
sage: x.mro_controlled                                                 #␣
↪needs sage.graphs
[10, 9, 8, 7, 6, 5, 4, 3, 2, 1]
```

```
>>> from sage.all import *
>>> x.mro                                                              #␣
```

(continues on next page)

(continued from previous page)

```
↪needs sage.graphs
[10, 9, 8, 7, 6, 5, 4, 3, 2, 1]
>>> x.mro_controlled                                                    #␣
↪needs sage.graphs
[10, 9, 8, 7, 6, 5, 4, 3, 2, 1]
```

The above checks, and more, can be run with:

```
sage: x._test_mro()                                                     #␣
↪needs sage.graphs
```

```
>>> from sage.all import *
>>> x._test_mro()                                                       #␣
↪needs sage.graphs
```

In practice, the control was achieved by adding the following bases:

```
sage: x._bases                                                          #␣
↪needs sage.graphs
[9, 8, 7]
sage: x._bases_controlled                                               #␣
↪needs sage.graphs
[9, 8, 7, 6, 5]
```

```
>>> from sage.all import *
>>> x._bases                                                            #␣
↪needs sage.graphs
[9, 8, 7]
>>> x._bases_controlled                                                 #␣
↪needs sage.graphs
[9, 8, 7, 6, 5]
```

Altogether, four bases were added for control:

```
sage: sum(len(HierarchyElement(q, Q)._bases) for q in Q)                #␣
↪needs sage.graphs
15
sage: sum(len(HierarchyElement(q, Q)._bases_controlled) for q in Q)     #␣
↪needs sage.graphs
19
```

```
>>> from sage.all import *
>>> sum(len(HierarchyElement(q, Q)._bases) for q in Q)                  #␣
↪needs sage.graphs
15
>>> sum(len(HierarchyElement(q, Q)._bases_controlled) for q in Q)       #␣
↪needs sage.graphs
19
```

This information can also be recovered with:

```
sage: x.all_bases_len()                                                    #␣
↪needs sage.graphs
15
sage: x.all_bases_controlled_len()                                         #␣
↪needs sage.graphs
19
```

```
>>> from sage.all import *
>>> x.all_bases_len()                                                      #␣
↪needs sage.graphs
15
>>> x.all_bases_controlled_len()                                           #␣
↪needs sage.graphs
19
```

We now check that the `C3` algorithm fails for all linear extensions l of this poset, whereas both the instrumented and controlled `C3` algorithms succeed; along the way, we collect some statistics:

```
sage: L = P.linear_extensions()                                            #␣
↪needs sage.graphs
sage: stats = []
sage: for l in L:                                                          #␣
↪needs sage.graphs sage.modules
....:     x = HierarchyElement(10, l.to_poset())
....:     try: # Check that x.mro_standard always fails with a ValueError
....:         x.mro_standard
....:     except ValueError:
....:         pass
....:     else:
....:         assert False
....:     assert x.mro            == list(P)
....:     assert x.mro_controlled == list(P)
....:     assert x.all_bases_len() == 15
....:     stats.append(x.all_bases_controlled_len()-x.all_bases_len())
```

```
>>> from sage.all import *
>>> L = P.linear_extensions()                                              #␣
↪needs sage.graphs
>>> stats = []
>>> for l in L:                                                            #␣
↪needs sage.graphs sage.modules
...     x = HierarchyElement(Integer(10), l.to_poset())
...     try: # Check that x.mro_standard always fails with a ValueError
...         x.mro_standard
...     except ValueError:
...         pass
...     else:
...         assert False
...     assert x.mro            == list(P)
...     assert x.mro_controlled == list(P)
...     assert x.all_bases_len() == Integer(15)
...     stats.append(x.all_bases_controlled_len()-x.all_bases_len())
```

Depending on the linear extension l it was necessary to add between one and five bases for control; for example, 216 linear extensions required the addition of four bases:

```
sage: sorted(Word(stats).evaluation_sparse())                                  #␣
↪needs sage.combinat sage.graphs sage.modules
[(1, 36), (2, 108), (3, 180), (4, 216), (5, 180)]
```

```
>>> from sage.all import *
>>> sorted(Word(stats).evaluation_sparse())                                    #␣
↪needs sage.combinat sage.graphs sage.modules
[(1, 36), (2, 108), (3, 180), (4, 216), (5, 180)]
```

We now consider a hierarchy of categories:

```
sage: from operator import attrgetter
sage: x = HierarchyElement(Groups(), attrcall("super_categories"), attrgetter("_cmp_
↪key"))
sage: x.mro
[Category of groups, Category of monoids, Category of semigroups,
 Category of inverse unital magmas, Category of unital magmas, Category of magmas,
 Category of sets, Category of sets with partial maps, Category of objects]
sage: x.mro_standard
[Category of groups, Category of monoids, Category of semigroups,
 Category of inverse unital magmas, Category of unital magmas, Category of magmas,
 Category of sets, Category of sets with partial maps, Category of objects]
```

```
>>> from sage.all import *
>>> from operator import attrgetter
>>> x = HierarchyElement(Groups(), attrcall("super_categories"), attrgetter("_cmp_key
↪"))
>>> x.mro
[Category of groups, Category of monoids, Category of semigroups,
 Category of inverse unital magmas, Category of unital magmas, Category of magmas,
 Category of sets, Category of sets with partial maps, Category of objects]
>>> x.mro_standard
[Category of groups, Category of monoids, Category of semigroups,
 Category of inverse unital magmas, Category of unital magmas, Category of magmas,
 Category of sets, Category of sets with partial maps, Category of objects]
```

For a typical category, few bases, if any, need to be added to force `C3` to give the desired order:

```
sage: C = FiniteFields()
sage: x = HierarchyElement(C, attrcall("super_categories"), attrgetter("_cmp_key"))
sage: x.mro == x.mro_standard
False
sage: x.all_bases_len()
72
sage: x.all_bases_controlled_len()
76

sage: C = GradedHopfAlgebrasWithBasis(QQ)
sage: x = HierarchyElement(C, attrcall("super_categories"), attrgetter("_cmp_key"))
sage: x._test_mro()
```

(continues on next page)

(continued from previous page)

```
sage: x.mro == x.mro_standard
False
sage: x.all_bases_len()
114
sage: x.all_bases_controlled_len()
117
```

```
>>> from sage.all import *
>>> C = FiniteFields()
>>> x = HierarchyElement(C, attrcall("super_categories"), attrgetter("_cmp_key"))
>>> x.mro == x.mro_standard
False
>>> x.all_bases_len()
72
>>> x.all_bases_controlled_len()
76

>>> C = GradedHopfAlgebrasWithBasis(QQ)
>>> x = HierarchyElement(C, attrcall("super_categories"), attrgetter("_cmp_key"))
>>> x._test_mro()
>>> x.mro == x.mro_standard
False
>>> x.all_bases_len()
114
>>> x.all_bases_controlled_len()
117
```

The following can be used to search through the Sage named categories for any that requires the addition of some bases. The output may change a bit when the category hierarchy is changed. As long as the list below does not change radically, it's fine to just update this doctest:

```
sage: from sage.categories.category import category_sample
sage: sorted([C for C in category_sample()                                  #␣
↪needs sage.combinat sage.graphs sage.modules sage.rings.number_field
....:         if len(C._super_categories_for_classes) != len(C.super_categories())],
....:        key=str)
[Category of affine Weyl groups,
 Category of fields,
 Category of finite Weyl groups,
 Category of finite dimensional Hopf algebras with basis over Rational Field,
 Category of finite dimensional algebras with basis over Rational Field,
 Category of finite enumerated permutation groups,
 Category of number fields]
```

```
>>> from sage.all import *
>>> from sage.categories.category import category_sample
>>> sorted([C for C in category_sample()                                    #␣
↪needs sage.combinat sage.graphs sage.modules sage.rings.number_field
...         if len(C._super_categories_for_classes) != len(C.super_categories())],
...        key=str)
[Category of affine Weyl groups,
 Category of fields,
```

(continues on next page)

(continued from previous page)

```
Category of finite Weyl groups,
Category of finite dimensional Hopf algebras with basis over Rational Field,
Category of finite dimensional algebras with basis over Rational Field,
Category of finite enumerated permutation groups,
Category of number fields]
```

AUTHOR:

- Nicolas M. Thiery (2012-09): initial version.

sage.misc.c3_controlled.**C3_merge**(*lists*)

Return the input lists merged using the C3 algorithm.

EXAMPLES:

```
sage: from sage.misc.c3_controlled import C3_merge
sage: C3_merge([[3,2],[4,3,1]])
[4, 3, 2, 1]
sage: C3_merge([[3,2],[4,1]])
[3, 2, 4, 1]
```

```
>>> from sage.all import *
>>> from sage.misc.c3_controlled import C3_merge
>>> C3_merge([[Integer(3),Integer(2)],[Integer(4),Integer(3),Integer(1)]])
[4, 3, 2, 1]
>>> C3_merge([[Integer(3),Integer(2)],[Integer(4),Integer(1)]])
[3, 2, 4, 1]
```

This function is only used for testing and experimenting purposes, but exercised quite some by the other doctests in this file.

It is an extract of *sage.misc.c3.C3_algorithm()*; the latter could be possibly rewritten to use this one to avoid duplication.

sage.misc.c3_controlled.**C3_sorted_merge**(*lists*, *key='identity'*)

Return the sorted input lists merged using the C3 algorithm, with a twist.

INPUT:

- lists – a non empty list (or iterable) of lists (or iterables), each sorted strictly decreasingly according to key
- key – a function

OUTPUT: a pair (result, suggestion)

result is the sorted list obtained by merging the lists in lists while removing duplicates, and suggestion is a list such that applying C3 on lists with its last list replaced by suggestion would return result.

EXAMPLES:

With the following input, *C3_merge()* returns right away a sorted list:

```
sage: from sage.misc.c3_controlled import C3_merge
sage: C3_merge([[2],[1]])
[2, 1]
```

```
>>> from sage.all import *
>>> from sage.misc.c3_controlled import C3_merge
>>> C3_merge([[Integer(2)],[Integer(1)]])
[2, 1]
```

In that case, *C3_sorted_merge()* returns the same result, with the last line unchanged:

```
sage: from sage.misc.c3_controlled import C3_sorted_merge
sage: C3_sorted_merge([[2],[1]])
([2, 1], [1])
```

```
>>> from sage.all import *
>>> from sage.misc.c3_controlled import C3_sorted_merge
>>> C3_sorted_merge([[Integer(2)],[Integer(1)]])
([2, 1], [1])
```

On the other hand, with the following input, *C3_merge()* returns a non sorted list:

```
sage: C3_merge([[1],[2]])
[1, 2]
```

```
>>> from sage.all import *
>>> C3_merge([[Integer(1)],[Integer(2)]])
[1, 2]
```

Then, *C3_sorted_merge()* returns a sorted list, and suggests to replace the last line by `[2,1]`:

```
sage: C3_sorted_merge([[1],[2]])
([2, 1], [2, 1])
```

```
>>> from sage.all import *
>>> C3_sorted_merge([[Integer(1)],[Integer(2)]])
([2, 1], [2, 1])
```

And indeed *C3_merge()* now returns the desired result:

```
sage: C3_merge([[1],[2,1]])
[2, 1]
```

```
>>> from sage.all import *
>>> C3_merge([[Integer(1)],[Integer(2),Integer(1)]])
[2, 1]
```

From now on, we use this little wrapper that checks that *C3_merge()*, with the suggestion of *C3_sorted_merge()*, returns a sorted list:

```
sage: def C3_sorted_merge_check(lists):
....:     result, suggestion = C3_sorted_merge(lists)
....:     assert result == C3_merge(lists[:-1] + [suggestion])
....:     return result, suggestion
```

```
>>> from sage.all import *
>>> def C3_sorted_merge_check(lists):
...     result, suggestion = C3_sorted_merge(lists)
...     assert result == C3_merge(lists[:-Integer(1)] + [suggestion])
...     return result, suggestion
```

Base cases:

```
sage: C3_sorted_merge_check([])
Traceback (most recent call last):
...
ValueError: The input should be a non empty list of lists (or iterables)
sage: C3_sorted_merge_check([[]])
([], [])
sage: C3_sorted_merge_check([[1]])
([1], [1])
sage: C3_sorted_merge_check([[3,2,1]])
([3, 2, 1], [3, 2, 1])
sage: C3_sorted_merge_check([[1],[1]])
([1], [1])
sage: C3_sorted_merge_check([[3,2,1],[3,2,1]])
([3, 2, 1], [3, 2, 1])
```

```
>>> from sage.all import *
>>> C3_sorted_merge_check([])
Traceback (most recent call last):
...
ValueError: The input should be a non empty list of lists (or iterables)
>>> C3_sorted_merge_check([[]])
([], [])
>>> C3_sorted_merge_check([[Integer(1)]])
([1], [1])
>>> C3_sorted_merge_check([[Integer(3),Integer(2),Integer(1)]])
([3, 2, 1], [3, 2, 1])
>>> C3_sorted_merge_check([[Integer(1)],[Integer(1)]])
([1], [1])
>>> C3_sorted_merge_check([[Integer(3),Integer(2),Integer(1)],[Integer(3),
↪Integer(2),Integer(1)]])
([3, 2, 1], [3, 2, 1])
```

Exercise different states for the last line:

```
sage: C3_sorted_merge_check([[1],[2],[]])
([2, 1], [2, 1])
sage: C3_sorted_merge_check([[1],[2], [1]])
([2, 1], [2, 1])
```

```
>>> from sage.all import *
>>> C3_sorted_merge_check([[Integer(1)],[Integer(2)],[]])
([2, 1], [2, 1])
>>> C3_sorted_merge_check([[Integer(1)],[Integer(2)], [Integer(1)]])
([2, 1], [2, 1])
```

Explore (all?) the different execution branches:

```
sage: C3_sorted_merge_check([[3,1],[4,2]])
([4, 3, 2, 1], [4, 3, 2, 1])
sage: C3_sorted_merge_check([[4,1],[3,2]])
([4, 3, 2, 1], [3, 2, 1])
sage: C3_sorted_merge_check([[3,2],[4,1]])
([4, 3, 2, 1], [4, 3, 1])
sage: C3_sorted_merge_check([[1],[4,3,2]])
([4, 3, 2, 1], [4, 3, 2, 1])
sage: C3_sorted_merge_check([[1],[3,2], []])
([3, 2, 1], [2, 1])
sage: C3_sorted_merge_check([[1],[4,3,2], []])
([4, 3, 2, 1], [2, 1])
sage: C3_sorted_merge_check([[1],[4,3,2], [2]])
([4, 3, 2, 1], [2, 1])
sage: C3_sorted_merge_check([[2],[1],[4],[3]])
([4, 3, 2, 1], [3, 2, 1])
sage: C3_sorted_merge_check([[2],[1],[4],[]])
([4, 2, 1], [4, 2, 1])
sage: C3_sorted_merge_check([[2],[1],[3],[4]])
([4, 3, 2, 1], [4, 3, 2, 1])
sage: C3_sorted_merge_check([[2],[1],[3,2,1],[3]])
([3, 2, 1], [3])
sage: C3_sorted_merge_check([[2],[1],[2,1],[3]])
([3, 2, 1], [3, 2])
```

```
>>> from sage.all import *
>>> C3_sorted_merge_check([[Integer(3),Integer(1)],[Integer(4),Integer(2)]])
([4, 3, 2, 1], [4, 3, 2, 1])
>>> C3_sorted_merge_check([[Integer(4),Integer(1)],[Integer(3),Integer(2)]])
([4, 3, 2, 1], [3, 2, 1])
>>> C3_sorted_merge_check([[Integer(3),Integer(2)],[Integer(4),Integer(1)]])
([4, 3, 2, 1], [4, 3, 1])
>>> C3_sorted_merge_check([[Integer(1)],[Integer(4),Integer(3),Integer(2)]])
([4, 3, 2, 1], [4, 3, 2, 1])
>>> C3_sorted_merge_check([[Integer(1)],[Integer(3),Integer(2)], []])
([3, 2, 1], [2, 1])
>>> C3_sorted_merge_check([[Integer(1)],[Integer(4),Integer(3),Integer(2)], []])
([4, 3, 2, 1], [2, 1])
>>> C3_sorted_merge_check([[Integer(1)],[Integer(4),Integer(3),Integer(2)],␣
↪[Integer(2)]])
([4, 3, 2, 1], [2, 1])
>>> C3_sorted_merge_check([[Integer(2)],[Integer(1)],[Integer(4)],[Integer(3)]])
([4, 3, 2, 1], [3, 2, 1])
>>> C3_sorted_merge_check([[Integer(2)],[Integer(1)],[Integer(4)],[]])
([4, 2, 1], [4, 2, 1])
>>> C3_sorted_merge_check([[Integer(2)],[Integer(1)],[Integer(3)],[Integer(4)]])
([4, 3, 2, 1], [4, 3, 2, 1])
>>> C3_sorted_merge_check([[Integer(2)],[Integer(1)],[Integer(3),Integer(2),
↪Integer(1)],[Integer(3)]])
([3, 2, 1], [3])
>>> C3_sorted_merge_check([[Integer(2)],[Integer(1)],[Integer(2),Integer(1)],
```

(continues on next page)

(continued from previous page)

```
↪[Integer(3)]])
([3, 2, 1], [3, 2])
```

Exercises adding one item when the last list has a single element; the second example comes from an actual poset:

```
sage: C3_sorted_merge_check([[5,4,2],[4,3],[5,4,1]])
([5, 4, 3, 2, 1], [5, 4, 3, 2, 1])
sage: C3_sorted_merge_check([[6,4,2],[5,3],[6,5,1]])
([6, 5, 4, 3, 2, 1], [6, 5, 4, 3, 2, 1])
```

```
>>> from sage.all import *
>>> C3_sorted_merge_check([[Integer(5),Integer(4),Integer(2)],[Integer(4),
↪Integer(3)],[Integer(5),Integer(4),Integer(1)]])
([5, 4, 3, 2, 1], [5, 4, 3, 2, 1])
>>> C3_sorted_merge_check([[Integer(6),Integer(4),Integer(2)],[Integer(5),
↪Integer(3)],[Integer(6),Integer(5),Integer(1)]])
([6, 5, 4, 3, 2, 1], [6, 5, 4, 3, 2, 1])
```

class sage.misc.c3_controlled.**CmpKey**

Bases: object

This class implements the lazy attribute `Category._cmp_key`.

The comparison key `A._cmp_key` of a category is used to define an (almost) total order on non-join categories by setting, for two categories A and B, $A < B$ if `A._cmp_key > B._cmp_key`. This order in turn is used to give a normal form to join's, and help toward having a consistent method resolution order for parent/element classes.

The comparison key should satisfy the following properties:

- If A is a subcategory of B, then $A < B$ (so that `A._cmp_key > B._cmp_key`). In particular, `Objects()` is the largest category.
- If $A != B$ and taking the join of A and B makes sense (e.g. taking the join of `Algebras(GF(5))` and `Algebras(QQ)` does not make sense), then $A < B$ or $B < A$.

The rationale for the inversion above between $A < B$ and `A._cmp_key > B._cmp_key` is that we want the order to be compatible with inclusion of categories, yet it's easier in practice to create keys that get bigger and bigger while we go down the category hierarchy.

This implementation applies to join-irreducible categories (i.e. categories that are not join categories). It returns a pair of integers `(flags, i)`, where `flags` is to be interpreted as a bit vector. The first bit is set if `self` is a facade set. The second bit is set if `self` is finite. And so on. The choice of the flags is adhoc and was primarily crafted so that the order between categories would not change too much upon integration of Issue #13589 and would be reasonably session independent. The number `i` is there to resolve ambiguities; it is session dependent, and is assigned increasingly when new categories are created.

Note

This is currently not implemented using a *lazy_attribute* for speed reasons only (the code is in Cython and takes advantage of the fact that Category objects always have a `__dict__` dictionary)

Todo

- Handle nicely (covariant) functorial constructions and axioms

EXAMPLES:

```
sage: Objects()._cmp_key
(0, 0)
sage: SetsWithPartialMaps()._cmp_key
(0, 1)
sage: Sets()._cmp_key
(0, 2)
sage: Sets().Facade()._cmp_key
(1, ...)
sage: Sets().Finite()._cmp_key
(2, ...)
sage: Sets().Infinite()._cmp_key
(4, ...)
sage: EnumeratedSets()._cmp_key
(8, ...)
sage: FiniteEnumeratedSets()._cmp_key
(10, ...)
sage: SetsWithGrading()._cmp_key
(16, ...)
sage: Posets()._cmp_key
(32, ...)
sage: LatticePosets()._cmp_key
(96, ...)
sage: Crystals()._cmp_key
(136, ...)
sage: AdditiveMagmas()._cmp_key
(256, ...)
sage: Magmas()._cmp_key
(4096, ...)
sage: CommutativeAdditiveSemigroups()._cmp_key
(256, ...)
sage: Rings()._cmp_key
(225536, ...)
sage: Algebras(QQ)._cmp_key
(225536, ...)
sage: AlgebrasWithBasis(QQ)._cmp_key
(227584, ...)
sage: GradedAlgebras(QQ)._cmp_key
(226560, ...)
sage: GradedAlgebrasWithBasis(QQ)._cmp_key
(228608, ...)
```

```
>>> from sage.all import *
>>> Objects()._cmp_key
(0, 0)
>>> SetsWithPartialMaps()._cmp_key
(0, 1)
>>> Sets()._cmp_key
(0, 2)
```

(continues on next page)

(continued from previous page)

```
>>> Sets().Facade()._cmp_key
(1, ...)
>>> Sets().Finite()._cmp_key
(2, ...)
>>> Sets().Infinite()._cmp_key
(4, ...)
>>> EnumeratedSets()._cmp_key
(8, ...)
>>> FiniteEnumeratedSets()._cmp_key
(10, ...)
>>> SetsWithGrading()._cmp_key
(16, ...)
>>> Posets()._cmp_key
(32, ...)
>>> LatticePosets()._cmp_key
(96, ...)
>>> Crystals()._cmp_key
(136, ...)
>>> AdditiveMagmas()._cmp_key
(256, ...)
>>> Magmas()._cmp_key
(4096, ...)
>>> CommutativeAdditiveSemigroups()._cmp_key
(256, ...)
>>> Rings()._cmp_key
(225536, ...)
>>> Algebras(QQ)._cmp_key
(225536, ...)
>>> AlgebrasWithBasis(QQ)._cmp_key
(227584, ...)
>>> GradedAlgebras(QQ)._cmp_key
(226560, ...)
>>> GradedAlgebrasWithBasis(QQ)._cmp_key
(228608, ...)
```

For backward compatibility we currently want the following comparisons:

```
sage: EnumeratedSets()._cmp_key > Sets().Facade()._cmp_key
True
sage: AdditiveMagmas()._cmp_key > EnumeratedSets()._cmp_key
True

sage: Category.join([EnumeratedSets(), Sets().Facade()]).parent_class._an_element_
↪.__module__
'sage.categories.enumerated_sets'

sage: CommutativeAdditiveSemigroups()._cmp_key < Magmas()._cmp_key
True
sage: VectorSpaces(QQ)._cmp_key < Rings()._cmp_key
True
sage: VectorSpaces(QQ)._cmp_key < Magmas()._cmp_key
True
```

```
>>> from sage.all import *
>>> EnumeratedSets()._cmp_key > Sets().Facade()._cmp_key
True
>>> AdditiveMagmas()._cmp_key > EnumeratedSets()._cmp_key
True

>>> Category.join([EnumeratedSets(), Sets().Facade()]).parent_class._an_element_._
↪_module__
'sage.categories.enumerated_sets'

>>> CommutativeAdditiveSemigroups()._cmp_key < Magmas()._cmp_key
True
>>> VectorSpaces(QQ)._cmp_key < Rings()._cmp_key
True
>>> VectorSpaces(QQ)._cmp_key < Magmas()._cmp_key
True
```

class sage.misc.c3_controlled.**CmpKeyNamed**

Bases: object

This class implements the lazy attribute `CategoryWithParameters._cmp_key`.

See also

- *CmpKey*
- *lazy_attribute*
- sage.categories.category.CategoryWithParameters.

Note

- The value of the attribute depends only on the parameters of this category.
- This is currently not implemented using a *lazy_attribute* for speed reasons only.

EXAMPLES:

```
sage: Algebras(GF(3))._cmp_key == Algebras(GF(5))._cmp_key  # indirect doctest
True
sage: Algebras(ZZ)._cmp_key != Algebras(GF(5))._cmp_key
True
```

```
>>> from sage.all import *
>>> Algebras(GF(Integer(3)))._cmp_key == Algebras(GF(Integer(5)))._cmp_key  #␣
↪indirect doctest
True
>>> Algebras(ZZ)._cmp_key != Algebras(GF(Integer(5)))._cmp_key
True
```

class sage.misc.c3_controlled.**HierarchyElement**(*value*, *bases*, *key*, *from_value*)

Bases: object

A class for elements in a hierarchy.

This class is for testing and experimenting with various variants of the C3 algorithm to compute a linear extension of the elements above an element in a hierarchy. Given the topic at hand, we use the following naming conventions. For x an element of the hierarchy, we call the elements just above x its *bases*, and the linear extension of all elements above x its *MRO*.

By convention, the bases are given as lists of instances of *HierarchyElement*, and MROs are given a list of the corresponding values.

INPUT:

- value – an object
- succ – a successor function, poset or digraph from which one can recover the successors of value
- key – a function taking values as input (default: the identity) this function is used to compute comparison keys for sorting elements of the hierarchy.

Note

Constructing a *HierarchyElement* immediately constructs the whole hierarchy above it.

EXAMPLES:

See the introduction of this module *sage.misc.c3_controlled* for many examples. Here we consider a large example, originally taken from the hierarchy of categories above HopfAlgebrasWithBasis:

```
sage: from sage.misc.c3_controlled import HierarchyElement
sage: G = DiGraph({                                                    #␣
↪needs sage.graphs
....:     44 :  [43, 42, 41, 40, 39, 38, 37, 36, 35, 34, 33, 32, 31, 30, 29, 28,␣
↪27, 26, 25, 24, 23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7,
↪ 6, 5, 4, 3, 2, 1, 0],
....:     43 :  [42, 41, 40, 36, 35, 39, 38, 37, 33, 32, 31, 30, 29, 28, 27, 26,␣
↪23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2,␣
↪1, 0],
....:     42 :  [36, 35, 37, 30, 29, 28, 27, 26, 15, 14, 12, 11, 9, 8, 5, 3, 2, 1,
↪ 0],
....:     41 :  [40, 36, 35, 33, 32, 31, 30, 29, 28, 27, 26, 23, 22, 21, 20, 19,␣
↪18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
....:     40 :  [36, 35, 32, 31, 30, 29, 28, 27, 26, 19, 18, 17, 16, 15, 14, 13,␣
↪12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
....:     39 :  [38, 37, 33, 32, 31, 30, 29, 28, 27, 26, 23, 22, 21, 20, 19, 18,␣
↪17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
....:     38 :  [37, 33, 32, 31, 30, 29, 28, 27, 26, 23, 22, 21, 20, 19, 18, 17,␣
↪16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
....:     37 :  [30, 29, 28, 27, 26, 15, 14, 12, 11, 9, 8, 5, 3, 2, 1, 0],
....:     36 :  [35, 30, 29, 28, 27, 26, 15, 14, 12, 11, 9, 8, 5, 3, 2, 1, 0],
....:     35 :  [29, 28, 27, 26, 15, 14, 12, 11, 9, 8, 5, 3, 2, 1, 0],
....:     34 :  [33, 32, 31, 30, 29, 28, 27, 26, 25, 24, 23, 22, 21, 20, 19, 18,␣
↪17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
....:     33 :  [32, 31, 30, 29, 28, 27, 26, 23, 22, 21, 20, 19, 18, 17, 16, 15,␣
↪14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
....:     32 :  [31, 30, 29, 28, 27, 26, 19, 18, 17, 16, 15, 14, 13, 12, 11, 10,␣
↪9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
```

(continues on next page)

(continued from previous page)

```
....:     31 :  [30, 29, 28, 27, 26, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4,
↪ 3, 2, 1, 0],
....:     30 :  [29, 28, 27, 26, 15, 14, 12, 11, 9, 8, 5, 3, 2, 1, 0],
....:     29 :  [28, 27, 26, 15, 14, 12, 11, 9, 8, 5, 3, 2, 1, 0],
....:     28 :  [27, 26, 15, 14, 12, 11, 9, 8, 5, 3, 2, 1, 0],
....:     27 :  [15, 14, 12, 11, 9, 8, 5, 3, 2, 1, 0],
....:     26 :  [15, 14, 12, 11, 9, 8, 5, 3, 2, 1, 0],
....:     25 :  [24, 23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8,
↪ 7, 6, 5, 4, 3, 2, 1, 0],
....:     24 :  [4, 2, 1, 0],
....:     23 :  [22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6,␣
↪5, 4, 3, 2, 1, 0],
....:     22 :  [21, 20, 18, 17, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
....:     21 :  [20, 17, 4, 2, 1, 0],
....:     20 :  [4, 2, 1, 0],
....:     19 :  [18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1,␣
↪0],
....:     18 :  [17, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
....:     17 :  [4, 2, 1, 0],
....:     16 :  [15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
....:     15 :  [14, 12, 11, 9, 8, 5, 3, 2, 1, 0],
....:     14 :  [11, 3, 2, 1, 0],
....:     13 :  [12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
....:     12 :  [11, 9, 8, 5, 3, 2, 1, 0],
....:     11 :  [3, 2, 1, 0],
....:     10 :  [9, 8, 7, 6, 5, 4, 3, 2, 1, 0],
....:     9 :  [8, 5, 3, 2, 1, 0],
....:     8 :  [3, 2, 1, 0],
....:     7 :  [6, 5, 4, 3, 2, 1, 0],
....:     6 :  [4, 3, 2, 1, 0],
....:     5 :  [3, 2, 1, 0],
....:     4 :  [2, 1, 0],
....:     3 :  [2, 1, 0],
....:     2 :  [1, 0],
....:     1 :  [0],
....:     0 :  [],
....:     })

sage: # needs sage.combinat sage.graphs
sage: x = HierarchyElement(44, G)
sage: x.mro
[44, 43, 42, 41, 40, 39, 38, 37, 36, 35, 34, 33, 32, 31, 30, 29, 28, 27, 26, 25,␣
↪24, 23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3,
↪ 2, 1, 0]
sage: x.cls
<class '44.cls'>
sage: x.cls.mro()
[<class '44.cls'>, <class '43.cls'>, <class '42.cls'>, <class '41.cls'>, <class
↪'40.cls'>, <class '39.cls'>, <class '38.cls'>, <class '37.cls'>, <class '36.cls
↪'>, <class '35.cls'>, <class '34.cls'>, <class '33.cls'>, <class '32.cls'>,
↪<class '31.cls'>, <class '30.cls'>, <class '29.cls'>, <class '28.cls'>, <class
↪'27.cls'>, <class '26.cls'>, <class '25.cls'>, <class '24.cls'>, <class '23.cls
```

(continues on next page)

(continued from previous page)

```
↪'>, <class '22.cls'>, <class '21.cls'>, <class '20.cls'>, <class '19.cls'>,
↪<class '18.cls'>, <class '17.cls'>, <class '16.cls'>, <class '15.cls'>, <class
↪'14.cls'>, <class '13.cls'>, <class '12.cls'>, <class '11.cls'>, <class '10.cls
↪'>, <class '9.cls'>, <class '8.cls'>, <class '7.cls'>, <class '6.cls'>, <class
↪'5.cls'>, <class '4.cls'>, <class '3.cls'>, <class '2.cls'>, <class '1.cls'>,
↪<class '0.cls'>, <... 'object'>]
```

```
>>> from sage.all import *
>>> from sage.misc.c3_controlled import HierarchyElement
>>> G = DiGraph({                                                              #␣
↪needs sage.graphs
...     Integer(44) :  [Integer(43), Integer(42), Integer(41), Integer(40),␣
↪Integer(39), Integer(38), Integer(37), Integer(36), Integer(35), Integer(34),␣
↪Integer(33), Integer(32), Integer(31), Integer(30), Integer(29), Integer(28),␣
↪Integer(27), Integer(26), Integer(25), Integer(24), Integer(23), Integer(22),␣
↪Integer(21), Integer(20), Integer(19), Integer(18), Integer(17), Integer(16),␣
↪Integer(15), Integer(14), Integer(13), Integer(12), Integer(11), Integer(10),␣
↪Integer(9), Integer(8), Integer(7), Integer(6), Integer(5), Integer(4),␣
↪Integer(3), Integer(2), Integer(1), Integer(0)],
...     Integer(43) :  [Integer(42), Integer(41), Integer(40), Integer(36),␣
↪Integer(35), Integer(39), Integer(38), Integer(37), Integer(33), Integer(32),␣
↪Integer(31), Integer(30), Integer(29), Integer(28), Integer(27), Integer(26),␣
↪Integer(23), Integer(22), Integer(21), Integer(20), Integer(19), Integer(18),␣
↪Integer(17), Integer(16), Integer(15), Integer(14), Integer(13), Integer(12),␣
↪Integer(11), Integer(10), Integer(9), Integer(8), Integer(7), Integer(6),␣
↪Integer(5), Integer(4), Integer(3), Integer(2), Integer(1), Integer(0)],
...     Integer(42) :  [Integer(36), Integer(35), Integer(37), Integer(30),␣
↪Integer(29), Integer(28), Integer(27), Integer(26), Integer(15), Integer(14),␣
↪Integer(12), Integer(11), Integer(9), Integer(8), Integer(5), Integer(3),␣
↪Integer(2), Integer(1), Integer(0)],
...     Integer(41) :  [Integer(40), Integer(36), Integer(35), Integer(33),␣
↪Integer(32), Integer(31), Integer(30), Integer(29), Integer(28), Integer(27),␣
↪Integer(26), Integer(23), Integer(22), Integer(21), Integer(20), Integer(19),␣
↪Integer(18), Integer(17), Integer(16), Integer(15), Integer(14), Integer(13),␣
↪Integer(12), Integer(11), Integer(10), Integer(9), Integer(8), Integer(7),␣
↪Integer(6), Integer(5), Integer(4), Integer(3), Integer(2), Integer(1),␣
↪Integer(0)],
...     Integer(40) :  [Integer(36), Integer(35), Integer(32), Integer(31),␣
↪Integer(30), Integer(29), Integer(28), Integer(27), Integer(26), Integer(19),␣
↪Integer(18), Integer(17), Integer(16), Integer(15), Integer(14), Integer(13),␣
↪Integer(12), Integer(11), Integer(10), Integer(9), Integer(8), Integer(7),␣
↪Integer(6), Integer(5), Integer(4), Integer(3), Integer(2), Integer(1),␣
↪Integer(0)],
...     Integer(39) :  [Integer(38), Integer(37), Integer(33), Integer(32),␣
↪Integer(31), Integer(30), Integer(29), Integer(28), Integer(27), Integer(26),␣
↪Integer(23), Integer(22), Integer(21), Integer(20), Integer(19), Integer(18),␣
↪Integer(17), Integer(16), Integer(15), Integer(14), Integer(13), Integer(12),␣
↪Integer(11), Integer(10), Integer(9), Integer(8), Integer(7), Integer(6),␣
↪Integer(5), Integer(4), Integer(3), Integer(2), Integer(1), Integer(0)],
...     Integer(38) :  [Integer(37), Integer(33), Integer(32), Integer(31),␣
↪Integer(30), Integer(29), Integer(28), Integer(27), Integer(26), Integer(23),␣
↪Integer(22), Integer(21), Integer(20), Integer(19), Integer(18), Integer(17),␣
```

(continues on next page)

(continued from previous page)

```
↪Integer(16), Integer(15), Integer(14), Integer(13), Integer(12), Integer(11),␣
↪Integer(10), Integer(9), Integer(8), Integer(7), Integer(6), Integer(5),␣
↪Integer(4), Integer(3), Integer(2), Integer(1), Integer(0)],
...     Integer(37) :  [Integer(30), Integer(29), Integer(28), Integer(27),␣
↪Integer(26), Integer(15), Integer(14), Integer(12), Integer(11), Integer(9),␣
↪Integer(8), Integer(5), Integer(3), Integer(2), Integer(1), Integer(0)],
...     Integer(36) :  [Integer(35), Integer(30), Integer(29), Integer(28),␣
↪Integer(27), Integer(26), Integer(15), Integer(14), Integer(12), Integer(11),␣
↪Integer(9), Integer(8), Integer(5), Integer(3), Integer(2), Integer(1),␣
↪Integer(0)],
...     Integer(35) :  [Integer(29), Integer(28), Integer(27), Integer(26),␣
↪Integer(15), Integer(14), Integer(12), Integer(11), Integer(9), Integer(8),␣
↪Integer(5), Integer(3), Integer(2), Integer(1), Integer(0)],
...     Integer(34) :  [Integer(33), Integer(32), Integer(31), Integer(30),␣
↪Integer(29), Integer(28), Integer(27), Integer(26), Integer(25), Integer(24),␣
↪Integer(23), Integer(22), Integer(21), Integer(20), Integer(19), Integer(18),␣
↪Integer(17), Integer(16), Integer(15), Integer(14), Integer(13), Integer(12),␣
↪Integer(11), Integer(10), Integer(9), Integer(8), Integer(7), Integer(6),␣
↪Integer(5), Integer(4), Integer(3), Integer(2), Integer(1), Integer(0)],
...     Integer(33) :  [Integer(32), Integer(31), Integer(30), Integer(29),␣
↪Integer(28), Integer(27), Integer(26), Integer(23), Integer(22), Integer(21),␣
↪Integer(20), Integer(19), Integer(18), Integer(17), Integer(16), Integer(15),␣
↪Integer(14), Integer(13), Integer(12), Integer(11), Integer(10), Integer(9),␣
↪Integer(8), Integer(7), Integer(6), Integer(5), Integer(4), Integer(3),␣
↪Integer(2), Integer(1), Integer(0)],
...     Integer(32) :  [Integer(31), Integer(30), Integer(29), Integer(28),␣
↪Integer(27), Integer(26), Integer(19), Integer(18), Integer(17), Integer(16),␣
↪Integer(15), Integer(14), Integer(13), Integer(12), Integer(11), Integer(10),␣
↪Integer(9), Integer(8), Integer(7), Integer(6), Integer(5), Integer(4),␣
↪Integer(3), Integer(2), Integer(1), Integer(0)],
...     Integer(31) :  [Integer(30), Integer(29), Integer(28), Integer(27),␣
↪Integer(26), Integer(16), Integer(15), Integer(14), Integer(13), Integer(12),␣
↪Integer(11), Integer(10), Integer(9), Integer(8), Integer(7), Integer(6),␣
↪Integer(5), Integer(4), Integer(3), Integer(2), Integer(1), Integer(0)],
...     Integer(30) :  [Integer(29), Integer(28), Integer(27), Integer(26),␣
↪Integer(15), Integer(14), Integer(12), Integer(11), Integer(9), Integer(8),␣
↪Integer(5), Integer(3), Integer(2), Integer(1), Integer(0)],
...     Integer(29) :  [Integer(28), Integer(27), Integer(26), Integer(15),␣
↪Integer(14), Integer(12), Integer(11), Integer(9), Integer(8), Integer(5),␣
↪Integer(3), Integer(2), Integer(1), Integer(0)],
...     Integer(28) :  [Integer(27), Integer(26), Integer(15), Integer(14),␣
↪Integer(12), Integer(11), Integer(9), Integer(8), Integer(5), Integer(3),␣
↪Integer(2), Integer(1), Integer(0)],
...     Integer(27) :  [Integer(15), Integer(14), Integer(12), Integer(11),␣
↪Integer(9), Integer(8), Integer(5), Integer(3), Integer(2), Integer(1),␣
↪Integer(0)],
...     Integer(26) :  [Integer(15), Integer(14), Integer(12), Integer(11),␣
↪Integer(9), Integer(8), Integer(5), Integer(3), Integer(2), Integer(1),␣
↪Integer(0)],
...     Integer(25) :  [Integer(24), Integer(23), Integer(22), Integer(21),␣
↪Integer(20), Integer(19), Integer(18), Integer(17), Integer(16), Integer(15),␣
↪Integer(14), Integer(13), Integer(12), Integer(11), Integer(10), Integer(9),␣
```

(continues on next page)

(continued from previous page)

```
↪Integer(8), Integer(7), Integer(6), Integer(5), Integer(4), Integer(3),␣
↪Integer(2), Integer(1), Integer(0)],
...      Integer(24) :  [Integer(4), Integer(2), Integer(1), Integer(0)],
...      Integer(23) :  [Integer(22), Integer(21), Integer(20), Integer(19),␣
↪Integer(18), Integer(17), Integer(16), Integer(15), Integer(14), Integer(13),␣
↪Integer(12), Integer(11), Integer(10), Integer(9), Integer(8), Integer(7),␣
↪Integer(6), Integer(5), Integer(4), Integer(3), Integer(2), Integer(1),␣
↪Integer(0)],
...      Integer(22) :  [Integer(21), Integer(20), Integer(18), Integer(17),␣
↪Integer(13), Integer(12), Integer(11), Integer(10), Integer(9), Integer(8),␣
↪Integer(7), Integer(6), Integer(5), Integer(4), Integer(3), Integer(2),␣
↪Integer(1), Integer(0)],
...      Integer(21) :  [Integer(20), Integer(17), Integer(4), Integer(2),␣
↪Integer(1), Integer(0)],
...      Integer(20) :  [Integer(4), Integer(2), Integer(1), Integer(0)],
...      Integer(19) :  [Integer(18), Integer(17), Integer(16), Integer(15),␣
↪Integer(14), Integer(13), Integer(12), Integer(11), Integer(10), Integer(9),␣
↪Integer(8), Integer(7), Integer(6), Integer(5), Integer(4), Integer(3),␣
↪Integer(2), Integer(1), Integer(0)],
...      Integer(18) :  [Integer(17), Integer(13), Integer(12), Integer(11),␣
↪Integer(10), Integer(9), Integer(8), Integer(7), Integer(6), Integer(5),␣
↪Integer(4), Integer(3), Integer(2), Integer(1), Integer(0)],
...      Integer(17) :  [Integer(4), Integer(2), Integer(1), Integer(0)],
...      Integer(16) :  [Integer(15), Integer(14), Integer(13), Integer(12),␣
↪Integer(11), Integer(10), Integer(9), Integer(8), Integer(7), Integer(6),␣
↪Integer(5), Integer(4), Integer(3), Integer(2), Integer(1), Integer(0)],
...      Integer(15) :  [Integer(14), Integer(12), Integer(11), Integer(9),␣
↪Integer(8), Integer(5), Integer(3), Integer(2), Integer(1), Integer(0)],
...      Integer(14) :  [Integer(11), Integer(3), Integer(2), Integer(1),␣
↪Integer(0)],
...      Integer(13) :  [Integer(12), Integer(11), Integer(10), Integer(9),␣
↪Integer(8), Integer(7), Integer(6), Integer(5), Integer(4), Integer(3),␣
↪Integer(2), Integer(1), Integer(0)],
...      Integer(12) :  [Integer(11), Integer(9), Integer(8), Integer(5),␣
↪Integer(3), Integer(2), Integer(1), Integer(0)],
...      Integer(11) :  [Integer(3), Integer(2), Integer(1), Integer(0)],
...      Integer(10) :  [Integer(9), Integer(8), Integer(7), Integer(6),␣
↪Integer(5), Integer(4), Integer(3), Integer(2), Integer(1), Integer(0)],
...      Integer(9) :  [Integer(8), Integer(5), Integer(3), Integer(2), Integer(1),
↪ Integer(0)],
...      Integer(8) :  [Integer(3), Integer(2), Integer(1), Integer(0)],
...      Integer(7) :  [Integer(6), Integer(5), Integer(4), Integer(3), Integer(2),
↪ Integer(1), Integer(0)],
...      Integer(6) :  [Integer(4), Integer(3), Integer(2), Integer(1),␣
↪Integer(0)],
...      Integer(5) :  [Integer(3), Integer(2), Integer(1), Integer(0)],
...      Integer(4) :  [Integer(2), Integer(1), Integer(0)],
...      Integer(3) :  [Integer(2), Integer(1), Integer(0)],
...      Integer(2) :  [Integer(1), Integer(0)],
...      Integer(1) :  [Integer(0)],
...      Integer(0) :  [],
...      })
```

(continues on next page)

(continued from previous page)

```
>>> # needs sage.combinat sage.graphs
>>> x = HierarchyElement(Integer(44), G)
>>> x.mro
[44, 43, 42, 41, 40, 39, 38, 37, 36, 35, 34, 33, 32, 31, 30, 29, 28, 27, 26, 25,␣
↪24, 23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3,
↪ 2, 1, 0]
>>> x.cls
<class '44.cls'>
>>> x.cls.mro()
[<class '44.cls'>, <class '43.cls'>, <class '42.cls'>, <class '41.cls'>, <class
↪'40.cls'>, <class '39.cls'>, <class '38.cls'>, <class '37.cls'>, <class '36.cls
↪'>, <class '35.cls'>, <class '34.cls'>, <class '33.cls'>, <class '32.cls'>,
↪<class '31.cls'>, <class '30.cls'>, <class '29.cls'>, <class '28.cls'>, <class
↪'27.cls'>, <class '26.cls'>, <class '25.cls'>, <class '24.cls'>, <class '23.cls
↪'>, <class '22.cls'>, <class '21.cls'>, <class '20.cls'>, <class '19.cls'>,
↪<class '18.cls'>, <class '17.cls'>, <class '16.cls'>, <class '15.cls'>, <class
↪'14.cls'>, <class '13.cls'>, <class '12.cls'>, <class '11.cls'>, <class '10.cls
↪'>, <class '9.cls'>, <class '8.cls'>, <class '7.cls'>, <class '6.cls'>, <class
↪'5.cls'>, <class '4.cls'>, <class '3.cls'>, <class '2.cls'>, <class '1.cls'>,
↪<class '0.cls'>, <... 'object'>]
```

all_bases()

Return the set of all instances of *HierarchyElement* above `self`, `self` included.

EXAMPLES:

```
sage: # needs sage.graphs
sage: from sage.misc.c3_controlled import HierarchyElement
sage: P = Poset((divisors(30), lambda x, y: y.divides(x)), facade=True)
sage: HierarchyElement(1, P).all_bases()
{1}
sage: HierarchyElement(10, P).all_bases()  # random output
{10, 5, 2, 1}
sage: sorted([x.value for x in HierarchyElement(10, P).all_bases()])
[1, 2, 5, 10]
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> from sage.misc.c3_controlled import HierarchyElement
>>> P = Poset((divisors(Integer(30)), lambda x, y: y.divides(x)), facade=True)
>>> HierarchyElement(Integer(1), P).all_bases()
{1}
>>> HierarchyElement(Integer(10), P).all_bases()  # random output
{10, 5, 2, 1}
>>> sorted([x.value for x in HierarchyElement(Integer(10), P).all_bases()])
[1, 2, 5, 10]
```

all_bases_controlled_len()

Return the cumulated size of the controlled bases of the elements above `self` in the hierarchy.

EXAMPLES:

```
sage: from sage.misc.c3_controlled import HierarchyElement
sage: P = Poset((divisors(30), lambda x, y: y.divides(x)), facade=True)      #␣
↪needs sage.graphs
sage: HierarchyElement(30, P).all_bases_controlled_len()                     #␣
↪needs sage.graphs
13
```

```
>>> from sage.all import *
>>> from sage.misc.c3_controlled import HierarchyElement
>>> P = Poset((divisors(Integer(30)), lambda x, y: y.divides(x)),␣
↪facade=True)      # needs sage.graphs
>>> HierarchyElement(Integer(30), P).all_bases_controlled_len()              ␣
↪      # needs sage.graphs
13
```

all_bases_len()

Return the cumulated size of the bases of the elements above `self` in the hierarchy.

EXAMPLES:

```
sage: from sage.misc.c3_controlled import HierarchyElement
sage: P = Poset((divisors(30), lambda x, y: y.divides(x)), facade=True)      #␣
↪needs sage.graphs
sage: HierarchyElement(30, P).all_bases_len()                                #␣
↪needs sage.graphs
12
```

```
>>> from sage.all import *
>>> from sage.misc.c3_controlled import HierarchyElement
>>> P = Poset((divisors(Integer(30)), lambda x, y: y.divides(x)),␣
↪facade=True)      # needs sage.graphs
>>> HierarchyElement(Integer(30), P).all_bases_len()                         ␣
↪      # needs sage.graphs
12
```

bases()

The bases of `self`.

The bases are given as a list of instances of *HierarchyElement*, sorted decreasingly according to the `key` function.

EXAMPLES:

```
sage: # needs sage.combinat sage.graphs
sage: from sage.misc.c3_controlled import HierarchyElement
sage: P = Poset((divisors(30), lambda x, y: y.divides(x)), facade=True)
sage: x = HierarchyElement(10, P)
sage: x.bases
[5, 2]
sage: type(x.bases[0])
<class 'sage.misc.c3_controlled.HierarchyElement'>
sage: x.mro
[10, 5, 2, 1]
```

(continues on next page)

(continued from previous page)

```
sage: x._bases_controlled
[5, 2]
```

```
>>> from sage.all import *
>>> # needs sage.combinat sage.graphs
>>> from sage.misc.c3_controlled import HierarchyElement
>>> P = Poset((divisors(Integer(30)), lambda x, y: y.divides(x)), facade=True)
>>> x = HierarchyElement(Integer(10), P)
>>> x.bases
[5, 2]
>>> type(x.bases[Integer(0)])
<class 'sage.misc.c3_controlled.HierarchyElement'>
>>> x.mro
[10, 5, 2, 1]
>>> x._bases_controlled
[5, 2]
```

cls()

Return a Python class with inheritance graph parallel to the hierarchy above `self`.

EXAMPLES:

```
sage: # needs sage.graphs
sage: from sage.misc.c3_controlled import HierarchyElement
sage: P = Poset((divisors(30), lambda x, y: y.divides(x)), facade=True)
sage: x = HierarchyElement(1, P)
sage: x.cls
<class '1.cls'>
sage: x.cls.mro()
[<class '1.cls'>, <... 'object'>]
sage: x = HierarchyElement(30, P)
sage: x.cls
<class '30.cls'>
sage: x.cls.mro()
[<class '30.cls'>, <class '15.cls'>, <class '10.cls'>, <class '6.cls'>,
↪<class '5.cls'>, <class '3.cls'>, <class '2.cls'>, <class '1.cls'>, <...
↪'object'>]
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> from sage.misc.c3_controlled import HierarchyElement
>>> P = Poset((divisors(Integer(30)), lambda x, y: y.divides(x)), facade=True)
>>> x = HierarchyElement(Integer(1), P)
>>> x.cls
<class '1.cls'>
>>> x.cls.mro()
[<class '1.cls'>, <... 'object'>]
>>> x = HierarchyElement(Integer(30), P)
>>> x.cls
<class '30.cls'>
>>> x.cls.mro()
[<class '30.cls'>, <class '15.cls'>, <class '10.cls'>, <class '6.cls'>,
```

(continues on next page)

(continued from previous page)

```
↪<class '5.cls'>, <class '3.cls'>, <class '2.cls'>, <class '1.cls'>, <...
↪'object'>]
```

mro()

The MRO for this object, calculated with *C3_sorted_merge()*.

EXAMPLES:

```
sage: # needs sage.graphs
sage: from sage.misc.c3_controlled import HierarchyElement, C3_sorted_merge,␣
↪identity
sage: P = Poset({7: [5, 6], 5: [1, 2], 6: [3, 4]}, facade=True)
sage: x = HierarchyElement(5, P)
sage: x.mro
[5, 2, 1]
sage: x = HierarchyElement(6, P)
sage: x.mro
[6, 4, 3]
sage: x = HierarchyElement(7, P)
sage: x.mro
[7, 6, 5, 4, 3, 2, 1]

sage: C3_sorted_merge([[6, 4, 3], [5, 2, 1], [6, 5]], identity)             #␣
↪needs sage.graphs
([6, 5, 4, 3, 2, 1], [6, 5, 4])
```

```
>>> from sage.all import *
>>> # needs sage.graphs
>>> from sage.misc.c3_controlled import HierarchyElement, C3_sorted_merge,␣
↪identity
>>> P = Poset({Integer(7): [Integer(5), Integer(6)], Integer(5): [Integer(1),␣
↪Integer(2)], Integer(6): [Integer(3), Integer(4)]}, facade=True)
>>> x = HierarchyElement(Integer(5), P)
>>> x.mro
[5, 2, 1]
>>> x = HierarchyElement(Integer(6), P)
>>> x.mro
[6, 4, 3]
>>> x = HierarchyElement(Integer(7), P)
>>> x.mro
[7, 6, 5, 4, 3, 2, 1]

>>> C3_sorted_merge([[Integer(6), Integer(4), Integer(3)], [Integer(5),␣
↪Integer(2), Integer(1)], [Integer(6), Integer(5)]], identity)             #␣
↪needs sage.graphs
([6, 5, 4, 3, 2, 1], [6, 5, 4])
```

mro_controlled()

The MRO for this object, calculated with *C3_merge()*, under control of *C3_sorted_merge()*

EXAMPLES:

```
sage: from sage.misc.c3_controlled import HierarchyElement, C3_merge

sage: # needs sage.graphs
sage: P = Poset({7: [5, 6], 5: [1, 2], 6: [3, 4]}, facade=True)
sage: x = HierarchyElement(5, P)
sage: x.mro_controlled
[5, 2, 1]
sage: x = HierarchyElement(6, P)
sage: x.mro_controlled
[6, 4, 3]
sage: x = HierarchyElement(7, P)
sage: x.mro_controlled
[7, 6, 5, 4, 3, 2, 1]
sage: x._bases
[6, 5]
sage: x._bases_controlled
[6, 5, 4]

sage: C3_merge([[6, 4, 3], [5, 2, 1], [6, 5]])
[6, 4, 3, 5, 2, 1]
sage: C3_merge([[6, 4, 3], [5, 2, 1], [6, 5, 4]])
[6, 5, 4, 3, 2, 1]
```

```
>>> from sage.all import *
>>> from sage.misc.c3_controlled import HierarchyElement, C3_merge

>>> # needs sage.graphs
>>> P = Poset({Integer(7): [Integer(5), Integer(6)], Integer(5): [Integer(1),␣
↪Integer(2)], Integer(6): [Integer(3), Integer(4)]}, facade=True)
>>> x = HierarchyElement(Integer(5), P)
>>> x.mro_controlled
[5, 2, 1]
>>> x = HierarchyElement(Integer(6), P)
>>> x.mro_controlled
[6, 4, 3]
>>> x = HierarchyElement(Integer(7), P)
>>> x.mro_controlled
[7, 6, 5, 4, 3, 2, 1]
>>> x._bases
[6, 5]
>>> x._bases_controlled
[6, 5, 4]

>>> C3_merge([[Integer(6), Integer(4), Integer(3)], [Integer(5), Integer(2),␣
↪Integer(1)], [Integer(6), Integer(5)]])
[6, 4, 3, 5, 2, 1]
>>> C3_merge([[Integer(6), Integer(4), Integer(3)], [Integer(5), Integer(2),␣
↪Integer(1)], [Integer(6), Integer(5), Integer(4)]])
[6, 5, 4, 3, 2, 1]
```

mro_standard()

The MRO for this object, calculated with *C3_merge()*.

EXAMPLES:

```
sage: from sage.misc.c3_controlled import HierarchyElement, C3_merge

sage: # needs sage.graphs
sage: P = Poset({7: [5, 6], 5: [1, 2], 6: [3, 4]}, facade=True)
sage: x = HierarchyElement(5, P)
sage: x.mro_standard
[5, 2, 1]
sage: x = HierarchyElement(6, P)
sage: x.mro_standard
[6, 4, 3]
sage: x = HierarchyElement(7, P)
sage: x.mro_standard
[7, 6, 4, 3, 5, 2, 1]

sage: C3_merge([[6, 4, 3], [5, 2, 1], [6, 5]])
[6, 4, 3, 5, 2, 1]
```

```
>>> from sage.all import *
>>> from sage.misc.c3_controlled import HierarchyElement, C3_merge

>>> # needs sage.graphs
>>> P = Poset({Integer(7): [Integer(5), Integer(6)], Integer(5): [Integer(1),␣
↪Integer(2)], Integer(6): [Integer(3), Integer(4)]}, facade=True)
>>> x = HierarchyElement(Integer(5), P)
>>> x.mro_standard
[5, 2, 1]
>>> x = HierarchyElement(Integer(6), P)
>>> x.mro_standard
[6, 4, 3]
>>> x = HierarchyElement(Integer(7), P)
>>> x.mro_standard
[7, 6, 4, 3, 5, 2, 1]

>>> C3_merge([[Integer(6), Integer(4), Integer(3)], [Integer(5), Integer(2),␣
↪Integer(1)], [Integer(6), Integer(5)]])
[6, 4, 3, 5, 2, 1]
```

sage.misc.c3_controlled.**identity**(*x*)

EXAMPLES:

```
sage: from sage.misc.c3_controlled import identity
sage: identity(10)
10
```

```
>>> from sage.all import *
>>> from sage.misc.c3_controlled import identity
>>> identity(Integer(10))
10
```

CHAPTER

NINE

INDICES AND TABLES

- Index
- Module Index
- Search Page

PYTHON MODULE INDEX

a

sage.arith.srange, 144

d

sage.databases.sql_db, 165

e

sage.ext.fast_callable, 340
sage.ext.fast_eval, 375
sage.ext.memory, 723

m

sage.misc.abstract_method, 95
sage.misc.banner, 599
sage.misc.benchmark, 654
sage.misc.bindable_class, 100
sage.misc.c3, 723
sage.misc.c3_controlled, 725
sage.misc.cachefunc, 275
sage.misc.call, 125
sage.misc.callable_dict, 126
sage.misc.citation, 634
sage.misc.classcall_metaclass, 115
sage.misc.classgraph, 702
sage.misc.constant_function, 114
sage.misc.converting_dict, 127
sage.misc.copying, 636
sage.misc.cython, 377
sage.misc.decorators, 104
sage.misc.defaults, 1
sage.misc.dev_tools, 704
sage.misc.edit_module, 698
sage.misc.element_with_label, 150
sage.misc.explain_pickle, 567
sage.misc.fast_methods, 122
sage.misc.flatten, 130
sage.misc.fpickle, 565
sage.misc.func_persist, 547
sage.misc.function_mangling, 714
sage.misc.functional, 3
sage.misc.gperftools, 666
sage.misc.html, 477
sage.misc.inherit_comparison, 119
sage.misc.inline_fortran, 381
sage.misc.instancedoc, 669
sage.misc.latex, 483
sage.misc.latex_macros, 513
sage.misc.latex_standalone, 515
sage.misc.lazy_attribute, 239
sage.misc.lazy_format, 252
sage.misc.lazy_import, 254
sage.misc.lazy_import_cache, 262
sage.misc.lazy_list, 263
sage.misc.lazy_string, 273
sage.misc.map_threaded, 143
sage.misc.mathml, 483
sage.misc.messaging, 160
sage.misc.method_decorator, 121
sage.misc.misc, 207
sage.misc.misc_c, 224
sage.misc.mrange, 133
sage.misc.multireplace, 143
sage.misc.nested_class, 585
sage.misc.object_multiplexer, 121
sage.misc.package, 626
sage.misc.pager, 609
sage.misc.parser, 382
sage.misc.persist, 547
sage.misc.prandom, 82
sage.misc.profiler, 664
sage.misc.python, 400
sage.misc.random_testing, 650
sage.misc.randstate, 67
sage.misc.remote_file, 159
sage.misc.repr, 430
sage.misc.reset, 602
sage.misc.rest_index_of_methods, 718
sage.misc.sage_eval, 401
sage.misc.sage_input, 433
sage.misc.sage_ostools, 161
sage.misc.sage_timeit, 658
sage.misc.sage_timeit_class, 662
sage.misc.sage_unittest, 637
sage.misc.sagedoc, 609

sage.misc.sagedoc_conf, 624
sage.misc.sageinspect, 673
sage.misc.search, 132
sage.misc.session, 591
sage.misc.sh, 406
sage.misc.sphinxify, 625
sage.misc.stopgap, 201
sage.misc.superseded, 202
sage.misc.table, 466
sage.misc.temporary_file, 151
sage.misc.test_nested_class, 653
sage.misc.unknown, 91
sage.misc.verbose, 235
sage.misc.viewer, 604
sage.misc.weak_dict, 324

t

sage.typeset.ascii_art, 418
sage.typeset.character_art, 411
sage.typeset.character_art_factory, 414
sage.typeset.symbols, 407
sage.typeset.unicode_art, 425
sage.typeset.unicode_characters, 427

INDEX

Non-alphabetical

_rich_repr_() (*sage.misc.html.HtmlFragment method*), 479
_rich_repr_() (*sage.misc.table.table method*), 474

A

abs() (*sage.ext.fast_callable.Expression method*), 350
abstract_method() (*in module sage.misc.abstract_method*), 96
abstract_methods_of_class() (*in module sage.misc.abstract_method*), 99
AbstractMethod (*class in sage.misc.abstract_method*), 95
add_column() (*sage.databases.sql_db.SQLDatabase method*), 171
add_data() (*sage.databases.sql_db.SQLDatabase method*), 173
add_document_class_option() (*sage.misc.latex_standalone.Standalone method*), 523
add_library() (*sage.misc.inline_fortran.InlineFortran method*), 381
add_library_path() (*sage.misc.inline_fortran.InlineFortran method*), 381
add_macro() (*sage.misc.latex_standalone.Standalone method*), 523
add_macro() (*sage.misc.latex.Latex method*), 485
add_package_to_preamble_if_available() (*sage.misc.latex.Latex method*), 485
add_row() (*sage.databases.sql_db.SQLDatabase method*), 173
add_rows() (*sage.databases.sql_db.SQLDatabase method*), 174
add_standalone_config() (*sage.misc.latex_standalone.Standalone method*), 524
add_to_preamble() (*sage.misc.latex.Latex method*), 485
add_usepackage() (*sage.misc.latex_standalone.Standalone method*), 524
add_usetikzlibrary() (*sage.misc.latex_standalone.TikzPicture method*), 536
additive_order() (*in module sage.misc.functional*), 8
all_bases() (*sage.misc.c3_controlled.HierarchyElement method*), 748
all_bases_controlled_len() (*sage.misc.c3_controlled.HierarchyElement method*), 748
all_bases_len() (*sage.misc.c3_controlled.HierarchyElement method*), 749
APPEND() (*sage.misc.explain_pickle.PickleExplainer method*), 570
append() (*sage.misc.explain_pickle.TestAppendList method*), 577
APPENDS() (*sage.misc.explain_pickle.PickleExplainer method*), 570
apply() (*sage.misc.sagedoc_conf.SagemathTransform method*), 624
ArgumentFixer (*class in sage.misc.function_mangling*), 714
arguments() (*sage.ext.fast_callable.ExpressionCall method*), 351
ascii_art() (*in module sage.typeset.ascii_art*), 422
AsciiArt (*class in sage.typeset.ascii_art*), 422
assign() (*sage.misc.sage_input.SageInputBuilder method*), 445
atomic_dir (*class in sage.misc.temporary_file*), 151
atomic_write (*class in sage.misc.temporary_file*), 153
attrcall() (*in module sage.misc.call*), 125
AttrCallObject (*class in sage.misc.call*), 125
attributes() (*in module sage.misc.lazy_import*), 256

B

BackslashOperator (*class in sage.misc.misc*), 207
backtrack() (*sage.misc.parser.Tokenizer method*), 395
balanced_sum() (*in module sage.misc.misc_c*), 224
banner() (*in module sage.misc.banner*), 599
banner_text() (*in module sage.misc.banner*), 599
base() (*sage.ext.fast_callable.ExpressionIPow method*), 354
base_field() (*in module sage.misc.functional*), 9
base_ring() (*in module sage.misc.functional*), 9
bases() (*sage.misc.c3_controlled.HierarchyElement method*), 749
basis() (*in module sage.misc.functional*), 10
bench0() (*in module sage.misc.benchmark*), 654

bench1() (*in module sage.misc.benchmark*), 654
bench2() (*in module sage.misc.benchmark*), 655
bench3() (*in module sage.misc.benchmark*), 655
bench4() (*in module sage.misc.benchmark*), 655
bench5() (*in module sage.misc.benchmark*), 655
bench6() (*in module sage.misc.benchmark*), 656
bench7() (*in module sage.misc.benchmark*), 656
benchmark() (*in module sage.misc.benchmark*), 656
benchmark_libc() (*in module sage.misc.randstate*), 75
benchmark_mt() (*in module sage.misc.randstate*), 75
betavariate() (*in module sage.misc.prandom*), 83
BindableClass (*class in sage.misc.bindable_class*), 100
BINFLOAT() (*sage.misc.explain_pickle.PickleExplainer method*), 570
BINGET() (*sage.misc.explain_pickle.PickleExplainer method*), 570
BININT() (*sage.misc.explain_pickle.PickleExplainer method*), 570
BININT1() (*sage.misc.explain_pickle.PickleExplainer method*), 570
BININT2() (*sage.misc.explain_pickle.PickleExplainer method*), 570
BINPERSID() (*sage.misc.explain_pickle.PickleExplainer method*), 570
BINPUT() (*sage.misc.explain_pickle.PickleExplainer method*), 570
BINSTRING() (*sage.misc.explain_pickle.PickleExplainer method*), 570
BINUNICODE() (*sage.misc.explain_pickle.PickleExplainer method*), 570
blackboard_bold() (*sage.misc.latex.Latex method*), 486
BlockFinder (*class in sage.misc.sageinspect*), 677
bool_function() (*in module sage.misc.latex*), 498
bool_function() (*in module sage.misc.mathml*), 483
BoundClass (*class in sage.misc.bindable_class*), 103
browser() (*in module sage.misc.viewer*), 607
browser() (*sage.misc.viewer.Viewer method*), 605
BUILD() (*sage.misc.explain_pickle.PickleExplainer method*), 570
build() (*sage.typeset.character_art_factory.CharacterArtFactory method*), 414
build_container() (*sage.typeset.character_art_factory.CharacterArtFactory method*), 415
build_dict() (*sage.typeset.character_art_factory.CharacterArtFactory method*), 415
build_empty() (*sage.typeset.character_art_factory.CharacterArtFactory method*), 415
build_from_magic_method() (*sage.typeset.character_art_factory.CharacterArtFactory method*), 416
build_from_string() (*sage.typeset.character_art_factory.CharacterArtFactory method*), 416
build_list() (*sage.typeset.character_art_factory.CharacterArtFactory method*), 417
build_set() (*sage.typeset.character_art_factory.CharacterArtFactory method*), 417
build_tuple() (*sage.typeset.character_art_factory.CharacterArtFactory method*), 417
builtin_constant_function() (*in module sage.misc.latex*), 499
by_opcode (*sage.ext.fast_callable.InterpreterMetadata attribute*), 367
by_opname (*sage.ext.fast_callable.InterpreterMetadata attribute*), 367

C

C3_algorithm() (*in module sage.misc.c3*), 723
C3_merge() (*in module sage.misc.c3_controlled*), 735
C3_sorted_merge() (*in module sage.misc.c3_controlled*), 735
c_rand_double() (*sage.misc.randstate.randstate method*), 77
c_random() (*sage.misc.randstate.randstate method*), 77
cache (*sage.misc.cachefunc.CachedFunction attribute*), 291
cache() (*sage.misc.sage_input.SageInputBuilder method*), 445
cache_key() (*in module sage.misc.cachefunc*), 314
cached() (*sage.misc.cachefunc.CachedFunction method*), 291
cached() (*sage.misc.cachefunc.CachedMethodCaller method*), 301
cached_function() (*in module sage.misc.cachefunc*), 315
cached_in_parent_method() (*in module sage.misc.cachefunc*), 317
cached_method() (*in module sage.misc.cachefunc*), 317
CachedFunction (*class in sage.misc.cachefunc*), 290
CacheDict (*class in sage.misc.cachefunc*), 290
CachedInParentMethod (*class in sage.misc.cachefunc*), 296
CachedMethod (*class in sage.misc.cachefunc*), 296
CachedMethodCaller (*class in sage.misc.cachefunc*), 300
CachedMethodCallerNoArgs (*class in sage.misc.cachefunc*), 302
CachedMethodPickle (*class in sage.misc.cachefunc*), 305
CachedSpecialMethod (*class in sage.misc.cachefunc*), 307
CachedWeakValueDictionary (*class in sage.misc.weak_dict*), 326
call() (*sage.ext.fast_callable.ExpressionTreeBuilder method*), 355
call_method() (*in module sage.misc.call*), 126
call_pickled_function() (*in module sage.misc.fpickle*), 565

CallableDict (*class in sage.misc.callable_dict*), 126
cantor_product() (*in module sage.misc.mrange*), 133
cardinality() (*sage.misc.mrange.xmrange_iter method*), 142
cartesian_product_iterator() (*in module sage.misc.mrange*), 135
category() (*in module sage.misc.functional*), 10
character_art() (*sage.typeset.symbols.CompoundAsciiSymbol method*), 409
character_art() (*sage.typeset.symbols.CompoundUnicodeSymbol method*), 411
CharacterArt (*class in sage.typeset.character_art*), 411
CharacterArtFactory (*class in sage.typeset.character_art_factory*), 414
characteristic_polynomial() (*in module sage.misc.functional*), 10
charpoly() (*in module sage.misc.functional*), 12
check_file() (*sage.misc.latex.Latex method*), 487
check_value() (*sage.misc.explain_pickle.PickleExplainer method*), 572
choice() (*in module sage.misc.prandom*), 84
choice() (*sage.ext.fast_callable.ExpressionTreeBuilder method*), 356
class_graph() (*in module sage.misc.classgraph*), 702
ClasscallMetaclass (*class in sage.misc.classcall_metaclass*), 115
clean_namespace() (*in module sage.misc.lazy_import*), 257
clear() (*sage.misc.cachefunc.FileCache method*), 308
clear() (*sage.misc.profiler.Profiler method*), 665
clear_cache() (*sage.misc.cachefunc.CachedFunction method*), 292
clear_cache() (*sage.misc.cachefunc.CachedMethodCallerNoArgs method*), 303
cls() (*sage.misc.c3_controlled.HierarchyElement method*), 750
CmpKey (*class in sage.misc.c3_controlled*), 739
CmpKeyNamed (*class in sage.misc.c3_controlled*), 742
code_ctor() (*in module sage.misc.fpickle*), 565
coeff_repr() (*in module sage.misc.latex*), 499
coeff_repr() (*in module sage.misc.repr*), 430
coerce() (*in module sage.misc.functional*), 13
command() (*sage.misc.sage_input.SageInputBuilder method*), 446
commit() (*sage.databases.sql_db.SQLDatabase method*), 174
compile_and_load() (*in module sage.misc.cython*), 377
CompilerInstrSpec (*class in sage.ext.fast_callable*), 348
compose() (*in module sage.misc.misc*), 208
CompoundAsciiSymbol (*class in sage.typeset.symbols*), 409
CompoundSymbol (*class in sage.typeset.symbols*), 409
CompoundUnicodeSymbol (*class in sage.typeset.symbols*), 411
concatenate() (*sage.typeset.character_art_factory.CharacterArtFactory method*), 417
condition() (*sage.ext.fast_callable.ExpressionChoice method*), 352
constant() (*sage.ext.fast_callable.ExpressionTreeBuilder method*), 357
ConstantFunction (*class in sage.misc.constant_function*), 114
construct_skeleton() (*in module sage.databases.sql_db*), 197
content() (*sage.misc.latex_standalone.Standalone method*), 525
convert_latex_macro_to_mathjax() (*in module sage.misc.latex_macros*), 513
create_table() (*sage.databases.sql_db.SQLDatabase method*), 175
crun() (*in module sage.misc.gperftools*), 669
current_op_list() (*sage.ext.fast_callable.InstructionStream method*), 360
current_randstate() (*in module sage.misc.randstate*), 76
cyclotomic_polynomial() (*in module sage.misc.functional*), 13
cyflush() (*in module sage.misc.misc_c*), 225
cython() (*in module sage.misc.cython*), 377
cython_compile() (*in module sage.misc.cython*), 378
cython_import() (*in module sage.misc.cython*), 378
cython_import_all() (*in module sage.misc.cython*), 378
cython_lambda() (*in module sage.misc.cython*), 379
cython_profile_enabled() (*in module sage.misc.citation*), 634

D

db() (*in module sage.misc.persist*), 551
db_save() (*in module sage.misc.persist*), 551
decomposition() (*in module sage.misc.functional*), 14
decorator_defaults() (*in module sage.misc.decorators*), 104
decorator_keywords() (*in module sage.misc.decorators*), 105
default_engine() (*in module sage.misc.latex*), 500
default_priority (*sage.misc.sagedoc_conf.SagemathTransform attribute*), 624
default_viewer() (*in module sage.misc.viewer*), 607
delete_rows() (*sage.databases.sql_db.SQLDatabase method*), 176
denominator() (*in module sage.misc.functional*), 15
deprecated_function_alias() (*in module sage.misc.superseded*), 202
DeprecatedFunctionAlias (*class in sage.misc.superseded*), 202

deprecation() (*in module sage.misc.superseded*), 204
deprecation_cython() (*in module sage.misc.superseded*), 204
dest_fd (*sage.misc.sage_ostools.redirection attribute*), 164
dest_file (*sage.misc.sage_ostools.redirection attribute*), 164
det() (*in module sage.misc.functional*), 15
detex() (*in module sage.misc.sagedoc*), 609
DICT() (*sage.misc.explain_pickle.PickleExplainer method*), 570
dict() (*sage.misc.sage_input.SageInputBuilder method*), 447
dict_function() (*in module sage.misc.latex*), 500
dict_key() (*in module sage.misc.cachefunc*), 320
dim() (*in module sage.misc.functional*), 16
dimension() (*in module sage.misc.functional*), 16
disc() (*in module sage.misc.functional*), 16
discriminant() (*in module sage.misc.functional*), 17
disk_cached_function (*class in sage.misc.cachefunc*), 321
DiskCachedFunction (*class in sage.misc.cachefunc*), 308
doc_index() (*in module sage.misc.rest_index_of_methods*), 718
drop_column() (*sage.databases.sql_db.SQLDatabase method*), 177
drop_data_from_table() (*sage.databases.sql_db.SQLDatabase method*), 178
drop_index() (*sage.databases.sql_db.SQLDatabase method*), 179
drop_primary_key() (*sage.databases.sql_db.SQLDatabase method*), 180
drop_table() (*sage.databases.sql_db.SQLDatabase method*), 180
drop_unique() (*sage.databases.sql_db.SQLDatabase method*), 181
dummy() (*sage.misc.nested_class.MainClass.NestedClass.NestedSubClass method*), 588
dumps() (*in module sage.misc.persist*), 551
dumps() (*sage.misc.persist.SagePickler class method*), 549
DUP() (*sage.misc.explain_pickle.PickleExplainer method*), 571
dup_source_fd (*sage.misc.sage_ostools.redirection attribute*), 164
dvi() (*sage.misc.latex_standalone.Standalone method*), 526
dvi_viewer() (*in module sage.misc.viewer*), 607
dvi_viewer() (*sage.misc.viewer.Viewer method*), 605

E

edit() (*in module sage.misc.edit_module*), 698
edit_devel() (*in module sage.misc.edit_module*), 699
EDITOR, 698700
ElementWithLabel (*class in sage.misc.element_with_label*), 150
ellipsis_iter() (*in module sage.arith.srange*), 144
ellipsis_range() (*in module sage.arith.srange*), 144
empty() (*sage.typeset.character_art.CharacterArt class method*), 412
EMPTY_DICT() (*sage.misc.explain_pickle.PickleExplainer method*), 571
EMPTY_LIST() (*sage.misc.explain_pickle.PickleExplainer method*), 571
empty_subscript() (*sage.misc.sage_input.SageInputBuilder method*), 447
EMPTY_TUPLE() (*sage.misc.explain_pickle.PickleExplainer method*), 571
EmptyNewstyleClass (*class in sage.misc.explain_pickle*), 570
EmptyOldstyleClass (*class in sage.misc.explain_pickle*), 570
engine() (*sage.misc.latex.Latex method*), 487
ensure_startup_finished() (*in module sage.misc.lazy_import*), 257
environment variable
    EDITOR, 698700
    PATH, 161
eps() (*sage.misc.latex_standalone.Standalone method*), 527
eta() (*in module sage.misc.functional*), 17
eval() (*sage.misc.html.HTMLFragmentFactory method*), 477
eval() (*sage.misc.html.MathJax method*), 479
eval() (*sage.misc.inline_fortran.InlineFortran method*), 381
eval() (*sage.misc.latex.Latex method*), 488
eval() (*sage.misc.python.Python method*), 400
eval() (*sage.misc.sage_timeit_class.SageTimeit method*), 663
eval() (*sage.misc.sh.Sh method*), 406
exactly_one_is_true() (*in module sage.misc.misc*), 209
exists() (*in module sage.misc.misc*), 210
experimental (*class in sage.misc.superseded*), 204
experimental_warning() (*in module sage.misc.superseded*), 205
explain_pickle() (*in module sage.misc.explain_pickle*), 579
explain_pickle_string() (*in module sage.misc.explain_pickle*), 581
exponent() (*sage.ext.fast_callable.ExpressionIPow method*), 355
expovariate() (*in module sage.misc.prandom*), 84
Expression (*class in sage.ext.fast_callable*), 349
ExpressionCall (*class in sage.ext.fast_callable*), 350
ExpressionChoice (*class in sage.ext.fast_callable*), 351
ExpressionConstant (*class in sage.ext.fast_callable*),

353
ExpressionIPow (*class in sage.ext.fast_callable*), 354
ExpressionTreeBuilder (*class in sage.ext.fast_callable*), 355
ExpressionVariable (*class in sage.ext.fast_callable*), 358
EXT1() (*sage.misc.explain_pickle.PickleExplainer method*), 571
EXT2() (*sage.misc.explain_pickle.PickleExplainer method*), 571
EXT4() (*sage.misc.explain_pickle.PickleExplainer method*), 571
extend() (*sage.misc.explain_pickle.TestAppendList method*), 577
extra_macros() (*sage.misc.latex.Latex method*), 489
extra_preamble() (*sage.misc.latex.Latex method*), 489

F

f (*sage.misc.cachefunc.CachedFunction attribute*), 292
f (*sage.misc.function_mangling.ArgumentFixer attribute*), 716
fast_callable() (*in module sage.ext.fast_callable*), 368
fast_float() (*in module sage.ext.fast_eval*), 375
FastCallableFloatWrapper (*class in sage.ext.fast_callable*), 359
FastHashable_class (*class in sage.misc.fast_methods*), 122
fcp() (*in module sage.misc.functional*), 18
file_and_line() (*in module sage.misc.edit_module*), 700
file_list() (*sage.misc.cachefunc.FileCache method*), 309
FileCache (*class in sage.misc.cachefunc*), 308
filename() (*sage.misc.gperftools.Profiler method*), 666
find_object_modules() (*in module sage.misc.sageinspect*), 683
find_objects_from_name() (*in module sage.misc.dev_tools*), 704
finish_startup() (*in module sage.misc.lazy_import*), 257
fix_to_named() (*sage.misc.function_mangling.ArgumentFixer method*), 716
fix_to_pos() (*sage.misc.function_mangling.ArgumentFixer method*), 717
flatten() (*in module sage.misc.flatten*), 130
FLOAT() (*sage.misc.explain_pickle.PickleExplainer method*), 571
float_function() (*in module sage.misc.latex*), 501
float_str() (*sage.misc.sage_input.SageInputBuilder method*), 448
foo() (*in module sage.misc.parser*), 399
forall() (*in module sage.misc.misc*), 211
format() (*in module sage.misc.sagedoc*), 610
format() (*sage.misc.sage_input.SageInputFormatter method*), 459
format_search_as_html() (*in module sage.misc.sagedoc*), 611
format_src() (*in module sage.misc.sagedoc*), 612
formatannotation() (*in module sage.misc.sageinspect*), 684
from_dot_string() (*sage.misc.latex_standalone.TikzPicture class method*), 537
from_graph() (*sage.misc.latex_standalone.TikzPicture class method*), 538
from_graph_with_pos() (*sage.misc.latex_standalone.TikzPicture class method*), 543
from_poset() (*sage.misc.latex_standalone.TikzPicture class method*), 544
func_persist (*class in sage.misc.func_persist*), 547
function() (*sage.ext.fast_callable.ExpressionCall method*), 351
function_name() (*in module sage.ext.fast_callable*), 372

G

gammavariate() (*in module sage.misc.prandom*), 85
gauss() (*in module sage.misc.prandom*), 85
gen() (*in module sage.misc.functional*), 18
gen() (*sage.misc.sage_input.SageInputBuilder method*), 448
gen_rest_table_index() (*in module sage.misc.rest_index_of_methods*), 719
gen_thematic_rest_table_index() (*in module sage.misc.rest_index_of_methods*), 721
generate_code() (*in module sage.ext.fast_callable*), 373
gens() (*in module sage.misc.functional*), 19
GET() (*sage.misc.explain_pickle.PickleExplainer method*), 571
get() (*sage.misc.lazy_list.lazy_list_generic method*), 271
get() (*sage.misc.weak_dict.WeakValueDictionary method*), 329
get_baseline() (*sage.typeset.character_art.CharacterArt method*), 412
get_breakpoints() (*sage.typeset.character_art.CharacterArt method*), 412
get_builtin_functions() (*in module sage.ext.fast_callable*), 374
get_cache_file() (*in module sage.misc.lazy_import_cache*), 262
get_connection() (*sage.databases.sql_db.SQLDatabase method*), 182
get_current() (*sage.ext.fast_callable.InstructionStream method*), 361
get_cursor() (*sage.databases.sql_db.SQLDatabase method*), 183

get_key() (*sage.misc.cachefunc.CachedFunction method*), 293
get_main_globals() (*in module sage.misc.misc*), 212
get_metadata() (*sage.ext.fast_callable.InstructionStream method*), 362
get_name() (*sage.misc.sage_input.SageInputFormatter method*), 461
get_orig_args() (*sage.ext.fast_callable.Wrapper method*), 367
get_query_string() (*sage.databases.sql_db.SQLQuery method*), 192
get_remote_file() (*in module sage.misc.remote_file*), 159
get_skeleton() (*sage.databases.sql_db.SQLDatabase method*), 183
get_star_imports() (*in module sage.misc.lazy_import*), 257
get_systems() (*in module sage.misc.citation*), 635
get_verbose() (*in module sage.misc.verbose*), 237
get_verbose_files() (*in module sage.misc.verbose*), 238
getattr() (*sage.misc.sage_input.SageInputBuilder method*), 449
getrandbits() (*in module sage.misc.prandom*), 86
GLOBAL() (*sage.misc.explain_pickle.PickleExplainer method*), 571
GloballyCachedMethodCaller (*class in sage.misc.cachefunc*), 311

H

has_file() (*sage.misc.latex.Latex method*), 490
has_instr() (*sage.ext.fast_callable.InstructionStream method*), 362
has_latex_attr() (*in module sage.misc.latex*), 501
have_program() (*in module sage.misc.sage_ostools*), 161
hecke_operator() (*in module sage.misc.functional*), 19
height() (*sage.typeset.character_art.CharacterArt method*), 413
help() (*in module sage.misc.sagedoc*), 613
HierarchyElement (*class in sage.misc.c3_controlled*), 742
html() (*in module sage.misc.html*), 480
HtmlFragment (*class in sage.misc.html*), 478
HTMLFragmentFactory (*class in sage.misc.html*), 477

I

id_cache() (*sage.misc.sage_input.SageInputBuilder method*), 449
identity() (*in module sage.misc.c3_controlled*), 753
if_false() (*sage.ext.fast_callable.ExpressionChoice method*), 352
if_true() (*sage.ext.fast_callable.ExpressionChoice method*), 353
iframe() (*sage.misc.html.HTMLFragmentFactory method*), 477
image() (*in module sage.misc.functional*), 20
import_name() (*sage.misc.sage_input.SageInputBuilder method*), 450
import_statement_string() (*in module sage.misc.dev_tools*), 705
import_statements() (*in module sage.misc.dev_tools*), 706
increase_recursion_limit() (*in module sage.misc.misc*), 213
infix_operator (*class in sage.misc.decorators*), 106
info() (*sage.misc.sage_unittest.InstanceTester method*), 637
InheritComparisonClasscallMetaclass (*class in sage.misc.inherit_comparison*), 119
InheritComparisonMetaclass (*class in sage.misc.inherit_comparison*), 119
init() (*in module sage.misc.session*), 593
init_memory_functions() (*in module sage.ext.memory*), 723
initial_seed() (*in module sage.misc.randstate*), 76
inject_variable() (*in module sage.misc.misc*), 213
inject_variable_test() (*in module sage.misc.misc*), 215
InlineFortran (*class in sage.misc.inline_fortran*), 381
Inner2 (*class in sage.misc.bindable_class*), 103
Inner2 (*sage.misc.bindable_class.Outer attribute*), 103
INST() (*sage.misc.explain_pickle.PickleExplainer method*), 571
installed_packages() (*in module sage.misc.package*), 627
installed_version (*sage.misc.package.PackageInfo attribute*), 626
instance_tester() (*in module sage.misc.sage_unittest*), 649
instancedoc() (*in module sage.misc.instancedoc*), 673
InstanceDocDescriptor (*class in sage.misc.instancedoc*), 672
InstanceTester (*class in sage.misc.sage_unittest*), 637
instr() (*sage.ext.fast_callable.InstructionStream method*), 363
InstructionStream (*class in sage.ext.fast_callable*), 360
INT() (*sage.misc.explain_pickle.PickleExplainer method*), 571
int() (*sage.misc.sage_input.SageInputBuilder method*), 451
IntegerPowerFunction (*class in sage.ext.fast_callable*), 365
integral() (*in module sage.misc.functional*), 20
integral_closure() (*in module sage.misc.functional*), 22
integrate() (*in module sage.misc.functional*), 23

InterpreterMetadata (*class in sage.ext.fast_callable*), 366
intersect() (*sage.databases.sql_db.SQLQuery method*), 192
interval() (*in module sage.misc.functional*), 25
ipow_range (*sage.ext.fast_callable.InterpreterMetadata attribute*), 367
is_during_startup() (*in module sage.misc.lazy_import*), 258
is_even() (*in module sage.misc.functional*), 25
is_fast_float() (*in module sage.ext.fast_eval*), 376
is_function_or_cython_function() (*in module sage.misc.sageinspect*), 685
is_in_cache() (*sage.misc.cachefunc.CachedFunction method*), 294
is_in_cache() (*sage.misc.cachefunc.CachedMethodCallerNoArgs method*), 304
is_in_string() (*in module sage.misc.misc*), 215
is_installed() (*sage.misc.package.PackageInfo method*), 627
is_iterator() (*in module sage.misc.misc*), 216
is_lazy_string() (*in module sage.misc.lazy_string*), 274
is_mutable_pickle_object() (*sage.misc.explain_pickle.PickleExplainer method*), 572
is_odd() (*in module sage.misc.functional*), 26
is_optional() (*sage.misc.abstract_method.AbstractMethod method*), 95
is_package_installed() (*in module sage.misc.package*), 627
is_package_installed_and_updated() (*in module sage.misc.package*), 628
is_sublist() (*in module sage.misc.misc*), 217
isclassinstance() (*in module sage.misc.sageinspect*), 685
isqrt() (*in module sage.misc.functional*), 26
items() (*sage.misc.cachefunc.FileCache method*), 310
items() (*sage.misc.weak_dict.WeakValueDictionary method*), 330
items_list() (*sage.misc.weak_dict.WeakValueDictionary method*), 332
iterator_prod() (*in module sage.misc.misc_c*), 226
iteritems() (*sage.misc.weak_dict.WeakValueDictionary method*), 334
itervalues() (*sage.misc.weak_dict.WeakValueDictionary method*), 334

K

kernel() (*in module sage.misc.functional*), 26
KeyConvertingDict (*class in sage.misc.converting_dict*), 128
keys() (*sage.misc.cachefunc.FileCache method*), 310
keys() (*sage.misc.weak_dict.WeakValueDictionary method*), 335
krull_dimension() (*in module sage.misc.functional*), 27

L

last() (*sage.misc.parser.Tokenizer method*), 395
last_token_string() (*sage.misc.parser.Tokenizer method*), 396
Latex (*class in sage.misc.latex*), 483
latex() (*in module sage.misc.latex*), 502
latex_extra_preamble() (*in module sage.misc.latex*), 503
latex_variable_name() (*in module sage.misc.latex*), 504
latex_variable_names() (*in module sage.misc.defaults*), 1
latex_varify() (*in module sage.misc.latex*), 505
LatexCall (*class in sage.misc.latex*), 494
LatexExamples (*class in sage.misc.latex*), 495
LatexExamples.diagram (*class in sage.misc.latex*), 495
LatexExamples.graph (*class in sage.misc.latex*), 496
LatexExamples.knot (*class in sage.misc.latex*), 496
LatexExamples.pstricks (*class in sage.misc.latex*), 496
LatexExpr (*class in sage.misc.latex*), 497
lazy_attribute (*class in sage.misc.lazy_attribute*), 239
lazy_class_attribute (*class in sage.misc.lazy_attribute*), 250
lazy_import() (*in module sage.misc.lazy_import*), 258
lazy_list() (*in module sage.misc.lazy_list*), 266
lazy_list_formatter() (*in module sage.misc.lazy_list*), 268
lazy_list_from_function (*class in sage.misc.lazy_list*), 269
lazy_list_from_iterator (*class in sage.misc.lazy_list*), 270
lazy_list_from_update_function (*class in sage.misc.lazy_list*), 271
lazy_list_generic (*class in sage.misc.lazy_list*), 271
lazy_string() (*in module sage.misc.lazy_string*), 274
LazyFormat (*class in sage.misc.lazy_format*), 252
LazyImport (*class in sage.misc.lazy_import*), 255
License (*class in sage.misc.copying*), 636
lift() (*in module sage.misc.functional*), 28
LIST() (*sage.misc.explain_pickle.PickleExplainer method*), 571
list() (*sage.misc.lazy_list.lazy_list_generic method*), 272
list_function() (*in module sage.misc.latex*), 506
list_function() (*in module sage.misc.mathml*), 483
list_of_subfunctions() (*in module sage.misc.rest_index_of_methods*), 722
list_packages() (*in module sage.misc.package*), 628
load() (*in module sage.misc.persist*), 551
load_arg() (*sage.ext.fast_callable.InstructionStream method*), 364

load_const() (*sage.ext.fast_callable.InstructionStream method*), 365
load_sage_element() (*in module sage.misc.persist*), 554
load_sage_object() (*in module sage.misc.persist*), 554
load_session() (*in module sage.misc.session*), 593
load_submodules() (*in module sage.misc.dev_tools*), 712
loads() (*in module sage.misc.persist*), 554
loads() (*sage.misc.persist.SageUnpickler class method*), 550
log() (*in module sage.misc.functional*), 29
lognormvariate() (*in module sage.misc.prandom*), 86
LONG() (*sage.misc.explain_pickle.PickleExplainer method*), 571
LONG1() (*sage.misc.explain_pickle.PickleExplainer method*), 571
LONG4() (*sage.misc.explain_pickle.PickleExplainer method*), 571
LONG_BINGET() (*sage.misc.explain_pickle.PickleExplainer method*), 571
LONG_BINPUT() (*sage.misc.explain_pickle.PickleExplainer method*), 571
long_seed() (*sage.misc.randstate.randstate method*), 78
longMessage (*sage.misc.sage_unittest.InstanceTester attribute*), 638
LookupNameMaker (*class in sage.misc.parser*), 382

M

MainClass (*class in sage.misc.nested_class*), 587
MainClass.NestedClass (*class in sage.misc.nested_class*), 587
MainClass.NestedClass.NestedSubClass (*class in sage.misc.nested_class*), 587
make_index() (*sage.databases.sql_db.SQLDatabase method*), 184
make_None() (*in module sage.misc.persist*), 556
make_primary_key() (*sage.databases.sql_db.SQLDatabase method*), 185
make_unique() (*sage.databases.sql_db.SQLDatabase method*), 186
map_threaded() (*in module sage.misc.map_threaded*), 143
MARK() (*sage.misc.explain_pickle.PickleExplainer method*), 571
math_parse() (*in module sage.misc.html*), 482
MathJax (*class in sage.misc.html*), 479
MathJaxExpr (*class in sage.misc.html*), 480
MathML (*class in sage.misc.mathml*), 483
mathml() (*in module sage.misc.mathml*), 483
matrix_column_alignment() (*sage.misc.latex.Latex method*), 490
matrix_delimiters() (*sage.misc.latex.Latex method*), 492
MethodDecorator (*class in sage.misc.method_decorator*), 121
minimal_polynomial() (*in module sage.misc.functional*), 33
minpoly() (*in module sage.misc.functional*), 34
modify_for_nested_pickle() (*in module sage.misc.nested_class*), 589
module
    sage.arith.srange, 144
    sage.databases.sql_db, 165
    sage.ext.fast_callable, 340
    sage.ext.fast_eval, 375
    sage.ext.memory, 723
    sage.misc.abstract_method, 95
    sage.misc.banner, 599
    sage.misc.benchmark, 654
    sage.misc.bindable_class, 100
    sage.misc.c3, 723
    sage.misc.c3_controlled, 725
    sage.misc.cachefunc, 275
    sage.misc.call, 125
    sage.misc.callable_dict, 126
    sage.misc.citation, 634
    sage.misc.classcall_metaclass, 115
    sage.misc.classgraph, 702
    sage.misc.constant_function, 114
    sage.misc.converting_dict, 127
    sage.misc.copying, 636
    sage.misc.cython, 377
    sage.misc.decorators, 104
    sage.misc.defaults, 1
    sage.misc.dev_tools, 704
    sage.misc.edit_module, 698
    sage.misc.element_with_label, 150
    sage.misc.explain_pickle, 567
    sage.misc.fast_methods, 122
    sage.misc.flatten, 130
    sage.misc.fpickle, 565
    sage.misc.func_persist, 547
    sage.misc.function_mangling, 714
    sage.misc.functional, 3
    sage.misc.gperftools, 666
    sage.misc.html, 477
    sage.misc.inherit_comparison, 119
    sage.misc.inline_fortran, 381
    sage.misc.instancedoc, 669
    sage.misc.latex, 483
    sage.misc.latex_macros, 513
    sage.misc.latex_standalone, 515
    sage.misc.lazy_attribute, 239
    sage.misc.lazy_format, 252
    sage.misc.lazy_import, 254
    sage.misc.lazy_import_cache, 262
    sage.misc.lazy_list, 263

sage.misc.lazy_string, 273
sage.misc.map_threaded, 143
sage.misc.mathml, 483
sage.misc.messaging, 160
sage.misc.method_decorator, 121
sage.misc.misc, 207
sage.misc.misc_c, 224
sage.misc.mrange, 133
sage.misc.multireplace, 143
sage.misc.nested_class, 585
sage.misc.object_multiplexer, 121
sage.misc.package, 626
sage.misc.pager, 609
sage.misc.parser, 382
sage.misc.persist, 547
sage.misc.prandom, 82
sage.misc.profiler, 664
sage.misc.python, 400
sage.misc.random_testing, 650
sage.misc.randstate, 67
sage.misc.remote_file, 159
sage.misc.repr, 430
sage.misc.reset, 602
sage.misc.rest_index_of_methods, 718
sage.misc.sage_eval, 401
sage.misc.sage_input, 433
sage.misc.sage_ostools, 161
sage.misc.sage_timeit, 658
sage.misc.sage_timeit_class, 662
sage.misc.sage_unittest, 637
sage.misc.sagedoc, 609
sage.misc.sagedoc_conf, 624
sage.misc.sageinspect, 673
sage.misc.search, 132
sage.misc.session, 591
sage.misc.sh, 406
sage.misc.sphinxify, 625
sage.misc.stopgap, 201
sage.misc.superseded, 202
sage.misc.table, 466
sage.misc.temporary_file, 151
sage.misc.test_nested_class, 653
sage.misc.unknown, 91
sage.misc.verbose, 235
sage.misc.viewer, 604
sage.misc.weak_dict, 324
sage.typeset.ascii_art, 418
sage.typeset.character_art, 411
sage.typeset.character_art_factory, 414
sage.typeset.symbols, 407
sage.typeset.unicode_art, 425
sage.typeset.unicode_characters, 427
mrange() (*in module sage.misc.mrange*), 135
mrange_iter() (*in module sage.misc.mrange*), 136
mro() (*sage.misc.c3_controlled.HierarchyElement method*), 751
mro_controlled() (*sage.misc.c3_controlled.HierarchyElement method*), 751
mro_standard() (*sage.misc.c3_controlled.HierarchyElement method*), 752
multiple_replace() (*in module sage.misc.multireplace*), 143
Multiplex (*class in sage.misc.object_multiplexer*), 121
MultiplexFunction (*class in sage.misc.object_multiplexer*), 121
multiplicative_order() (*in module sage.misc.functional*), 35
my_getsource() (*in module sage.misc.sagedoc*), 613

N

N() (*in module sage.misc.functional*), 3
n() (*in module sage.misc.functional*), 35
name (*sage.misc.package.PackageInfo attribute*), 627
name() (*sage.misc.sage_input.SageInputBuilder method*), 452
name_is_valid() (*in module sage.misc.explain_pickle*), 581
nest() (*in module sage.misc.misc*), 218
nested_pickle() (*in module sage.misc.nested_class*), 590
NestedClassMetaclass (*class in sage.misc.nested_class*), 588
NEWFALSE() (*sage.misc.explain_pickle.PickleExplainer method*), 571
NEWOBJ() (*sage.misc.explain_pickle.PickleExplainer method*), 571
newton_method_sizes() (*in module sage.misc.misc*), 219
NEWTRUE() (*sage.misc.explain_pickle.PickleExplainer method*), 571
next() (*sage.misc.parser.Tokenizer method*), 397
ngens() (*in module sage.misc.functional*), 41
NonAssociative (*class in sage.misc.misc_c*), 224
NONE() (*sage.misc.explain_pickle.PickleExplainer method*), 571
None_function() (*in module sage.misc.latex*), 498
NonpicklingDict (*class in sage.misc.cachefunc*), 311
norm() (*in module sage.misc.functional*), 41
normalize_index() (*in module sage.misc.misc_c*), 227
normalvariate() (*in module sage.misc.prandom*), 86
numerator() (*in module sage.misc.functional*), 44
numerical_approx() (*in module sage.misc.functional*), 45

O

OBJ() (*sage.misc.explain_pickle.PickleExplainer method*), 571
objgen() (*in module sage.misc.functional*), 50

objgens() (*in module sage.misc.functional*), 51
op_list() (*in module sage.ext.fast_callable*), 374
op_list() (*sage.ext.fast_callable.Wrapper method*), 367
operators (*sage.misc.decorators.infix_operator attribute*), 107
options (*class in sage.misc.decorators*), 107
options() (*sage.misc.table.table method*), 474
order() (*in module sage.misc.functional*), 51
Outer (*class in sage.misc.bindable_class*), 103
Outer.Inner (*class in sage.misc.bindable_class*), 103

P

p_arg() (*sage.misc.parser.Parser method*), 384
p_args() (*sage.misc.parser.Parser method*), 385
p_atom() (*sage.misc.parser.Parser method*), 385
p_eqn() (*sage.misc.parser.Parser method*), 386
p_expr() (*sage.misc.parser.Parser method*), 387
p_factor() (*sage.misc.parser.Parser method*), 388
p_list() (*sage.misc.parser.Parser method*), 388
p_matrix() (*sage.misc.parser.Parser method*), 389
p_power() (*sage.misc.parser.Parser method*), 389
p_sequence() (*sage.misc.parser.Parser method*), 390
p_term() (*sage.misc.parser.Parser method*), 391
p_tuple() (*sage.misc.parser.Parser method*), 391
package_manifest() (*in module sage.misc.package*), 630
package_versions() (*in module sage.misc.package*), 631
PackageInfo (*class in sage.misc.package*), 626
pad_zeros() (*in module sage.misc.misc*), 219
pager() (*in module sage.misc.pager*), 609
parent_with_gens() (*sage.misc.sage_input.SageInputBuilder method*), 452
paretovariate() (*in module sage.misc.prandom*), 87
parse() (*sage.misc.parser.Parser method*), 392
parse_expression() (*sage.misc.parser.Parser method*), 392
parse_keywords() (*sage.typeset.character_art_factory.CharacterArtFactory method*), 418
parse_sequence() (*sage.misc.parser.Parser method*), 392
Parser (*class in sage.misc.parser*), 383
PATH, 161
pdf() (*in module sage.misc.latex*), 507
pdf() (*sage.misc.latex_standalone.Standalone method*), 528
pdf_viewer() (*in module sage.misc.viewer*), 608
pdf_viewer() (*sage.misc.viewer.Viewer method*), 606
peek() (*sage.misc.parser.Tokenizer method*), 397
PERSID() (*sage.misc.explain_pickle.PickleExplainer method*), 571
pickle_function() (*in module sage.misc.fpickle*), 566
PickleDict (*class in sage.misc.explain_pickle*), 570
PickleExplainer (*class in sage.misc.explain_pickle*), 570
PickleInstance (*class in sage.misc.explain_pickle*), 576
picklejar() (*in module sage.misc.persist*), 556
pickleMethod() (*in module sage.misc.fpickle*), 566
pickleModule() (*in module sage.misc.fpickle*), 566
PickleObject (*class in sage.misc.explain_pickle*), 577
pip_installed_packages() (*in module sage.misc.package*), 632
pip_remote_version() (*in module sage.misc.package*), 632
pkgname_split() (*in module sage.misc.package*), 633
png() (*in module sage.misc.latex*), 508
png() (*sage.misc.latex_standalone.Standalone method*), 530
png_viewer() (*in module sage.misc.viewer*), 608
png_viewer() (*sage.misc.viewer.Viewer method*), 606
pop() (*sage.misc.converting_dict.KeyConvertingDict method*), 129
POP() (*sage.misc.explain_pickle.PickleExplainer method*), 571
pop() (*sage.misc.explain_pickle.PickleExplainer method*), 573
pop() (*sage.misc.weak_dict.WeakValueDictionary method*), 335
POP_MARK() (*sage.misc.explain_pickle.PickleExplainer method*), 571
pop_to_mark() (*sage.misc.explain_pickle.PickleExplainer method*), 573
popitem() (*sage.misc.weak_dict.WeakValueDictionary method*), 336
precompute() (*sage.misc.cachefunc.CachedFunction method*), 295
precompute() (*sage.misc.cachefunc.CachedMethodCaller method*), 301
preparse() (*sage.misc.sage_input.SageInputBuilder method*), 454
pretty_print_default() (*in module sage.misc.html*), 482
print_last() (*sage.misc.profiler.Profiler method*), 665
print_to_stdout() (*sage.typeset.symbols.CompoundSymbol method*), 410
process_directives() (*in module sage.misc.sagedoc_conf*), 624
process_docstring_aliases() (*in module sage.misc.sagedoc_conf*), 624
process_docstring_cython() (*in module sage.misc.sagedoc_conf*), 624
process_docstring_module_title() (*in module sage.misc.sagedoc_conf*), 624
process_dollars() (*in module sage.misc.sagedoc*), 613
process_dollars() (*in module sage.misc.sagedoc_conf*), 624
process_extlinks() (*in module sage.misc.sagedoc*),

615
process_inherited() (*in module sage.misc.sagedoc_conf*), 625
process_mathtt() (*in module sage.misc.sagedoc*), 615
process_optional_doctest_tags() (*in module sage.misc.sagedoc*), 616
prod() (*in module sage.misc.misc_c*), 232
prod() (*sage.misc.sage_input.SageInputBuilder method*), 455
produce_latex_macro() (*in module sage.misc.latex_macros*), 513
Profiler (*class in sage.misc.gperftools*), 666
Profiler (*class in sage.misc.profiler*), 664
PROTO() (*sage.misc.explain_pickle.PickleExplainer method*), 571
push() (*sage.misc.explain_pickle.PickleExplainer method*), 574
push_and_share() (*sage.misc.explain_pickle.PickleExplainer method*), 574
push_mark() (*sage.misc.explain_pickle.PickleExplainer method*), 575
pushover() (*in module sage.misc.messaging*), 160
PUT() (*sage.misc.explain_pickle.PickleExplainer method*), 571
Python (*class in sage.misc.python*), 400
python_calls() (*sage.ext.fast_callable.Wrapper method*), 368
python_random() (*sage.misc.randstate.randstate method*), 78
PythonObjectWithTests (*class in sage.misc.sage_unittest*), 642

Q

query() (*sage.databases.sql_db.SQLDatabase method*), 187
query_results() (*sage.databases.sql_db.SQLQuery method*), 194
quo() (*in module sage.misc.functional*), 51
quotient() (*in module sage.misc.functional*), 52

R

randint() (*in module sage.misc.prandom*), 87
random() (*in module sage.misc.prandom*), 87
random() (*in module sage.misc.randstate*), 77
random_sublist() (*in module sage.misc.misc*), 220
random_testing() (*in module sage.misc.random_testing*), 650
randrange() (*in module sage.misc.prandom*), 88
randstate (*class in sage.misc.randstate*), 77
rank() (*in module sage.misc.functional*), 52
redirection (*class in sage.misc.sage_ostools*), 162
REDUCE() (*sage.misc.explain_pickle.PickleExplainer method*), 571
reduce_code() (*in module sage.misc.fpickle*), 566
regexp() (*in module sage.databases.sql_db*), 198
register_name() (*sage.misc.sage_input.SageInputFormatter method*), 461
register_unpickle_override() (*in module sage.misc.persist*), 557
regulator() (*in module sage.misc.functional*), 53
remote_version (*sage.misc.package.PackageInfo attribute*), 627
rename_keyword (*class in sage.misc.decorators*), 107
rename_table() (*sage.databases.sql_db.SQLDatabase method*), 187
repr_lincomb() (*in module sage.misc.latex*), 508
repr_lincomb() (*in module sage.misc.repr*), 430
require_version() (*in module sage.misc.banner*), 600
reset() (*in module sage.misc.reset*), 602
reset() (*sage.misc.parser.Tokenizer method*), 398
reset_interfaces() (*in module sage.misc.reset*), 603
restore() (*in module sage.misc.reset*), 603
restore_cwd() (*in module sage.misc.sage_ostools*), 164
result() (*sage.misc.sage_input.SageInputBuilder method*), 456
round() (*in module sage.misc.functional*), 54
run() (*sage.misc.sage_unittest.TestSuite method*), 645
run_100ms() (*in module sage.misc.gperftools*), 669
run_once() (*in module sage.misc.misc*), 221
run_pickle() (*sage.misc.explain_pickle.PickleExplainer method*), 575
running_total() (*in module sage.misc.misc_c*), 233
runsnake() (*in module sage.misc.dev_tools*), 713
runTest() (*sage.misc.sage_unittest.InstanceTester method*), 638

S

sage_eval() (*in module sage.misc.sage_eval*), 401
sage_formatargspec() (*in module sage.misc.sageinspect*), 686
sage_getargspec() (*in module sage.misc.sageinspect*), 687
sage_getdef() (*in module sage.misc.sageinspect*), 690
sage_getdoc() (*in module sage.misc.sageinspect*), 690
sage_getdoc_original() (*in module sage.misc.sageinspect*), 691
sage_getfile() (*in module sage.misc.sageinspect*), 693
sage_getfile_relative() (*in module sage.misc.sageinspect*), 695
sage_getsource() (*in module sage.misc.sageinspect*), 696
sage_getsourcelines() (*in module sage.misc.sageinspect*), 696
sage_getvariablename() (*in module sage.misc.sageinspect*), 697
sage_input() (*in module sage.misc.sage_input*), 462
sage_latex_macros() (*in module sage.misc.latex_macros*), 514

sage_mathjax_macros() (*in module sage.misc.latex_macros*), 514
sage_timeit() (*in module sage.misc.sage_timeit*), 659
sage_wraps() (*in module sage.misc.decorators*), 108
SageArgSpecVisitor (*class in sage.misc.sageinspect*), 677
sage.arith.srange
    module, 144
sage.databases.sql_db
    module, 165
sage.ext.fast_callable
    module, 340
sage.ext.fast_eval
    module, 375
sage.ext.memory
    module, 723
SageInputAnswer (*class in sage.misc.sage_input*), 443
SageInputBuilder (*class in sage.misc.sage_input*), 444
SageInputExpression (*class in sage.misc.sage_input*), 459
SageInputFormatter (*class in sage.misc.sage_input*), 459
SagemathTransform (*class in sage.misc.sagedoc_conf*), 624
sage.misc.abstract_method
    module, 95
sage.misc.banner
    module, 599
sage.misc.benchmark
    module, 654
sage.misc.bindable_class
    module, 100
sage.misc.c3
    module, 723
sage.misc.c3_controlled
    module, 725
sage.misc.cachefunc
    module, 275
sage.misc.call
    module, 125
sage.misc.callable_dict
    module, 126
sage.misc.citation
    module, 634
sage.misc.classcall_metaclass
    module, 115
sage.misc.classgraph
    module, 702
sage.misc.constant_function
    module, 114
sage.misc.converting_dict
    module, 127
sage.misc.copying
    module, 636
sage.misc.cython
    module, 377
sage.misc.decorators
    module, 104
sage.misc.defaults
    module, 1
sage.misc.dev_tools
    module, 704
sage.misc.edit_module
    module, 698
sage.misc.element_with_label
    module, 150
sage.misc.explain_pickle
    module, 567
sage.misc.fast_methods
    module, 122
sage.misc.flatten
    module, 130
sage.misc.fpickle
    module, 565
sage.misc.func_persist
    module, 547
sage.misc.function_mangling
    module, 714
sage.misc.functional
    module, 3
sage.misc.gperftools
    module, 666
sage.misc.html
    module, 477
sage.misc.inherit_comparison
    module, 119
sage.misc.inline_fortran
    module, 381
sage.misc.instancedoc
    module, 669
sage.misc.latex
    module, 483
sage.misc.latex_macros
    module, 513
sage.misc.latex_standalone
    module, 515
sage.misc.lazy_attribute
    module, 239
sage.misc.lazy_format
    module, 252
sage.misc.lazy_import
    module, 254
sage.misc.lazy_import_cache
    module, 262
sage.misc.lazy_list
    module, 263
sage.misc.lazy_string
    module, 273

sage.misc.map_threaded
    module, 143
sage.misc.mathml
    module, 483
sage.misc.messaging
    module, 160
sage.misc.method_decorator
    module, 121
sage.misc.misc
    module, 207
sage.misc.misc_c
    module, 224
sage.misc.mrange
    module, 133
sage.misc.multireplace
    module, 143
sage.misc.nested_class
    module, 585
sage.misc.object_multiplexer
    module, 121
sage.misc.package
    module, 626
sage.misc.pager
    module, 609
sage.misc.parser
    module, 382
sage.misc.persist
    module, 547
sage.misc.prandom
    module, 82
sage.misc.profiler
    module, 664
sage.misc.python
    module, 400
sage.misc.random_testing
    module, 650
sage.misc.randstate
    module, 67
sage.misc.remote_file
    module, 159
sage.misc.repr
    module, 430
sage.misc.reset
    module, 602
sage.misc.rest_index_of_methods
    module, 718
sage.misc.sage_eval
    module, 401
sage.misc.sage_input
    module, 433
sage.misc.sage_ostools
    module, 161
sage.misc.sage_timeit
    module, 658
sage.misc.sage_timeit_class
    module, 662
sage.misc.sage_unittest
    module, 637
sage.misc.sagedoc
    module, 609
sage.misc.sagedoc_conf
    module, 624
sage.misc.sageinspect
    module, 673
sage.misc.search
    module, 132
sage.misc.session
    module, 591
sage.misc.sh
    module, 406
sage.misc.sphinxify
    module, 625
sage.misc.stopgap
    module, 201
sage.misc.superseded
    module, 202
sage.misc.table
    module, 466
sage.misc.temporary_file
    module, 151
sage.misc.test_nested_class
    module, 653
sage.misc.unknown
    module, 91
sage.misc.verbose
    module, 235
sage.misc.viewer
    module, 604
sage.misc.weak_dict
    module, 324
sageobj() (*in module sage.misc.sage_eval*), 404
SagePickler (*class in sage.misc.persist*), 548
SageTimeit (*class in sage.misc.sage_timeit_class*), 662
SageTimeitResult (*class in sage.misc.sage_timeit*), 658
sage.typeset.ascii_art
    module, 418
sage.typeset.character_art
    module, 411
sage.typeset.character_art_factory
    module, 414
sage.typeset.symbols
    module, 407
sage.typeset.unicode_art
    module, 425
sage.typeset.unicode_characters
    module, 427
SageUnpickler (*class in sage.misc.persist*), 549
sample() (*in module sage.misc.prandom*), 89

sanitize() (*in module sage.misc.cython*), 380
save() (*in module sage.misc.persist*), 561
save() (*sage.databases.sql_db.SQLDatabase method*), 188
save() (*sage.misc.gperftools.Profiler method*), 667
save() (*sage.misc.latex_standalone.Standalone method*), 531
save_cache_file() (*in module sage.misc.lazy_import*), 262
save_session() (*in module sage.misc.session*), 594
search() (*in module sage.misc.search*), 132
search_def() (*in module sage.misc.sagedoc*), 616
search_doc() (*in module sage.misc.sagedoc*), 617
search_src() (*in module sage.misc.sagedoc*), 618
seed (*in module sage.misc.randstate*), 81
seed() (*sage.misc.randstate.randstate method*), 79
series_precision() (*in module sage.misc.defaults*), 1
set_cache() (*sage.misc.cachefunc.CachedFunction method*), 295
set_cache() (*sage.misc.cachefunc.CachedMethodCallerNoArgs method*), 304
set_default_variable_name() (*in module sage.misc.defaults*), 2
set_edit_template() (*in module sage.misc.edit_module*), 700
set_editor() (*in module sage.misc.edit_module*), 701
set_names() (*sage.misc.parser.LookupNameMaker method*), 383
set_random_seed() (*in module sage.misc.randstate*), 81
set_seed_gap() (*sage.misc.randstate.randstate method*), 79
set_seed_gp() (*sage.misc.randstate.randstate method*), 80
set_seed_libc() (*sage.misc.randstate.randstate method*), 80
set_seed_ntl() (*sage.misc.randstate.randstate method*), 80
set_seed_pari() (*sage.misc.randstate.randstate method*), 81
set_series_precision() (*in module sage.misc.defaults*), 2
set_state() (*in module sage.misc.stopgap*), 201
set_verbose() (*in module sage.misc.verbose*), 238
set_verbose_files() (*in module sage.misc.verbose*), 238
setdefault() (*sage.misc.converting_dict.KeyConvertingDict method*), 129
setdefault() (*sage.misc.weak_dict.WeakValueDictionary method*), 337
SETITEM() (*sage.misc.explain_pickle.PickleExplainer method*), 571
SETITEMS() (*sage.misc.explain_pickle.PickleExplainer method*), 572
setup() (*in module sage.misc.sagedoc_conf*), 625
Sh (*class in sage.misc.sh*), 406
share() (*sage.misc.explain_pickle.PickleExplainer method*), 576
share() (*sage.misc.sage_input.SageInputBuilder method*), 456
SHORT_BINSTRING() (*sage.misc.explain_pickle.PickleExplainer method*), 572
show() (*sage.databases.sql_db.SQLDatabase method*), 189
show() (*sage.databases.sql_db.SQLQuery method*), 195
show_identifiers() (*in module sage.misc.session*), 596
shuffle() (*in module sage.misc.prandom*), 89
SIE_assign (*class in sage.misc.sage_input*), 437
SIE_binary (*class in sage.misc.sage_input*), 438
SIE_call (*class in sage.misc.sage_input*), 438
SIE_dict (*class in sage.misc.sage_input*), 438
SIE_gen (*class in sage.misc.sage_input*), 439
SIE_gens_constructor (*class in sage.misc.sage_input*), 439
SIE_getattr (*class in sage.misc.sage_input*), 440
SIE_import_name (*class in sage.misc.sage_input*), 440
SIE_literal (*class in sage.misc.sage_input*), 441
SIE_literal_stringrep (*class in sage.misc.sage_input*), 441
SIE_subscript (*class in sage.misc.sage_input*), 442
SIE_tuple (*class in sage.misc.sage_input*), 442
SIE_unary (*class in sage.misc.sage_input*), 443
Singleton (*class in sage.misc.fast_methods*), 122
sized_iter (*class in sage.misc.misc_c*), 234
skip_TESTS_block() (*in module sage.misc.sagedoc*), 622
skip_TESTS_block() (*in module sage.misc.sagedoc_conf*), 625
slice_unpickle() (*in module sage.misc.lazy_list*), 273
some_elements() (*sage.misc.sage_unittest.InstanceTester method*), 638
some_tuples() (*in module sage.misc.misc*), 221
source (*sage.misc.package.PackageInfo attribute*), 627
source_fd (*sage.misc.sage_ostools.redirection attribute*), 164
source_file (*sage.misc.sage_ostools.redirection attribute*), 164
specialize (*class in sage.misc.decorators*), 112
sphinxify() (*in module sage.misc.sphinxify*), 625
spkg_type() (*in module sage.misc.package*), 634
split() (*sage.typeset.character_art.CharacterArt method*), 413
spyx_tmp() (*in module sage.misc.temporary_file*), 157
SQLDatabase (*class in sage.databases.sql_db*), 166
SQLQuery (*class in sage.databases.sql_db*), 190
sqrt() (*in module sage.misc.functional*), 55
squarefree_part() (*in module sage.misc.functional*), 58
srange() (*in module sage.arith.srange*), 145

Standalone (*class in sage.misc.latex_standalone*), 522
start() (*sage.misc.gperftools.Profiler method*), 667
STOP() (*sage.misc.explain_pickle.PickleExplainer method*), 572
stop() (*sage.misc.gperftools.Profiler method*), 668
stopgap() (*in module sage.misc.stopgap*), 201
StopgapWarning, 201
str_function() (*in module sage.misc.latex*), 510
str_function() (*in module sage.misc.mathml*), 483
STRING() (*sage.misc.explain_pickle.PickleExplainer method*), 572
strunc() (*in module sage.misc.misc*), 221
suboptions (*class in sage.misc.decorators*), 113
sum() (*sage.misc.sage_input.SageInputBuilder method*), 457
svg() (*sage.misc.latex_standalone.Standalone method*), 532
symbolic_prod() (*in module sage.misc.functional*), 59
symbolic_sum() (*in module sage.misc.functional*), 60

T

table (*class in sage.misc.table*), 466
template_fields() (*in module sage.misc.edit_module*), 701
test() (*sage.misc.parser.Tokenizer method*), 399
test_add_commutes() (*in module sage.misc.random_testing*), 651
test_add_is_mul() (*in module sage.misc.random_testing*), 651
test_fake_startup() (*in module sage.misc.lazy_import*), 262
test_pickle() (*in module sage.misc.explain_pickle*), 582
TestAppendList (*class in sage.misc.explain_pickle*), 577
TestAppendNonlist (*class in sage.misc.explain_pickle*), 578
TestBuild (*class in sage.misc.explain_pickle*), 578
TestBuildSetstate (*class in sage.misc.explain_pickle*), 578
TestGlobalFunnyName (*class in sage.misc.explain_pickle*), 578
TestGlobalNewName (*class in sage.misc.explain_pickle*), 579
TestGlobalOldName (*class in sage.misc.explain_pickle*), 579
TestReduceGetinitargs (*class in sage.misc.explain_pickle*), 579
TestReduceNoGetinitargs (*class in sage.misc.explain_pickle*), 579
TestSuite (*class in sage.misc.sage_unittest*), 642
TestSuiteFailure, 649
tex() (*sage.misc.latex_standalone.Standalone method*), 533
tikz_picture_code() (*sage.misc.latex_standalone.TikzPicture method*), 546
TikzPicture (*class in sage.misc.latex_standalone*), 534
timeCall() (*in module sage.misc.classcall_metaclass*), 116
tmp_dir() (*in module sage.misc.temporary_file*), 158
tmp_filename() (*in module sage.misc.temporary_file*), 158
token_to_str() (*in module sage.misc.parser*), 399
tokeneater() (*sage.misc.sageinspect.BlockFinder method*), 677
Tokenizer (*class in sage.misc.parser*), 393
top() (*sage.misc.gperftools.Profiler method*), 668
transpose() (*in module sage.misc.functional*), 66
transpose() (*sage.misc.table.table method*), 476
try_read() (*in module sage.misc.misc*), 221
TUPLE() (*sage.misc.explain_pickle.PickleExplainer method*), 572
TUPLE1() (*sage.misc.explain_pickle.PickleExplainer method*), 572
TUPLE2() (*sage.misc.explain_pickle.PickleExplainer method*), 572
TUPLE3() (*sage.misc.explain_pickle.PickleExplainer method*), 572
tuple_function() (*in module sage.misc.latex*), 511
tuple_function() (*in module sage.misc.mathml*), 483
type (*sage.misc.package.PackageInfo attribute*), 627
typecall() (*in module sage.misc.classcall_metaclass*), 118

U

UNICODE() (*sage.misc.explain_pickle.PickleExplainer method*), 572
unicode_art() (*in module sage.typeset.unicode_art*), 425
unicode_subscript() (*in module sage.typeset.unicode_art*), 427
unicode_superscript() (*in module sage.typeset.unicode_art*), 427
UnicodeArt (*class in sage.typeset.unicode_art*), 425
uniform() (*in module sage.misc.prandom*), 90
union() (*sage.databases.sql_db.SQLQuery method*), 196
UnknownClass (*class in sage.misc.unknown*), 93
UnknownError, 94
unpickle_all() (*in module sage.misc.persist*), 563
unpickle_appends() (*in module sage.misc.explain_pickle*), 583
unpickle_build() (*in module sage.misc.explain_pickle*), 583
unpickle_extension() (*in module sage.misc.explain_pickle*), 583
unpickle_function() (*in module sage.misc.fpickle*), 567
unpickle_global() (*in module sage.misc.persist*), 564

unpickle_instantiate() (*in module sage.misc.explain_pickle*), 584
unpickle_newobj() (*in module sage.misc.explain_pickle*), 584
unpickle_persistent() (*in module sage.misc.explain_pickle*), 584
unpickleMethod() (*in module sage.misc.fpickle*), 567
unpickleModule() (*in module sage.misc.fpickle*), 567
unset_verbose_files() (*in module sage.misc.verbose*), 238
update() (*sage.misc.converting_dict.KeyConvertingDict method*), 130
use_variable() (*sage.misc.sage_input.SageInputBuilder method*), 458

V

vacuum() (*sage.databases.sql_db.SQLDatabase method*), 190
value() (*sage.ext.fast_callable.ExpressionConstant method*), 354
values() (*sage.misc.cachefunc.FileCache method*), 311
values() (*sage.misc.weak_dict.WeakValueDictionary method*), 338
values_list() (*sage.misc.weak_dict.WeakValueDictionary method*), 339
var() (*sage.ext.fast_callable.ExpressionTreeBuilder method*), 357
variable_index() (*sage.ext.fast_callable.ExpressionVariable method*), 358
variable_names() (*in module sage.misc.defaults*), 2
vector_delimiters() (*sage.misc.latex.Latex method*), 493
verbose() (*in module sage.misc.verbose*), 238
verify_column() (*in module sage.databases.sql_db*), 199
verify_operator() (*in module sage.databases.sql_db*), 199
verify_same() (*in module sage.misc.sage_input*), 464
verify_si_answer() (*in module sage.misc.sage_input*), 465
verify_type() (*in module sage.databases.sql_db*), 200
version() (*in module sage.misc.banner*), 601
version_dict() (*in module sage.misc.banner*), 601
view() (*in module sage.misc.latex*), 511
Viewer (*class in sage.misc.viewer*), 605
visit_arg() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 683
visit_BinOp() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 678
visit_BoolOp() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 678
visit_Compare() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 679
visit_Dict() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 679
visit_List() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 680
visit_Name() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 680
visit_NameConstant() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 680
visit_Num() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 681
visit_Str() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 682
visit_Tuple() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 682
visit_UnaryOp() (*sage.misc.sageinspect.SageArgSpecVisitor method*), 682
vonmisesvariate() (*in module sage.misc.prandom*), 90

W

warning() (*in module sage.misc.superseded*), 206
weak_cached_function() (*in module sage.misc.cachefunc*), 321
WeakCachedFunction (*class in sage.misc.cachefunc*), 312
WeakValueDictEraser (*class in sage.misc.weak_dict*), 328
WeakValueDictionary (*class in sage.misc.weak_dict*), 328
weibullvariate() (*in module sage.misc.prandom*), 91
width() (*sage.typeset.character_art.CharacterArt method*), 414
WithEqualityById (*class in sage.misc.fast_methods*), 123
word_wrap() (*in module sage.misc.misc*), 223
Wrapper (*class in sage.ext.fast_callable*), 367

X

xinterval() (*in module sage.misc.functional*), 66
xmrange (*class in sage.misc.mrange*), 137
xmrange_iter (*class in sage.misc.mrange*), 140
xsrange() (*in module sage.arith.srange*), 149

Z

ZZ_seed() (*sage.misc.randstate.randstate method*), 77